


2.1




GIVEN: FORCES SHOWN
DETERMINE GRAPHICALLY
THEIR RESULTANT,
USING
(a) THE PARALLELOGRAM
LAW
(b) THE TRIANGLE
RULE

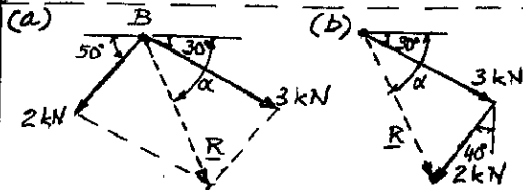


WE MEASURE: $R = 3.30 \text{ kN}$, $\alpha = 66.6^\circ$
 $R = 3.30 \text{ kN} \angle 66.6^\circ$

2.2




GIVEN:
 $P = 75 \text{ N}$, $Q = 125 \text{ N}$
DETERMINE GRAPHICALLY
THE RESULTANT OF P
AND Q , USING
(a) THE PARALLELOGRAM
LAW
(b) THE TRIANGLE RULE




WE MEASURE:
 $R = 179 \text{ N}$
 $\alpha = 75.1^\circ$
 $R = 179 \text{ N} \angle 75.1^\circ$

2.3




GIVEN:
 $P = 60 \text{ lb}$, $Q = 25 \text{ lb}$
DETERMINE GRAPHICALLY
THE RESULTANT OF P
AND Q , USING
(a) THE PARALLELOGRAM
LAW
(b) THE TRIANGLE RULE




WE MEASURE:
 $R = 77.1 \text{ lb}$
 $\alpha = 85.4^\circ$
 $R = 77.1 \text{ lb} \angle 85.4^\circ$


2.4

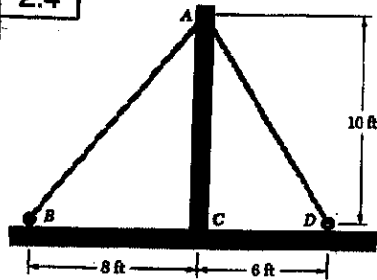

GIVEN:
 $T_{AB} = 120 \text{ lb}$
 $T_{AD} = 40 \text{ lb}$
DETERMINE
GRAPHICALLY
THE RESULTANT
AT A, USING
(a) THE PARALLELO-
GRAM LAW
(b) THE TRIANGLE
RULE




WE MEASURE THE
ANGLES α AND β :
 $\alpha = 51.3^\circ$
 $\beta = 59.0^\circ$

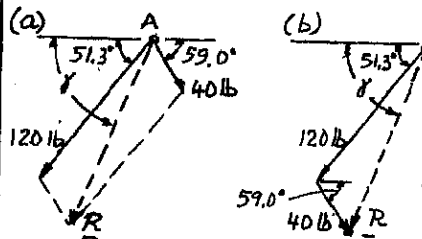


WE MEASURE:
 $R = 139.1 \text{ lb}$
 $\gamma = 67.0^\circ$
 $R = 139.1 \text{ lb} \angle 67.0^\circ$

2.5



GIVEN:
COMPONENT OF
200-N FORCE ALONG
 $a-a'$ MUST BE 150 N.
DETERMINE BY
TRIGONOMETRY
(a) ANGLE α
(b) COMPONENT
ALONG $b-b'$.

(a) USING TRIANGLE RULE AND LAW OF SINES:



$$\frac{\sin \beta}{150 \text{ N}} = \frac{\sin 45^\circ}{200 \text{ N}}$$

$$\sin \beta = 0.53033$$

$$\beta = 32.03^\circ$$

$$\alpha + \beta + 45^\circ = 180^\circ$$

$$\alpha = 180^\circ - 45^\circ - 32.03^\circ$$

$$\alpha = 102.97^\circ$$

$$\alpha = 103.0^\circ$$


(b) LAW OF SINES:

$$\frac{F_{bb'}}{\sin \alpha} = \frac{200 \text{ N}}{\sin 45^\circ}$$

$$F_{bb'} = (200 \text{ N}) \frac{\sin 102.97^\circ}{\sin 45^\circ}$$

$$= 275.63 \text{ N}$$

$$F_{bb'} = 276 \text{ N}$$

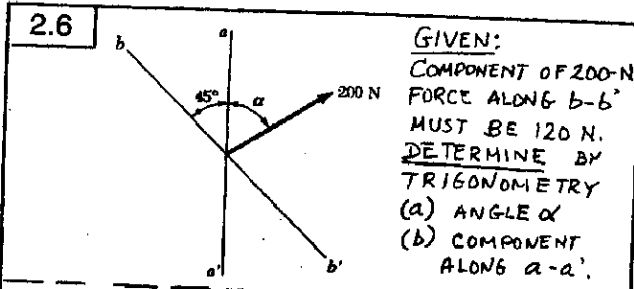


(a) USING TRIANGLE RULE AND LAW OF SINES!

$\frac{\sin \alpha}{120 \text{ N}} = \frac{\sin 45^\circ}{200 \text{ N}}$
 $\sin \alpha = 0.42426$
 $\alpha = 25.1^\circ$

(b) $\beta = 180^\circ - 45^\circ - 25.1^\circ = 109.9^\circ$

LAW OF SINES: $\frac{F_{aa'}}{\sin \beta} = \frac{200 \text{ N}}{\sin 45^\circ}$
 $F_{aa'} = (200 \text{ N}) \frac{\sin 109.9^\circ}{\sin 45^\circ} = 266 \text{ N}$

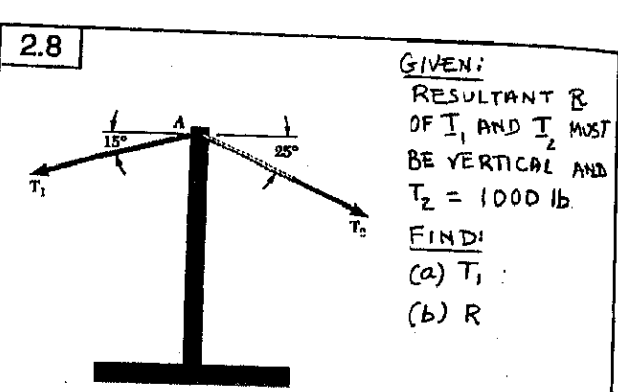


TRIANGLE RULE AND LAW OF SINES!

$\frac{T_1}{\sin 65^\circ} = \frac{1000 \text{ lb}}{\sin 75^\circ} = \frac{R}{\sin 40^\circ}$

(a) SOLVING FOR T_1 :
 $T_1 = (1000 \text{ lb}) \frac{\sin 65^\circ}{\sin 75^\circ} = 938.28 \text{ lb}$, $T_1 = 938 \text{ lb}$

(b) SOLVING FOR R :
 $R = (1000 \text{ lb}) \frac{\sin 40^\circ}{\sin 75^\circ} = 665.46 \text{ lb}$, $R = 665 \text{ lb}$

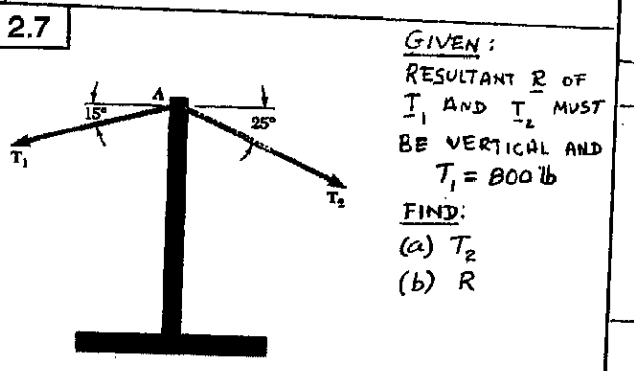


TRIANGLE RULE AND LAW OF SINES!

$\frac{T_1}{\sin 65^\circ} = \frac{T_2}{\sin 75^\circ} = \frac{R}{\sin 40^\circ}$
 $\frac{800 \text{ lb}}{\sin 65^\circ} = \frac{T_2}{\sin 75^\circ} = \frac{R}{\sin 40^\circ}$

(a) SOLVING FOR T_2 :
 $T_2 = (800 \text{ lb}) \frac{\sin 75^\circ}{\sin 65^\circ} = 852.6 \text{ lb}$
 $T_2 = 853 \text{ lb}$

(b) SOLVING FOR R :
 $R = (800 \text{ lb}) \frac{\sin 40^\circ}{\sin 65^\circ} = 567.4 \text{ lb}$
 $R = 567 \text{ lb}$

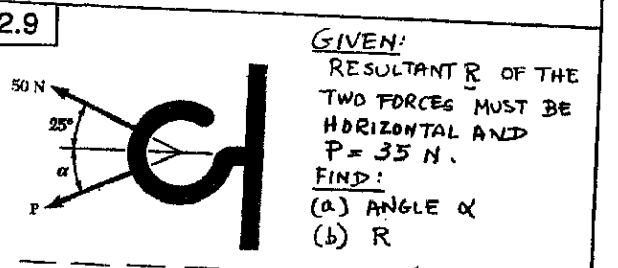


TRIANGLE RULE:

(a) LAW OF SINES:
 $\frac{\sin \alpha}{50 \text{ N}} = \frac{\sin 25^\circ}{35 \text{ N}}$
 $\sin \alpha = \frac{50 \text{ N} \sin 25^\circ}{35 \text{ N}}$
 $\sin \alpha = 0.60374$, $\alpha = 37.14^\circ$
 $\alpha \approx 37.1^\circ$


(b) $\beta = 180^\circ - 25^\circ - 37.14^\circ = 117.86^\circ$

LAW OF SINES:
 $\frac{R}{\sin \beta} = \frac{35 \text{ N}}{\sin 25^\circ}$
 $R = (35 \text{ N}) \frac{\sin 117.86^\circ}{\sin 25^\circ} = 73.218 \text{ N}$
 $R = 73.2 \text{ N}$

2.16

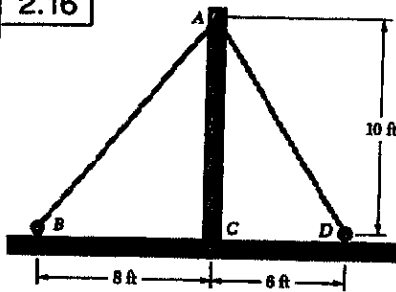

GIVEN:
 $T_{AB} = 120 \text{ lb}$
 $T_{AD} = 40 \text{ lb}$
FIND:
 RESULTANT R
 OF THE FORCES
 EXERTED AT A
 BY AB AND AD

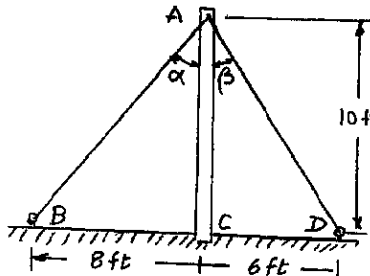

$\tan \alpha = \frac{10}{8}$
 $\alpha = 38.66^\circ$
 $\tan \beta = \frac{10}{14}$
 $\beta = 30.96^\circ$

FROM FORCE TRIANGLE:


LAW OF COSINES:

$R^2 = (120)^2 + (40)^2 - 2(120)(40) \cos 110.38^\circ$
 $= 14,400 + 1600 - 9600(-0.3482)$
 $R^2 = 19,343 \quad R = 139.08 \text{ lb}$


LAW OF SINES:

$\frac{\sin \gamma}{40 \text{ lb}} = \frac{\sin 110.38^\circ}{139.08 \text{ lb}}$

$\sin \gamma = 0.26960 \quad \gamma = 15.64^\circ$
 $\phi = (90^\circ - \alpha) + \gamma = 51.34^\circ + 15.64^\circ = 66.98^\circ$
 $R = 139.11 \text{ lb} \angle 67.0^\circ$



2.17



GIVEN:

$P = 75 \text{ N}, \alpha = 50^\circ$

FIND:

RESULTANT R
 OF THE TWO FORCES
 SHOWN.

FROM FORCE TRIANGLE:

LAW OF COSINES:

$R^2 = (75)^2 + (50)^2 - 2(75)(50) \cos 105^\circ$
 $= 5625 + 2500 - 7500(-0.25982)$
 $R^2 = 10,066 \quad R = 100.33 \text{ N}$


LAW OF SINES:

$\frac{\sin \gamma}{75 \text{ N}} = \frac{\sin 105^\circ}{100.33 \text{ N}}$


$\sin \gamma = 0.72206 \quad \gamma = 46.22^\circ$

$R \angle = \gamma - 25^\circ = 46.22^\circ - 25^\circ = 21.22^\circ$

$R = 100.3 \text{ N} \angle 21.2^\circ$




2.18

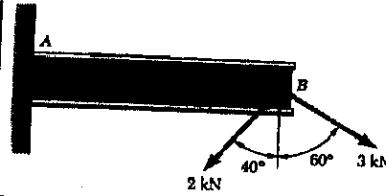

GIVEN:
 FORCES SHOWN

FIND:
 THEIR RESULTANT



FROM FORCE TRIANGLE:

LAW OF COSINES:

$R^2 = (2)^2 + (3)^2 - 2(2)(3) \cos 80^\circ$
 $R^2 = 10.916 \quad R = 3.304 \text{ kN}$


LAW OF SINES:

$\frac{\sin \gamma}{2 \text{ kN}} = \frac{\sin 80^\circ}{3.304 \text{ kN}} \quad \gamma = 36.59^\circ$

$\beta = 180^\circ - (80^\circ + 36.59^\circ) = 63.41^\circ \quad \phi = 180^\circ - (\beta + 50^\circ) = 66.59^\circ$

$R = 3.30 \text{ kN} \angle 66.6^\circ$

2.19




GIVEN:

$F_A = 15 \text{ kN}$

$F_B = 10 \text{ kN}$

FIND:

RESULTANT OF FORCES
 EXERTED ON BRACKET
 BY MEMBERS A AND B.



FROM FORCE TRIANGLE:

LAW OF COSINES:

$R^2 = (15)^2 + (10)^2 - 2(15)(10) \cos 120^\circ$
 $R^2 = 475 \quad R = 21.794 \text{ kN}$


LAW OF SINES:

$\frac{\sin \delta}{10 \text{ kN}} = \frac{\sin 120^\circ}{21.794 \text{ kN}} \quad \delta = 23.41^\circ$

$\phi = 50^\circ + \delta = 50^\circ + 23.41^\circ = 73.41^\circ$

$R = 21.8 \text{ kN} \angle 73.4^\circ$

2.20




GIVEN:

$F_A = 10 \text{ kN}$

$F_B = 15 \text{ kN}$

FIND:

RESULTANT OF FORCES
 EXERTED ON BRACKET
 BY MEMBERS A AND B.



FROM FORCE TRIANGLE:

LAW OF COSINES:

$R^2 = (10)^2 + (15)^2 - 2(10)(15) \cos 120^\circ$
 $R^2 = 475 \quad R = 21.794 \text{ kN}$


LAW OF SINES:

$\frac{\sin \gamma}{15 \text{ kN}} = \frac{\sin 120^\circ}{21.794 \text{ kN}} \quad \gamma = 36.59^\circ$

$\phi = 50^\circ + \gamma = 50^\circ + 36.59^\circ = 86.59^\circ$

$R = 21.8 \text{ kN} \angle 86.6^\circ$

2.21



GIVEN:
MAGNITUDES AND DIRECTIONS OF FORCES


FIND:
X AND Y COMPONENTS OF THE FORCES.

80-N FORCE: $F_x = + (80\text{ N}) \cos 40^\circ$, $F_x = + 61.3\text{ N}$
 $F_y = + (80\text{ N}) \sin 40^\circ$, $F_y = + 51.4\text{ N}$

120-N FORCE: $F_x = + (120\text{ N}) \cos 70^\circ$, $F_x = + 41.0\text{ N}$
 $F_y = + (120\text{ N}) \sin 70^\circ$, $F_y = + 112.8\text{ N}$

150-N FORCE: $F_x = - (150\text{ N}) \cos 35^\circ$, $F_x = - 122.9\text{ N}$
 $F_y = + (150\text{ N}) \sin 35^\circ$, $F_y = + 86.0\text{ N}$

2.22



GIVEN:
MAGNITUDES AND DIRECTIONS OF FORCES


FIND:
X AND Y COMPONENTS OF THE FORCES.

40-lb FORCE: $F_x = + (40\text{ lb}) \cos 60^\circ = + 20.0\text{ lb}$, $F_x = + 20.0\text{ lb}$
 $F_y = - (40\text{ lb}) \sin 60^\circ = - 34.64\text{ lb}$, $F_y = - 34.6\text{ lb}$

50-lb FORCE: $F_x = - (50\text{ lb}) \sin 50^\circ = - 38.30\text{ lb}$, $F_x = - 38.3\text{ lb}$
 $F_y = - (50\text{ lb}) \cos 50^\circ = - 32.14\text{ lb}$, $F_y = - 32.1\text{ lb}$

60-lb FORCE: $F_x = + (60\text{ lb}) \cos 25^\circ = + 54.38\text{ lb}$, $F_x = + 54.4\text{ lb}$
 $F_y = + (60\text{ lb}) \sin 25^\circ = + 25.36\text{ lb}$, $F_y = + 25.4\text{ lb}$

2.23



GIVEN:
FORCES AND DIMENSIONS SHOWN.
FIND:
X AND Y COMPONENTS OF FORCES.


WE COMPUTE THE FOLLOWING DISTANCES:
 $OA = \sqrt{(24)^2 + (45)^2} = 51\text{ in.}$
 $OB = \sqrt{(28)^2 + (45)^2} = 53\text{ in.}$
 $OC = \sqrt{(40)^2 + (30)^2} = 50\text{ in.}$

102-lb FORCE: $F_x = - (102\text{ lb}) \frac{24}{51}$, $F_x = - 48.0\text{ lb}$
 $F_y = + (102\text{ lb}) \frac{45}{51}$, $F_y = + 90.0\text{ lb}$

106-lb FORCE: $F_x = + (106\text{ lb}) \frac{28}{53}$, $F_x = + 56.0\text{ lb}$
 $F_y = + (106\text{ lb}) \frac{45}{53}$, $F_y = + 90.0\text{ lb}$

200-lb FORCE: $F_x = - (200\text{ lb}) \frac{40}{50}$, $F_x = - 160.0\text{ lb}$
 $F_y = - (200\text{ lb}) \frac{30}{50}$, $F_y = - 120.0\text{ lb}$

2.24

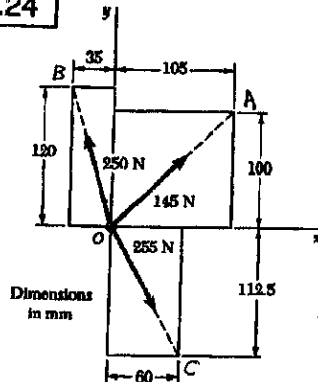

GIVEN:
FORCES AND DIMENSIONS SHOWN.


FIND:
X AND Y COMPONENTS OF FORCES

145-N FORCE: $OA = \sqrt{(105)^2 + (100)^2} = 145\text{ mm}$
 $F_x = + (145\text{ N}) \frac{105\text{ mm}}{145\text{ mm}}$, $F_x = + 105.0\text{ N}$
 $F_y = + (145\text{ N}) \frac{100\text{ mm}}{145\text{ mm}}$, $F_y = + 100.0\text{ N}$


250-N FORCE: $OB = \sqrt{(35)^2 + (120)^2} = 125\text{ mm}$
 $F_x = - (250\text{ N}) \frac{35\text{ mm}}{125\text{ mm}}$, $F_x = - 70.0\text{ N}$
 $F_y = + (250\text{ N}) \frac{120\text{ mm}}{125\text{ mm}}$, $F_y = + 240\text{ N}$

255-N FORCE: $OC = \sqrt{(60)^2 + (112.5)^2} = 127.5\text{ mm}$
 $F_x = + (255\text{ N}) \frac{60\text{ mm}}{127.5\text{ mm}}$, $F_x = + 120.0\text{ N}$
 $F_y = - (255\text{ N}) \frac{112.5\text{ mm}}{127.5\text{ mm}}$, $F_y = - 225\text{ N}$

2.25

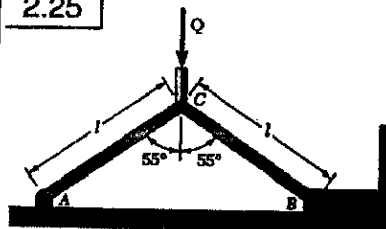


GIVEN:
(1) CB EXERTS FORCE P ON B ALONG CB.
(2) HORIZONTAL COMPONENT OF P IS $P_x = 1200\text{ N}$.
FIND:
(a) MAGNITUDE P
(b) VERT. COMP. P_y



(a) $P_x = P \sin 55^\circ$, $P = \frac{P_x}{\sin 55^\circ} = \frac{1200\text{ N}}{\sin 55^\circ} = 1464.9\text{ N}$
 $P = 1465\text{ N}$

(b) $P_x = P_y \tan 55^\circ$, $P_y = \frac{P_x}{\tan 55^\circ} = \frac{1200\text{ N}}{\tan 55^\circ} = 840.2\text{ N}$
 $P_y = 840\text{ N} \downarrow$

2.26

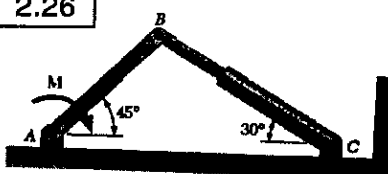

GIVEN:
 (1) FORCE P EXERTED BY BC ON AB IS DIRECTED ALONG BC.
 (2) COMPONENT OF $P \perp AB$ IS 600 N

FIND: (a) P


(b) COMP. OF P ALONG AB

(a) $P = \frac{P_x}{\cos 15^\circ} = \frac{600 \text{ N}}{\cos 15^\circ}$


$P = 621 \text{ N}$

(b) $P_y = P_x \tan 15^\circ = (600 \text{ N}) \tan 15^\circ$

$P_y = 160.8 \text{ N}$



2.27



GIVEN:
 (1) FORCE P EXERTED BY BD ON ABC IS DIRECTED ALONG BD.
 (2) HORIZ. COMPONENT OF P IS $P_x = 300 \text{ lb}$.

FIND:

(a) MAGNITUDE P


(b) VERT. COMP. P_y

(a) $P = \frac{P_x}{\sin 35^\circ} = \frac{300 \text{ lb}}{\sin 35^\circ}$


$P = 523 \text{ lb}$

(b) $P_y = \frac{P_x}{\tan 35^\circ} = \frac{300 \text{ lb}}{\tan 35^\circ}$

$P_y = 428 \text{ lb}$



2.28



GIVEN:
 (1) FORCE P EXERTED BY BD ON ABC IS DIRECTED ALONG BD.
 (2) VERT. COMPONENT OF P IS $P_y = 240 \text{ lb}$.

FIND:

(a) MAGNITUDE P


(b) HORIZ. COMP. P_x

(a) $P = \frac{P_y}{\sin 40^\circ} = \frac{240 \text{ lb}}{\sin 40^\circ}$


$P = 373 \text{ lb}$

(b) $P_x = \frac{P_y}{\tan 40^\circ} = \frac{240 \text{ lb}}{\tan 40^\circ}$

$P_x = 286 \text{ lb}$



2.29



GIVEN:
 (1) FORCE P EXERTED BY BD ON POLE IS DIRECTED ALONG BD.
 (2) COMPONENT OF $P \perp TO AC$ IS 120 N.

FIND:

(a) MAGNITUDE P


(b) COMPONENT OF P ALONG AC.

(a) $P = \frac{P_x}{\sin 38^\circ} = \frac{120 \text{ N}}{\sin 38^\circ} = 194.91 \text{ N}$


$P = 194.9 \text{ N}$

(b) $P_y = \frac{P_x}{\tan 38^\circ} = \frac{120 \text{ N}}{\tan 38^\circ} = 153.59 \text{ N}$

$P_y = 153.6 \text{ N}$



2.30



GIVEN:

(1) FORCE P EXERTED BY BD ON POLE IS DIRECTED ALONG BD.
 (2) COMPONENT OF P ALONG AC IS 180 N.

FIND:

(a) MAGNITUDE P


(b) COMPONENT OF $P \perp TO AC$.

(a) $P = \frac{180 \text{ N}}{\cos 38^\circ} = 228.4 \text{ N}$


$P = 228 \text{ N}$

(b) $P_x = (180 \text{ N}) \tan 30^\circ = 140.63 \text{ N}$

$P_x = 140.6 \text{ N}$



2.35

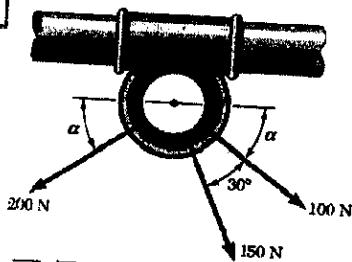

GIVEN:
 $\alpha = 35^\circ$
FIND:
 RESULTANT OF THE THREE FORCES SHOWN.


100-N FORCE:

$F_x = +(100 \text{ N}) \cos 35^\circ = +81.92 \text{ N}$, $F_y = -(100 \text{ N}) \sin 35^\circ = -57.36 \text{ N}$

150-N FORCE:
 $F_x = +(150 \text{ N}) \cos 65^\circ = +63.39 \text{ N}$, $F_y = -(150 \text{ N}) \sin 65^\circ = -135.45 \text{ N}$

200-N FORCE:
 $F_x = -(200 \text{ N}) \cos 35^\circ = -163.03 \text{ N}$, $F_y = -(200 \text{ N}) \sin 35^\circ = -114.72 \text{ N}$


FORCE	x COMP. (N)	y COMP. (N)
100 N	+81.92	-57.36
150 N	+63.39	-135.45
200 N	-163.03	-114.72
	$R_x = -18.52$	$R_y = -308.03$



$\tan \alpha = \frac{308.03 \text{ N}}{18.52 \text{ N}}$ $\alpha = 86.56^\circ$

$R = \frac{308.03 \text{ N}}{\sin 86.56^\circ} = 308.6 \text{ N}$ $R = 309 \text{ N} \angle 86.6^\circ$

2.37

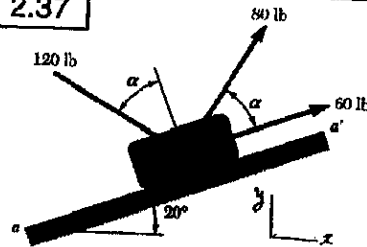

GIVEN:
 $\alpha = 40^\circ$
FIND:
 RESULTANT OF THE THREE FORCES SHOWN


60-lb FORCE:

$F_x = +(60 \text{ lb}) \cos 20^\circ = +56.38 \text{ lb}$, $F_y = +(60 \text{ lb}) \sin 20^\circ = +20.52 \text{ lb}$

80-lb FORCE:
 $F_x = +(80 \text{ lb}) \cos 60^\circ = +40.00 \text{ lb}$, $F_y = +(80 \text{ lb}) \sin 60^\circ = +69.28 \text{ lb}$

120-lb FORCE:
 $F_x = +(120 \text{ lb}) \cos 30^\circ = +103.92 \text{ lb}$, $F_y = -(120 \text{ lb}) \sin 30^\circ = -60.00 \text{ lb}$


FORCE	x COMP. (lb)	y COMP. (lb)
60 lb	+56.38	+20.52
80 lb	+40.00	+69.28
120 lb	+103.92	-60.00
	$R_x = +200.30$	$R_y = +29.80$



$\tan \alpha = \frac{29.80 \text{ lb}}{200.30 \text{ lb}}$ $\alpha = 8.462^\circ$

$R = \frac{29.80 \text{ lb}}{\sin 8.462^\circ} = 202.51 \text{ lb}$ $R = 203 \text{ lb} \angle 8.46^\circ$

2.36

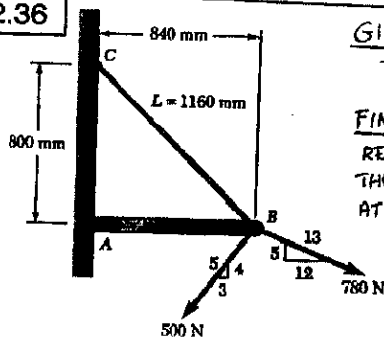

GIVEN:
 $T_{BC} = 725 \text{ N}$
FIND:
 RESULTANT OF THE THREE FORCES EXERTED AT POINT B OF BEAM AB.


FORCE EXERTED BY CABLE BC:

$F_x = -(725 \text{ N}) \frac{840 \text{ mm}}{1160 \text{ mm}} = -525 \text{ N}$, $F_y = +(725 \text{ N}) \frac{800 \text{ mm}}{1160 \text{ mm}} = +500 \text{ N}$

500-N FORCE:
 $F_x = -(500 \text{ N}) \frac{3}{5} = -300 \text{ N}$, $F_y = -(500 \text{ N}) \frac{4}{5} = -400 \text{ N}$

780-N FORCE:
 $F_x = +(780 \text{ N}) \frac{12}{13} = +720 \text{ N}$, $F_y = -(780 \text{ N}) \frac{5}{13} = -300 \text{ N}$

FORCE	x COMP. (N)	y COMP. (N)
$T_{BC} = 725 \text{ N}$	-525	+500
500 N	-300	-400
780 N	+720	-300
	$R_x = -105$	$R_y = -200$




$\tan \alpha = \frac{200 \text{ N}}{105 \text{ N}}$ $\alpha = 62.30^\circ$

$R = \frac{200 \text{ N}}{\sin 62.30^\circ} = 225.9 \text{ N}$

$R = 226 \text{ N} \angle 62.3^\circ$

2.38



GIVEN:
 $\alpha = 75^\circ$
FIND:
 RESULTANT OF THE THREE FORCES SHOWN.


60-lb FORCE:

$F_x = +(60 \text{ lb}) \cos 20^\circ = +56.38 \text{ lb}$, $F_y = +(60 \text{ lb}) \sin 20^\circ = +20.52 \text{ lb}$

80-lb FORCE:
 $F_x = +(80 \text{ lb}) \cos 95^\circ = -6.97 \text{ lb}$, $F_y = +(80 \text{ lb}) \sin 95^\circ = +79.70 \text{ lb}$

120-lb FORCE:
 $F_x = +(120 \text{ lb}) \cos 5^\circ = +119.54 \text{ lb}$, $F_y = +(120 \text{ lb}) \sin 5^\circ = +10.46 \text{ lb}$

FORCE	x COMP. (lb)	y COMP. (lb)
60 lb	+56.38	+20.52
80 lb	-6.97	+79.70
120 lb	+119.54	+10.46
	$R_x = +168.95$	$R_y = +110.68$




$\tan \alpha = \frac{110.68 \text{ lb}}{168.95 \text{ lb}}$ $\alpha = 33.23^\circ$

$R = \frac{110.68 \text{ lb}}{\sin 33.23^\circ} = 201.98 \text{ lb}$

$R = 202 \text{ lb} \angle 33.2^\circ$


2.43

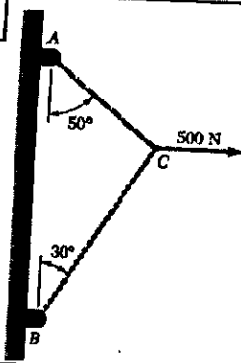


GIVEN:
CABLES AC AND BC
ARE LOADED AS SHOWN

FIND:
(a) TENSION IN AC.
(b) TENSION IN BC.

F.B. DIAGRAM



FORCE TRIANGLE



LAW OF SINES: $\frac{T_{AC}}{\sin 60^\circ} = \frac{T_{BC}}{\sin 40^\circ} = \frac{500\text{N}}{\sin 80^\circ}$


(a) $T_{AC} = \frac{500\text{N}}{\sin 80^\circ} \sin 60^\circ = 439.7\text{N}$

(b) $T_{BC} = \frac{500\text{N}}{\sin 80^\circ} \sin 40^\circ = 326.4\text{N}$

$T_{AC} = 440\text{N}$

$T_{BC} = 326\text{N}$


2.45

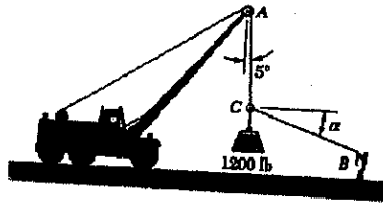


GIVEN:
 $\alpha = 20^\circ$

FIND:
TENSION IN
(a) AC
(b) BC

F.B. DIAGRAM



FORCE TRIANGLE



LAW OF SINES: $\frac{T_{AC}}{\sin 110^\circ} = \frac{T_{BC}}{\sin 5^\circ} = \frac{1200\text{lb}}{\sin 65^\circ}$


(a) $T_{AC} = \frac{1200\text{lb}}{\sin 65^\circ} \sin 110^\circ = 1244.2\text{lb}$

(b) $T_{BC} = \frac{1200\text{lb}}{\sin 65^\circ} \sin 5^\circ = 115.40\text{lb}$

$T_{AC} = 1244\text{lb}$

$T_{BC} = 115.4\text{lb}$


2.44




GIVEN
(1) CABLES AC
AND BC ARE
LOADED AS SHOWN
(2) $\alpha = 20^\circ$

FIND:
TENSION IN
(a) AC
(b) BC

F.B. DIAGRAM



FORCE TRIANGLE



LAW OF SINES: $\frac{T_{AC}}{\sin 70^\circ} = \frac{T_{BC}}{\sin 50^\circ} = \frac{1962\text{N}}{\sin 60^\circ}$


(a) $T_{AC} = \frac{1962\text{N}}{\sin 60^\circ} \sin 70^\circ = 2128.9\text{N}$

(b) $T_{BC} = \frac{1962\text{N}}{\sin 60^\circ} \sin 50^\circ = 1735.49\text{N}$

$T_{AC} = 2,13\text{ kN}$

$T_{BC} = 1,735\text{ kN}$


2.46

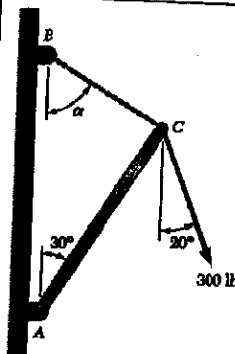


GIVEN:
(1) $\alpha = 55^\circ$.
(2) BOOM AC EXERTS
ON PIN C A FORCE
ALONG AC.

FIND:
(a) F_{AC}
(b) T_{BC}

F.B. DIAGRAM



FORCE TRIANGLE



LAW OF SINES: $\frac{F_{AC}}{\sin 35^\circ} = \frac{T_{BC}}{\sin 50^\circ} = \frac{300\text{lb}}{\sin 95^\circ}$


(a) $F_{AC} = \frac{300\text{lb}}{\sin 95^\circ} \sin 35^\circ = 172.73\text{lb}$

(b) $T_{BC} = \frac{300\text{lb}}{\sin 95^\circ} \sin 50^\circ = 230.7\text{lb}$

$F_{AC} = 172.7\text{lb}$

$T_{BC} = 231\text{lb}$

2.51

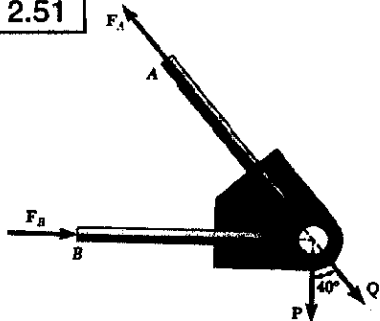


GIVEN:
 (1) CONNECTION IN EQUILIBRIUM UNDER FOUR FORCES
 (2) $P = 500 \text{ lb}$
 $Q = 650 \text{ lb}$

FIND:
 F_A AND F_B

FREE-BODY DIAGRAM

RESOLVING THE FORCES INTO X AND Y COMPONENTS!

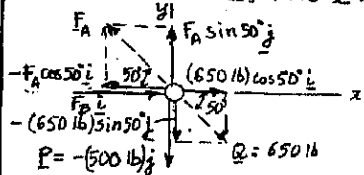

$$\underline{R} = \underline{F}_A + \underline{F}_B + \underline{P} + \underline{Q} = 0$$

$$-F_A \cos 50^\circ \underline{i} + F_A \sin 50^\circ \underline{j} + F_B \underline{i} - 500 \underline{j} + 650 \cos 50^\circ \underline{i} - 650 \sin 50^\circ \underline{j} = 0$$


EQUATING TO ZERO THE COEFF. OF \underline{i} AND \underline{j} :

$$\textcircled{1} F_A \sin 50^\circ - 500 - 650 \sin 50^\circ = 0 \quad F_A = 1303 \text{ lb}$$

$$\textcircled{2} -F_A \cos 50^\circ + F_B + 650 \cos 50^\circ = 0$$

$$F_B = (1303 \text{ lb}) \cos 50^\circ - (650 \text{ lb} \cos 50^\circ) \quad F_B = 420 \text{ lb}$$

2.52

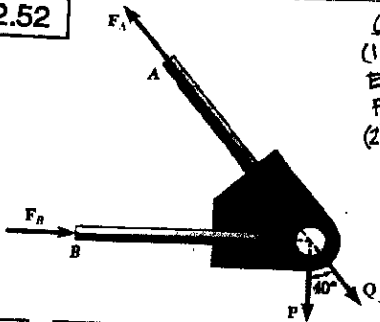


GIVEN:
 (1) CONNECTION IN EQUILIBRIUM UNDER FOUR FORCES
 (2) $F_A = 750 \text{ lb}$
 $F_B = 400 \text{ lb}$

FIND:
 P AND Q

FREE-BODY DIAGRAM:

RESOLVING THE FORCES INTO X AND Y COMPONENTS

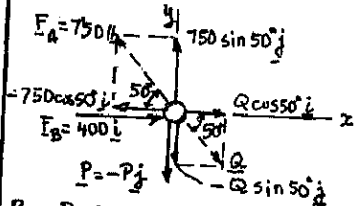

$$\underline{R} = \underline{P} + \underline{Q} + \underline{F}_A + \underline{F}_B = 0$$

$$-P \underline{j} + Q \cos 50^\circ \underline{i} - Q \sin 50^\circ \underline{j} - 750 \cos 50^\circ \underline{i} + 750 \sin 50^\circ \underline{j} + 400 \underline{i} = 0$$

EQUATING TO ZERO THE COEFF. OF \underline{i} AND \underline{j} :


$$\textcircled{1} Q \cos 50^\circ - 750 \cos 50^\circ + 400 = 0 \quad Q = 127.7 \text{ lb}$$

$$\textcircled{2} -P - Q \sin 50^\circ + 750 \sin 50^\circ = 0$$

$$P = -(127.7 \text{ lb}) \sin 50^\circ + (750 \text{ lb}) \sin 50^\circ$$

$$P = 477 \text{ lb}$$


2.53

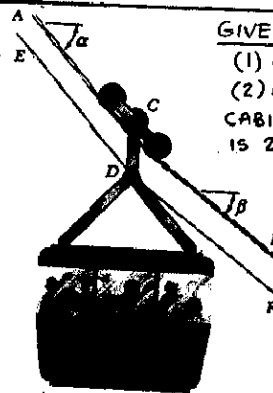

GIVEN:
 (1) $\alpha = 45^\circ$, $\beta = 40^\circ$
 (2) COMBINED WEIGHT OF CABIN AND PASSENGERS IS 22.5 kN .
 (3) $T_{DF} \approx 0$

FIND:
 (a) T_{ACB}
 (b) T_{DE}

FREE-BODY DIAGRAM (CABIN CONSIDERED AS PARTICLE)



$$\Sigma F_x = 0:$$

$$T_{ACB} \cos 40^\circ - T_{ACB} \cos 45^\circ - T_{DE} \cos 45^\circ = 0$$

$$0.05894 T_{ACB} - 0.7071 T_{DE} = 0 \quad (1)$$

$$\Sigma F_y = 0:$$

$$-T_{ACB} \sin 40^\circ + T_{ACB} \sin 45^\circ + T_{DE} \sin 45^\circ - 22.5 = 0$$


$$0.06432 T_{ACB} + 0.7071 T_{DE} = 22.5 \quad (2)$$

$$\textcircled{a} \text{ ADD (1) AND (2): } 0.12326 T_{ACB} = 22.5 \quad T_{ACB} = 182.5 \text{ kN}$$

$$\textcircled{b} \text{ FROM (1): } T_{DE} = \frac{0.05894}{0.7071} (182.5) \quad T_{DE} = 15.22 \text{ kN}$$

NOTE: IN PROBS. 2.53 AND 2.54 THE CABIN IS CONSIDERED AS A PARTICLE. IF CONSIDERED AS A RIGID BODY (CHAP. 4) IT WOULD BE FOUND THAT ITS CENTER OF GRAVITY SHOULD BE LOCATED TO THE LEFT OF D FOR CD TO BE VERTICAL.


2.54

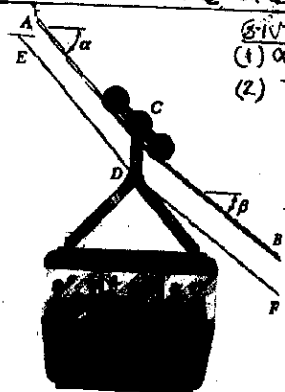

GIVEN:
 (1) $\alpha = 48^\circ$, $\beta = 38^\circ$
 (2) $T_{BE} = 18 \text{ kN}$, $T_{DF} \approx 0$

FIND:
 (a) COMBINED WEIGHT OF CABIN, PASSENGERS, AND SUPPORT SYSTEM
 (b) T_{ACB}

FREE-BODY DIAGRAM (CABIN CONSIDERED AS PARTICLE)



$$\textcircled{b} \Sigma F_x = 0:$$

$$T_{ACB} \cos 38^\circ - T_{ACB} \cos 48^\circ - (18 \text{ kN}) \cos 48^\circ = 0$$

$$0.1189 T_{ACB} - 12.044 \text{ kN} = 0$$

$$\textcircled{b} T_{ACB} = 101.3 \text{ kN}$$


$$\textcircled{a} \Sigma F_y = 0: T_{ACB} \sin 48^\circ - T_{ACB} \sin 38^\circ + (18 \text{ kN}) \sin 48^\circ - W = 0$$

$$W = (101.3 \text{ kN})(\sin 48^\circ - \sin 38^\circ) + (18 \text{ kN}) \sin 48^\circ$$

$$W = 26.24 \text{ kN}$$

$$\textcircled{a} W = 26.3 \text{ kN}$$


2.63

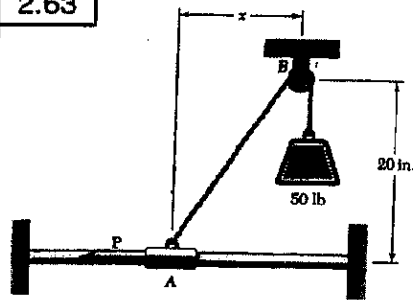

GIVEN:
SYSTEM SHOWN
IS IN EQUILIBRIUM

FIND
P WHEN
(a) $x = 4.5$ in.
(b) $x = 15$ in.

(a) FREE BODY: COLLAR A

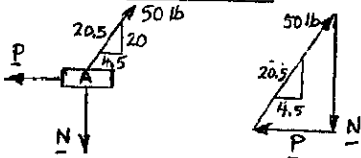


FORCE TRIANGLE

$$\frac{P}{4.5} = \frac{50 \text{ lb}}{20.5}$$

$$P = 10.98 \text{ lb}$$

(b) FREE BODY: COLLAR A

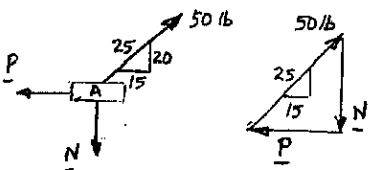


FORCE TRIANGLE

$$\frac{P}{15} = \frac{50 \text{ lb}}{25}$$

$$P = 30.0 \text{ lb}$$


2.65

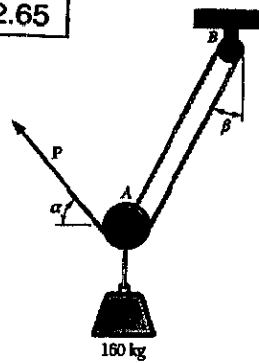

GIVEN:
 $\beta = 20^\circ$
ALSO: T IS THE SAME IN
ALL PORTIONS OF THE ROPE

FIND:
MAGNITUDE AND
DIRECTION OF P

FREE BODY: PULLEY A



$$\Sigma F_x = 0: 2P \sin 20^\circ - P \cos \alpha = 0$$

$$\cos \alpha = 2 \sin 20^\circ \quad \alpha = \pm 46.84^\circ$$

FOR $\alpha = +46.84^\circ$:

$$\Sigma F_y = 0: 2P \cos 20^\circ + P \sin 46.84^\circ - 1569.6 \text{ N} = 0$$

$$P = \frac{1569.6 \text{ N}}{2.609} = 601.6 \text{ N}$$


$$P = 602 \text{ N} \nearrow 46.8^\circ$$

$$W = (160 \text{ kg})(9.81 \text{ m/s}^2) = 1569.6 \text{ N}$$

FOR $\alpha = -46.84^\circ$: $\Sigma F_y = 0: 2P \cos 20^\circ + P \sin(-46.84^\circ) - 1569.6 \text{ N} = 0$

$$P = \frac{1569.6 \text{ N}}{1.1499} = 1364.9 \text{ N} \quad P = 1365 \text{ N} \searrow 46.8^\circ$$



2.64

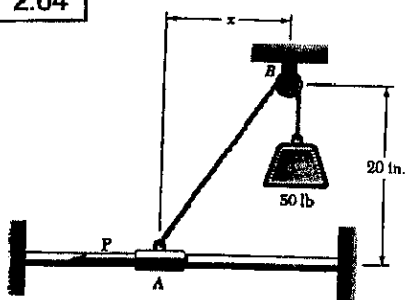

GIVEN:
SYSTEM SHOWN
IS IN EQUILIBRIUM
WITH $P = 48$ lb.

FIND: x

FREE BODY: COLLAR A




$$N^2 = (50)^2 - (48)^2 = 196$$

$$N = 14.00 \text{ lb}$$


SIMILAR TRIANGLES:

$$\frac{x}{20 \text{ in.}} = \frac{48 \text{ lb}}{14 \text{ lb}}$$

$$x = 68.6 \text{ in.}$$




2.66

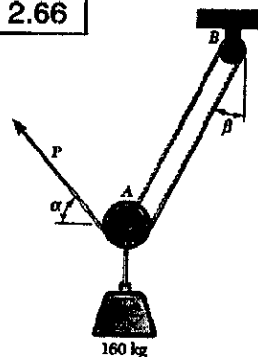

GIVEN:
 $\alpha = 40^\circ$
ALSO: T IS THE SAME IN
ALL PORTIONS OF THE ROPE.

FIND:
(a) ANGLE β
(b) MAGNITUDE OF P.

FREE BODY: PULLEY A



$$\Sigma F_x = 0: 2P \sin \beta - P \cos 40^\circ = 0$$

$$(a) \sin \beta = \frac{1}{2} \cos 40^\circ \quad \beta = 22.52^\circ$$

$$\beta = 22.5^\circ$$

(b) $\Sigma F_y = 0$:


$$P \sin 40^\circ + 2P \cos 22.52^\circ - 1569.6 \text{ N} = 0$$

$$P = \frac{1569.6 \text{ N}}{2.4903} = 630.3 \text{ N}$$

$$P = 630 \text{ N}$$

$$W = (160 \text{ kg})(9.81 \text{ m/s}^2) = 1569.6 \text{ N}$$

2.67

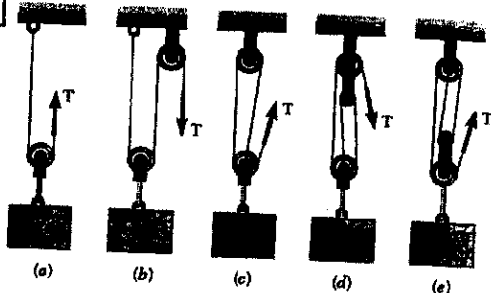

GIVEN: 600-lb CRATE SUPPORTED BY ONE OF THE ROPE-AND-PULLEY ARRANGEMENTS SHOWN.
 FIND: TENSION IN THE ROPE FOR EACH ARRANGEMENT.

FREE-BODY: PULLEY

(a) $\Sigma F_y = 0:$
 $2T - 600 \text{ lb} = 0$
 $T = 300 \text{ lb}$

(b) $\Sigma F_y = 0:$
 $2T - 600 \text{ lb} = 0$
 $T = 300 \text{ lb}$

(c) $\Sigma F_y = 0:$
 $3T - 600 \text{ lb} = 0$
 $T = 200 \text{ lb}$

(d) $\Sigma F_y = 0:$
 $3T - 600 \text{ lb} = 0$
 $T = 200 \text{ lb}$

(e) $\Sigma F_y = 0:$
 $4T - 600 \text{ lb} = 0$
 $T = 150 \text{ lb}$

2.68

GIVEN: ASSUME THAT IN PARTS b AND d OF PROB. 2.67 THE FREE END OF THE ROPE IS ATTACHED TO THE CRATE.
 FIND: TENSION IN ROPE.


FREE-BODY: PULLEY AND CRATE

(b) $\Sigma F_y = 0:$
 $3T - 600 \text{ lb} = 0$
 $T = 200 \text{ lb}$

(d) $\Sigma F_y = 0:$
 $4T - 600 \text{ lb} = 0$
 $T = 150 \text{ lb}$

2.69

PULLEY C CAN ROLL ON CABLE ACB.



GIVEN:

$P = 750 \text{ N}$

FIND:

(a) T_{ACB}

(b) Q

NOTE: (1) THE TENSION IS THE SAME IN BOTH PORTIONS OF CABLE ACB.

(2) THE TENSION IN CABLE DAC IS EQUAL TO P.


FREE BODY: PULLEY C

$\Sigma F_x = 0:$
 $T_{ACB} \cos 25^\circ - T_{ACB} \cos 55^\circ - (750 \text{ N}) \cos 55^\circ = 0$
 $T_{ACB} (\cos 25^\circ - \cos 55^\circ) = 750 \cos 55^\circ$
 $T_{ACB} = (750 \text{ N}) \frac{0.5736}{0.3327}$
 $T_{ACB} = 1293 \text{ N}$

(b) $\Sigma F_y = 0:$ $(T_{ACB} + T_{DAC}) \sin 55^\circ + T_{ACB} \sin 25^\circ - Q = 0$
 $Q = (1293 \text{ N} + 750 \text{ N}) \sin 55^\circ + (1293 \text{ N}) \sin 25^\circ = 2220.0 \text{ N}$
 $Q = 2220 \text{ N}$

2.70

PULLEY C CAN ROLL ON CABLE ACB.

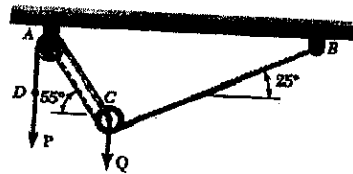

GIVEN:

$Q = 1800 \text{ N}$

FIND:

(a) T_{ACB}

(b) P

NOTE: (1) THE TENSION IS THE SAME IN BOTH PORTIONS OF CABLE ACB.

(2) THE TENSION IN CABLE DAC IS EQUAL TO P.

FREE BODY: PULLEY C

$\Sigma F_x = 0:$
 $T_{ACB} \cos 25^\circ - T_{ACB} \cos 55^\circ - P \cos 55^\circ = 0$
 $P = T_{ACB} \frac{\cos 25^\circ - \cos 55^\circ}{\cos 55^\circ}$
 $P = 0.5801 T_{ACB}$ (1)

$\Sigma F_y = 0:$ $(T_{ACB} + P) \sin 55^\circ + T_{ACB} \sin 25^\circ - 1800 \text{ N} = 0$ (2)

(a) SUBSTITUTE FOR P FROM (1) INTO (2):
 $(1.5801 \sin 55^\circ + \sin 25^\circ) T_{ACB} = 1800 \text{ N}$


$T_{ACB} = 1048.4 \text{ N}$

$T_{ACB} = 1048 \text{ N}$

(b) CARRY INTO (1):
 $P = 0.5801 (1048.4 \text{ N})$

$P = 608 \text{ N}$

2.75

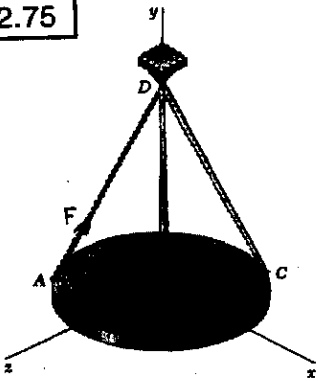

GIVEN:

- (1) WIRES FORM 30° ANGLES WITH VERTICAL
 (2) FORCE EXERTED BY AD ON PLATE HAS COMPONENT $F_x = 110.3 \text{ N}$.

FIND:

- (a) TENSION IN AD
 (b) ANGLES $\theta_x, \theta_y, \theta_z$ THAT FORCE EXERTED AT A FORMS WITH THE COORDINATE AXES.

$$(a) F_x = F \sin 30^\circ \sin 50^\circ = 110.3 \text{ N (GIVEN)}$$

$$F = \frac{110.3 \text{ N}}{\sin 30^\circ \sin 50^\circ} = 287.97 \text{ N} \quad F = 288 \text{ N} \quad \blacktriangleleft$$

$$(b) \cos \theta_x = \frac{F_x}{F} = \frac{110.3 \text{ N}}{287.97 \text{ N}} = 0.3830 \quad \theta_x = 67.5^\circ \quad \blacktriangleleft$$

$$F_y = F \cos 30^\circ, \quad \cos \theta_y = \frac{F_y}{F} = \cos 30^\circ. \text{ Thus: } \theta_y = 30.0^\circ \quad \blacktriangleleft$$


$$F_z = -F \sin 30^\circ \cos 50^\circ$$

$$= -(287.97 \text{ N}) \sin 30^\circ \cos 50^\circ = -92.552 \text{ N}$$

$$\cos \theta_z = \frac{F_z}{F} = \frac{-92.552 \text{ N}}{287.97 \text{ N}} = -0.3214$$

$$\theta_z = 108.7^\circ \quad \blacktriangleleft$$

2.77

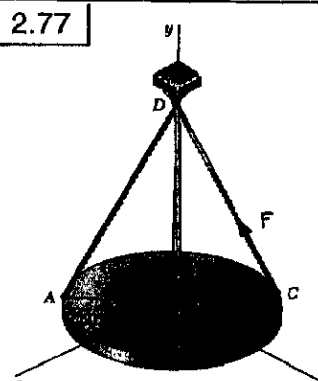

GIVEN:

- (1) WIRES FORM 30° ANGLES WITH VERTICAL
 (2) TENSION IN CD IS 60 lb.

FIND:

- (a) COMPONENTS OF FORCE EXERTED AT C.
 (b) ANGLES $\theta_x, \theta_y, \theta_z$ THAT FORCE FORMS WITH THE COORDINATE AXES.

$$(a) F_x = -(60 \text{ lb}) \sin 30^\circ \cos 60^\circ \quad F_x = -15.00 \text{ lb} \quad \blacktriangleleft$$

$$F_y = (60 \text{ lb}) \cos 30^\circ = 51.96 \text{ lb} \quad F_y = +52.0 \text{ lb} \quad \blacktriangleleft$$

$$F_z = (60 \text{ lb}) \sin 30^\circ \sin 60^\circ = 25.98 \text{ lb} \quad F_z = +26.0 \text{ lb} \quad \blacktriangleleft$$


$$(b) \cos \theta_x = \frac{F_x}{F} = \frac{-15.00 \text{ lb}}{60 \text{ lb}} = -0.2500, \quad \theta_x = 104.5^\circ \quad \blacktriangleleft$$

$$\cos \theta_y = \frac{F_y}{F} = \frac{+51.96 \text{ lb}}{60 \text{ lb}} = 0.8660, \quad \theta_y = 30.0^\circ \quad \blacktriangleleft$$

$$\cos \theta_z = \frac{F_z}{F} = \frac{+25.98 \text{ lb}}{60 \text{ lb}} = 0.4330 \quad \theta_z = 64.3^\circ \quad \blacktriangleleft$$

NOTE: VALUE OBTAINED FOR θ_y CHECKS WITH GIVEN DATA.

2.76

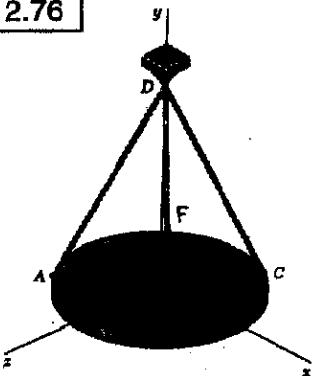

GIVEN:

- (1) WIRES FORM 30° ANGLES WITH VERTICAL
 (2) FORCE EXERTED BY BD ON PLATE HAS COMPONENT $F_x = -32.14 \text{ N}$.

FIND:

- (a) TENSION IN BD
 (b) ANGLES $\theta_x, \theta_y, \theta_z$ THAT FORCE EXERTED AT B FORMS WITH THE COORDINATE AXES.

$$(a) F_x = -F \sin 30^\circ \cos 40^\circ = -32.14 \text{ N (GIVEN)}$$

$$F = \frac{32.14 \text{ N}}{\sin 30^\circ \cos 40^\circ} = 100.0 \text{ N} \quad F = 100.0 \text{ N} \quad \blacktriangleleft$$

$$(b) F_z = -F \sin 30^\circ \cos 40^\circ$$


$$= -(100.0 \text{ N}) \sin 30^\circ \cos 40^\circ = -38.30 \text{ N}$$

$$\cos \theta_x = \frac{F_x}{F} = \frac{-38.30 \text{ N}}{100.0 \text{ N}} = -0.3830 \quad \theta_x = 112.5^\circ \quad \blacktriangleleft$$

$$F_y = F \cos 30^\circ, \quad \cos \theta_y = \frac{F_y}{F} = \cos 30^\circ, \text{ Thus: } \theta_y = 30.0^\circ \quad \blacktriangleleft$$

$$\cos \theta_z = \frac{F_z}{F} = \frac{-32.14 \text{ N}}{100.0 \text{ N}} = -0.3214 \quad \theta_z = 108.7^\circ \quad \blacktriangleleft$$

2.78

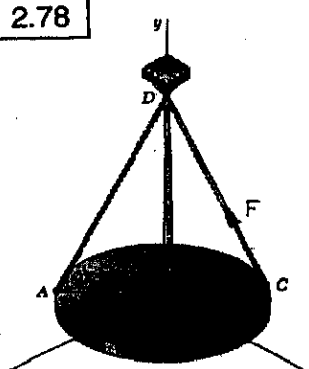

GIVEN:

- (1) WIRES FORM 30° ANGLES WITH VERTICAL.
 (2) FORCE EXERTED BY CD ON PLATE HAS COMPONENT $F_x = -20.0 \text{ lb}$

FIND:

- (a) TENSION IN CD.
 (b) ANGLES $\theta_x, \theta_y, \theta_z$ THAT FORCE EXERTED AT C FORMS WITH THE COORDINATE AXES.

$$(a) F_x = -F \sin 30^\circ \cos 60^\circ = -20.0 \text{ lb (GIVEN)}$$

$$F = \frac{20.0 \text{ lb}}{\sin 30^\circ \cos 60^\circ} = 80.0 \text{ lb} \quad F = 80.0 \text{ lb} \quad \blacktriangleleft$$

$$(b) \cos \theta_x = \frac{F_x}{F} = \frac{-20.0 \text{ lb}}{80.0 \text{ lb}} = -0.2500 \quad \theta_x = 104.5^\circ \quad \blacktriangleleft$$

$$F_y = F \cos 30^\circ, \quad \cos \theta_y = \frac{F_y}{F} = \cos 30^\circ. \text{ Thus: } \theta_y = 30.0^\circ \quad \blacktriangleleft$$

$$F_z = F \sin 30^\circ \sin 60^\circ$$

$$= (80.0 \text{ lb}) \sin 30^\circ \sin 60^\circ = 34.641 \text{ lb}$$

$$\cos \theta_z = \frac{F_z}{F} = \frac{34.641 \text{ lb}}{80.0 \text{ lb}} = 0.4330 \quad \theta_z = 64.3^\circ \quad \blacktriangleleft$$

2.79 GIVEN: $\underline{F} = (260\text{N})\underline{i} - (320\text{N})\underline{j} + (800\text{N})\underline{k}$
 FIND: MAGNITUDE AND DIRECTION OF \underline{F}

$$F = \sqrt{F_x^2 + F_y^2 + F_z^2} = \sqrt{(260)^2 + (320)^2 + (800)^2}, F = 900\text{N}$$

$$\cos \theta_x = \frac{F_x}{F} = \frac{260\text{N}}{900\text{N}} = 0.2889 \quad \theta_x = 73.2^\circ$$

$$\cos \theta_y = \frac{F_y}{F} = \frac{-320\text{N}}{900\text{N}} = -0.3556 \quad \theta_y = 110.8^\circ$$

$$\cos \theta_z = \frac{F_z}{F} = \frac{800\text{N}}{900\text{N}} = 0.8889 \quad \theta_z = 27.3^\circ$$

2.80 GIVEN: $\underline{F} = (320\text{N})\underline{i} + (400\text{N})\underline{j} - (250\text{N})\underline{k}$
 FIND: MAGNITUDE AND DIRECTION OF \underline{F} .

$$F = \sqrt{F_x^2 + F_y^2 + F_z^2} = \sqrt{(320)^2 + (400)^2 + (250)^2}, F = 570\text{N}$$

$$\cos \theta_x = \frac{F_x}{F} = \frac{320\text{N}}{570\text{N}} = 0.5614 \quad \theta_x = 55.8^\circ$$

$$\cos \theta_y = \frac{F_y}{F} = \frac{400\text{N}}{570\text{N}} = 0.7018 \quad \theta_y = 45.4^\circ$$

$$\cos \theta_z = \frac{F_z}{F} = \frac{-250\text{N}}{570\text{N}} = -0.4386 \quad \theta_z = 116.0^\circ$$

2.81 GIVEN: FORCE WITH $\theta_x = 69.3^\circ$, $\theta_z = 57.9^\circ$
 AND $F_y = -174.0\text{ lb}$.
 FIND: (a) θ_y , (b) F_x , F_z , AND F .

(a) TO DETERMINE θ_y WE USE THE RELATION
 $\cos^2 \theta_x + \cos^2 \theta_y + \cos^2 \theta_z = 1 \quad \cos^2 \theta_y = 1 - \cos^2 \theta_x - \cos^2 \theta_z$
 SINCE $F_y < 0$, WE MUST HAVE $\cos \theta_y < 0$. THUS:
 $\cos \theta_y = -\sqrt{1 - \cos^2 69.3^\circ - \cos^2 57.9^\circ} = -0.7699, \theta_y = 140.3^\circ$

(b) $F = \frac{F_y}{\cos \theta_y} = \frac{-174.0\text{ lb}}{-0.7699} = 226.0\text{ lb} \quad F = 226\text{ lb}$
 $F_x = F \cos \theta_x = (226.0\text{ lb}) \cos 69.3^\circ \quad F_x = 79.9\text{ lb}$
 $F_z = F \cos \theta_z = (226.0\text{ lb}) \cos 57.9^\circ \quad F_z = 120.1\text{ lb}$

2.82 GIVEN: FORCE WITH $\theta_x = 70.9^\circ$, $\theta_y = 144.9^\circ$
 AND $F_z = -52.0\text{ lb}$
 FIND: (a) θ_z , (b) F_x , F_y , AND F .

(a) TO DETERMINE θ_z WE USE THE RELATION
 $\cos^2 \theta_x + \cos^2 \theta_y + \cos^2 \theta_z = 1, \cos^2 \theta_z = 1 - \cos^2 \theta_x - \cos^2 \theta_y$
 SINCE $F_z < 0$, WE MUST HAVE $\cos \theta_z < 0$. THUS:
 $\cos \theta_z = -\sqrt{1 - \cos^2 70.9^\circ - \cos^2 144.9^\circ} = -0.4728, \theta_z = 118.2^\circ$

(b) $F = \frac{F_z}{\cos \theta_z} = \frac{-52.0\text{ lb}}{-0.4728} = 110.0\text{ lb} \quad F = 110\text{ lb}$
 $F_x = F \cos \theta_x = (110.0\text{ lb}) \cos 70.9^\circ \quad F_x = 36.0\text{ lb}$
 $F_y = F \cos \theta_y = (110.0\text{ lb}) \cos 144.9^\circ \quad F_y = -90.0\text{ lb}$

2.83 GIVEN: $F = 230\text{N}$, $\theta_x = 32.5^\circ$, $F_y = -60\text{N}$, $F_z > 0$
 FIND: (a) F_x AND F_z , (b) θ_y AND θ_z

(a) $F_x = F \cos \theta_x = (230\text{N}) \cos 32.5^\circ \quad F_x = 194.0\text{N}$
 $F^2 = F_x^2 + F_y^2 + F_z^2 \quad (230\text{N})^2 = (194.0\text{N})^2 + (-60\text{N})^2 + F_z^2$
 $F_z = \sqrt{(230)^2 - (194)^2 - (60)^2} \quad F_z = +108.0\text{N}$

(b) $\cos \theta_y = F_y / F = -60 / 230 = -0.2609 \quad \theta_y = 105.1^\circ$
 $\cos \theta_z = F_z / F = 108 / 230 = +0.4696 \quad \theta_z = 62.0^\circ$

2.84 GIVEN: $F = 210\text{N}$, $F_x = 80\text{N}$, $\theta_z = 151.2^\circ$, $F_y < 0$
 FIND: (a) F_y AND F_z , (b) θ_x AND θ_y .

(a) $F_z = F \cos \theta_z = (210\text{N}) \cos 151.2^\circ \quad F_z = -184.0\text{N}$
 $F^2 = F_x^2 + F_y^2 + F_z^2 \quad (210\text{N})^2 = (80\text{N})^2 + F_y^2 + (-184.0\text{N})^2$
 $F_y = -\sqrt{(210)^2 - (80)^2 - (184.0)^2} \quad F_y = -62.0\text{N}$

(b) $\cos \theta_x = F_x / F = 80 / 210 = +0.3810 \quad \theta_x = 67.6^\circ$
 $\cos \theta_y = F_y / F = -62.0 / 210 = - \quad \theta_y = 107.2^\circ$

2.85 GIVEN: TENSION IN CABLE AB IS 408 N.
 FIND: COMPONENTS OF FORCE EXERTED ON PLATE AT B.

Dimensions in mm

$$\underline{BA} = 320\text{ mm}\underline{i} + 480\text{ mm}\underline{j} - 360\text{ mm}\underline{k} \quad BA = \sqrt{(320)^2 + (480)^2 + (360)^2} = 680$$

$$\underline{F} = F \frac{\underline{BA}}{BA} = \frac{408\text{ N}}{680\text{ mm}} [(320\text{ mm})\underline{i} + (480\text{ mm})\underline{j} - (360\text{ mm})\underline{k}]$$

$$\underline{F} = (192\text{ N})\underline{i} + (288\text{ N})\underline{j} - (216\text{ N})\underline{k}$$

$$F_x = +192\text{ N}, F_y = +288\text{ N}, F_z = -216\text{ N}$$

2.86 GIVEN: TENSION IN CABLE AD IS 429 N.
 FIND: COMPONENTS OF FORCE EXERTED ON PLATE AT D.

Dimensions in mm


$$\underline{DA} = -250\text{ mm}\underline{i} + 480\text{ mm}\underline{j} + 360\text{ mm}\underline{k} \quad DA = \sqrt{(250)^2 + (480)^2 + (360)^2} = 650$$

$$\underline{F} = F \frac{\underline{DA}}{DA} = \frac{429\text{ N}}{650\text{ mm}} [(-250\text{ mm})\underline{i} + (480\text{ mm})\underline{j} + (360\text{ mm})\underline{k}]$$

$$\underline{F} = -(165\text{ N})\underline{i} + (316.8\text{ N})\underline{j} + (237.6\text{ N})\underline{k}$$

$$F_x = -165\text{ N}, F_y = +317\text{ N}, F_z = +238\text{ N}$$

2.87

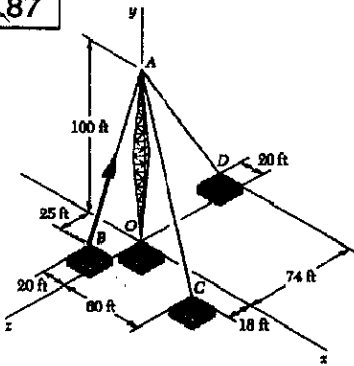

GIVEN:
TENSION IN WIRE
AB IS 525 lb.

FIND:
COMPONENTS OF
FORCE EXERTED
ON BOLT B BY
WIRE AB.

$$\vec{BA} = (20\text{ft})\underline{i} + (100\text{ft})\underline{j} - (25\text{ft})\underline{k}$$

$$BA = \sqrt{(20)^2 + (100)^2 + (25)^2}$$


$$BA = 105\text{ft}$$

$$\underline{F} = F \frac{\vec{BA}}{BA} = F \frac{\vec{BA}}{105\text{ft}} = \frac{525\text{lb}}{105\text{ft}} [(20\text{ft})\underline{i} + (100\text{ft})\underline{j} - (25\text{ft})\underline{k}]$$

$$\underline{F} = (100\text{lb})\underline{i} + (500\text{lb})\underline{j} - (125\text{lb})\underline{k}$$

$$F_x = +100\text{ lb}, F_y = +500\text{ lb}, F_z = -125\text{ lb}$$

2.89

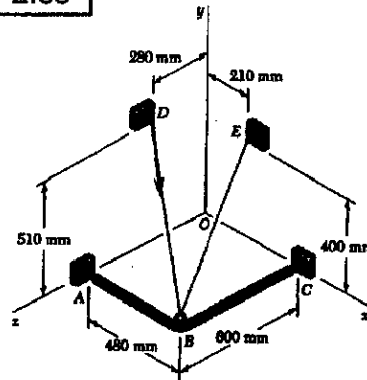

GIVEN:
TENSION IN
CABLE DBE
IS 385 N.

FIND:
COMPONENTS OF
FORCE EXERTED
BY CABLE ON D.

$$\vec{DB} = (480\text{mm})\underline{i} - (510\text{mm})\underline{j} + (320\text{mm})\underline{k}$$


$$DB = \sqrt{(480)^2 + (510)^2 + (320)^2} = 770\text{mm}$$

$$\underline{F} = F \frac{\vec{DB}}{DB} = F \frac{\vec{DB}}{770\text{mm}} = \frac{385\text{N}}{770\text{mm}} [(480\text{mm})\underline{i} - (510\text{mm})\underline{j} + (320\text{mm})\underline{k}]$$

$$\underline{F} = (240\text{N})\underline{i} - (255\text{N})\underline{j} + (160\text{N})\underline{k}$$

$$F_x = +240\text{N}, F_y = -255\text{N}, F_z = +160\text{N}$$

2.88

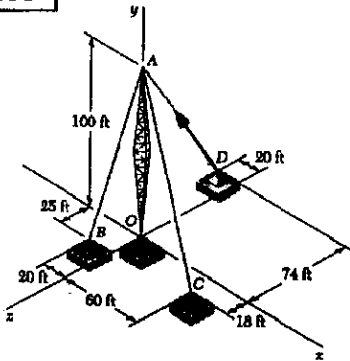

GIVEN:
TENSION IN WIRE
AD IS 315 lb.

FIND:
COMPONENTS OF
FORCE EXERTED
ON BOLT D BY
WIRE AD.

$$\vec{DA} = (20\text{ft})\underline{i} + (100\text{ft})\underline{j} + (74\text{ft})\underline{k}$$


$$DA = \sqrt{(20)^2 + (100)^2 + (74)^2} = 126\text{ft}$$

$$\underline{F} = F \frac{\vec{DA}}{DA} = F \frac{\vec{DA}}{126\text{ft}} = \frac{315\text{lb}}{126\text{ft}} [(20\text{ft})\underline{i} + (100\text{ft})\underline{j} + (74\text{ft})\underline{k}]$$

$$\underline{F} = (50\text{lb})\underline{i} + (250\text{lb})\underline{j} + (185\text{lb})\underline{k}$$

$$F_x = +50\text{ lb}, F_y = +250\text{ lb}, F_z = +185\text{ lb}$$

2.90

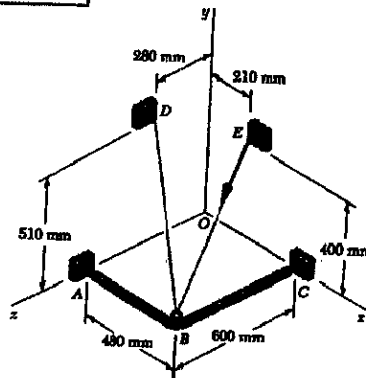

GIVEN:
TENSION IN
CABLE DBE
IS 385 N.

FIND:
COMPONENTS OF
FORCE EXERTED
BY CABLE ON E.

$$\vec{EB} = (270\text{mm})\underline{i} - (400\text{mm})\underline{j} + (600\text{mm})\underline{k}$$


$$EB = \sqrt{(270)^2 + (400)^2 + (600)^2} = 770\text{mm}$$

$$\underline{F} = F \frac{\vec{EB}}{EB} = F \frac{\vec{EB}}{770\text{mm}} = \frac{385\text{N}}{770\text{mm}} [(270\text{mm})\underline{i} - (400\text{mm})\underline{j} + (600\text{mm})\underline{k}]$$

$$\underline{F} = (135\text{N})\underline{i} - (200\text{N})\underline{j} + (300\text{N})\underline{k}$$

$$F_x = +135\text{ N}, F_y = -200\text{ N}, F_z = +300\text{ N}$$

2.91



GIVEN:

$$P = 300 \text{ N}$$

$$Q = 400 \text{ N}$$

FIND:

MAGNITUDE AND
DIRECTION OF
RESULTANT
OF \underline{P} AND \underline{Q} .

FORCE \underline{P} : $P_x = -(300 \text{ N}) \cos 30^\circ \sin 15^\circ = -67.24 \text{ N}$
 $P_y = +(300 \text{ N}) \sin 30^\circ = +150.00 \text{ N}$
 $P_z = +(300 \text{ N}) \cos 30^\circ \cos 15^\circ = +250.95 \text{ N}$
 $\underline{P} = -(67.24 \text{ N})\underline{i} + (150.00 \text{ N})\underline{j} + (250.95 \text{ N})\underline{k}$

FORCE \underline{Q} : $Q_x = +(400 \text{ N}) \cos 50^\circ \cos 20^\circ = +241.61 \text{ N}$
 $Q_y = +(400 \text{ N}) \sin 50^\circ = +306.42 \text{ N}$
 $Q_z = -(400 \text{ N}) \cos 50^\circ \sin 20^\circ = -87.94 \text{ N}$
 $\underline{Q} = +(241.61 \text{ N})\underline{i} + (306.42 \text{ N})\underline{j} - (87.94 \text{ N})\underline{k}$

RESULTANT:

$$\underline{R} = \underline{P} + \underline{Q} = (174.37 \text{ N})\underline{i} + (456.42 \text{ N})\underline{j} + (163.01 \text{ N})\underline{k}$$


$$R = \sqrt{(174.37)^2 + (456.42)^2 + (163.01)^2} = 515.07 \text{ N}, R = 515 \text{ N}$$

$$\cos \theta_x = R_x/R = (174.37 \text{ N})/(515.07 \text{ N}) = 0.3385, \theta_x = 70.2^\circ$$

$$\cos \theta_y = R_y/R = (456.42 \text{ N})/(515.07 \text{ N}) = 0.8861, \theta_y = 27.6^\circ$$

$$\cos \theta_z = R_z/R = (163.01 \text{ N})/(515.07 \text{ N}) = 0.3165, \theta_z = 71.5^\circ$$

2.93

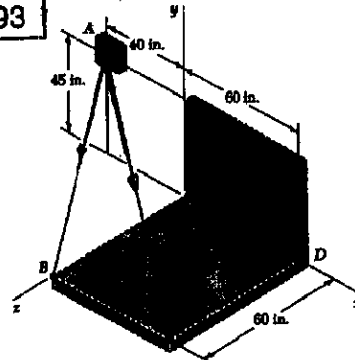

GIVEN:

$$T_{AB} = 425 \text{ lb}$$

$$T_{AC} = 510 \text{ lb}$$

FIND:

MAGNITUDE AND
DIRECTION OF
RESULTANT OF
FORCES AT A.

$$\underline{AB} = (40 \text{ in})\underline{i} - (45 \text{ in})\underline{j} + (60 \text{ in})\underline{k} \quad AB = \sqrt{(40)^2 + (45)^2 + (60)^2} = 85 \text{ in.}$$

$$\underline{AC} = (100 \text{ in})\underline{i} - (45 \text{ in})\underline{j} + (60 \text{ in})\underline{k} \quad AC = \sqrt{(100)^2 + (45)^2 + (60)^2} = 125 \text{ in.}$$

$$\underline{F}_{AB} = F_{AB} \frac{\underline{AB}}{AB} = F_{AB} \frac{\underline{AB}}{85 \text{ in.}} = \frac{425 \text{ lb}}{85 \text{ in.}} [(40 \text{ in})\underline{i} - (45 \text{ in})\underline{j} + (60 \text{ in})\underline{k}]$$

$$\underline{F}_{AB} = (200 \text{ lb})\underline{i} - (225 \text{ lb})\underline{j} + (300 \text{ lb})\underline{k}$$

$$\underline{F}_{AC} = F_{AC} \frac{\underline{AC}}{AC} = F_{AC} \frac{\underline{AC}}{125 \text{ in.}} = \frac{510 \text{ lb}}{125 \text{ in.}} [(100 \text{ in})\underline{i} - (45 \text{ in})\underline{j} + (60 \text{ in})\underline{k}]$$

$$\underline{F}_{AC} = (408 \text{ lb})\underline{i} - (183.6 \text{ lb})\underline{j} + (244.8 \text{ lb})\underline{k}$$

$$\underline{R} = \underline{F}_{AB} + \underline{F}_{AC} = (608 \text{ lb})\underline{i} - (408.6 \text{ lb})\underline{j} + (544.8 \text{ lb})\underline{k}, R = 912.92 \text{ lb}$$

$$R = 913 \text{ lb}$$

$$\cos \theta_x = R_x/R = 608/912.92 = 0.6660$$

$$\theta_x = 48.2^\circ$$


$$\cos \theta_y = R_y/R = -408.6/912.92 = -0.4476$$

$$\theta_y = 116.6^\circ$$

$$\cos \theta_z = R_z/R = 544.8/912.92 = 0.5968$$

$$\theta_z = 53.4^\circ$$

2.92



GIVEN:

$$P = 400 \text{ N}$$

$$Q = 300 \text{ N}$$

FIND:

MAGNITUDE AND
DIRECTION OF
RESULTANT
OF \underline{P} AND \underline{Q} .

FORCE \underline{P} : $P_x = -(400 \text{ N}) \cos 30^\circ \sin 15^\circ = -89.66 \text{ N}$
 $P_y = +(400 \text{ N}) \sin 30^\circ = +200.00 \text{ N}$
 $P_z = +(400 \text{ N}) \cos 30^\circ \cos 15^\circ = +334.61 \text{ N}$
 $\underline{P} = -(89.66 \text{ N})\underline{i} + (200.00 \text{ N})\underline{j} + (334.61 \text{ N})\underline{k}$

FORCE \underline{Q} : $Q_x = +(300 \text{ N}) \cos 50^\circ \cos 20^\circ = +181.21 \text{ N}$
 $Q_y = +(300 \text{ N}) \sin 50^\circ = +229.81 \text{ N}$
 $Q_z = -(300 \text{ N}) \cos 50^\circ \sin 20^\circ = -65.45 \text{ N}$
 $\underline{Q} = (181.21 \text{ N})\underline{i} + (229.81 \text{ N})\underline{j} - (65.45 \text{ N})\underline{k}$

RESULTANT:

$$\underline{R} = \underline{P} + \underline{Q} = (91.55 \text{ N})\underline{i} + (429.81 \text{ N})\underline{j} + (268.66 \text{ N})\underline{k}$$


$$R = \sqrt{(91.55)^2 + (429.81)^2 + (268.66)^2} = 515.07 \text{ N}, R = 515 \text{ N}$$

$$\cos \theta_x = R_x/R = (91.55 \text{ N})/(515.07 \text{ N}) = 0.1777, \theta_x = 79.8^\circ$$

$$\cos \theta_y = R_y/R = (429.81 \text{ N})/(515.07 \text{ N}) = 0.8345, \theta_y = 33.4^\circ$$

$$\cos \theta_z = R_z/R = (268.66 \text{ N})/(515.07 \text{ N}) = 0.5216, \theta_z = 58.6^\circ$$

2.94

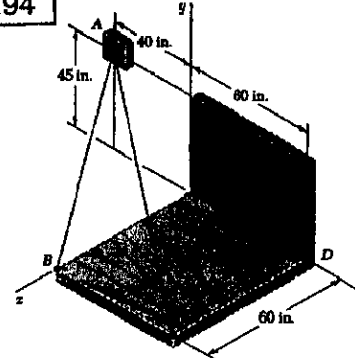

GIVEN:

$$T_{AB} = 510 \text{ lb}$$

$$T_{AC} = 425 \text{ lb}$$

FIND:

MAGNITUDE AND
DIRECTION OF
RESULTANT OF
FORCES AT A.

$$\underline{AB} = (40 \text{ in})\underline{i} - (45 \text{ in})\underline{j} + (60 \text{ in})\underline{k} \quad AB = \sqrt{(40)^2 + (45)^2 + (60)^2} = 85 \text{ in.}$$

$$\underline{AC} = (100 \text{ in})\underline{i} - (45 \text{ in})\underline{j} + (60 \text{ in})\underline{k} \quad AC = \sqrt{(100)^2 + (45)^2 + (60)^2} = 125 \text{ in.}$$

$$\underline{F}_{AB} = F_{AB} \frac{\underline{AB}}{AB} = F_{AB} \frac{\underline{AB}}{85 \text{ in.}} = \frac{510 \text{ lb}}{85 \text{ in.}} [(40 \text{ in})\underline{i} - (45 \text{ in})\underline{j} + (60 \text{ in})\underline{k}]$$

$$\underline{F}_{AB} = (240 \text{ lb})\underline{i} - (270 \text{ lb})\underline{j} + (360 \text{ lb})\underline{k}$$

$$\underline{F}_{AC} = F_{AC} \frac{\underline{AC}}{AC} = F_{AC} \frac{\underline{AC}}{125 \text{ in.}} = \frac{425 \text{ lb}}{125 \text{ in.}} [(100 \text{ in})\underline{i} - (45 \text{ in})\underline{j} + (60 \text{ in})\underline{k}]$$

$$\underline{F}_{AC} = (340 \text{ lb})\underline{i} - (153 \text{ lb})\underline{j} + (204 \text{ lb})\underline{k}$$

$$\underline{R} = \underline{F}_{AB} + \underline{F}_{AC} = (580 \text{ lb})\underline{i} - (423 \text{ lb})\underline{j} + (564 \text{ lb})\underline{k}, R = 912.92 \text{ lb}$$

$$R = 913 \text{ lb}$$

$$\cos \theta_x = R_x/R = 580/912.92 = 0.6353$$

$$\theta_x = 50.6^\circ$$


$$\cos \theta_y = R_y/R = -423/912.92 = -0.4633$$

$$\theta_y = 117.6^\circ$$

$$\cos \theta_z = R_z/R = 564/912.92 = 0.6178$$

$$\theta_z = 51.8^\circ$$


2.99

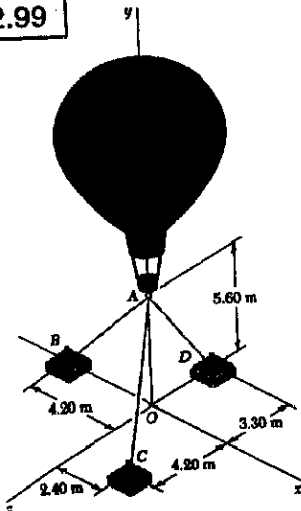

GIVEN:
 $T_{AB} = 259 \text{ N}$

FIND:
VERTICAL FORCE P
EXERTED AT A BY THE
BALLOON.

FIG. P 2.99, P 2.100,
P 2.101, AND P 2.102



FREE BODY: A

FORCES APPLIED AT A
ARE T_{AB} , T_{AC} , T_{AD} ,
AND P , WHERE $P = P_j$.
TO EXPRESS THE OTHER
FORCES IN TERMS OF THE
UNIT VECTORS, WE WRITE

$$\begin{aligned} \vec{AB} &= -(4.20\text{m})\hat{i} - (5.60\text{m})\hat{j} & AB &= 7.00\text{m} \\ \vec{AC} &= (2.40\text{m})\hat{i} - (5.60\text{m})\hat{j} + (4.20\text{m})\hat{k}, & AC &= 7.40\text{m} \\ \vec{AD} &= - (5.60\text{m})\hat{j} - (3.30\text{m})\hat{k}, & AD &= 6.50\text{m} \end{aligned}$$

$$\begin{aligned} T_{AB} &= T_{AB} \lambda_{AB} = T_{AB} \frac{\vec{AB}}{AB} = (-0.6\hat{i} - 0.8\hat{j}) T_{AB} \\ T_{AC} &= T_{AC} \lambda_{AC} = T_{AC} \frac{\vec{AC}}{AC} = \left(\frac{24}{74}\hat{i} - \frac{56}{74}\hat{j} + \frac{42}{74}\hat{k} \right) T_{AC} \\ T_{AD} &= T_{AD} \lambda_{AD} = T_{AD} \frac{\vec{AD}}{AD} = \left(-\frac{56}{65}\hat{j} - \frac{33}{65}\hat{k} \right) T_{AD} \end{aligned}$$

EQUILIBRIUM CONDITION:

$$\Sigma \vec{F} = 0: T_{AB} + T_{AC} + T_{AD} + P_j = 0$$

SUBSTITUTING THE EXPRESSIONS OBTAINED FOR T_{AB} ,
 T_{AC} , AND T_{AD} AND FACTORING \hat{i} , \hat{j} , AND \hat{k} :

$$\begin{aligned} &(-0.6 T_{AB} + \frac{24}{74} T_{AC}) \hat{i} \\ &+ (-0.8 T_{AB} - \frac{56}{74} T_{AC} - \frac{56}{65} T_{AD} + P) \hat{j} \\ &+ (\frac{42}{74} T_{AC} - \frac{33}{65} T_{AD}) \hat{k} = 0 \end{aligned}$$

SETTING TO ZERO THE COEFFICIENTS OF \hat{i} , \hat{j} , \hat{k} :

$$\begin{aligned} \textcircled{1} \quad &-0.6 T_{AB} + \frac{24}{74} T_{AC} = 0 & (1) \\ \textcircled{2} \quad &-0.8 T_{AB} - \frac{56}{74} T_{AC} - \frac{56}{65} T_{AD} + P = 0 & (2) \\ \textcircled{3} \quad &\frac{42}{74} T_{AC} - \frac{33}{65} T_{AD} = 0 & (3) \end{aligned}$$

CONTINUED

2.99 CONTINUED

MAKING $T_{AB} = 259 \text{ N}$ IN EQ.(1) AND SOLVING FOR T_{AC} :

$$T_{AC} = \frac{74}{24} (0.6)(259 \text{ N}) \quad T_{AC} = 479.15 \text{ N}$$

CARRYING INTO EQ.(3) AND SOLVING FOR T_{AD} :

$$T_{AD} = \frac{65}{33} \frac{42}{74} (479.15 \text{ N}) \quad T_{AD} = 535.66 \text{ N}$$

SUBSTITUTING FOR T_{AB} , T_{AC} , T_{AD} INTO (2) AND SOLVING
FOR P :

$$P = 0.8(259 \text{ N}) + \frac{56}{74} (479.15 \text{ N}) + \frac{56}{65} (535.66 \text{ N}) = 1031.3 \text{ N}$$

$$P = 1031 \text{ N} \uparrow$$

2.100

GIVEN: $T_{AC} = 444 \text{ N}$

FIND: VERTICAL FORCE P EXERTED
AT A BY THE BALLOON

SEE LEFT-HAND COLUMN FOR DERIVATION OF EQS.(1),(2),(3)

MAKING $T_{AC} = 444 \text{ N}$ IN EQS. (1) AND (3) AND SOLVING
FOR T_{AB} AND T_{AD} :

$$\begin{aligned} T_{AB} &= \frac{24}{0.6(74)} (444 \text{ N}) & T_{AD} &= \frac{65}{33} \frac{42}{74} (444 \text{ N}) \\ T_{AB} &= 240 \text{ N} & T_{AD} &= 496.36 \text{ N} \end{aligned}$$

SUBSTITUTING FOR T_{AB} , T_{AC} , T_{AD} INTO (2) AND SOLVING
FOR P :

$$P = 0.8(240 \text{ N}) + \frac{56}{74} (444 \text{ N}) + \frac{56}{65} (496.36 \text{ N}) = 956.6 \text{ N}$$

$$P = 956 \text{ N} \uparrow$$

2.101

(SEE FIGURE ON UPPER LEFT)

GIVEN: $T_{AD} = 481 \text{ N}$

FIND: VERTICAL FORCE P EXERTED AT A BY THE BALLOON

SEE LEFT-HAND COLUMN FOR DERIVATION OF EQS.(1),(2),(3)

MAKING $T_{AD} = 481 \text{ N}$ IN EQ.(3) AND SOLVING FOR T_{AC} :

$$T_{AC} = \frac{74}{42} \frac{33}{65} (481 \text{ N}) \quad T_{AC} = 430.26 \text{ N}$$

CARRYING INTO EQ.(1) AND SOLVING FOR T_{AB} :

$$T_{AB} = \frac{24}{0.6(74)} (430.26 \text{ N}) \quad T_{AB} = 232.57 \text{ N}$$

SUBSTITUTING FOR T_{AB} , T_{AC} , T_{AD} INTO (2) AND SOLVING
FOR P :

$$P = 0.8(232.57 \text{ N}) + \frac{56}{74} (430.26 \text{ N}) + \frac{56}{65} (481 \text{ N}) = 926.06 \text{ N}$$

$$P = 926 \text{ N} \uparrow$$

2.102

(SEE FIGURE ON UPPER LEFT)

GIVEN: BALLOON EXERTS FORCE $P = 800 \text{ N}$ AT A.

FIND: TENSION IN EACH CABLE

SEE LEFT-HAND COLUMN FOR DERIVATION OF EQS.(1),(2),(3)

$$\text{FROM EQ.(1): } T_{AB} = \frac{24}{0.6(74)} T_{AC} \quad T_{AB} = 0.54054 T_{AC}$$

$$\text{FROM EQ.(3): } T_{AD} = \frac{65}{33} \frac{42}{74} T_{AC} \quad T_{AD} = 1.1179 T_{AC}$$

SUBSTITUTE FOR T_{AB} AND T_{AD} INTO EQ.(2):

$$-0.8(0.54054 T_{AC}) - \frac{56}{74} T_{AC} - \frac{56}{65} (1.1179 T_{AC}) + P = 0$$

$$2.1523 T_{AC} = P \quad T_{AC} = \frac{800 \text{ N}}{2.1523} \quad T_{AC} = 371.69 \text{ N}$$

SUBSTITUTE INTO EXPRESSIONS FOR T_{AB} AND T_{AD} :

$$T_{AB} = 0.54054(371.69 \text{ N}) = 200.91 \text{ N}$$

$$T_{AD} = 1.1179(371.69 \text{ N}) = 415.51 \text{ N}$$

$$T_{AB} = 201 \text{ N}, T_{AC} = 372 \text{ N}, T_{AD} = 416 \text{ N}$$

2.111 CONTINUED

WE REPEAT THE LAST Eqs:

$$-160 \text{ lb} + \frac{60}{118} T_{AC} - \frac{20}{126} T_{AD} = 0 \quad (1)$$

$$-800 \text{ lb} - \frac{100}{118} T_{AC} - \frac{100}{126} T_{AD} + P = 0 \quad (2)$$

$$200 \text{ lb} + \frac{18}{118} T_{AC} - \frac{74}{126} T_{AD} = 0 \quad (3)$$

MULTIPLY EQ.(1) BY -3, EQ.(3) BY 10, AND ADD:

$$2400 \text{ lb} - \frac{180}{118} T_{AC} = 0 \quad T_{AD} = 459.529 \text{ lb}$$

SUBSTITUTE INTO (1) AND SOLVE FOR T_{AC} :

$$T_{AC} = \frac{118}{60} (160 + \frac{20}{126} \times 459.529) \quad T_{AC} = 458.118 \text{ lb}$$

SUBSTITUTE FOR THE TENSIONS IN (2) AND SOLVE FOR P:

$$P = 800 \text{ lb} + \frac{100}{118} (458.118 \text{ lb}) + \frac{100}{126} (459.529 \text{ lb}) = 1552.94 \text{ lb}$$

$$\text{WEIGHT OF PLATE} = P = 1553 \text{ lb}$$

2.112 CONTINUED

MAKING $T_{AC} = 590 \text{ lb}$ IN EQS. (1), (2), AND (3):

$$-\frac{4}{21} T_{AB} - \frac{20}{126} T_{AD} + 900 \text{ lb} = 0 \quad (1')$$

$$-\frac{20}{21} T_{AB} - \frac{100}{126} T_{AD} - 500 \text{ lb} + P = 0 \quad (2')$$

$$\frac{5}{21} T_{AB} - \frac{74}{126} T_{AD} + 90 \text{ lb} = 0 \quad (3')$$

MULTIPLY EQ.(1') BY 5, EQ.(3') BY 4, AND ADD:

$$-\frac{20}{21} T_{AB} + 1860 \text{ lb} = 0 \quad T_{AD} = 591.818 \text{ lb}$$

SUBSTITUTE INTO (1') AND SOLVE FOR T_{AB} :


$$T_{AB} = \frac{21}{4} (300 \text{ lb} - \frac{30}{126} \times 591.818 \text{ lb}) \quad T_{AB} = 1081.82 \text{ lb}$$

SUBSTITUTE FOR THE TENSIONS IN (2') AND SOLVE FOR P:

$$P = 500 \text{ lb} + \frac{20}{21} (1081.82 \text{ lb}) + \frac{100}{126} (591.818 \text{ lb}) = 2000.00 \text{ lb}$$

$$\text{WEIGHT OF PLATE} = P = 2000 \text{ lb}$$

2.112

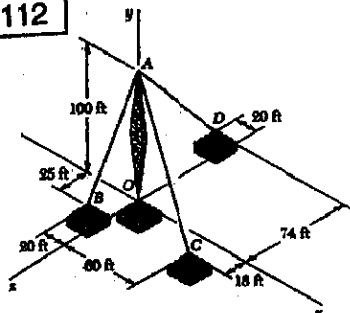


GIVEN:

$$T_{AC} = 590 \text{ lb}$$

FIND:

VERTICAL FORCE P EXERTED BY TOWER ON PIN A.

2.113



GIVEN:

TOWER EXERTS ON A AN UPWARD VERTICAL FORCE P OF 1800 lb.

FIND:

TENSION IN EACH WIRE.

FREE BODY: A

$$\Sigma \vec{F} = 0:$$

$$T_{AB} \vec{j} + T_{AC} \vec{i} + T_{AD} \vec{k} + P \vec{j} = 0$$

$$\vec{AB} = -20\vec{i} - 100\vec{j} + 25\vec{k}$$

$$AB = 105 \text{ ft}$$

$$\vec{AC} = 60\vec{i} - 100\vec{j} + 18\vec{k}$$

$$AC = 118 \text{ ft}$$

$$\vec{AD} = -20\vec{i} - 100\vec{j} - 74\vec{k}$$

$$AD = 126 \text{ ft}$$

WE WRITE

$$T_{AB} = T_{AB} \frac{\vec{AB}}{AB} = T_{AB} \frac{-20\vec{i} - 100\vec{j} + 25\vec{k}}{105}$$

$$T_{AC} = T_{AC} \frac{\vec{AC}}{AC} = T_{AC} \frac{60\vec{i} - 100\vec{j} + 18\vec{k}}{118}$$

$$T_{AD} = T_{AD} \frac{\vec{AD}}{AD} = T_{AD} \frac{-20\vec{i} - 100\vec{j} - 74\vec{k}}{126}$$

SUBSTITUTING INTO THE EQ. $\Sigma \vec{F} = 0$ AND FACTORING $\vec{i}, \vec{j}, \vec{k}$:

$$\left(-\frac{4}{21} T_{AB} + \frac{60}{118} T_{AC} - \frac{20}{126} T_{AD} \right) \vec{i} + \left(-\frac{20}{21} T_{AB} - \frac{100}{118} T_{AC} - \frac{100}{126} T_{AD} + P \right) \vec{j} + \left(\frac{5}{21} T_{AB} + \frac{18}{118} T_{AC} - \frac{74}{126} T_{AD} \right) \vec{k} = 0$$

SETTING THE COEFF. OF $\vec{i}, \vec{j}, \vec{k}$ EQUAL TO ZERO:

$$\textcircled{1} -\frac{4}{21} T_{AB} + \frac{60}{118} T_{AC} - \frac{20}{126} T_{AD} = 0 \quad (1)$$

$$\textcircled{2} -\frac{20}{21} T_{AB} - \frac{100}{118} T_{AC} - \frac{100}{126} T_{AD} + P = 0 \quad (2)$$

$$\textcircled{3} \frac{5}{21} T_{AB} + \frac{18}{118} T_{AC} - \frac{74}{126} T_{AD} = 0 \quad (3)$$

CONTINUED

SEE COLUMN ON THE LEFT FOR DERIVATION OF EQS. (1), (2), AND (3). MAKING $P = 1800 \text{ lb}$ IN EQ. (2), WE HAVE

$$-\frac{4}{21} T_{AB} + \frac{60}{118} T_{AC} - \frac{20}{126} T_{AD} = 0 \quad (1)$$

$$-\frac{20}{21} T_{AB} - \frac{100}{118} T_{AC} - \frac{100}{126} T_{AD} + 1800 \text{ lb} = 0 \quad (2)$$

$$\frac{5}{21} T_{AB} + \frac{18}{118} T_{AC} - \frac{74}{126} T_{AD} = 0 \quad (3)$$

MULTIPLY (1) BY -74, (3) BY 20, AND ADD:

$$\frac{396}{21} T_{AB} - \frac{4080}{118} T_{AC} = 0 \quad T_{AC} = 0.545378 T_{AB} \quad (4)$$

SUBSTITUTE INTO (1):

$$\left[-\frac{4}{21} + \frac{60}{118} (0.545378) \right] T_{AB} - \frac{20}{126} T_{AD} = 0$$

$$0.0868347 T_{AB} - \frac{20}{126} T_{AD} = 0 \quad T_{AD} = 0.547059 T_{AB} \quad (5)$$

SUBSTITUTE FOR T_{AC} AND T_{AD} INTO (2) AND SOLVE FOR T_{AB} :

$$-\frac{20}{21} T_{AB} - \frac{100}{118} (0.545378 T_{AB}) - \frac{100}{126} (0.547059 T_{AB}) + 1800 \text{ lb} = 0$$

$$1.84814 T_{AB} = 1800 \text{ lb} \quad T_{AB} = 973.636 \text{ lb} \quad (6)$$

$$T_{AB} = 974 \text{ lb}$$

SUBSTITUTING FROM (6) INTO (4):

$$T_{AC} = 0.545378 (973.636 \text{ lb}) = 531.000 \text{ lb}$$


$$T_{AC} = 531 \text{ lb}$$

SUBSTITUTING FROM (6) INTO (5):

$$T_{AD} = 0.547059 (973.636 \text{ lb}) = 532.637 \text{ lb}$$

$$T_{AD} = 533 \text{ lb}$$

2.119



GIVEN:

(1) 200-lb COUNTERWEIGHT IS IN EQUILIBRIUM UNDER FORCES EXERTED BY ROPES AND FORCE PERPENDICULAR TO CHUTE.

(2) COORDINATES OF A, B, C ARE

A (0, -20 in., 40 in.)

B (-40 in., 50 in., 0)

C (45 in., 40 in., 0)

FIND:

TENSION IN EACH ROPE.

FREE BODY: COUNTERWEIGHT

$$\Sigma \mathbf{F} = \mathbf{0}:$$

$$T_{AB} + T_{AC} + \mathbf{W} + \mathbf{N} = \mathbf{0}$$

WHERE

$$\mathbf{W} = -(200 \text{ lb}) \mathbf{j}$$

$$\mathbf{N} = \left(\frac{2}{\sqrt{5}} \mathbf{j} + \frac{1}{\sqrt{5}} \mathbf{k} \right) N$$

WE NOTE THAT

$$\vec{AB} = -(40 \text{ in.}) \mathbf{i} + (70 \text{ in.}) \mathbf{j} - (40 \text{ in.}) \mathbf{k}$$

$$AB = 90 \text{ in.}$$

$$\vec{AC} = (45 \text{ in.}) \mathbf{i} + (60 \text{ in.}) \mathbf{j} - (40 \text{ in.}) \mathbf{k}$$

$$AC = 85 \text{ in.}$$

$$\text{THUS: } T_{AB} = T_{AB} \frac{\vec{AB}}{AB} = \left(-\frac{4}{9} \mathbf{i} + \frac{7}{9} \mathbf{j} - \frac{4}{9} \mathbf{k} \right) T_{AB}$$

$$T_{AC} = T_{AC} \frac{\vec{AC}}{AC} = \left(\frac{9}{17} \mathbf{i} + \frac{12}{17} \mathbf{j} - \frac{8}{17} \mathbf{k} \right) T_{AC}$$

SUBSTITUTE FOR T_{AB} , T_{AC} , \mathbf{N} , AND \mathbf{W} INTO $\Sigma \mathbf{F} = \mathbf{0}$ AND FACTOR \mathbf{i} , \mathbf{j} , \mathbf{k} :

$$\left(-\frac{4}{9} T_{AB} + \frac{9}{17} T_{AC} \right) \mathbf{i} + \left(\frac{7}{9} T_{AB} + \frac{12}{17} T_{AC} + \frac{2}{\sqrt{5}} N - 200 \text{ lb} \right) \mathbf{j} + \left(-\frac{4}{9} T_{AB} - \frac{8}{17} T_{AC} + \frac{1}{\sqrt{5}} N \right) \mathbf{k} = \mathbf{0}$$

EQUATING TO ZERO THE COEFFICIENTS OF \mathbf{i} , \mathbf{j} , \mathbf{k} :

$$\textcircled{1} \quad -\frac{4}{9} T_{AB} + \frac{9}{17} T_{AC} = 0 \quad (1)$$

$$\textcircled{2} \quad \frac{7}{9} T_{AB} + \frac{12}{17} T_{AC} + \frac{2}{\sqrt{5}} N - 200 \text{ lb} = 0 \quad (2)$$

$$\textcircled{3} \quad -\frac{4}{9} T_{AB} - \frac{8}{17} T_{AC} + \frac{1}{\sqrt{5}} N = 0 \quad (3)$$

MULTIPLY (3) BY -2 AND ADD (2):

$$\frac{15}{9} T_{AB} + \frac{28}{17} T_{AC} - 200 \text{ lb} = 0 \quad (4)$$

MULTIPLY (1) BY 15, (4) BY 4, AND ADD:

$$\frac{247}{17} T_{AC} - 800 \text{ lb} = 0 \quad T_{AC} = 55.061 \text{ lb} \quad (5)$$


SUBSTITUTE FROM (5) INTO (1) AND SOLVE FOR T_{AB} :

$$T_{AB} = \frac{9}{4} \cdot \frac{2}{17} (55.061 \text{ lb}) = 65.587 \text{ lb}$$

THE TENSIONS IN THE ROPES ARE

$$T_{AB} = 65.6 \text{ lb}, \quad T_{AC} = 55.1 \text{ lb}$$

2.120



GIVEN:

(1) 200-lb COUNTERWEIGHT IS IN EQUILIBRIUM UNDER FORCES EXERTED BY THE TWO WORKERS SHOWN, BY A THIRD WORKER WHO PUSHES WITH $\mathbf{P} = -(40 \text{ lb}) \mathbf{i}$, AND A FORCE PERPENDICULAR TO THE CHUTE.

(2) COORDINATES OF A, B, C ARE

A (0, -20 in., 40 in.)

B (-40 in., 50 in., 0)

C (45 in., 40 in., 0)

FIND: TENSION IN ROPES AB AND AC.

FREE BODY: COUNTERWEIGHT

$$\Sigma \mathbf{F} = \mathbf{0}:$$

$$T_{AB} + T_{AC} + \mathbf{W} + \mathbf{P} + \mathbf{N} = \mathbf{0}$$

WHERE

$$\mathbf{W} = -(200 \text{ lb}) \mathbf{j}$$

$$\mathbf{P} = -(40 \text{ lb}) \mathbf{i}$$

$$\mathbf{N} = \left(\frac{2}{\sqrt{5}} \mathbf{j} + \frac{1}{\sqrt{5}} \mathbf{k} \right) N$$

WE NOTE THAT

$$\vec{AB} = -(40 \text{ in.}) \mathbf{i} + (70 \text{ in.}) \mathbf{j} - (40 \text{ in.}) \mathbf{k}$$

$$AB = 90 \text{ in.}$$

$$\vec{AC} = (45 \text{ in.}) \mathbf{i} + (60 \text{ in.}) \mathbf{j} - (40 \text{ in.}) \mathbf{k}$$

$$AC = 85 \text{ in.}$$

$$\text{THUS: } T_{AB} = T_{AB} \frac{\vec{AB}}{AB} = \left(-\frac{4}{9} \mathbf{i} + \frac{7}{9} \mathbf{j} - \frac{4}{9} \mathbf{k} \right) T_{AB}$$

$$T_{AC} = T_{AC} \frac{\vec{AC}}{AC} = \left(\frac{9}{17} \mathbf{i} + \frac{12}{17} \mathbf{j} - \frac{8}{17} \mathbf{k} \right) T_{AC}$$

SUBSTITUTE FOR T_{AB} , T_{AC} , \mathbf{N} , \mathbf{P} , AND \mathbf{W} INTO $\Sigma \mathbf{F} = \mathbf{0}$ AND FACTOR \mathbf{i} , \mathbf{j} , \mathbf{k} :

$$\left(-\frac{4}{9} T_{AB} + \frac{9}{17} T_{AC} - 40 \text{ lb} \right) \mathbf{i} + \left(\frac{7}{9} T_{AB} + \frac{12}{17} T_{AC} + \frac{2}{\sqrt{5}} N - 200 \text{ lb} \right) \mathbf{j} + \left(-\frac{4}{9} T_{AB} - \frac{8}{17} T_{AC} + \frac{1}{\sqrt{5}} N \right) \mathbf{k} = \mathbf{0}$$

EQUATING TO ZERO THE COEFFICIENTS OF \mathbf{i} , \mathbf{j} , \mathbf{k} :

$$\textcircled{1} \quad -\frac{4}{9} T_{AB} + \frac{9}{17} T_{AC} - 40 \text{ lb} = 0 \quad (1)$$

$$\textcircled{2} \quad \frac{7}{9} T_{AB} + \frac{12}{17} T_{AC} + \frac{2}{\sqrt{5}} N - 200 \text{ lb} = 0 \quad (2)$$

$$\textcircled{3} \quad -\frac{4}{9} T_{AB} - \frac{8}{17} T_{AC} + \frac{1}{\sqrt{5}} N = 0 \quad (3)$$

MULTIPLY (3) BY -2 AND ADD (2):

$$\frac{15}{9} T_{AB} + \frac{28}{17} T_{AC} - 200 \text{ lb} = 0 \quad (4)$$

MULTIPLY (1) BY 15, (4) BY 4, AND ADD:

$$\frac{247}{17} T_{AC} - 1400 \text{ lb} = 0 \quad T_{AC} = 96.3563 \text{ lb} \quad (5)$$


SUBSTITUTE FROM (5) INTO (1) AND SOLVE FOR T_{AB} :

$$T_{AB} = \frac{9}{4} \left[\frac{9}{17} (96.3563 \text{ lb}) - 40 \text{ lb} \right] = 24.777 \text{ lb}$$


THE TENSIONS IN THE ROPES ARE

$$T_{AB} = 24.8 \text{ lb}, \quad T_{AC} = 96.4 \text{ lb}$$

2.121

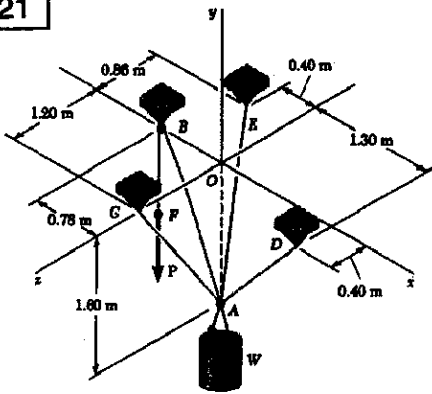

GIVEN: CONTAINER OF WEIGHT $W = 1000 \text{ N}$ IS SUSPENDED FROM RING A. CABLES AC AND AE ARE ATTACHED TO RING. CABLE FBAD PASSES THROUGH RING AND OVER PULLEY B. FIND: MAGNITUDE OF FORCE P .

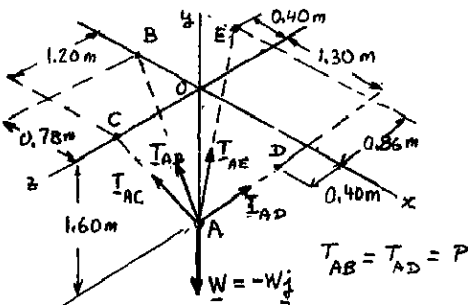

FREE BODY: RING A

$$\sum \mathbf{F} = 0: T_{AB} + T_{AC} + T_{AD} + T_{AE} - W\mathbf{j} = 0$$

WE HAVE

$$\begin{aligned} \vec{AB} &= -(0.78\text{m})\mathbf{i} + (1.60\text{m})\mathbf{j} & AB &= 1.78\text{m} \\ \vec{AC} &= (1.60\text{m})\mathbf{j} + (1.20\text{m})\mathbf{k} & AC &= 2.00\text{m} \\ \vec{AD} &= (1.30\text{m})\mathbf{i} + (1.60\text{m})\mathbf{j} + (0.40\text{m})\mathbf{k} & AD &= 2.10\text{m} \\ \vec{AE} &= -(0.40\text{m})\mathbf{i} + (1.60\text{m})\mathbf{j} - (0.86\text{m})\mathbf{k} & AE &= 1.86\text{m} \end{aligned}$$

$$T_{AB} = P \frac{\vec{AB}}{AB} = P \frac{-(0.78)\mathbf{i} + 1.6\mathbf{j}}{1.78}$$

$$T_{AC} = T_{AC} \frac{\vec{AC}}{AC} = (0.8\mathbf{j} + 0.6\mathbf{k}) T_{AC}$$

$$T_{AD} = P \frac{\vec{AD}}{AD} = \left(\frac{1.3}{2.1}\mathbf{i} + \frac{1.6}{2.1}\mathbf{j} + \frac{0.4}{2.1}\mathbf{k} \right) P$$

$$T_{AE} = T_{AE} \frac{\vec{AE}}{AE} = \left(-\frac{0.4}{1.86}\mathbf{i} + \frac{1.6}{1.86}\mathbf{j} - \frac{0.86}{1.86}\mathbf{k} \right) T_{AE}$$

SUBSTITUTING FOR THE TENSIONS IN $\sum \mathbf{F} = 0$ AND FACTORING $\mathbf{i}, \mathbf{j}, \mathbf{k}$:

$$\begin{aligned} & \left(-\frac{0.78}{1.78} P + \frac{1.3}{2.1} P - \frac{0.4}{1.86} T_{AE} \right) \mathbf{i} \\ & + \left(\frac{1.6}{1.78} P + 0.8 T_{AC} + \frac{1.6}{2.1} P + \frac{1.6}{1.86} T_{AE} - W \right) \mathbf{j} \\ & + \left(0.6 T_{AC} + \frac{0.4}{2.1} P - \frac{0.86}{1.86} T_{AE} \right) \mathbf{k} = 0 \end{aligned}$$

EQUATING TO ZERO THE COEFFICIENTS OF $\mathbf{i}, \mathbf{j}, \mathbf{k}$, WE OBTAIN AFTER REDUCTIONS:

CONTINUED

2.121 CONTINUED

$$(1) \quad 0.180845P - 0.215054 T_{AE} \tag{1}$$

$$(2) \quad 1.66078P + 0.8 T_{AC} + 0.860215 T_{AE} - W = 0 \tag{2}$$

$$(3) \quad 0.190476P + 0.6 T_{AC} - 0.462366 T_{AE} = 0 \tag{3}$$

SOLVING (1) FOR T_{AE} : $T_{AE} = 0.840931 P$

CARRYING INTO ERS. (2) AND (3):

$$2.38416 P + 0.8 T_{AC} - W = 0 \tag{4}$$

$$-0.198342 P + 0.6 T_{AC} = 0 \tag{5}$$


MULTIPLY (4) BY 3, (5) BY -4, AND ADD:

$$7.94525P - 3W = 0$$

MAKING $W = 1000 \text{ N}$:

$$7.94525P - 3000 \text{ N} = 0 \quad P = 377.556 \text{ N} \quad P \approx 378 \text{ N}$$

2.122

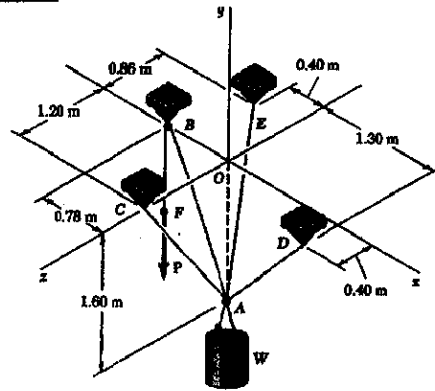

GIVEN:

- (1) CONTAINER IS SUSPENDED FROM RING A. CABLES AC AND AE ARE ATTACHED TO RING. CABLE FBAD PASSES THROUGH RING AND OVER PULLEY B.
- (2) $T_{AC} = 150 \text{ N}$.

FIND:

- (a) MAGNITUDE OF FORCE P
- (b) WEIGHT W OF CONTAINER

SEE SOLUTION OF PROB. 2.121 LEADING TO EQS. (4) AND (5):

$$2.38416 P + 0.8 T_{AC} - W = 0 \tag{4}$$

$$-0.198342 P + 0.6 T_{AC} = 0 \tag{5}$$

(a) MAKE $T_{AC} = 150 \text{ N}$ IN EQ. (5):

$$-0.198342 P + 0.6(150 \text{ N}) = 0$$

$$P = 453.762 \text{ N}$$

$$P = 454 \text{ N}$$


(b) CARRY THE VALUES OF T_{AC} AND P INTO EQ. (4):

$$2.38416(453.762 \text{ N}) + 0.8(150 \text{ N}) - W = 0$$


$$W = 1201.84 \text{ N}$$

$$W = 1202 \text{ N}$$

2.123

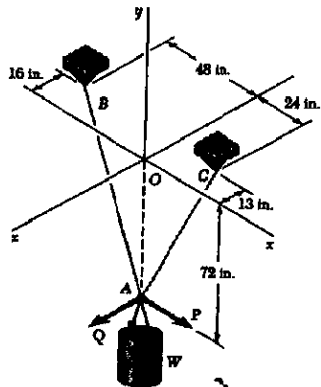

GIVEN: CONTAINER OF WEIGHT $W = 270$ lb IS SUSPENDED FROM RING A.
 CABLE BAC PASSES THROUGH RING A.
 FIND: P AND Q FOR EQUILIBRIUM POSITION SHOWN

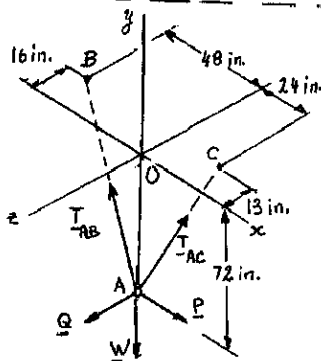

FREE BODY: RING A
 $\Sigma \underline{F} = 0$
 $T_{AB} + T_{AC} + P + Q + W = 0$
 WHERE $\underline{P} = P \underline{j}$
 $\underline{Q} = Q \underline{k}$
 $\underline{W} = -W \underline{j}$
 $\underline{T}_{AB} = T \underline{\lambda}_{AB}$
 $\underline{T}_{AC} = T \underline{\lambda}_{AC}$
 (SAME TENSION T IN BOTH PORTIONS OF CABLE)

WE HAVE
 $\underline{AB} = -(48 \text{ in.}) \underline{i} + (72 \text{ in.}) \underline{j} - (16 \text{ in.}) \underline{k}$
 $\underline{AC} = (24 \text{ in.}) \underline{i} + (72 \text{ in.}) \underline{j} - (13 \text{ in.}) \underline{k}$
 $AB = 88 \text{ in}$
 $AC = 77 \text{ in}$
 $\underline{T}_{AB} = T \underline{\lambda}_{AB} = T \frac{\underline{AB}}{AB} = \left(-\frac{6}{11} \underline{i} + \frac{9}{11} \underline{j} - \frac{2}{11} \underline{k} \right) T$
 $\underline{T}_{AC} = T \underline{\lambda}_{AC} = T \frac{\underline{AC}}{AC} = \left(\frac{24}{77} \underline{i} + \frac{72}{77} \underline{j} - \frac{13}{77} \underline{k} \right) T$

SUBSTITUTING FOR \underline{T}_{AB} , \underline{T}_{AC} , \underline{P} , \underline{Q} , AND \underline{W} INTO $\Sigma \underline{F} = 0$ AND FACTORING \underline{i} , \underline{j} , \underline{k} :
 $\left(-\frac{6}{11} T + \frac{24}{77} T + P \right) \underline{i}$
 $+ \left(\frac{9}{11} T + \frac{72}{77} T - W \right) \underline{j}$
 $+ \left(-\frac{2}{11} T - \frac{13}{77} T + Q \right) \underline{k} = 0$

SETTING THE COEFFICIENTS OF \underline{i} , \underline{j} , \underline{k} EQUAL TO ZERO AND REDUCING:
 (1) $-\frac{10}{77} T + P = 0$
 (2) $\frac{135}{77} T - W = 0$
 (3) $-\frac{27}{77} T + Q = 0$

MAKING $W = 270$ lb IN EQ. (2) AND SOLVING FOR T:
 $T = \frac{77}{135} (270 \text{ lb}) = 154.0 \text{ lb}$
 SUBSTITUTING FOR T IN EQS. (1) AND (3), WE OBTAIN
 $P = 36.0 \text{ lb}$, $Q = 54.0 \text{ lb}$


2.124

(SEE FIGURE ON THE LEFT)
 GIVEN: (1) $Q = 36$ lb.
 (2) CABLE BAC PASSES THROUGH RING A.
 FIND: W AND P.


SEE SOLUTION AT LEFT FOR DERIVATION OF EQS. (1), (2), (3).
 MAKING $Q = 36$ lb IN EQ. (3):
 $-\frac{27}{77} T + 36 \text{ lb} = 0$ $T = \frac{77}{27} (36 \text{ lb})$ $T = 102.667 \text{ lb}$
 SUBSTITUTING FOR T IN EQS. (1) AND (2):
 $-\frac{10}{77} (102.667 \text{ lb}) + P = 0$ $P = 24.0 \text{ lb}$
 $\frac{135}{77} (102.667 \text{ lb}) - W = 0$ $W = 180.0 \text{ lb}$

2.125


GIVEN:
 (1) COLLARS A AND B CONNECTED BY WIRE OF LENGTH 525 mm
 (2) $\underline{P} = (341 \text{ N}) \underline{j}$
 (3) $y = 155$ mm
 FIND:
 (a) T_{AB}
 (b) Q FOR EQUILIBRIUM

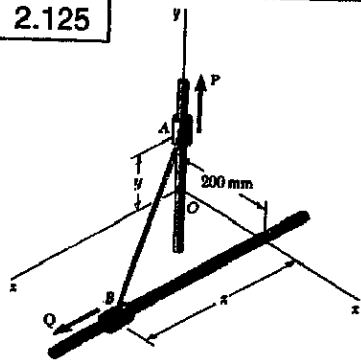

$(AB)^2 = x^2 + y^2 + z^2$: $(525 \text{ mm})^2 = (200 \text{ mm})^2 + (155 \text{ mm})^2 + z^2$
 $z = 460 \text{ mm}$
 $\underline{AB} = (200 \text{ mm}) \underline{i} - (155 \text{ mm}) \underline{j} + (460 \text{ mm}) \underline{k}$
 $AB = 525 \text{ mm}$
 $\underline{\lambda}_{AB} = \frac{\underline{AB}}{AB} = \frac{200}{525} \underline{i} - \frac{155}{525} \underline{j} + \frac{460}{525} \underline{k}$




(a) FREE BODY: COLLAR A
 $\Sigma \underline{F} = 0$
 $N_x \underline{i} + P \underline{j} + N_z \underline{k} + T_{AB} \underline{\lambda}_{AB} = 0$
 SUBSTITUTING FOR $\underline{\lambda}_{AB}$ AND SETTING THE COEFF. OF \underline{j} EQUAL TO ZERO:
 $P + \left(-\frac{155}{525} T_{AB} \right) = 0$
 MAKING $P = 341 \text{ N}$ AND SOLVING FOR T_{AB} :
 $T_{AB} = \frac{525}{155} (341 \text{ N})$ $T_{AB} = 1155 \text{ N}$




(b) FREE BODY: COLLAR B
 $\Sigma \underline{F} = 0$
 $N_x \underline{i} + N_y \underline{j} + Q \underline{k} - T_{AB} \underline{\lambda}_{AB} = 0$
 SUBSTITUTING FOR $\underline{\lambda}_{AB}$ AND SETTING THE COEFF. OF \underline{k} EQUAL TO ZERO:
 $Q - \left(\frac{460}{525} T_{AB} \right) = 0$

MAKING $T_{AB} = 1155 \text{ N}$ AND SOLVING FOR Q:
 $Q = \frac{460}{525} (1155 \text{ N})$ $Q = 1012 \text{ N}$

3.1

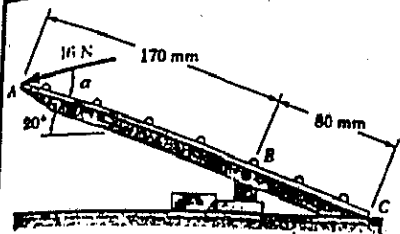

GIVEN: $\alpha = 28^\circ$
 FIND: MOMENT OF FORCE ABOUT B (RESOLVE FORCE INTO HORIZONTAL AND VERTICAL COMPONENTS)



FIRST NOTE THAT $\theta = 28^\circ - 20^\circ = 8^\circ$

THEN

$$F_x = (16 \text{ N}) \cos \theta = 15.8443 \text{ N}$$

$$F_y = (16 \text{ N}) \sin \theta = 2.2268 \text{ N}$$

$$\text{AND } x = (0.17 \text{ m}) \cos 20^\circ = 0.159748 \text{ m}$$

$$y = (0.17 \text{ m}) \sin 20^\circ = 0.058143 \text{ m}$$

NOTING THAT THE DIRECTION OF THE MOMENT OF EACH FORCE COMPONENT ABOUT B IS COUNTERCLOCKWISE, HAVE


$$M_B = xF_y + yF_x$$

$$= (0.159748 \text{ m})(2.2268 \text{ N}) + (0.058143 \text{ m})(15.8443 \text{ N})$$


$$= 1.277 \text{ N}$$

$$\text{OR } \underline{M_B = 1.277 \text{ N}\cdot\text{m}}$$

3.2

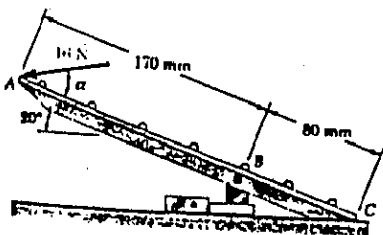

GIVEN: $\alpha = 28^\circ$
 FIND: MOMENT OF FORCE ABOUT B (RESOLVE FORCE INTO COMPONENTS PARALLEL AND PERPENDICULAR TO ABC)



FIRST RESOLVE THE 16-N FORCE INTO COMPONENTS P AND Q, WHERE

$$Q = (16 \text{ N}) \sin 28^\circ = 7.5115 \text{ N}$$

$$\text{THEN } \dots M_B = r_{AB} Q$$



$$= (0.17 \text{ m})(7.5115 \text{ N})$$

$$= 1.277 \text{ N}\cdot\text{m}$$

$$\text{OR } \underline{M_B = 1.277 \text{ N}\cdot\text{m}}$$

3.3

GIVEN: $P = 8 \text{ lb}$, $\alpha = 25^\circ$
 FIND: MOMENT OF FORCE ABOUT B

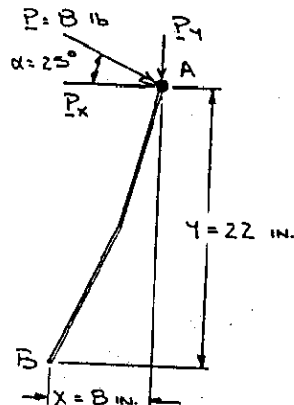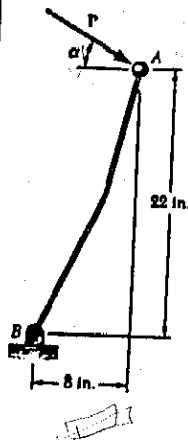

FIRST NOTE ..

$$P_x = (8 \text{ lb}) \cos 25^\circ = 7.2505 \text{ lb}$$

$$P_y = (8 \text{ lb}) \sin 25^\circ = 3.3809 \text{ lb}$$

NOTING THAT THE DIRECTION OF THE MOMENT OF EACH FORCE COMPONENT ABOUT B IS CLOCKWISE, HAVE

$$M_B = -xP_y - yP_x$$



$$= -(8 \text{ in.})(3.3809 \text{ lb}) - (22 \text{ in.})(7.2505 \text{ lb})$$

$$= -186.6 \text{ lb}\cdot\text{in.}$$

$$\text{OR } \underline{M_B = 186.6 \text{ lb}\cdot\text{in.}}$$

3.4

GIVEN: $M_B = 210 \text{ lb}\cdot\text{in.}$
 FIND: $(P)_{\text{MIN}}$

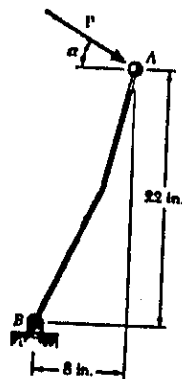

FOR P TO BE MINIMUM, IT MUST BE PERPENDICULAR TO THE LINE JOINING POINTS A AND B. THUS,

$$\alpha = \theta$$

$$= \tan^{-1} \frac{8}{22}$$

$$= 19.98^\circ$$

$$\text{AND } M_B = d P_{\text{MIN}}$$

$$\text{WHERE } d = r_{AB} = \sqrt{(8 \text{ in.})^2 + (22 \text{ in.})^2}$$

$$= 23.409 \text{ in.}$$

$$\text{THEN } P_{\text{MIN}} = \frac{210 \text{ lb}\cdot\text{in.}}{23.409 \text{ in.}}$$



$$= 8.97 \text{ lb}$$

$$\underline{P_{\text{MIN}} = 8.97 \text{ lb } \angle 19.98^\circ}$$

3.5

GIVEN: $P = 11 \text{ lb}$, $M_B = 250 \text{ lb}\cdot\text{in.}$

FIND: α

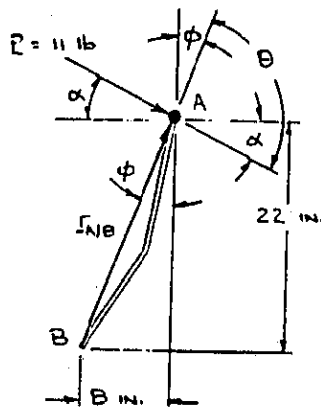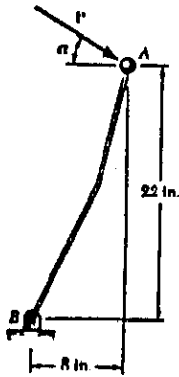



BY DEFINITION... $M_B = r_{AB} P \sin \theta$
 WHERE $\theta = \alpha + (90^\circ - \phi)$
 AND $\phi = \tan^{-1} \frac{8}{22} = 19.9831^\circ$

ALSO... $r_{NB} = \sqrt{(8 \text{ in.})^2 + (22 \text{ in.})^2} = 23.409 \text{ in.}$
 THEN... $250 \text{ lb}\cdot\text{in.} = (23.409 \text{ in.})(11 \text{ lb}) \times \sin(\alpha + 90^\circ - 19.9831^\circ)$
 OR $\sin(\alpha + 70.0169^\circ) = 0.970888$
 OR $\alpha + 70.0169^\circ = 76.1391^\circ$
 AND $\alpha + 70.0169^\circ = 103.861^\circ$
 $\alpha = 6.12^\circ, 33.8^\circ$

3.6

GIVEN: $F_N = 200 \text{ lb}$
 FIND:

- (a) MOMENT M_B OF F_N ABOUT B
- (b) P GIVEN M_B AND $\alpha = 10^\circ$
- (c) P_{MIN} GIVEN M_B

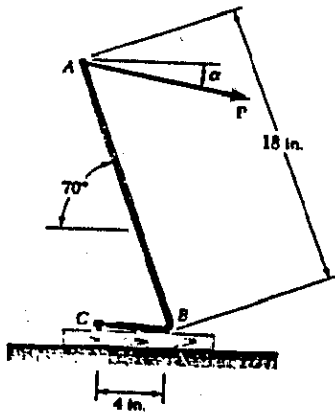


(a) HAVE $M_B = r_{CB} F_N$
 $= (4 \text{ in.})(200 \text{ lb})$
 $= 800 \text{ lb}\cdot\text{in.}$
 OR $M_B = 800 \text{ lb}\cdot\text{in.}$

(b) BY DEFINITION $M_B = r_{AB} P \sin \theta$
 WHERE $\theta = 10^\circ + (180^\circ - 70^\circ) = 120^\circ$
 THEN $800 \text{ lb}\cdot\text{in.} = (18 \text{ in.}) \times P \sin 120^\circ$
 OR $P = 51.3 \text{ lb}$

(CONTINUED)

3.6 CONTINUED



FOR P TO BE MINIMUM, IT MUST BE PERPENDICULAR TO THE LINE JOINING POINTS A AND B. THUS, P MUST BE DIRECTED AS SHOWN.



THUS... $M_B = d P_{\text{MIN}}$ $d = r_{AB}$
 OR $800 \text{ lb}\cdot\text{in.} = (18 \text{ in.}) P_{\text{MIN}}$
 OR $P_{\text{MIN}} = 44.4 \text{ lb}$
 $P_{\text{MIN}} = 44.4 \text{ lb}$ $\Delta 20^\circ$

3.7

GIVEN: MASS m OF CRATE = 80 kg

FIND:


- (a) MOMENT M_E OF WEIGHT W ABOUT E
- (b) $(F_B)_{\text{MIN}}$ GIVEN $-M_E$



FIRST NOTE...

$W = mg$
 $= (80 \text{ kg})(9.81 \frac{\text{m}}{\text{s}^2})$
 $= 784.8 \text{ N}$

(a) HAVE $M_E = r_{H/E} W$
 $= (0.25 \text{ m})(784.8 \text{ N})$
 $= 196.2 \text{ N}\cdot\text{m}$
 OR $M_E = 196.2 \text{ N}\cdot\text{m}$



FOR F_B TO BE MINIMUM, IT MUST BE PERPENDICULAR TO THE LINE JOINING POINTS B AND E. THEN, WITH F_B DIRECTED AS SHOWN, HAVE

$(-M_E) = r_{B/E} (F_B)_{\text{MIN}}$

WHERE $r_{B/E} = \sqrt{(0.85 \text{ m})^2 + (0.5 \text{ m})^2}$
 $= 0.98615 \text{ m}$


THEN $196.2 \text{ N}\cdot\text{m} = (0.98615 \text{ m})(F_B)_{\text{MIN}}$
 OR $(F_B)_{\text{MIN}} = 199.0 \text{ N}$

ALSO... $\tan \theta = \frac{0.85 \text{ m}}{0.5 \text{ m}}$

OR $\theta = 59.5^\circ$

$(F_B)_{\text{MIN}} = 199.0 \text{ N}$ $\Delta 59.5^\circ$


3.8



GIVEN: MASS m OF CRATE = 80 kg

FIND:

- (a) MOMENT M_E OF WEIGHT W ABOUT E
- (b) $(F_A)_{\min}$ GIVEN $-M_E$
- (c) $(F_{\text{VERTICAL}})_{\min}$ GIVEN $-M_E$




FIRST NOTE...

$$W = mg = (80 \text{ kg})(9.81 \frac{\text{m}}{\text{s}^2}) = 784.8 \text{ N}$$

(a) HAVE $M_E = r_{W/E} W = (0.25 \text{ m})(784.8 \text{ N}) = 196.2 \text{ N}\cdot\text{m}$
OR $M_E = 196.2 \text{ N}\cdot\text{m}$

(b)

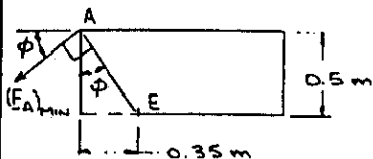

FOR F_A TO BE MINIMUM, IT MUST BE PERPENDICULAR TO THE LINE JOINING POINTS A AND E. THEN,

WITH F_A DIRECTED AS SHOWN, HAVE $(-M_E) = r_{A/E} (F_A)_{\min}$

WHERE $r_{A/E} = \sqrt{(0.35 \text{ m})^2 + (0.5 \text{ m})^2} = 0.61033 \text{ m}$
THEN $196.2 \text{ N}\cdot\text{m} = (0.61033 \text{ m})(F_A)_{\min}$
OR $(F_A)_{\min} = 321 \text{ N}$

ALSO... $\tan \phi = \frac{0.35 \text{ m}}{0.5 \text{ m}}$ OR $\phi = 35.0^\circ$

$(F_A)_{\min} = 321 \text{ N} \nearrow 35.0^\circ$


(c) FOR F_{VERTICAL} TO BE MINIMUM, THE PERPENDICULAR DISTANCE FROM ITS LINE OF ACTION TO POINT E MUST BE MAXIMUM. THUS, APPLY $(F_{\text{VERTICAL}})_{\min}$ AT POINT D, AND THEN

$(-M_E) = r_{D/E} (F_{\text{VERTICAL}})_{\min}$

$196.2 \text{ N}\cdot\text{m} = (0.85 \text{ m})(F_{\text{VERTICAL}})_{\min}$

OR $(F_{\text{VERTICAL}})_{\min} = 231 \text{ N}$ AT POINT D

3.9

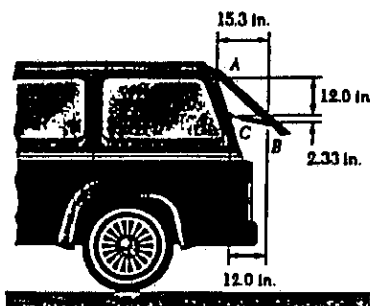

GIVEN: $F_{CB} = 125 \text{ lb}$


FIND: MOMENT OF F_{CB} ABOUT A

FIRST NOTE... $d_{CB} = \sqrt{(12 \text{ in.})^2 + (2.33 \text{ in.})^2} = 12.2241 \text{ in.}$

THEN $\cos \theta = \frac{12.0}{12.2241}$


$\sin \theta = \frac{2.33}{12.2241}$

AND $F_{CB} = F_{CB} \cos \theta \mathbf{i} - F_{CB} \sin \theta \mathbf{j} = \frac{125 \text{ lb}}{12.2241} (12.0 \mathbf{i} - 2.33 \mathbf{j})$



NOW... $M_A = r_{B/A} \times F_{CB}$
WHERE $r_{B/A} = (15.3 \text{ in.})\mathbf{i} - (12.0 \text{ in.})\mathbf{j}$
THEN... $M_A = [(15.3 \text{ in.})\mathbf{i} - (12.0 \text{ in.})\mathbf{j}] \times \frac{125 \text{ lb}}{12.2241} (12.0 \mathbf{i} - 2.33 \mathbf{j})$
 $= -(364.54 \text{ lb}\cdot\text{in.})\mathbf{k} + (1758.41 \text{ lb}\cdot\text{in.})\mathbf{k}$
 $= (1393.87 \text{ lb}\cdot\text{in.})\mathbf{k}$
 $= (116.2 \text{ lb}\cdot\text{ft})\mathbf{k}$
 $M_A = 116.2 \text{ lb}\cdot\text{ft}$

3.10

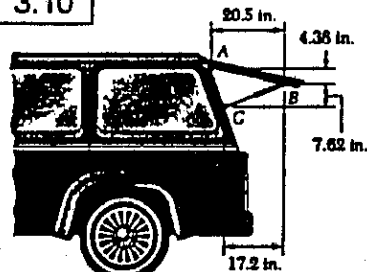


GIVEN: $F_{CB} = 125 \text{ lb}$

FIND: MOMENT OF F_{CB} ABOUT A

FIRST NOTE... $d_{CB} = \sqrt{(17.2 \text{ in.})^2 + (7.62 \text{ in.})^2} = 18.8123 \text{ in.}$

THEN $\cos \theta = \frac{17.2}{18.8123}$

$\sin \theta = \frac{7.62}{18.8123}$

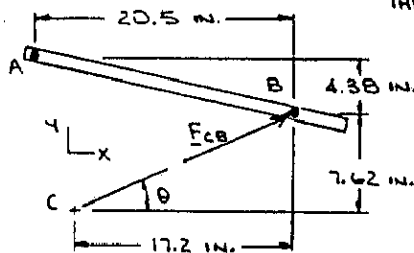


(CONTINUED)

3.10 CONTINUED


$$\text{AND } F_{CB} = F_{CB} \cos \theta \mathbf{i} + F_{CB} \sin \theta \mathbf{j} \\ = \frac{125 \text{ lb}}{18.8123} (17.2 \mathbf{i} + 7.62 \mathbf{j})$$

$$\text{NOW.. } \underline{M}_A = \sum r_{A/B} \times F_{CB} \\ \text{WHERE } r_{A/B} = (20.5 \text{ in.}) \mathbf{i} - (4.38 \text{ in.}) \mathbf{j} \\ \text{THEN.. } \underline{M}_A = [(20.5 \text{ in.}) \mathbf{i} - (4.38 \text{ in.}) \mathbf{j}] \\ \times \frac{125 \text{ lb}}{18.8123} (17.2 \mathbf{i} + 7.62 \mathbf{j}) \\ = (1037.95 \text{ lb}\cdot\text{in.}) \mathbf{k} + (500.58 \text{ lb}\cdot\text{in.}) \mathbf{k} \\ = (1538.53 \text{ lb}\cdot\text{in.}) \mathbf{k} \\ = (128.2 \text{ lb}\cdot\text{ft}) \mathbf{k} \\ \underline{M}_A = 128.2 \text{ lb}\cdot\text{ft} \quad \blacktriangleleft$$

3.11

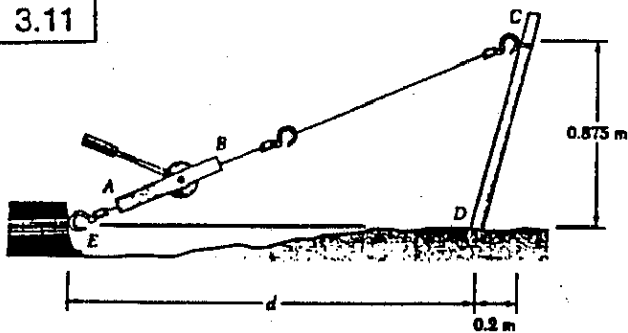

GIVEN: $T_{CB} = 1040 \text{ N}$, $d = 1.90 \text{ m}$.
FIND: Moment of T_{CB} about D; RESOLVE T_{CB} INTO HORIZONTAL AND VERTICAL COMPONENTS APPLIED AT
 (a) POINT C
 (b) POINT E

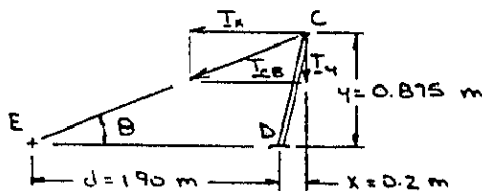


FIRST NOTE.. $d_{CE} = \sqrt{(2.1 \text{ m})^2 + (0.875 \text{ m})^2} = 2.275 \text{ m}$

THEN $\cos \theta = \frac{2.1}{2.275} = \frac{12}{13}$ $\sin \theta = \frac{0.875}{2.275} = \frac{5}{13}$


AND $T_x = T_{CB} \cos \theta = (1040 \text{ N}) \left(\frac{12}{13}\right) = 960 \text{ N}$
 $T_y = T_{CB} \sin \theta = (1040 \text{ N}) \left(\frac{5}{13}\right) = 400 \text{ N}$

(a) BY OBSERVATION.. $M_D = -xT_y + yT_x$
 OR $M_D = (0.2 \text{ m})(400 \text{ N}) + (0.875 \text{ m})(960 \text{ N}) = 760 \text{ N}\cdot\text{m}$

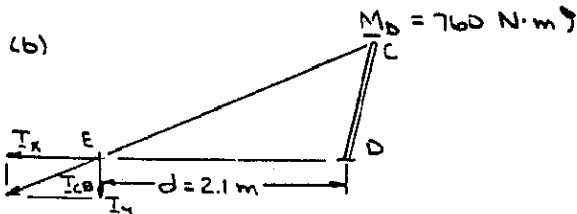


(b) BY OBSERVATION.. $M_D = dT_y = (1.90 \text{ m})(400 \text{ N}) = 760 \text{ N}\cdot\text{m}$
 $\underline{M}_D = 760 \text{ N}\cdot\text{m} \quad \blacktriangleleft$

3.12

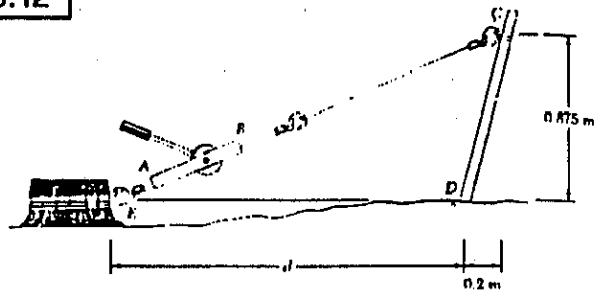

GIVEN: Moment of T_{BA} about D = $960 \text{ N}\cdot\text{m}$
 $d = 2.80 \text{ m}$


FIND: T_{BA}



FIRST NOTE.. $d_{CE} = \sqrt{(3.0 \text{ m})^2 + (0.875 \text{ m})^2} = 3.125 \text{ m}$


THEN $\sin \theta = \frac{0.875}{3.125} = \frac{7}{25}$
 WITH T_{BA} APPLIED AT POINT E, HAVE
 $M_D = d(T_{BA} \sin \theta)$
 OR $960 \text{ N}\cdot\text{m} = (2.80 \text{ m})(T_{BA} \cdot \frac{7}{25})$
 OR $T_{BA} = 1224 \text{ N} \quad \blacktriangleleft$

3.13

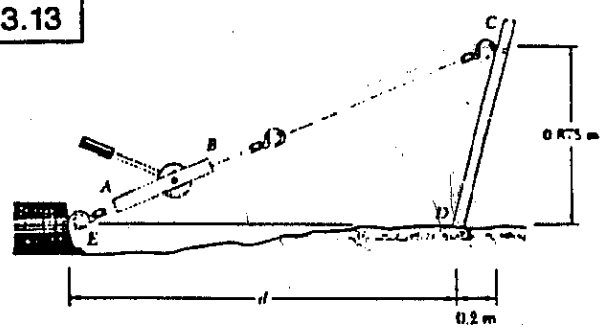

GIVEN: Moment of T_{BA} about D = $960 \text{ N}\cdot\text{m}$
 $(T_{BA})_{\text{MAX}} = 2400 \text{ N}$

FIND: d_{MIN}

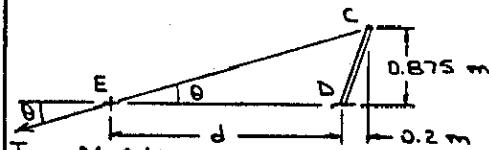

WITH T_{BA} APPLIED AT POINT E, HAVE
 $M_D = d(T_{BA} \sin \theta)$
 WHERE $\sin \theta = \frac{0.875}{\sqrt{(d+0.2)^2 + (0.875)^2}}$

THEN.. $960 \text{ N}\cdot\text{m} = (d \text{ m})(2400 \text{ N}) \left(\frac{0.875}{\sqrt{(d+0.2)^2 + (0.875)^2}} \right)$

OR $\sqrt{(d+0.2)^2 + (0.875)^2} = 2.1875 d$
 SQUARING BOTH SIDES OF THE EQUATION..
 $d^2 + 0.4d + 0.04 + 0.7656 = 4.7852 d^2$
 OR $3.7852 d^2 - 0.4d - 0.8056 = 0$

(CONTINUED)


3.13 CONTINUED

THEN $d = \frac{0.4 \pm \sqrt{(-0.4)^2 - 4(3.7852)(-0.8056)}}{2(3.7852)}$


REJECTING THE NEGATIVE ROOT
 $d = 0.517 \text{ m}$

$d = 517 \text{ mm}$

3.14

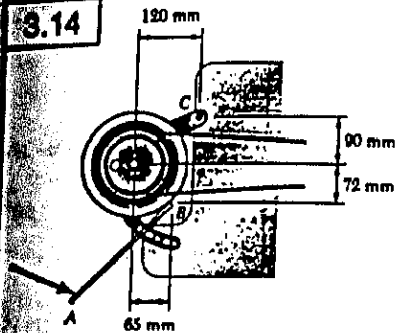

GIVEN: $F_B = 485 \text{ N}$,
 LINE OF
 ACTION OF F_B
 PASSED
 THROUGH O
 FIND: MOMENT OF
 F_B ABOUT C



FIRST NOTE...
 $d_{OB} = \sqrt{(65 \text{ mm})^2 + (72 \text{ mm})^2}$
 $= 97 \text{ mm}$

THEN $\cos \theta = \frac{65}{97}$
 $\sin \theta = \frac{72}{97}$


AND $F_x = F_B \cos \theta = (485 \text{ N}) \left(\frac{65}{97}\right) = 325 \text{ N}$
 $F_y = F_B \sin \theta = (485 \text{ N}) \left(\frac{72}{97}\right) = 360 \text{ N}$

BY OBSERVATION... $M_C = -x F_y - y F_x$
 WHERE $x = 0.12 \text{ m} - 0.065 \text{ m} = 0.055 \text{ m}$
 $y = 0.072 \text{ m} + 0.09 \text{ m} = 0.162 \text{ m}$

THEN $M_C = -(0.055 \text{ m})(360 \text{ N}) - (0.162 \text{ m})(325 \text{ N})$
 $= -72.45 \text{ N}\cdot\text{m}$

$M_C = 72.5 \text{ N}\cdot\text{m}$

3.15



GIVEN: VECTORS B , B'
 AND C
 PROVE: $\sin \alpha \cos \beta$
 $= \frac{1}{2} \sin(\alpha + \beta)$
 $+ \frac{1}{2} \sin(\alpha - \beta)$

FIRST NOTE... $B = B(\cos \beta \mathbf{i} + \sin \beta \mathbf{j})$
 $B' = B(\cos \beta \mathbf{i} - \sin \beta \mathbf{j})$
 $C = C(\cos \alpha \mathbf{i} + \sin \alpha \mathbf{j})$

BY DEFINITION... $|B \times C| = BC \sin(\alpha - \beta)$ (1)

$|B' \times C| = BC \sin(\alpha + \beta)$ (2)

(CONTINUED)

3.15 CONTINUED

NOW $B \times C = B(\cos \beta \mathbf{i} + \sin \beta \mathbf{j}) \times C(\cos \alpha \mathbf{i} + \sin \alpha \mathbf{j})$
 $= BC(\cos \beta \sin \alpha - \sin \beta \cos \alpha) \mathbf{k}$ (3)
 AND $B' \times C = B(\cos \beta \mathbf{i} - \sin \beta \mathbf{j}) \times C(\cos \alpha \mathbf{i} + \sin \alpha \mathbf{j})$
 $= BC(\cos \beta \sin \alpha + \sin \beta \cos \alpha) \mathbf{k}$ (4)


EQUATING THE RIGHT-HAND SIDES OF EQS. (1) AND (2) TO THE MAGNITUDES OF THE RIGHT-HAND SIDES OF EQS. (3) AND (4), RESPECTIVELY, YIELDS...

$BC \sin(\alpha - \beta) = BC(\cos \beta \sin \alpha - \sin \beta \cos \alpha)$ (5)
 $BC \sin(\alpha + \beta) = BC(\cos \beta \sin \alpha + \sin \beta \cos \alpha)$ (6)
 (5) + (6) $\Rightarrow \sin(\alpha - \beta) + \sin(\alpha + \beta) = 2 \cos \beta \sin \alpha$
 OR $\sin \alpha \cos \beta = \frac{1}{2} \sin(\alpha + \beta) + \frac{1}{2} \sin(\alpha - \beta)$

3.16

GIVEN: POINTS (20 m, 16 m) AND (-1 m, -4 m)

FIND: PERPENDICULAR DISTANCE d FROM THE ORIGIN TO THE LINE DRAWN THROUGH THE POINTS

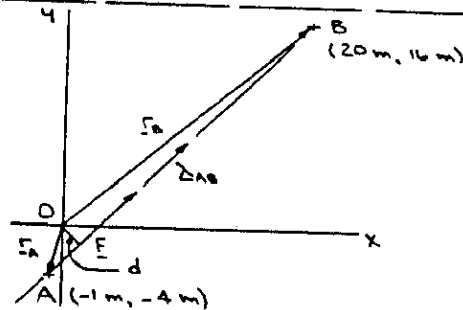

FIRST NOTE... $d_{AB} = \sqrt{[20 \text{ m} - (-1 \text{ m})]^2 + [16 \text{ m} - (-4 \text{ m})]^2}$
 $= 29 \text{ m}$

NOW ASSUME THAT A FORCE F , OF MAGNITUDE F , ACTS AT POINT A AND IS DIRECTED FROM A TO B. THEN $F = F \lambda_{AB}$ (F IN N)

WHERE $\lambda_{AB} = \frac{\mathbf{r}_B - \mathbf{r}_A}{d_{AB}}$
 $= \frac{1}{29} (21 \mathbf{i} + 20 \mathbf{j})$

BY DEFINITION... $M_O = |\mathbf{r}_A \times \mathbf{F}| = dF$
 WHERE $\mathbf{r}_A = (-1 \text{ m}) \mathbf{i} - (4 \text{ m}) \mathbf{j}$

THEN $M_O = [(-1 \text{ m}) \mathbf{i} - (4 \text{ m}) \mathbf{j}] \times \frac{F}{29} (21 \mathbf{i} + 20 \mathbf{j})$ (N)
 $= \frac{F}{29} [-(20) \mathbf{k} + (84) \mathbf{k}] \text{ N}\cdot\text{m}$
 $= \left(\frac{64}{29} F \text{ N}\cdot\text{m}\right) \mathbf{k}$

FINALLY... $\left(\frac{64}{29} F\right) \text{ N}\cdot\text{m} = d(F \text{ N})$

OR $d = \frac{64}{29} \text{ m}$
 $d = 2.21 \text{ m}$

3.17

GIVEN: VECTORS \underline{A} AND \underline{B} FIND: UNIT VECTOR $\underline{\lambda}$ NORMAL TO THE PLANE DEFINED BY \underline{A} AND \underline{B} WHEN

$$\begin{aligned} \text{(a)} \quad & \underline{A} = \underline{i} + 2\underline{j} - 5\underline{k} \\ & \underline{B} = 4\underline{i} - 7\underline{j} - 5\underline{k} \\ \text{(b)} \quad & \underline{A} = 3\underline{i} - 3\underline{j} + 2\underline{k} \\ & \underline{B} = -2\underline{j} + 6\underline{j} - 4\underline{k} \end{aligned}$$

BY DEFINITION, THE VECTOR $\underline{A} \times \underline{B}$ IS NORMAL TO THE PLANE DEFINED BY \underline{A} AND \underline{B} . THUS,

$$\underline{\lambda} = \frac{\underline{A} \times \underline{B}}{|\underline{A} \times \underline{B}|}$$

$$\begin{aligned} \text{(a) HAVE} \quad & \underline{A} \times \underline{B} = \begin{vmatrix} \underline{i} & \underline{j} & \underline{k} \\ 1 & 2 & -5 \\ 4 & -7 & -5 \end{vmatrix} \\ & = (-10 - 35)\underline{j} + (-20 + 5)\underline{j} \\ & \quad + (-7 - 8)\underline{k} \\ & = -45\underline{j} - 15\underline{j} - 15\underline{k} \end{aligned}$$

$$\begin{aligned} \text{THEN} \quad & |\underline{A} \times \underline{B}| = 15 \sqrt{(-3)^2 + (-1)^2 + (-1)^2} \\ & = 15\sqrt{11} \end{aligned}$$

$$\therefore \underline{\lambda} = \frac{1}{\sqrt{11}} (-3\underline{j} - \underline{j} - \underline{k})$$

$$\begin{aligned} \text{(b) HAVE} \quad & \underline{A} \times \underline{B} = \begin{vmatrix} \underline{i} & \underline{j} & \underline{k} \\ 3 & -3 & 2 \\ -2 & 6 & -4 \end{vmatrix} \\ & = (12 - 12)\underline{j} + (-4 + 12)\underline{j} \\ & \quad + (18 - 6)\underline{k} \\ & = 8\underline{j} + 12\underline{k} \end{aligned}$$

$$\begin{aligned} \text{THEN} \quad & |\underline{A} \times \underline{B}| = 4 \sqrt{(2)^2 + (3)^2} \\ & = 4\sqrt{13} \end{aligned}$$

$$\therefore \underline{\lambda} = \frac{1}{\sqrt{13}} (2\underline{j} + 3\underline{k})$$

3.18

GIVEN: ADJACENT SIDES \underline{P} AND \underline{Q} OF A PARALLELOGRAM

FIND: AREA OF PARALLELOGRAM WHEN

$$\begin{aligned} \text{(a)} \quad & \underline{P} = -7\underline{i} + 3\underline{j} - 3\underline{k} \\ & \underline{Q} = 2\underline{i} + 2\underline{j} + 5\underline{k} \\ \text{(b)} \quad & \underline{P} = 6\underline{i} - 5\underline{j} - 2\underline{k} \\ & \underline{Q} = -2\underline{j} + 5\underline{j} - \underline{k} \end{aligned}$$

HAVE... AREA $A = |\underline{P} \times \underline{Q}|$

$$\begin{aligned} \text{(a)} \quad & \underline{P} \times \underline{Q} = \begin{vmatrix} \underline{i} & \underline{j} & \underline{k} \\ -7 & 3 & -3 \\ 2 & 2 & 5 \end{vmatrix} \\ & = (15 + 6)\underline{j} + (-6 + 35)\underline{j} + (-14 - 6)\underline{k} \\ & = 21\underline{j} + 29\underline{j} - 20\underline{k} \end{aligned}$$

$$\text{THEN } A = \sqrt{(20)^2 + (29)^2 + (20)^2} \quad A = 41.0$$

$$\begin{aligned} \text{(b)} \quad & \underline{P} \times \underline{Q} = \begin{vmatrix} \underline{i} & \underline{j} & \underline{k} \\ 6 & -5 & -2 \\ -2 & 5 & -1 \end{vmatrix} \\ & = (5 + 10)\underline{j} + (4 + 6)\underline{j} + (30 - 10)\underline{k} \\ & = 15\underline{j} + 10\underline{j} + 20\underline{k} \end{aligned}$$

$$\text{THEN } A = 5 \sqrt{(3)^2 + (2)^2 + (4)^2} \quad A = 26.9$$

3.19

GIVEN: FORCE $\underline{F} = 6\underline{i} + 4\underline{j} - \underline{k}$ ACTING AT POINT AFIND: MOMENT OF \underline{F} ABOUT ORIGIN O WHEN

$$\begin{aligned} \text{(a)} \quad & \underline{r}_A = -2\underline{i} + 6\underline{j} + 3\underline{k} \\ \text{(b)} \quad & \underline{r}_A = 5\underline{i} - 3\underline{j} + 7\underline{k} \\ \text{(c)} \quad & \underline{r}_A = -9\underline{j} - 6\underline{j} + 1.5\underline{k} \end{aligned}$$

BY DEFINITION $\underline{M}_O = \underline{r}_A \times \underline{F}$

$$\begin{aligned} \text{(a) HAVE...} \quad & \underline{M}_O = \begin{vmatrix} \underline{i} & \underline{j} & \underline{k} \\ -2 & 6 & 3 \\ 6 & 4 & -1 \end{vmatrix} \\ & = (-6 - 12)\underline{j} + (18 - 2)\underline{j} + (-8 - 36)\underline{k} \\ & = -18\underline{j} + 16\underline{j} - 44\underline{k} \end{aligned}$$

$$\begin{aligned} \text{(b) HAVE...} \quad & \underline{M}_O = \begin{vmatrix} \underline{i} & \underline{j} & \underline{k} \\ 5 & -3 & 7 \\ 6 & 4 & -1 \end{vmatrix} \\ & = (3 - 28)\underline{j} + (42 + 5)\underline{j} + (20 + 18)\underline{k} \\ & = -25\underline{j} + 47\underline{j} + 38\underline{k} \end{aligned}$$

$$\begin{aligned} \text{(c) HAVE...} \quad & \underline{M}_O = \begin{vmatrix} \underline{i} & \underline{j} & \underline{k} \\ -9 & -6 & 1.5 \\ 6 & 4 & -1 \end{vmatrix} \\ & = (6 - 6)\underline{j} + (9 - 9)\underline{j} + (-36 + 36)\underline{k} \\ & = 0 \end{aligned}$$

NOTE: THE ANSWER TO PART C IS AS EXPECTED SINCE \underline{r}_A AND \underline{F} ARE PROPORTIONAL (THUS, THEIR LINES OF ACTION ARE PARALLEL).

3.20

GIVEN: FORCE $\underline{F} = 2\underline{i} - 7\underline{j} - 3\underline{k}$ ACTING AT POINT AFIND: MOMENT OF \underline{F} ABOUT ORIGIN O WHEN

$$\begin{aligned} \text{(a)} \quad & \underline{r}_A = 4\underline{i} - 3\underline{j} - 5\underline{k} \\ \text{(b)} \quad & \underline{r}_A = -8\underline{j} - 2\underline{j} + \underline{k} \\ \text{(c)} \quad & \underline{r}_A = \underline{i} - 3.5\underline{j} - 1.5\underline{k} \end{aligned}$$

BY DEFINITION $\underline{M}_O = \underline{r}_A \times \underline{F}$

$$\begin{aligned} \text{(a) HAVE...} \quad & \underline{M}_O = \begin{vmatrix} \underline{i} & \underline{j} & \underline{k} \\ 4 & -3 & -5 \\ 2 & -7 & -3 \end{vmatrix} \\ & = (9 - 35)\underline{j} + (-10 + 12)\underline{j} + (28 + 6)\underline{k} \\ & = -26\underline{j} + 2\underline{j} - 22\underline{k} \end{aligned}$$

$$\begin{aligned} \text{(b) HAVE...} \quad & \underline{M}_O = \begin{vmatrix} \underline{i} & \underline{j} & \underline{k} \\ -8 & -2 & 1 \\ 2 & -7 & -3 \end{vmatrix} \\ & = (6 + 7)\underline{j} + (2 - 24)\underline{j} + (56 + 4)\underline{k} \\ & = 13\underline{j} - 22\underline{j} + 60\underline{k} \end{aligned}$$


$$\begin{aligned} \text{(c) HAVE...} \quad & \underline{M}_O = \begin{vmatrix} \underline{i} & \underline{j} & \underline{k} \\ 1 & -3.5 & -1.5 \\ 2 & -7 & -3 \end{vmatrix} \\ & = (10.5 - 10.5)\underline{j} + (-3 + 3)\underline{j} + (-7 + 7)\underline{k} \\ & = 0 \end{aligned}$$

(CONTINUED)

3.20 CONTINUED

NOTE: THE ANSWER TO PART C IS AS EXPECTED SINCE ΣA AND E ARE PROPORTIONAL (THUS, THEIR LINES OF ACTION ARE PARALLEL).

3.21

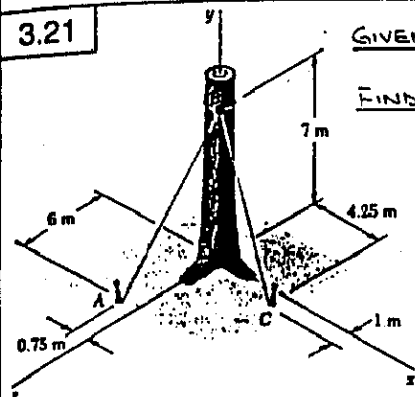

GIVEN: $T_{BA} = 555 \text{ N}$
 $T_{EC} = 660 \text{ N}$
 FIND: MOMENT OF $(T_{BA} + T_{EC})$ ABOUT O

FIRST NOTE.. $d_{BA} = \sqrt{(-0.75)^2 + (-7)^2 + (6)^2} = 9.25 \text{ m}$
 $d_{BC} = \sqrt{(4.25)^2 + (-7)^2 + (1)^2} = 8.25 \text{ m}$

NOW.. $T_{BA} = \frac{T_{BA}}{d_{BA}} \vec{BA} = \frac{555 \text{ N}}{9.25} (-0.75\mathbf{i} - 7\mathbf{j} + 6\mathbf{k}) = -(45 \text{ N})\mathbf{i} - (420 \text{ N})\mathbf{j} + (360 \text{ N})\mathbf{k}$

AND $T_{EC} = \frac{T_{EC}}{d_{BC}} \vec{BC} = \frac{660 \text{ N}}{8.25} (4.25\mathbf{i} - 7\mathbf{j} + \mathbf{k}) = (340 \text{ N})\mathbf{i} - (560 \text{ N})\mathbf{j} + (80 \text{ N})\mathbf{k}$

THEN $\mathbf{R} = T_{BA} + T_{EC} = -(295 \text{ N})\mathbf{i} - (980 \text{ N})\mathbf{j} + (440 \text{ N})\mathbf{k}$

FINALLY.. $\mathbf{M}_O = \mathbf{r}_{AO} \times \mathbf{R}$ WHERE $\mathbf{r}_{AO} = (7\text{m})\mathbf{j}$
 $= (7\text{m})\mathbf{j} \times [-(295 \text{ N})\mathbf{i} - (980 \text{ N})\mathbf{j} + (440 \text{ N})\mathbf{k}]$
 $= (3080 \text{ N}\cdot\text{m})\mathbf{i} - (2065 \text{ N}\cdot\text{m})\mathbf{k}$
 $\mathbf{M}_O = (3080 \text{ N}\cdot\text{m})\mathbf{i} - (2070 \text{ N}\cdot\text{m})\mathbf{k}$

3.22 CONTINUED

FIRST NOTE.. $T_{CB} = T_{CE} = W_{\text{cable}} = mg$
 WHERE $m = 26 \text{ kg}$ $g = 9.81 \frac{\text{m}}{\text{s}^2}$

NOW.. $d_{CE} = \sqrt{(1.5)^2 + (-6.0)^2 + (-2.0)^2} = 6.5 \text{ m}$

THEN $T_{CE} = \frac{T_{CE}}{d_{CE}} \vec{CE} = \frac{26g}{6.5} (1.5\mathbf{i} - 6\mathbf{j} - 2\mathbf{k}) = 9(6\mathbf{j} - 24\mathbf{j} - 8\mathbf{k}) \text{ (N)}$


ALSO.. $T_{CD} = -(26g)\mathbf{j} \text{ (N)}$

NOW.. $\mathbf{R} = T_{CD} + T_{CE} = 9(6\mathbf{j} - 50\mathbf{j} - 8\mathbf{k}) \text{ (N)}$

AND $\mathbf{M}_A = \mathbf{r}_{CA} \times \mathbf{R}$
 WHERE $\mathbf{r}_{CA} = (1\text{m})\mathbf{i} - (0.3\text{m})\mathbf{j}$

THEN.. $\mathbf{M}_A = 9.81 \begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 1 & -0.3 & 0 \\ 0 & -50 & -8 \end{vmatrix}$
 $= 9.81 [2.4\mathbf{i} + 8\mathbf{j} + (-50 + 1.8)\mathbf{k}]$
 OR $\mathbf{M}_A = (23.5 \text{ N}\cdot\text{m})\mathbf{i} + (78.5 \text{ N}\cdot\text{m})\mathbf{j} - (473 \text{ N}\cdot\text{m})\mathbf{k}$

3.23

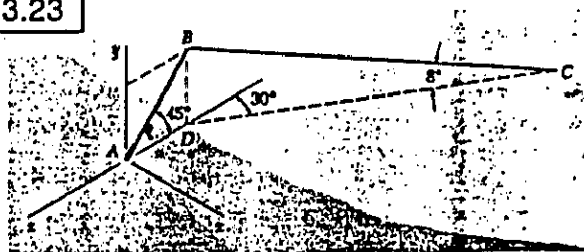

GIVEN: $d_{AB} = 6 \text{ ft}$, $T_{BC} = 6 \text{ lb}$
 FIND: MOMENT ABOUT A OF T_{BC} AT B

Diagram shows force components T_x , T_y , T_z and angles 30° and 45° .

HAVE.. $T_{xz} = (6 \text{ lb}) \cos 45^\circ = 5.9416 \text{ lb}$


THEN.. $T_x = T_{xz} \sin 30^\circ = 2.9708 \text{ lb}$
 $T_y = -T_{xz} \sin 30^\circ = -0.83504 \text{ lb}$
 $T_z = -T_{xz} \cos 30^\circ = -5.1456 \text{ lb}$

NOW.. $\mathbf{M}_A = \mathbf{r}_{BA} \times T_{BC}$
 WHERE $\mathbf{r}_{BA} = (6 \sin 45^\circ)\mathbf{j} - (6 \cos 45^\circ)\mathbf{k} = \frac{6}{\sqrt{2}} (\mathbf{j} - \mathbf{k})$

THEN $\mathbf{M}_A = \frac{6}{\sqrt{2}} \begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 0 & 1 & -1 \\ 2.9708 & -0.83504 & -5.1456 \end{vmatrix}$
 $= \frac{6}{\sqrt{2}} (-5.1456 - 0.83504)\mathbf{i}$
 $= -\frac{6}{\sqrt{2}} (2.9708)\mathbf{j} - \frac{6}{\sqrt{2}} (2.9708)\mathbf{k}$

OR $\mathbf{M}_A = -(25.4 \text{ lb}\cdot\text{ft})\mathbf{i} - (12.60 \text{ lb}\cdot\text{ft})\mathbf{j} - (12.60 \text{ lb}\cdot\text{ft})\mathbf{k}$


3.22

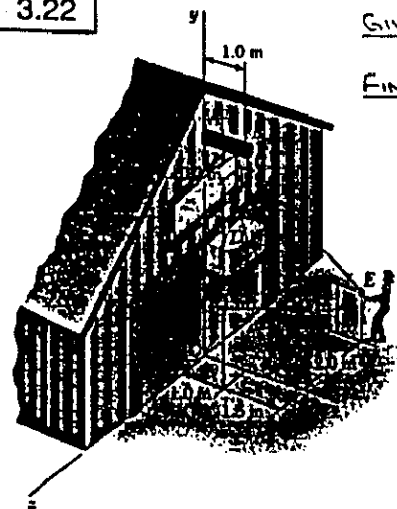

GIVEN: MASS m OF BALE = 26 kg
 FIND: MOMENT ABOUT A OF RESULTANT FORCE EXERTED ON THE PULLEY BY THE ROPE

(CONTINUED)

3.24

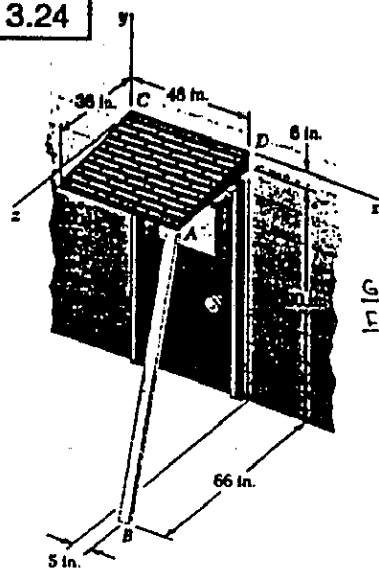


GIVEN: $T_{BA} = 57 \text{ lb}$
 FIND: MOMENT ABOUT C OF T_{BA} AT A

FIRST NOTE... $d_{BA} = \sqrt{(-5)^2 + (9)^2 + (3)^2} = 9.5 \text{ in.}$
 THEN $T_{BA} = \frac{T_{BA}}{d_{BA}} \vec{BA} = \frac{57 \text{ lb}}{9.5} (-5\mathbf{i} + 9\mathbf{j} - 3\mathbf{k})$
 $= 3[-(11)\mathbf{i} + (18)\mathbf{j} - (6)\mathbf{k}]$

NOW... $M_C = [r_{AC} \times T_{BA}]$
 WHERE $r_{AC} = (8 \text{ in.})\mathbf{i} - (6 \text{ in.})\mathbf{j} + (36 \text{ in.})\mathbf{k}$

THEN $M_C = (6)(3) \begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 8 & -6 & 36 \\ -11 & 18 & -6 \end{vmatrix}$
 $= 18 [(-6)(-108)\mathbf{i} + (-6)(48)\mathbf{j} + (144)(-1)\mathbf{k}]$
 $= -(1836 \text{ lb}\cdot\text{in.})\mathbf{i} + (736 \text{ lb}\cdot\text{in.})\mathbf{j} + (2574 \text{ lb}\cdot\text{in.})\mathbf{k}$
 OR $M_C = -(153.0 \text{ lb}\cdot\text{ft})\mathbf{i} + (63.0 \text{ lb}\cdot\text{ft})\mathbf{j} + (215 \text{ lb}\cdot\text{ft})\mathbf{k}$

3.25

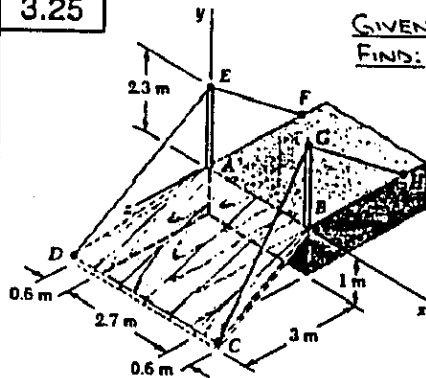

GIVEN: $T_{DE} = T_{CG} = 810 \text{ N}$
 FIND: MOMENT ABOUT A OF
 (a) T_{DE} AT D
 (b) T_{CG} AT C

FIRST NOTE: $d_{DE} = \sqrt{(0.6)^2 + (3.3)^2 + (-3)^2} = 4.5 \text{ m}$
 $d_{CG} = \sqrt{(-0.6)^2 + (3.3)^2 + (-3)^2} = 4.5 \text{ m}$

THEN $T_{DE} = \frac{T_{DE}}{d_{DE}} \vec{DE} = \frac{810 \text{ N}}{4.5} (0.6\mathbf{i} + 3.3\mathbf{j} - 3\mathbf{k})$
 $= 54 [(2 \text{ N})\mathbf{i} + (11 \text{ N})\mathbf{j} - (10 \text{ N})\mathbf{k}]$

SIMILARLY, $T_{CG} = 54 [-(2 \text{ N})\mathbf{i} + (11 \text{ N})\mathbf{j} - (10 \text{ N})\mathbf{k}]$


(a) NOW... $M_A = [r_{EA} \times T_{DE}]$ WHERE $r_{EA} = (2.3 \text{ m})\mathbf{j}$
 $= 2.3 \mathbf{j} \times 54 [-(2)\mathbf{i} + 11\mathbf{j} - 10\mathbf{k}]$
 OR $M_A = -(1242 \text{ N}\cdot\text{m})\mathbf{i} - (248 \text{ N}\cdot\text{m})\mathbf{k}$

(CONTINUED)


3.25 CONTINUED

(b) NOW... $M_A = [r_{CA} \times T_{CG}]$
 WHERE $r_{CA} = (2.7 \text{ m})\mathbf{i} + (2.3 \text{ m})\mathbf{j}$
 THEN... $M_A = 54 \begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 2.7 & 2.3 & 0 \\ -2 & 11 & -10 \end{vmatrix}$
 $= 54 [(-23)\mathbf{i} + 27\mathbf{j} + (29.7 + 4.6)\mathbf{k}]$
 OR $M_A = -(1242 \text{ N}\cdot\text{m})\mathbf{i} + (1458 \text{ N}\cdot\text{m})\mathbf{j} + (1852 \text{ N}\cdot\text{m})\mathbf{k}$

3.26

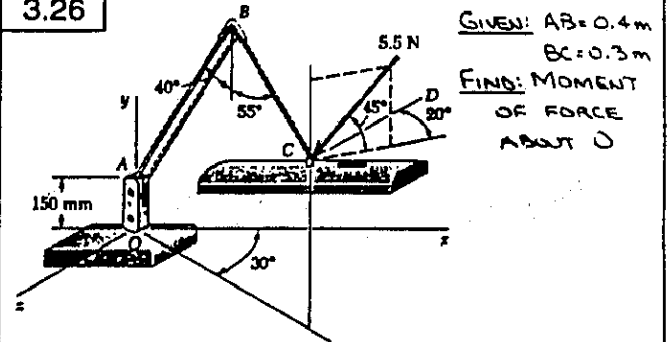

GIVEN: $AB = 0.4 \text{ m}$
 $BC = 0.3 \text{ m}$
 FIND: MOMENT OF FORCE ABOUT O

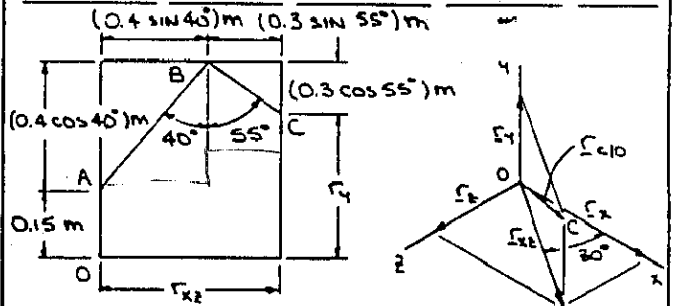


HAVE... $r_{DO} = [(0.4 \sin 40 + 0.3 \sin 55) \cos 30]\mathbf{i}$
 $+ [0.15 + 0.4 \cos 40 - 0.3 \cos 55]\mathbf{j}$
 $+ [(0.4 \sin 40 + 0.3 \sin 55) \sin 30]\mathbf{k}$
 $= (0.43549 \text{ m})\mathbf{i} + (0.28434 \text{ m})\mathbf{j}$
 $+ (0.25143 \text{ m})\mathbf{k}$

ALSO... $F = 5.5 (-\cos 45 \sin 20 \mathbf{i}$
 $- \sin 45 \mathbf{j}$
 $+ \cos 45 \cos 20 \mathbf{k})$
 $= \frac{5.5 \text{ N}}{\sqrt{2}} (-\sin 20 \mathbf{i} - \mathbf{j} + \cos 20 \mathbf{k})$

NOW... $M_O = r_{DO} \times F$
 $= \frac{5.5}{\sqrt{2}} \begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 0.43549 & 0.28434 & 0.25143 \\ -\sin 20 & -1 & \cos 20 \end{vmatrix}$
 $= \frac{5.5}{\sqrt{2}} [(0.28434 \cos 20 + 0.25143)\mathbf{i}$
 $+ (-0.25143 \sin 20 - 0.43549 \cos 20)\mathbf{j}$
 $+ (-0.43549 + 0.28434 \sin 20)\mathbf{k}]$

OR $M_O = (2.02 \text{ N}\cdot\text{m})\mathbf{i} - (1.926 \text{ N}\cdot\text{m})\mathbf{j} - (1.315 \text{ N}\cdot\text{m})\mathbf{k}$

3.27

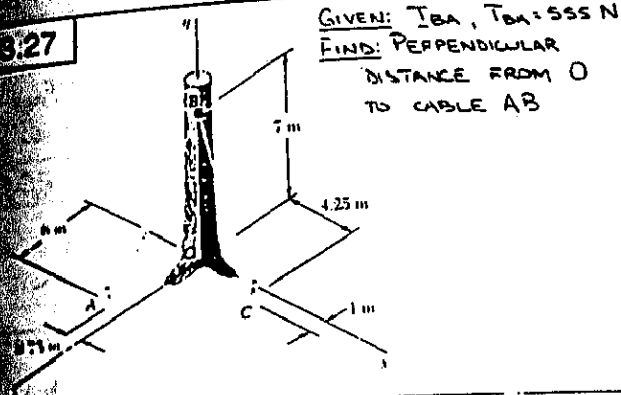


FROM THE SOLUTION TO PROBLEM 3.21

$$\begin{aligned} \mathbf{T}_{BA} &= -(45 \text{ N})\mathbf{i} - (420 \text{ N})\mathbf{j} + (360 \text{ N})\mathbf{k} \\ \text{Now... } \mathbf{M}_O &= \mathbf{r}_{O/A} \times \mathbf{T}_{BA} \quad \mathbf{r}_{O/A} = (7 \text{ m})\mathbf{j} \\ &= 7\mathbf{j} \times (-45\mathbf{i} - 420\mathbf{j} + 360\mathbf{k}) \\ &= 7[(360 \text{ N}\cdot\text{m})\mathbf{i} + (45 \text{ N}\cdot\text{m})\mathbf{k}] \\ \text{THEN... } M_O &= 7\sqrt{(360)^2 + (45)^2} \\ &= 2539.6 \text{ N}\cdot\text{m} \end{aligned}$$




$$\begin{aligned} \text{Also... } M_O &= dT_{BA} \\ \text{OR } 2539.6 \text{ N}\cdot\text{m} &= d \cdot 555 \text{ N} \\ \text{OR } d &= 4.58 \text{ m} \end{aligned}$$

3.28

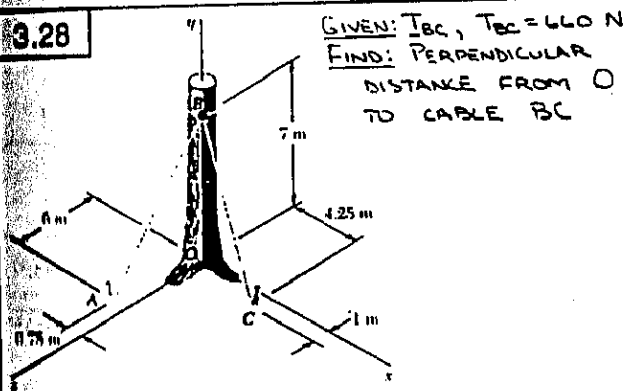


FROM THE SOLUTION TO PROBLEM 3.21

$$\begin{aligned} \mathbf{T}_{BC} &= (340 \text{ N})\mathbf{i} - (560 \text{ N})\mathbf{j} + (80 \text{ N})\mathbf{k} \\ \text{Now... } \mathbf{M}_O &= \mathbf{r}_{O/C} \times \mathbf{T}_{BC} \quad \mathbf{r}_{O/C} = (7 \text{ m})\mathbf{j} \\ &= 7\mathbf{j} \times (340\mathbf{i} - 560\mathbf{j} + 80\mathbf{k}) \\ &= 7[(80 \text{ N}\cdot\text{m})\mathbf{i} - (340 \text{ N}\cdot\text{m})\mathbf{k}] \\ \text{THEN... } M_O &= 7\sqrt{(80)^2 + (-340)^2} \\ &= 2445.0 \text{ N}\cdot\text{m} \end{aligned}$$



$$\begin{aligned} \text{Also... } M_O &= dT_{BC} \\ \text{OR } 2445.0 \text{ N}\cdot\text{m} &= d \cdot 660 \text{ N} \\ \text{OR } d &= 3.70 \text{ m} \end{aligned}$$

3.29

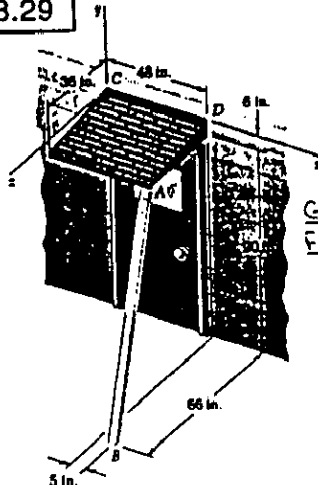


FROM THE SOLUTION TO PROBLEM 3.24

$$\begin{aligned} \mathbf{T}_{BA} &= 3[-(1 \text{ lb})\mathbf{i} + (18 \text{ lb})\mathbf{j} - (6 \text{ lb})\mathbf{k}] \\ \text{Now... } \mathbf{M}_D &= \mathbf{r}_{D/A} \times \mathbf{T}_{BA} \\ \text{WHERE } \mathbf{r}_{D/A} &= -(6 \text{ in})\mathbf{j} + (36 \text{ in})\mathbf{k} \\ &= 6[-(1 \text{ in})\mathbf{j} + (6 \text{ in})\mathbf{k}] \\ \text{THEN... } \mathbf{M}_D &= (3)(6) \begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 0 & -1 & 6 \\ -1 & 18 & -6 \end{vmatrix} \\ &= 18[(6 - 108)\mathbf{i} - 6\mathbf{j} - \mathbf{k}] \\ &= 18[(-102 \text{ lb}\cdot\text{in.})\mathbf{i} - (6 \text{ lb}\cdot\text{in.})\mathbf{j} \\ &\quad - (1 \text{ lb}\cdot\text{in.})\mathbf{k}] \\ \text{AND } M_D &= 18\sqrt{(-102)^2 + (-6)^2 + (-1)^2} \\ &= 1839.26 \text{ lb}\cdot\text{in.} \end{aligned}$$



$$\begin{aligned} \text{Also... } M_D &= dT_{BA} \\ \text{OR } 1839.26 \text{ lb}\cdot\text{in.} &= d \cdot 57 \text{ lb} \\ \text{OR } d &= 32.3 \text{ in.} \end{aligned}$$

3.30

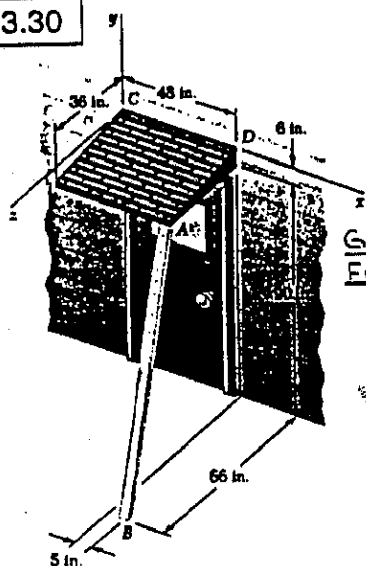


FROM THE SOLUTION TO PROBLEM 3.24

$$\begin{aligned} \mathbf{M}_C &= -(1836 \text{ lb}\cdot\text{in.})\mathbf{i} + (756 \text{ lb}\cdot\text{in.})\mathbf{j} + (2574 \text{ lb}\cdot\text{in.})\mathbf{k} \\ \text{THEN } M_C &= \sqrt{(-1836)^2 + (756)^2 + (2574)^2} \\ &\quad (\text{CONTINUED}) \end{aligned}$$

3.30 CONTINUED

OR $M_C = 3250.8 \text{ lb}\cdot\text{in.}$
 ALSO.. $M_C = dT_{BA}$
 OR $3250.8 \text{ lb}\cdot\text{in.} = d \cdot 57 \text{ lb}$
 OR $d = 57.0 \text{ in.}$

3.31

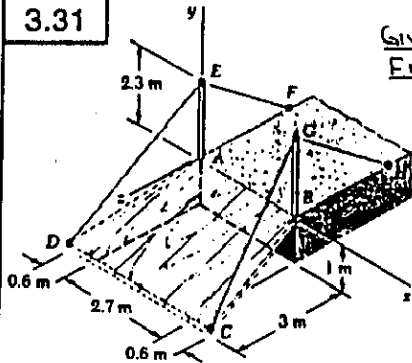


GIVEN: $M_A, T_{DE} = 810 \text{ N}$
 FIND: PERPENDICULAR
 DISTANCE FROM
 A TO CABLE
 DE

FROM THE SOLUTION TO PROBLEM 3.25(a)
 $M_A = -(1242 \text{ N}\cdot\text{m})\mathbf{i} - (248 \text{ N}\cdot\text{m})\mathbf{k}$
 THEN $M_A = \sqrt{(-1242)^2 + (-248)^2}$
 $= 1266.52 \text{ N}\cdot\text{m}$




ALSO.. $M_A = dT_{DE}$
 OR $1266.52 \text{ N}\cdot\text{m} = d \cdot 810 \text{ N}$
 OR $d = 1.564 \text{ m}$

3.32

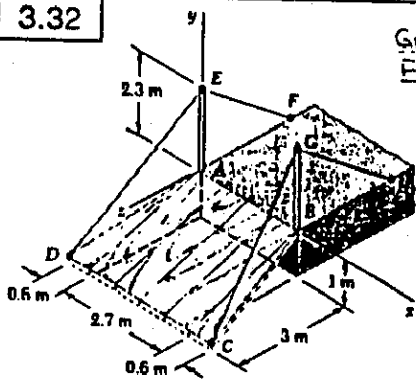


GIVEN: $M_A, T_{CG} = 810 \text{ N}$
 FIND: PERPENDICULAR
 DISTANCE FROM
 A TO A LINE
 THROUGH C
 AND G

FROM THE SOLUTION TO PROBLEM 3.25(b)
 $M_A = -(1242 \text{ N}\cdot\text{m})\mathbf{i} + (1458 \text{ N}\cdot\text{m})\mathbf{j} + (1852 \text{ N}\cdot\text{m})\mathbf{k}$
 THEN $M_A = \sqrt{(-1242)^2 + (1458)^2 + (1852)^2}$
 $= 2664.3 \text{ N}\cdot\text{m}$



ALSO.. $M_A = dT_{CG}$
 OR $2664.3 \text{ N}\cdot\text{m} = d \cdot 810 \text{ N}$
 OR $d = 3.29 \text{ m}$

3.33

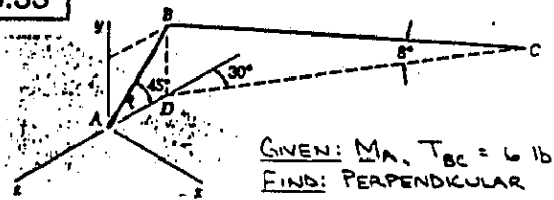


GIVEN: $M_A, T_{BC} = 6 \text{ lb}$
 FIND: PERPENDICULAR
 DISTANCE FROM A TO
 A LINE THROUGH C
 AND G

FROM THE SOLUTION TO PROBLEM 3.23
 $M_A = -(25.4 \text{ lb}\cdot\text{ft})\mathbf{j} - (12.60 \text{ lb}\cdot\text{ft})\mathbf{k}$
 THEN $M_A = \sqrt{(-25.4)^2 + (-12.60)^2 + (-12.60)^2}$
 $= 31.027 \text{ lb}\cdot\text{ft}$



ALSO.. $M_A = dT_{BC}$
 OR $31.027 \text{ lb}\cdot\text{ft} = d \cdot 6 \text{ lb}$
 OR $d = 5.17 \text{ ft}$

3.34

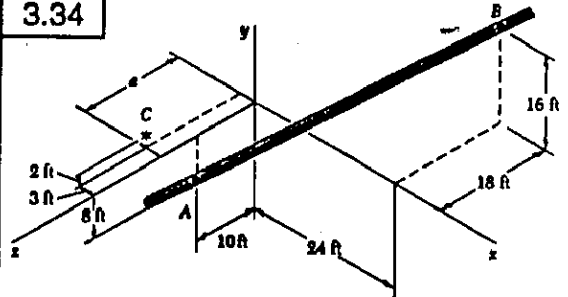

GIVEN: SECTION OF PIPELINE
 FIND: Q SO THAT PERPENDICULAR
 DISTANCE d FROM C TO A LINE
 THROUGH A AND B IS A MINIMUM

FIRST NOTE.. $d_{AB} = \sqrt{(24-0)^2 + [16-(6)]^2 + (-18-10)^2}$
 $= 44 \text{ ft}$

NOW ASSUME THAT A FORCE E , OF
 MAGNITUDE F , ACTS AT POINT A AND IS
 DIRECTED FROM A TO B. THEN

$E = F \Delta_{AB} \quad (F \text{ in lb})$
 $= \frac{F}{44} (24\mathbf{j} + 24\mathbf{j} - 28\mathbf{k})$
 $= \frac{F}{11} (6\mathbf{j} + 6\mathbf{j} - 7\mathbf{k})$

BY DEFINITION.. $M_C = |\Delta_{AC} \times E| = dF$
 WHERE $\Delta_{AC} = (3\text{ft})\mathbf{i} - (10\text{ft})\mathbf{j} + [(10-Q)\text{ft}]\mathbf{k}$

THEN $M_C = \frac{F}{11} \begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 3 & -10 & (10-Q) \\ 6 & 6 & -7 \end{vmatrix}$
 $= \frac{F}{11} \{ [70 - 6(10-Q)]\mathbf{i} + [6(10-Q) + 21]\mathbf{j} + [18 + 60]\mathbf{k} \}$
 $= \frac{F}{11} \{ [(10+6Q)16\text{ft}]\mathbf{i} + [(81-6Q)16\text{ft}]\mathbf{j} + [7816\text{ft}]\mathbf{k} \}$

THEN.. $(\frac{F}{11})^2 [(10+6Q)^2 + (81-6Q)^2 + (78)^2] = (dF)^2$
 OR $d^2 = \frac{1}{121} [(10+6Q)^2 + (81-6Q)^2 + (78)^2] (6t)^2$
 FINALLY.. $\frac{d(d^2)}{dQ} = \frac{1}{121} [2(6)(10+6Q) + 2(-6)(81-6Q)] = 0$

(CONTINUED)

3.34 CONTINUED

OR $(10+6a) - (81-6a) = 0$
 SO THAT FOR d_{\min} $a = 5.92 \text{ ft}$

3.35

GIVEN: $\underline{P} = 4\mathbf{i} + 3\mathbf{j} - 2\mathbf{k}$

$\underline{Q} = -\mathbf{j} + 4\mathbf{j} - 5\mathbf{k}$

$\underline{R} = \mathbf{j} + 4\mathbf{j} + 3\mathbf{k}$

FIND: $\underline{P} \cdot \underline{Q}$, $\underline{P} \cdot \underline{R}$, $\underline{Q} \cdot \underline{R}$

HAVE.. $\underline{P} \cdot \underline{Q} = (4\mathbf{i} + 3\mathbf{j} - 2\mathbf{k}) \cdot (-\mathbf{j} + 4\mathbf{j} - 5\mathbf{k})$
 $= (4)(-1) + (3)(4) + (-2)(-5)$
 OR $\underline{P} \cdot \underline{Q} = 18$

$\underline{P} \cdot \underline{R} = (4\mathbf{i} + 3\mathbf{j} - 2\mathbf{k}) \cdot (\mathbf{j} + 4\mathbf{j} + 3\mathbf{k})$
 $= (4)(1) + (3)(4) + (-2)(3)$
 OR $\underline{P} \cdot \underline{R} = 10$


$\underline{Q} \cdot \underline{R} = (-\mathbf{j} + 4\mathbf{j} - 5\mathbf{k}) \cdot (\mathbf{j} + 4\mathbf{j} + 3\mathbf{k})$
 $= (-1)(1) + (4)(4) + (-5)(3)$
 OR $\underline{Q} \cdot \underline{R} = 0$

THUS, \underline{Q} AND \underline{R} ARE PERPENDICULAR

3.36

GIVEN: \underline{B} , \underline{B}' , AND \underline{C}

PROVE: $\cos \alpha \cos \beta$
 $= \frac{1}{2} \cos(\alpha + \beta)$
 $+ \frac{1}{2} \cos(\alpha - \beta)$



FIRST NOTE.. $\underline{B} = B(\cos \beta \mathbf{i} + \sin \beta \mathbf{j})$
 $\underline{B}' = B(\cos \beta \mathbf{i} - \sin \beta \mathbf{j})$
 $\underline{C} = C(\cos \alpha \mathbf{i} + \sin \alpha \mathbf{j})$

BY DEFINITION.. $\underline{B} \cdot \underline{C} = BC \cos(\alpha - \beta)$ (1)
 $\underline{B}' \cdot \underline{C} = BC \cos(\alpha + \beta)$ (2)

NOW $\underline{B} \cdot \underline{C} = B(\cos \beta \mathbf{i} + \sin \beta \mathbf{j}) \cdot C(\cos \alpha \mathbf{i} + \sin \alpha \mathbf{j})$
 $= BC(\cos \beta \cos \alpha + \sin \beta \sin \alpha)$ (3)


AND $\underline{B}' \cdot \underline{C} = B(\cos \beta \mathbf{i} - \sin \beta \mathbf{j}) \cdot C(\cos \alpha \mathbf{i} + \sin \alpha \mathbf{j})$
 $= BC(\cos \beta \cos \alpha - \sin \beta \sin \alpha)$ (4)

EQUATING THE RIGHT-HAND SIDES OF EQS. (1) AND (2) TO THE RIGHT-HAND SIDES OF EQS. (3) AND (4), RESPECTIVELY, YIELDS
 $BC \cos(\alpha - \beta) = BC(\cos \beta \cos \alpha + \sin \beta \sin \alpha)$ (5)
 $BC \cos(\alpha + \beta) = BC(\cos \beta \cos \alpha - \sin \beta \sin \alpha)$ (6)

(5) + (6) $\Rightarrow \cos(\alpha - \beta) + \cos(\alpha + \beta) = 2 \cos \beta \cos \alpha$

OR $\cos \alpha \cos \beta = \frac{1}{2} \cos(\alpha + \beta) + \frac{1}{2} \cos(\alpha - \beta)$

3.37

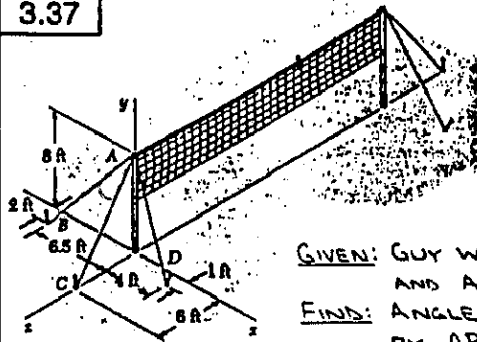

GIVEN: GUY WIRES AB AND AC

FIND: ANGLE θ FORMED BY AB AND AC


FIRST NOTE.. $AB = \sqrt{(-6.5)^2 + (-8)^2 + (2)^2}$
 $= 10.5 \text{ ft}$

$AC = \sqrt{(0)^2 + (-8)^2 + (6)^2}$
 $= 10 \text{ ft}$

AND $\underline{AB} = -(6.5 \text{ ft})\mathbf{i} - (8 \text{ ft})\mathbf{j} + (2 \text{ ft})\mathbf{k}$
 $\underline{AC} = -(8 \text{ ft})\mathbf{j} - (6 \text{ ft})\mathbf{k}$

BY DEFINITION.. $\underline{AB} \cdot \underline{AC} = (AB)(AC) \cos \theta$
 OR $(-6.5\mathbf{i} - 8\mathbf{j} + 2\mathbf{k}) \cdot (-8\mathbf{j} - 6\mathbf{k}) = (10.5)(10) \cos \theta$
 $(-6.5)(0) + (-8)(-8) + (2)(-6) = 105 \cos \theta$
 OR $\cos \theta = 0.723 \text{ BI}$
 OR $\theta = 43.6^\circ$

3.38

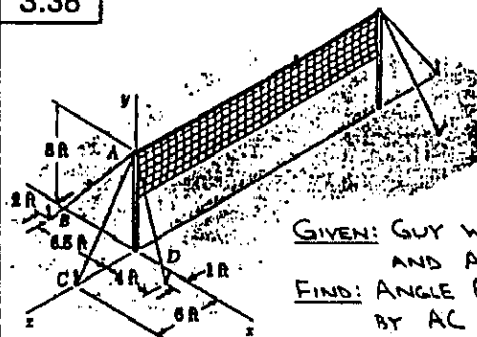

GIVEN: GUY WIRES AC AND AD

FIND: ANGLE θ FORMED BY AC AND AD


FIRST NOTE.. $AC = \sqrt{(0)^2 + (-8)^2 + (6)^2}$
 $= 10 \text{ ft}$

$AD = \sqrt{(4)^2 + (-8)^2 + (1)^2}$
 $= 9 \text{ ft}$

AND $\underline{AC} = -(8 \text{ ft})\mathbf{j} - (6 \text{ ft})\mathbf{k}$
 $\underline{AD} = (4 \text{ ft})\mathbf{i} - (8 \text{ ft})\mathbf{j} + (1 \text{ ft})\mathbf{k}$


BY DEFINITION.. $\underline{AC} \cdot \underline{AD} = (AC)(AD) \cos \theta$
 OR $(-8\mathbf{j} - 6\mathbf{k}) \cdot (4\mathbf{i} - 8\mathbf{j} + \mathbf{k}) = (10)(9) \cos \theta$
 $(0)(4) + (-8)(-8) + (-6)(1) = 90 \cos \theta$
 OR $\cos \theta = 0.777 \text{ BI}$
 OR $\theta = 38.9^\circ$

3.39

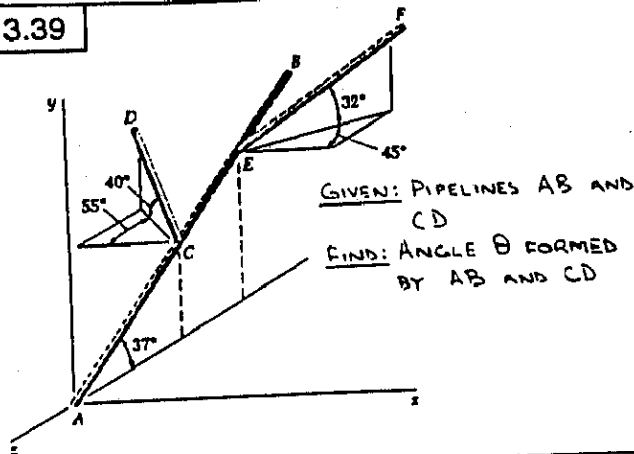


GIVEN: PIPELINES AB AND CD
FIND: ANGLE θ FORMED BY AB AND CD

FIRST NOTE. $\vec{AB} = AB(\sin 37^\circ \hat{j} - \cos 37^\circ \hat{k})$
 $\vec{CD} = CD(-\cos 40^\circ \cos 55^\circ \hat{i} + \sin 40^\circ \hat{j} - \cos 40^\circ \sin 55^\circ \hat{k})$

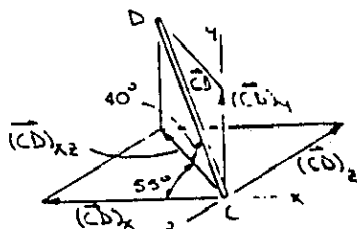


NOW. $\vec{AB} \cdot \vec{CD} = (AB)(CD) \cos \theta$
 OR $AB(\sin 37^\circ \hat{j} - \cos 37^\circ \hat{k}) \cdot CD(-\cos 40^\circ \cos 55^\circ \hat{i} + \sin 40^\circ \hat{j} - \cos 40^\circ \sin 55^\circ \hat{k})$
 $= (AB)(CD) \cos \theta$
 OR $\cos \theta = (\sin 37^\circ \times \sin 40^\circ) + (-\cos 37^\circ \times -\cos 40^\circ \sin 55^\circ)$
 $= 0.88799$ OR $\theta = 27.4^\circ$

3.40

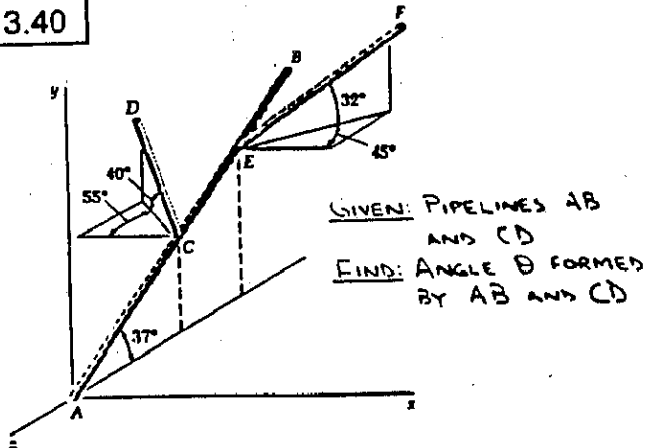

GIVEN: PIPELINES AB AND CD
FIND: ANGLE θ FORMED BY AB AND CD

FIRST NOTE.. $\vec{AB} = AB(\sin 37^\circ \hat{j} - \cos 37^\circ \hat{k})$
 $\vec{EF} = EF(\cos 32^\circ \cos 45^\circ \hat{i} + \sin 32^\circ \hat{j} - \cos 32^\circ \sin 45^\circ \hat{k})$

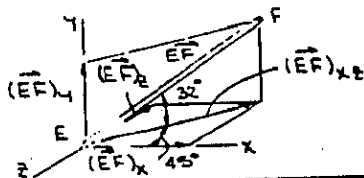


(CONTINUED)

3.40 CONTINUED

NOW $\vec{AB} \cdot \vec{EF} = (AB)(EF) \cos \theta$
 OR $AB(\sin 37^\circ \hat{j} - \cos 37^\circ \hat{k}) \cdot EF(\cos 32^\circ \cos 45^\circ \hat{i} + \sin 32^\circ \hat{j} - \cos 32^\circ \sin 45^\circ \hat{k})$
 $= (AB)(EF) \cos \theta$
 OR $\cos \theta = (\sin 37^\circ)(\sin 32^\circ) + (-\cos 37^\circ)(-\cos 32^\circ \sin 45^\circ)$
 $= 0.79782$ OR $\theta = 37.1^\circ$

3.41

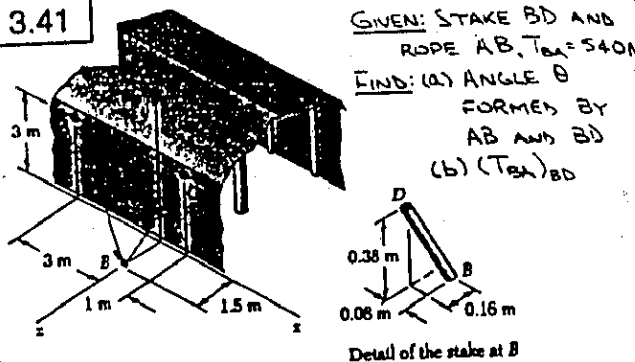

GIVEN: STAKE BD AND ROPE AB, $T_{AB} = 540$
FIND: (a) ANGLE θ FORMED BY AB AND BD
(b) $(T_{AB})_{BD}$

FIRST NOTE.. $BA = \sqrt{1^2 + 3^2 + (-1.5)^2} = 4.5$ m
 $BD = \sqrt{(0.08)^2 + (0.38)^2 + (0.16)^2} = 0.42$ m


THEN $\vec{T}_{AB} = \frac{T_{AB}}{4.5}(-3\hat{i} + 3\hat{j} - 1.5\hat{k})$
 $= \frac{T_{AB}}{3}(-2\hat{i} + 2\hat{j} - \hat{k})$
 $\Delta_{BD} = \frac{BD}{0.42} = \frac{1}{0.42}(-0.08\hat{i} + 0.38\hat{j} + 0.16\hat{k})$
 $= \frac{1}{21}(-4\hat{i} + 19\hat{j} + 8\hat{k})$

(a) HAVE $\vec{T}_{AB} \cdot \Delta_{BD} = T_{AB} \cos \theta$

OR $\frac{T_{AB}}{3}(-2\hat{i} + 2\hat{j} - \hat{k}) \cdot \frac{1}{21}(-4\hat{i} + 19\hat{j} + 8\hat{k}) = T_{AB} \cos \theta$
 OR $\cos \theta = \frac{1}{63} [(-2)(-4) + (2)(19) + (-1)(8)] = 0.60317$
 OR $\theta = 52.9^\circ$

(b) HAVE $(T_{AB})_{BD} = \vec{T}_{AB} \cdot \Delta_{BD} = T_{AB} \cos \theta = (540 \text{ N})(0.60317)$
 OR $(T_{AB})_{BD} = 326$ N

3.42

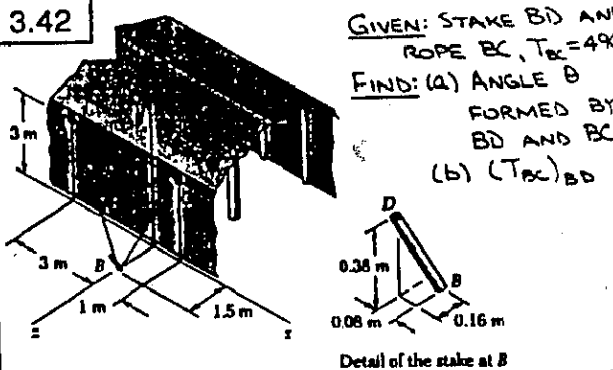

GIVEN: STAKE BD AND ROPE BC, $T_{BC} = 490$
FIND: (a) ANGLE θ FORMED BY BD AND BC
(b) $(T_{BC})_{BD}$

FIRST NOTE.. $BC = \sqrt{1^2 + 3^2 + (-1.5)^2} = 3.5$ m
(CONTINUED)

3.42 CONTINUED

$$BD = \sqrt{(-0.08)^2 + (0.38)^2 + (0.16)^2} = 0.42 \text{ m}$$

$$\text{THEN } T_{BC} = \frac{T_{BC}}{3.5} (\mathbf{i} + 3\mathbf{j} - 4\mathbf{k})$$

$$= \frac{T_{BC}}{7} (2\mathbf{i} + 6\mathbf{j} - 3\mathbf{k})$$

$$\Delta_{BD} = \frac{\vec{BD}}{BD} = \frac{1}{0.42} (-0.08\mathbf{i} + 0.38\mathbf{j} + 0.16\mathbf{k})$$

$$= \frac{1}{21} (-4\mathbf{i} + 19\mathbf{j} + 8\mathbf{k})$$

(a) HAVE $T_{BC} \cdot \Delta_{BD} = T_{BC} \cos \theta$

OR $\frac{T_{BC}}{7} (2\mathbf{i} + 6\mathbf{j} - 3\mathbf{k}) \cdot \frac{1}{21} (-4\mathbf{i} + 19\mathbf{j} + 8\mathbf{k}) = T_{BC} \cos \theta$

OR $\cos \theta = \frac{1}{147} [(2)(-4) + (6)(19) + (-3)(8)]$

$$= 0.55782$$

OR $\theta = 56.1^\circ$


(b) HAVE $(T_{BC})_{BD} = T_{BC} \cdot \Delta_{BD}$

$$= T_{BC} \cos \theta$$

$$= (490 \text{ N})(0.55782)$$

OR $(T_{BC})_{BD} = 273 \text{ N}$

3.43

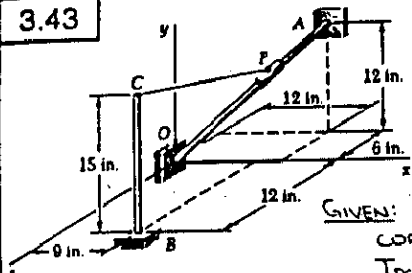

GIVEN: ROD OA AND
CORD PC, $OP = 6 \text{ in.}$,
 $T_{PC} = 3 \text{ lb}$

FINIS: (a) ANGLE θ FORMED
BY OA AND PC

(b) $(T_{PC})_{OA}$

FIRST NOTE.. $OA = \sqrt{(12)^2 + (12)^2 + (-6)^2} = 18 \text{ in.}$

THEN.. $\Delta_{OA} = \frac{\vec{OA}}{OA} = \frac{1}{18} (12\mathbf{i} + 12\mathbf{j} - 6\mathbf{k})$

$$= \frac{1}{3} (2\mathbf{i} + 2\mathbf{j} - \mathbf{k})$$

NOW $OP = 6 \text{ in.} \Rightarrow OP = \frac{1}{3} OA$

\therefore THE COORDINATES OF POINT P ARE

$$(4 \text{ in.}, 4 \text{ in.}, -2 \text{ in.})$$

SO THAT $\vec{PC} = (5 \text{ in.})\mathbf{i} + (11 \text{ in.})\mathbf{j} + (14 \text{ in.})\mathbf{k}$

AND $PC = \sqrt{(5)^2 + (11)^2 + (14)^2} = \sqrt{342} \text{ in.}$

(a) HAVE.. $\vec{PC} \cdot \Delta_{OA} = (PC) \cos \theta$

OR $(5\mathbf{i} + 11\mathbf{j} + 14\mathbf{k}) \cdot \frac{1}{3}(2\mathbf{i} + 2\mathbf{j} - \mathbf{k}) = \sqrt{342} \cos \theta$

OR $\cos \theta = \frac{1}{3\sqrt{342}} [(5)(2) + (11)(2) + (14)(-1)]$

$$= 0.32444$$

OR $\theta = 71.1^\circ$

(b) HAVE.. $(T_{PC})_{OA} = T_{PC} \cdot \Delta_{OA}$

$$= (T_{PC} \Delta_{PC}) \cdot \Delta_{OA}$$


$$= T_{PC} \frac{\vec{PC}}{PC} \cdot \Delta_{OA}$$

$$= T_{PC} \cos \theta$$

$$= (3 \text{ lb})(0.32444)$$

OR $(T_{PC})_{OA} = 0.973 \text{ lb}$

3.44

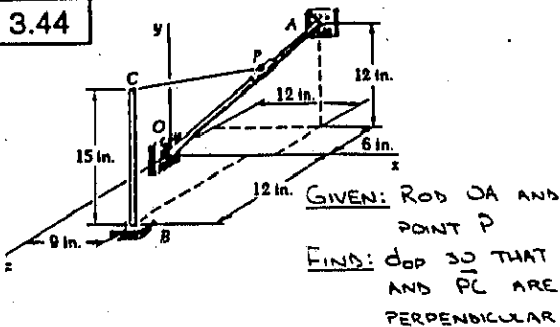

GIVEN: ROD OA AND
POINT P

FINIS: d_{OP} SO THAT OA
AND PC ARE
PERPENDICULAR

FIRST NOTE.. $OA = \sqrt{(12)^2 + (12)^2 + (-6)^2} = 18 \text{ in.}$

THEN.. $\Delta_{OA} = \frac{\vec{OA}}{OA} = \frac{1}{18} (12\mathbf{i} + 12\mathbf{j} - 6\mathbf{k})$

$$= \frac{1}{3} (2\mathbf{i} + 2\mathbf{j} - \mathbf{k})$$

LET THE COORDINATES OF POINT P BE

$(x \text{ in.}, y \text{ in.}, z \text{ in.})$. THEN

$$\vec{PC} = [(9-x)\mathbf{i}] + [(15-y)\mathbf{j}] + [(12-z)\mathbf{k}]$$

ALSO, $\vec{OP} = d_{OP} \Delta_{OA}$

$$= \frac{d_{OP}}{3} (2\mathbf{i} + 2\mathbf{j} - \mathbf{k})$$

AND $\vec{OP} = (x \text{ in.})\mathbf{i} + (y \text{ in.})\mathbf{j} + (z \text{ in.})\mathbf{k}$

$$\therefore x = \frac{2}{3} d_{OP} \quad y = \frac{2}{3} d_{OP} \quad z = -\frac{1}{3} d_{OP}$$

THE REQUIREMENT THAT OA AND PC BE
PERPENDICULAR IMPLIES THAT

$$\Delta_{OA} \cdot \vec{PC} = 0$$

OR $\frac{1}{3} (2\mathbf{i} + 2\mathbf{j} - \mathbf{k}) \cdot [(9-x)\mathbf{i} + (15-y)\mathbf{j} + (12-z)\mathbf{k}] = 0$

OR $(2)(9 - \frac{2}{3} d_{OP}) + (2)(15 - \frac{2}{3} d_{OP}) + (-1)[12 - (-\frac{1}{3} d_{OP})] = 0$

OR $d_{OP} = 12 \text{ in.}$

3.45

GIVEN: VECTORS \underline{P} , \underline{Q} , AND \underline{S}

FINIS: VOLUME OF THE PARALLELOGRAM
DEFINED BY \underline{P} , \underline{Q} , AND \underline{S} WHEN

(a) $\underline{P} = 4\mathbf{i} - 3\mathbf{j} + 2\mathbf{k}$

$$\underline{Q} = -2\mathbf{i} - 5\mathbf{j} + \mathbf{k}$$

$$\underline{S} = 7\mathbf{i} + \mathbf{j} - \mathbf{k}$$

(b) $\underline{P} = 5\mathbf{i} - \mathbf{j} + 6\mathbf{k}$

$$\underline{Q} = 2\mathbf{i} + 3\mathbf{j} + \mathbf{k}$$

$$\underline{S} = -3\mathbf{i} - 2\mathbf{j} + 4\mathbf{k}$$

AS EXPLAINED IN SEC. 3.10, THE VOLUME V
OF THE PARALLELOGRAM IS GIVEN BY

$$V = |\underline{P} \cdot (\underline{Q} \times \underline{S})|$$

(a) HAVE

$$\underline{P} \cdot (\underline{Q} \times \underline{S}) = \begin{vmatrix} 4 & -3 & 2 \\ -2 & -5 & 1 \\ 7 & 1 & -1 \end{vmatrix}$$

$$= 20 - 21 - 4 + 70 + 6 - 4$$

$$= 67$$

$\therefore V = 67$

(b) HAVE

$$\underline{P} \cdot (\underline{Q} \times \underline{S}) = \begin{vmatrix} 5 & -1 & 6 \\ 2 & 3 & 1 \\ -3 & -2 & 4 \end{vmatrix}$$

$$= 60 + 3 - 24 + 54 + 8 + 10$$

$$= 111$$

$\therefore V = 111$

3.46

GIVEN: $P = 3i - j + k$ $Q = 4i + Q_4j - 2k$ $S = 2i - 2j + 2k$ FIND: Q_4 SO THAT P , Q , AND S ARE COPLANARIF P , Q , AND S ARE COPLANAR, THEN P MUST BE PERPENDICULAR TO $(Q \times S)$.

$$\therefore P \cdot (Q \times S) = 0$$


(OR, THE VOLUME OF THE PARALLELEPIPED DEFINED BY P , Q , AND S IS ZERO). THEN

$$\begin{vmatrix} 3 & -1 & 1 \\ 4 & Q_4 & -2 \\ 2 & -2 & 2 \end{vmatrix} = 0$$

$$\text{OR } 6Q_4 + 4 - 8 - 2Q_4 + 8 - 12 = 0$$

$$\text{OR } Q_4 = 2$$

3.47

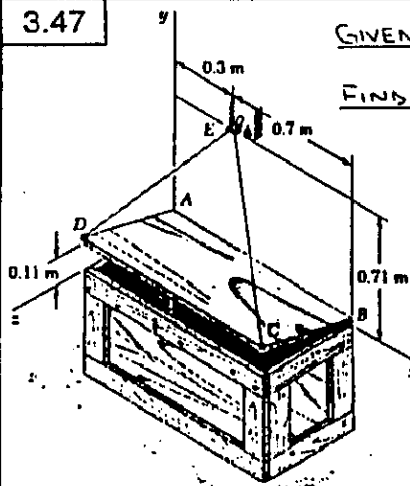GIVEN: $0.61 = 1.00\text{-m LID}$, $T_{DE} = 66\text{ N}$ FIND: M_x, M_y, M_z OF IDE AT D

FIRST NOTE..

$$z = \sqrt{(0.61)^2 - (0.11)^2} = 0.60\text{ m}$$

THEN AND

$$d_{DE} = \sqrt{(0.3)^2 + (0.6)^2 + (-0.6)^2} = 0.9\text{ m}$$

$$T_{DE} = \frac{66\text{ N}}{0.9} (0.3i + 0.6j - 0.6k)$$

$$= 22[(1\text{ N})i + (2\text{ N})j - (2\text{ N})k]$$

NOW..

$$M_A = \sum r_{DA} \times T_{DE}$$

WHERE $\sum r_{DA} = (0.11\text{ m})j + (0.60\text{ m})k$


$$\text{THEN.. } M_A = 22 \begin{vmatrix} i & j & k \\ 0 & 0.11 & 0.60 \\ 1 & 2 & -2 \end{vmatrix}$$

$$= 22[(-0.22 - 1.20)j + 0.60j - 0.11k]$$

$$= -(31.24\text{ N}\cdot\text{m})j + (13.20\text{ N}\cdot\text{m})j - (2.42\text{ N}\cdot\text{m})k$$


$$\therefore M_x = -31.2\text{ N}\cdot\text{m}, M_y = 13.20\text{ N}\cdot\text{m}, M_z = -2.42\text{ N}\cdot\text{m}$$

3.48

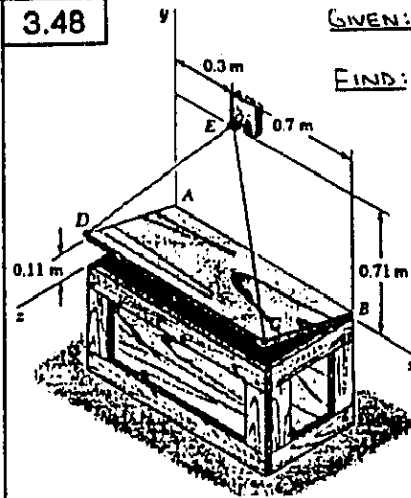GIVEN: $0.61 = 1.00\text{-m LID}$, $T_{CE} = 66\text{ N}$ FIND: M_x, M_y, M_z OF ICE AT C

FIRST NOTE..

$$z = \sqrt{(0.61)^2 - (0.11)^2} = 0.60\text{ m}$$



$$\text{THEN } d_{CE} = \sqrt{(-0.7)^2 + (0.6)^2 + (-0.6)^2} = 1.1\text{ m}$$

$$\text{AND } T_{CE} = \frac{66\text{ N}}{1.1} (-0.7i + 0.6j - 0.6k)$$

$$= 6[(-7\text{ N})i + (6\text{ N})j - (6\text{ N})k]$$

NOW..

$$M_A = \sum r_{EA} \times T_{CE}$$

WHERE $\sum r_{EA} = (0.3\text{ m})i + (0.71\text{ m})j$


$$\text{THEN.. } M_A = 6 \begin{vmatrix} i & j & k \\ 0.3 & 0.71 & 0 \\ -7 & 6 & -6 \end{vmatrix}$$

$$= 6[-4.26j + 1.8j + (1.8 + 4.97)k]$$

$$= -(25.56\text{ N}\cdot\text{m})j + (10.80\text{ N}\cdot\text{m})j + (40.62\text{ N}\cdot\text{m})k$$

$$\therefore M_x = -25.6\text{ N}\cdot\text{m}, M_y = 10.80\text{ N}\cdot\text{m}, M_z = 40.6\text{ N}\cdot\text{m}$$

3.49 and 3.50

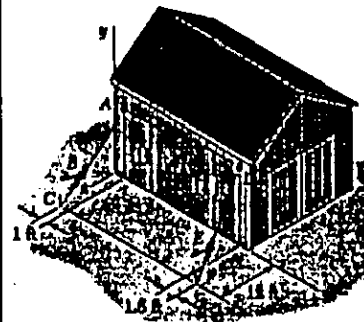GIVEN: T_{AB} , M_x OF T_{AB} (AT A) AND T_{DE} (AT D) = 4728 lb-ftFIND: T_{DE} 

$$\text{FIRST NOTE.. } d_{AC} = \sqrt{(-1)^2 + (-12)^2 + (12)^2} = 17\text{ ft}$$

$$d_{DE} = \sqrt{(1.5)^2 + (-14)^2 + (12)^2} = 18.5\text{ ft}$$

$$\text{THEN.. } T_{AB} = \frac{T_{AB}}{17} (-i - 12j + 12k) \quad (1b)$$

$$T_{DE} = \frac{T_{DE}}{18.5} (1.5i - 14j + 12k) \quad (1b)$$

$$\text{NOW.. } M_x = \sum r_{DA} \times T_{AB} + \sum r_{DA} \times T_{DE}$$

(CONTINUED)

3.49 and 3.50 CONTINUED

WHERE $\Sigma A/G = (12 \text{ ft})\mathbf{j}$
 $\Sigma OH = (14 \text{ ft})\mathbf{j}$

THEN.. $M_x = \mathbf{i} \cdot [12\mathbf{j} \times \frac{T_{AB}}{17}(-\mathbf{i} - 12\mathbf{j} + 12\mathbf{k}) + 14\mathbf{j} \times \frac{T_{DE}}{18.5}(1.5\mathbf{i} - 14\mathbf{j} + 12\mathbf{k})]$
 $= \frac{144}{17} T_{AB} + \frac{168}{18.5} T_{DE} \quad (16\text{-ft}) \quad (1)$


3.49 SUBSTITUTING INTO EQ. (1) WITH
 $T_{AB} = 255 \text{ lb} \quad M_x = 4728 \text{ lb}\cdot\text{ft}$

HAVE $4728 = \frac{144}{17}(255) + \frac{168}{18.5} T_{DE}$
 OR $T_{DE} = 283 \text{ lb}$

3.50 SUBSTITUTING INTO EQ. (1) WITH
 $T_{AB} = 306 \text{ lb} \quad M_x = 4728 \text{ lb}\cdot\text{ft}$

HAVE $4728 = \frac{144}{17}(306) + \frac{168}{18.5} T_{DE}$
 OR $T_{DE} = 235 \text{ lb}$

3.51

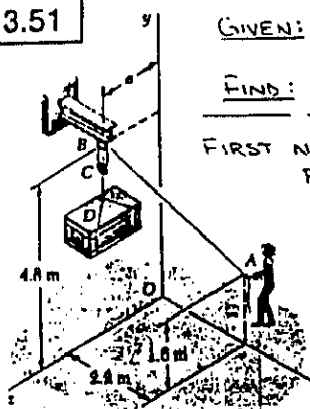

GIVEN: $M_y = 120 \text{ N}\cdot\text{m}$, $M_z = -460 \text{ N}\cdot\text{m}$
 OF T_{BA} AT B

FIND: a

FIRST NOTE..
 $BA = (2.2 \text{ m})\mathbf{i} - (3.2 \text{ m})\mathbf{j} - (a \text{ m})\mathbf{k}$

NOW.. $M_O = \Sigma A/O \times T_{BA}$

WHERE

$\Sigma A/O = (2.2 \text{ m})\mathbf{i} + (1.6 \text{ m})\mathbf{j}$

$T_{BA} = \frac{T_{BA}}{d_{BA}} (2.2\mathbf{i} - 3.2\mathbf{j} - a\mathbf{k}) \quad (\text{N})$

THEN.. $M_O = \frac{T_{BA}}{d_{BA}} \begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 2.2 & 1.6 & 0 \\ 2.2 & -3.2 & -a \end{vmatrix}$
 $= \frac{T_{BA}}{d_{BA}} \{ -1.6a\mathbf{j} + 2.2a\mathbf{j} + [(2.2)(-3.2) - (1.6)(2.2)]\mathbf{k} \}$

THUS.. $M_y = 2.2 \frac{T_{BA}}{d_{BA}} a \quad (\text{N}\cdot\text{m})$


$M_z = -10.56 \frac{T_{BA}}{d_{BA}} \quad (\text{N}\cdot\text{m})$

THEN.. FORMING THE RATIO $\frac{M_y}{M_z}$..

$\frac{120 \text{ N}\cdot\text{m}}{-460 \text{ N}\cdot\text{m}} = \frac{2.2 \frac{T_{BA}}{d_{BA}} a \quad (\text{N}\cdot\text{m})}{-10.56 \frac{T_{BA}}{d_{BA}} \quad (\text{N}\cdot\text{m})}$

OR $a = 1.252 \text{ m}$

3.52

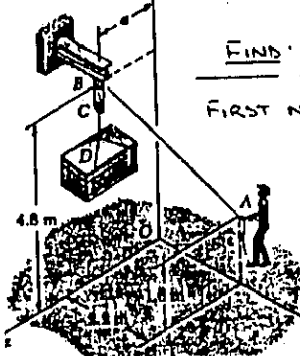

GIVEN: $T_{DA} = 195 \text{ N}$,
 $M_y = 132 \text{ N}\cdot\text{m}$ OF
 T_{BA} AT B

FIND: a

FIRST NOTE..

$d_{BA} = \sqrt{(2.2)^2 + (-3.2)^2 + (-a)^2}$
 $= \sqrt{15.08 + a^2} \text{ m}$

AND

$T_{BA} = \frac{195 \text{ N}}{d_{BA}} (2.2\mathbf{i} - 3.2\mathbf{j} - a\mathbf{k})$

NOW $M_y = \mathbf{j} \cdot (\Sigma A/O \times T_{BA})$

WHERE $\Sigma A/O = (2.2 \text{ m})\mathbf{i} + (1.6 \text{ m})\mathbf{j}$

THEN.. $M_y = \frac{195}{d_{BA}} \begin{vmatrix} 0 & 1 & 0 \\ 2.2 & 1.6 & 0 \\ 2.2 & -3.2 & -a \end{vmatrix}$
 $= \frac{195}{d_{BA}} (2.2a) \quad (\text{N}\cdot\text{m})$

SUBSTITUTING FOR M_y AND d_{BA} ..

$132 \text{ N}\cdot\text{m} = \frac{195}{\sqrt{15.08 + a^2}} (2.2a)$


OR $0.30769 \sqrt{15.08 + a^2} = a$

SQUARING BOTH SIDES OF THE EQUATION..

$0.094675(15.08 + a^2) = a^2$

OR $a = 1.256 \text{ m}$

3.53

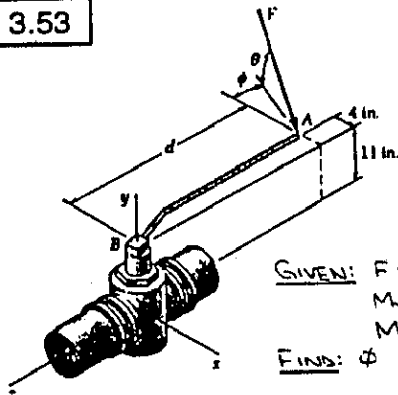

GIVEN: $F = 70 \text{ lb}$, $\theta = 25^\circ$,
 $M_x = -61 \text{ lb}\cdot\text{ft}$,
 $M_z = -43 \text{ lb}\cdot\text{ft}$

FIND: ϕ AND d

HAVE.. $M_O = \Sigma A/O \times F$

WHERE $\Sigma A/O = -(4 \text{ in.})\mathbf{j} + (11 \text{ in.})\mathbf{j} - (d \text{ in.})\mathbf{k}$

AND $F = (70 \text{ lb})(\cos\theta \cos\phi \mathbf{i} - \sin\theta \mathbf{j} + \cos\theta \sin\phi \mathbf{k})$

THEN.. $M_O = 70 \begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ -4 & 11 & -d \\ \cos\theta \cos\phi & -\sin\theta & \cos\theta \sin\phi \end{vmatrix}$
 $= 70 [(11 \cos\theta \sin\phi - d \sin\theta)\mathbf{i} + (-d \cos\theta \cos\phi + 4 \cos\theta \sin\phi)\mathbf{j} + (4 \sin\theta - 11 \cos\theta \cos\phi)\mathbf{k}] \quad (\text{lb}\cdot\text{in.})$

NOW CONSIDER THE z AND x COMPONENTS OF M_O . HAVE..

$M_z = -43 \text{ lb}\cdot\text{ft} = \frac{12 \text{ in.}}{1 \text{ ft}} = 70(4 \sin 25^\circ - 11 \cos 25^\circ \cos\phi) \text{ lb}\cdot\text{in.}$

OR $\cos\phi = 0.90897$

OR $\phi = 24.637^\circ$

$M_x = -61 \text{ lb}\cdot\text{ft} = \frac{12 \text{ in.}}{1 \text{ ft}} = 70(11 \cos 25^\circ \sin 24.637^\circ - d \sin 25^\circ) \text{ lb}\cdot\text{in.}$


OR $d = 34.6 \text{ in.}$

EVIDENCE!

PROOF!!

It was a moment!

3.54

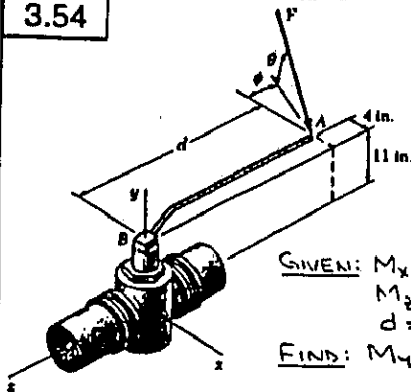

GIVEN: $M_x = -77 \text{ lb}\cdot\text{ft}$,
 $M_z = -81 \text{ lb}\cdot\text{ft}$,
 $d = 27 \text{ in}$.
 FIND: M_y

HAVE ... $\underline{M}_O = \Sigma \underline{r}_{iO} \times \underline{F}$
 WHERE $\Sigma \underline{r}_{iO} = -(4 \text{ in.})\underline{i} + (11 \text{ in.})\underline{j} - (27 \text{ in.})\underline{k}$
 AND $\underline{F} = F(\cos\theta \cos\phi \underline{i} - \sin\theta \underline{j} + \cos\theta \sin\phi \underline{k})$

THEN... $\underline{M}_O = F \begin{vmatrix} \underline{i} & \underline{j} & \underline{k} \\ -4 & 11 & -27 \\ \cos\theta \cos\phi & -\sin\theta & \cos\theta \sin\phi \end{vmatrix}$
 $= F[(11 \cos\theta \sin\phi - 27 \sin\theta)\underline{i}$
 $+ (-27 \cos\theta \cos\phi + 4 \cos\theta \sin\phi)\underline{j}$
 $+ (4 \sin\theta - 11 \cos\theta \cos\phi)] (16 \text{ in.})$

SO THAT $M_x = F(11 \cos\theta \sin\phi - 27 \sin\theta)$ (1)
 $M_y = F(-27 \cos\theta \cos\phi + 4 \cos\theta \sin\phi)$ (2)
 $M_z = F(4 \sin\theta - 11 \cos\theta \cos\phi)$ (3)

WHERE M_x , M_y , AND M_z ARE IN $\text{lb}\cdot\text{in.}$ NOW...
 EQ. (1) $\Rightarrow \cos\theta \sin\phi = \frac{1}{11} \left(\frac{M_x}{F} + 27 \sin\theta \right)$ (4)

EQ. (3) $\Rightarrow \cos\theta \cos\phi = \frac{1}{11} \left(4 \sin\theta - \frac{M_z}{F} \right)$ (5)

SUBSTITUTING EQS. (4) AND (5) INTO EQ. (2) YIELDS

$$M_y = F \left\{ -27 \left[\frac{1}{11} \left(4 \sin\theta - \frac{M_z}{F} \right) \right] + 4 \left[\frac{1}{11} \left(\frac{M_x}{F} + 27 \sin\theta \right) \right] \right\}$$


$$= \frac{1}{11} (27 M_z + 4 M_x)$$

NOTING THAT THE RATIOS $\frac{27}{11}$ AND $\frac{4}{11}$ ARE THE RATIOS OF LENGTHS, HAVE...

$$M_y = \frac{27}{11} (-81 \text{ lb}\cdot\text{ft}) + \frac{4}{11} (-77 \text{ lb}\cdot\text{ft})$$

OR $M_y = -227 \text{ lb}\cdot\text{ft}$

3.55

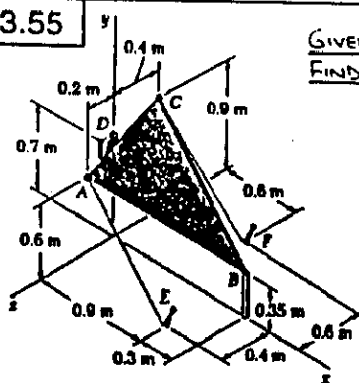

GIVEN: $T_{CE} = 55 \text{ N}$
 FIND: MOMENT OF T_{CE}
 AT A ABOUT LINE
 JOINING D AND B

FIRST NOTE... $d_{AE} = \sqrt{(0.9)^2 + (-0.6)^2 + (0.2)^2} = 1.1 \text{ m}$
 THEN... $T_{AE} = \frac{55 \text{ N}}{1.1} (0.9 \underline{i} - 0.6 \underline{j} + 0.2 \underline{k})$
 $= 5 [(9 \text{ N})\underline{i} - (6 \text{ N})\underline{j} + (2 \text{ N})\underline{k}]$
 (CONTINUED)


3.55 CONTINUED

ALSO... $DB = \sqrt{(1.2)^2 + (-0.35)^2 + (0)^2} = 1.25 \text{ m}$
 THEN $\underline{\Delta}_{DB} = \frac{\underline{DB}}{DB} = \frac{1}{1.25} (1.2 \underline{i} - 0.35 \underline{j})$
 $= \frac{1}{25} (24 \underline{i} - 7 \underline{j})$

NOW... $M_{DB} = \underline{\Delta}_{DB} \cdot (\Sigma \underline{r}_{iO} \times T_{AE})$
 WHERE $\Sigma \underline{r}_{iO} = -(0.1 \text{ m})\underline{j} - (0.2 \text{ m})\underline{k}$

THEN... $M_{DB} = \frac{1}{25} (5) \begin{vmatrix} 24 & -7 & 0 \\ 0 & -0.1 & 0.2 \\ 9 & -6 & 2 \end{vmatrix}$
 $= \frac{1}{25} (-4.8 - 12.6 + 28.8)$
 OR $M_{DB} = 2.28 \text{ N}\cdot\text{m}$

3.56

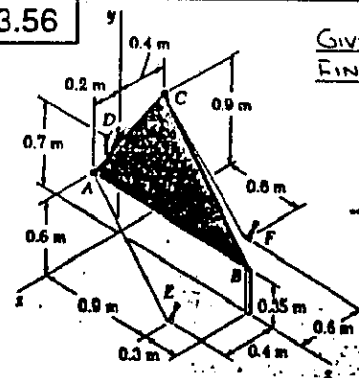

GIVEN: $T_{CF} = 33 \text{ N}$
 FIND: MOMENT OF T_{CF}
 AT C ABOUT LINE
 JOINING D AND B

FIRST NOTE... $d_{CF} = \sqrt{(0.6)^2 + (-0.9)^2 + (-0.2)^2} = 1.1 \text{ m}$
 THEN... $T_{CF} = \frac{33 \text{ N}}{1.1} (0.6 \underline{i} - 0.9 \underline{j} - 0.2 \underline{k})$
 $= 3 [(6 \text{ N})\underline{i} - (9 \text{ N})\underline{j} - (2 \text{ N})\underline{k}]$

ALSO... $DB = \sqrt{(1.2)^2 + (-0.35)^2 + (0)^2} = 1.25 \text{ m}$


THEN $\underline{\Delta}_{DB} = \frac{\underline{DB}}{DB} = \frac{1}{1.25} (1.2 \underline{i} - 0.35 \underline{j})$
 $= \frac{1}{25} (24 \underline{i} - 7 \underline{j})$

NOW... $M_{DB} = \underline{\Delta}_{DB} \cdot (\Sigma \underline{r}_{iO} \times T_{CF})$

WHERE $\Sigma \underline{r}_{iO} = (0.2 \text{ m})\underline{j} - (0.4 \text{ m})\underline{k}$

THEN... $M_{DB} = \frac{1}{25} (3) \begin{vmatrix} 24 & -7 & 0 \\ 0 & 0.2 & -0.4 \\ 6 & -9 & -2 \end{vmatrix}$
 $= \frac{3}{25} (-9.6 + 16.8 - 86.4)$
 OR $M_{DB} = -950 \text{ N}\cdot\text{m}$

3.57

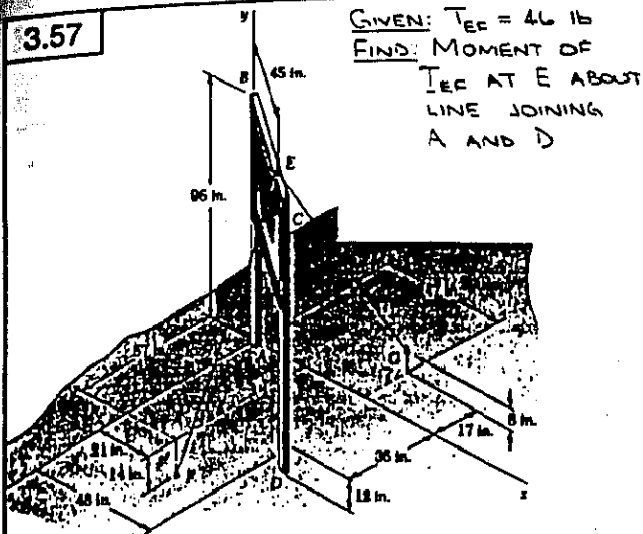GIVEN: $T_{EE} = 46 \text{ lb}$

FIND: MOMENT OF T_{EE} AT E ABOUT LINE JOINING A AND D

FIRST NOTE THAT $BC = \sqrt{(48)^2 + (36)^2} = 60 \text{ IN.}$
AND THAT $\frac{BE}{BC} = \frac{45}{60} = \frac{3}{4}$ THE COORDINATES OF POINT E ARE THEN $(\frac{3}{4} \times 48, 96, \frac{3}{4} \times 36)$ OR $(36 \text{ IN.}, 96 \text{ IN.}, 27 \text{ IN.})$. THEN..

$$d_{EE} = \sqrt{(-15)^2 + (-110)^2 + (30)^2} = 115 \text{ IN.}$$

$$\text{THEN.. } \underline{T}_{EE} = \frac{46 \text{ lb}}{115} (-15\mathbf{j} - 110\mathbf{j} + 30\mathbf{k})$$

$$= 2 [(-316)\mathbf{j} - (2216)\mathbf{j} + (1616)\mathbf{k}]$$

$$\text{ALSO.. } AD = \sqrt{(48)^2 + (-12)^2 + (36)^2} = 12\sqrt{26} \text{ IN.}$$

$$\text{THEN } \underline{\Delta}_{AD} = \frac{AD}{AD} = \frac{1}{12\sqrt{26}} (48\mathbf{i} - 12\mathbf{j} + 36\mathbf{k})$$

$$= \frac{1}{\sqrt{26}} (4\mathbf{i} - \mathbf{j} + 3\mathbf{k})$$

$$\text{NOW.. } M_{AD} = \underline{\Delta}_{AD} \cdot (\underline{\Sigma}_{E/A} \times \underline{T}_{EE})$$


WHERE.. $\underline{\Sigma}_{E/A} = (36 \text{ IN.})\mathbf{j} + (96 \text{ IN.})\mathbf{j} + (27 \text{ IN.})\mathbf{k}$

$$\text{THEN.. } M_{AD} = \frac{1}{\sqrt{26}} (2) \begin{vmatrix} 4 & -1 & 3 \\ 36 & 96 & 27 \\ -3 & -22 & 6 \end{vmatrix}$$

$$= \frac{2}{\sqrt{26}} (2304 + 81 - 2376 + 864 - 216 + 2576)$$

$$\text{OR } M_{AD} = 1359 \text{ lb}\cdot\text{IN.} \blacktriangleleft$$

3.58

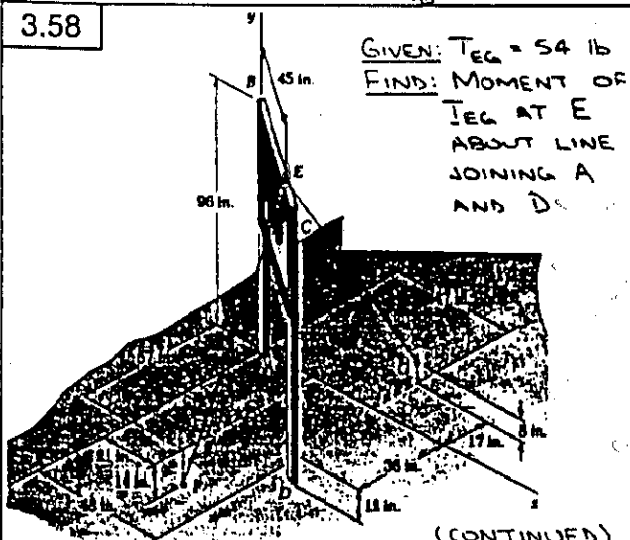GIVEN: $T_{EE} = 54 \text{ lb}$

FIND: MOMENT OF T_{EE} AT E ABOUT LINE JOINING A AND D

3.58 CONTINUED

FIRST NOTE THAT $BC = \sqrt{(48)^2 + (36)^2} = 60 \text{ IN.}$
AND THAT $\frac{BE}{BC} = \frac{45}{60} = \frac{3}{4}$. THE COORDINATES OF

POINT E ARE THEN $(\frac{3}{4} \times 48, 96, \frac{3}{4} \times 36)$ OR $(36 \text{ IN.}, 96 \text{ IN.}, 27 \text{ IN.})$. THEN..

$$d_{EE} = \sqrt{(11)^2 + (-88)^2 + (-44)^2} = 99 \text{ IN.}$$

$$\text{THEN.. } \underline{T}_{EE} = \frac{54 \text{ lb}}{99} (11\mathbf{j} - 88\mathbf{j} - 44\mathbf{k})$$

$$= 6 [(116)\mathbf{j} - (816)\mathbf{j} - (416)\mathbf{k}]$$

$$\text{ALSO.. } AD = \sqrt{(48)^2 + (-12)^2 + (36)^2} = 12\sqrt{26} \text{ IN.}$$

$$\text{THEN } \underline{\Delta}_{AD} = \frac{AD}{AD} = \frac{1}{12\sqrt{26}} (48\mathbf{i} - 12\mathbf{j} + 36\mathbf{k})$$

$$= \frac{1}{\sqrt{26}} (4\mathbf{i} - \mathbf{j} + 3\mathbf{k})$$

$$\text{NOW.. } M_{AD} = \underline{\Delta}_{AD} \cdot (\underline{\Sigma}_{E/A} \times \underline{T}_{EE})$$


WHERE $\underline{\Sigma}_{E/A} = (36 \text{ IN.})\mathbf{j} + (96 \text{ IN.})\mathbf{j} + (27 \text{ IN.})\mathbf{k}$

$$\text{THEN } M_{AD} = \frac{1}{\sqrt{26}} (6) \begin{vmatrix} 4 & -1 & 3 \\ 36 & 96 & 27 \\ 1 & -8 & -4 \end{vmatrix}$$

$$= \frac{6}{\sqrt{26}} (-1536 - 27 - 864 - 288 - 144 - 864)$$

$$\text{OR } M_{AD} = -2350 \text{ lb}\cdot\text{IN.} \blacktriangleleft$$

3.59

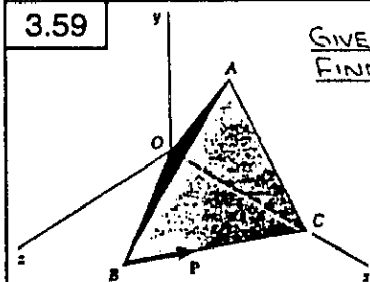

GIVEN: TETRAHEDRON, P

FIND: MOMENT OF P ABOUT EDGE OA

FIRST CONSIDER TRIANGLE OBC. WITH THE LENGTH OF THE SIDES OF THE TRIANGLE EQUAL TO a, HAVE..

$$\underline{BC} = a \cos 60^\circ \mathbf{j} - a \sin 60^\circ \mathbf{k}$$

$$\text{THEN } \underline{\Delta}_{BC} = \cos 60^\circ \mathbf{j} - \sin 60^\circ \mathbf{k}$$

$$= \frac{1}{2} (\mathbf{j} - \sqrt{3} \mathbf{k})$$

$$\text{AND } \underline{P} = P \underline{\Delta}_{BC} = \frac{P}{2} (\mathbf{j} - \sqrt{3} \mathbf{k})$$

TO DETERMINE $\underline{\Delta}_{OA}$, FIRST OBSERVE THAT $\angle AOC = 60^\circ$. THE PROJECTION OF OA ON THE X AXIS IS THEN

$$(OA)_x = a \cos 60^\circ = \frac{a}{2}$$

ALSO, THE PROJECTION OF OA ONTO THE XZ PLANE BISECTS $\angle BOC$, WHERE $\angle BOC = 60^\circ$. THEN, FROM THE SKETCH..

$$(OA)_x = \frac{a}{2} \quad (OA)_z = (OA)_x \tan 30^\circ = \frac{a}{2\sqrt{3}}$$

$$\text{NOW.. } (OA)^2 = (OA)_x^2 + (OA)_y^2 + (OA)_z^2$$

$$\text{SUBSTITUTING... } a^2 = \left(\frac{a}{2}\right)^2 + (OA)_y^2 + \left(\frac{a}{2\sqrt{3}}\right)^2$$

$$\text{OR } (OA)_y = a \sqrt{\frac{2}{3}}$$

$$\text{THEN.. } \underline{OA} = \frac{a}{2} \mathbf{i} + a \sqrt{\frac{2}{3}} \mathbf{j} + \frac{a}{2\sqrt{3}} \mathbf{k}$$

$$\text{SO THAT } \underline{\Delta}_{OA} = \frac{1}{2} \mathbf{i} + \sqrt{\frac{2}{3}} \mathbf{j} + \frac{1}{2\sqrt{3}} \mathbf{k}$$

(CONTINUED)

3.59 CONTINUED

FINALLY.. $M_{OA} = \Delta_{OA} \cdot (\Sigma C_{10} + P)$


WHERE $\Sigma C_{10} = a_i$

THEN.. $M_{OA} = a \left(\frac{P}{2} \right)$

$$= \frac{1}{2} a P \left(\sqrt{\frac{2}{3}} + \sqrt{3} \right)$$

OR $M_{OA} = \frac{aP}{\sqrt{2}}$

3.60

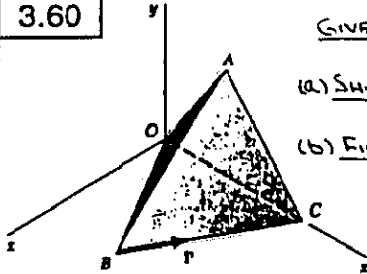


GIVEN: TETRAHEDRON, P,

M_{OA} OF P

(a) SHOW: \vec{OA} AND \vec{BC} ARE PERPENDICULAR

(b) FIND: PERPENDICULAR DISTANCE BETWEEN \vec{OA} AND \vec{BC}



FIRST CONSIDER TRIANGLE OBC. WITH THE LENGTH OF THE SIDES EQUAL TO a, HAVE..


$$\vec{BC} = a \cos 60^\circ \vec{i} - a \sin 60^\circ \vec{k}$$

$$= \frac{a}{2} (\vec{i} - \sqrt{3} \vec{k})$$

TO DETERMINE \vec{OA} , FIRST OBSERVE THAT $\Delta AOC = 60^\circ$. THE PROJECTION OF \vec{OA} ON THE X AXIS IS THEN

$$(\vec{OA})_x = a \cos 60^\circ = \frac{a}{2}$$

ALSO, THE PROJECTION OF \vec{OA} ONTO THE XY PLANE BISECTS ΔBOC , WHERE $\Delta BOC = 60^\circ$. THEN, FROM THE SKETCH..

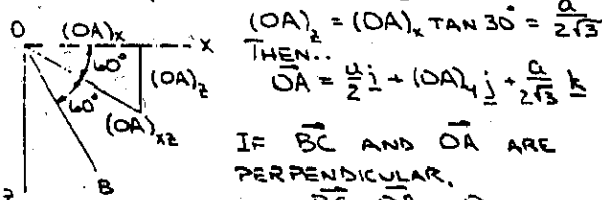

$$(\vec{OA})_z = (\vec{OA})_x \tan 30^\circ = \frac{a}{2\sqrt{3}}$$

THEN..

$$\vec{OA} = \frac{a}{2} \vec{i} + (\vec{OA})_y \vec{j} + \frac{a}{2\sqrt{3}} \vec{k}$$

IF \vec{BC} AND \vec{OA} ARE PERPENDICULAR,

$$\vec{BC} \cdot \vec{OA} = 0$$

THUS, $\vec{BC} \cdot \vec{OA} = \frac{a}{2} (\vec{i} - \sqrt{3} \vec{k}) \cdot \left[\frac{a}{2} \vec{i} + (\vec{OA})_y \vec{j} + \frac{a}{2\sqrt{3}} \vec{k} \right]$

$$= \frac{a}{2} \left[(1) \left(\frac{a}{2} \right) + (0) (\vec{OA})_y + (-\sqrt{3}) \left(\frac{a}{2\sqrt{3}} \right) \right]$$

$$\therefore \vec{BC} \cdot \vec{OA} = 0 \Rightarrow \vec{BC} \text{ AND } \vec{OA} \text{ ARE PERPENDICULAR}$$

(b) SINCE \vec{OA} IS PERPENDICULAR TO \vec{BC} , AND THUS TO P, IT FOLLOWS THAT

$$M_{OA} = dP$$


WHERE d IS THE PERPENDICULAR DISTANCE BETWEEN \vec{OA} AND \vec{BC} AND FROM THE SOLUTION TO PROBLEM 3.59

$$M_{OA} = \frac{1}{\sqrt{2}} aP$$

THEN.. $\frac{1}{\sqrt{2}} aP = dP$

OR $d = \frac{a}{\sqrt{2}}$

3.61

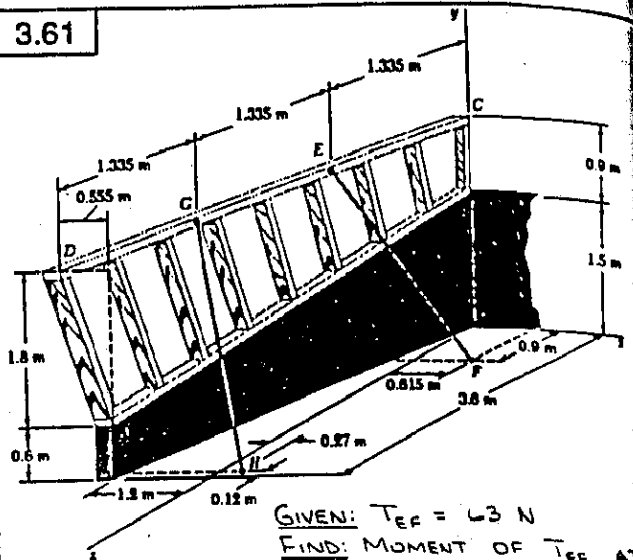

GIVEN: $T_{EF} = 63 \text{ N}$

FIND: MOMENT OF T_{EF} AT E ABOUT SILL AB

FIRST NOTE THAT

$$CE = \frac{1}{3} CD$$

THEN..

$$d_{EC} = \left\{ \left[\frac{1}{3} (0.555 + 1.2) + 0.615 \right]^2 + (-2.4)^2 + \left[0.9 - \left(\frac{1}{3} \times 3.6 \right) \right]^2 \right\}^{\frac{1}{2}}$$

$$= \sqrt{(1.2)^2 + (-2.4)^2 + (-0.3)^2} = 2.7 \text{ m}$$

AND $T_{EF} = \frac{63 \text{ N}}{2.7} (1.2 \vec{i} - 2.4 \vec{j} - 0.3 \vec{k})$

$$= 7 [(4 \text{ N}) \vec{i} - (8 \text{ N}) \vec{j} - (1 \text{ N}) \vec{k}]$$

ALSO.. $AB = \sqrt{(1.2)^2 + (0.9)^2 + (-3.6)^2} = 3.9 \text{ m}$

THEN $\Delta_{AB} = \frac{1}{3.9} (1.2 \vec{i} + 0.9 \vec{j} - 3.6 \vec{k})$

$$= \frac{1}{13} (4 \vec{i} + 3 \vec{j} - 12 \vec{k})$$

NOW.. $M_{AB} = \Delta_{AB} \cdot (\Sigma F_{iB} + T_{EF})$


WHERE $\Sigma F_{iB} = (0.615 \text{ m}) \vec{i} - (1.5 \text{ m}) \vec{j} + (0.9 \text{ m}) \vec{k}$

THEN.. $M_{AB} = \frac{1}{13} (7) \begin{vmatrix} 4 & 3 & -12 \\ 0.615 & -1.5 & 0.9 \\ 4 & -8 & -1 \end{vmatrix}$

$$= \frac{7}{13} (6 + 10.8 + 59.04 - 72 + 1.845 + 28.8)$$

OR $M_{AB} = 18.57 \text{ N}\cdot\text{m}$

3.62

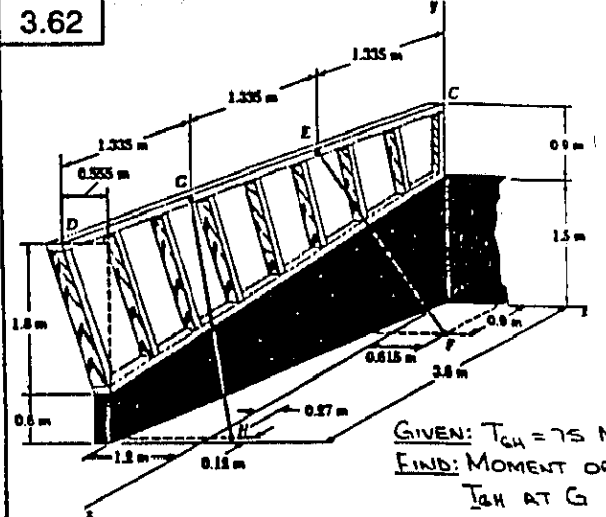

GIVEN: $T_{GH} = 75 \text{ N}$

FIND: MOMENT OF T_{GH} AT G ABOUT SILL AB

(CONTINUED)

3.62 CONTINUED

FIRST NOTE THAT $CG = \frac{2}{3} CD$

THEN.. $d_{GH} = \sqrt{\left[\frac{2}{3}(0.555 + 1.2) - 0.27\right]^2 + (-2.4)^2 + \left[(3.6 - 0.12) - \left(\frac{2}{3} \times 3.6\right)\right]^2}$
 $= \sqrt{(1.44)^2 + (-2.4)^2 + (-1.08)^2} = 3 \text{ m}$

AND $I_{GH} = \frac{73 \text{ N}}{3} (1.44 \mathbf{i} - 2.4 \mathbf{j} + 1.08 \mathbf{k})$
 $= 3 [(12 \text{ N}) \mathbf{i} - (20 \text{ N}) \mathbf{j} + (9 \text{ N}) \mathbf{k}]$

ALSO.. $AB = \sqrt{(1.2)^2 + (0.9)^2 + (-3.6)^2} = 3.9 \text{ m}$

THEN.. $\Delta_{AB} = \frac{1}{3.9} (1.2 \mathbf{i} + 0.9 \mathbf{j} - 3.6 \mathbf{k})$
 $= \frac{1}{13} (4 \mathbf{i} + 3 \mathbf{j} - 12 \mathbf{k})$

NOW.. $M_{AB} = \Delta_{AB} \cdot (\Sigma \mathbf{r}_{H/A} \times I_{GH})$
 WHERE $\Sigma \mathbf{r}_{H/A} = (1.47 \text{ m}) \mathbf{i} - (0.6 \text{ m}) \mathbf{j} - (0.12 \text{ m}) \mathbf{k}$

THEN.. $M_{AB} = \frac{1}{13} (3) \begin{vmatrix} 4 & 3 & -12 \\ 1.47 & -0.6 & -0.12 \\ 12 & -20 & 9 \end{vmatrix}$
 $= \frac{3}{13} (-216 - 4.32 + 552.8 - 86.4 - 39.69 - 9.6)$
 OR $M_{AB} = 44.1 \text{ N}\cdot\text{m}$

3.64 CONTINUED

FOLLOWS THAT ONLY THE PERPENDICULAR COMPONENT OF I_{AE} WILL CONTRIBUTE TO THE MOMENT OF I_{AE} ABOUT LINE \overline{DB} . NOW

$(I_{AE})_{\text{PARALLEL}} = I_{AE} \cdot \Delta_{DB}$
 $= 5(9 \mathbf{i} - 6 \mathbf{j} + 2 \mathbf{k}) \cdot \frac{1}{25} (24 \mathbf{i} - 7 \mathbf{j})$
 $= \frac{1}{5} [(9)(24) + (-6)(-7)]$
 $= 51.6 \text{ N}$

ALSO.. $I_{AE} = (I_{AE})_{\text{PARALLEL}} + (I_{AE})_{\text{PERP}}$
 SO THAT $(I_{AE})_{\text{PERP}} = \sqrt{(55)^2 - (51.6)^2}$
 $= 19.0379 \text{ N}$

SINCE Δ_{DB} AND $(I_{AE})_{\text{PERP}}$ ARE PERPENDICULAR, IT FOLLOWS THAT

$M_{DB} = d(I_{AE})_{\text{PERP}}$
 OR $2.28 \text{ N}\cdot\text{m} = d \cdot 19.0379 \text{ N}$
 OR $d = 0.1198 \text{ m}$

ALTERNATIVE SOLUTION

LET THE PERPENDICULAR LINE, DRAWN FROM LINE \overline{DB} TO THE LINE OF ACTION OF I_{AE} , BE REPRESENTED BY

$d = x \mathbf{i} + y \mathbf{j} + z \mathbf{k}$ x, y, z IN M

NOW.. $d \perp I_{AE} \Rightarrow d \cdot I_{AE} = 0$
 OR $(x \mathbf{i} + y \mathbf{j} + z \mathbf{k}) \cdot 5(9 \mathbf{i} - 6 \mathbf{j} + 2 \mathbf{k}) = 0$
 OR $9x - 6y + 2z = 0$ (1)

AND $d \perp \Delta_{DB} \Rightarrow d \cdot \Delta_{DB} = 0$
 OR $(x \mathbf{i} + y \mathbf{j} + z \mathbf{k}) \cdot \frac{1}{25} (24 \mathbf{i} - 7 \mathbf{j}) = 0$
 OR $24x - 7y = 0 \Rightarrow y = \frac{24}{7}x$ (2)

SUBSTITUTING EQ. (2) INTO EQ. (1):
 $9x - 6\left(\frac{24}{7}x\right) + 2z = 0 \Rightarrow z = \frac{81}{14}x$ (3)

NOW.. $M_{DB} = \Delta_{DB} \cdot (d \times I_{AE})$
 $= \frac{1}{25} (5) \begin{vmatrix} 24 & -7 & 0 \\ x & y & z \\ 9 & -6 & 2 \end{vmatrix}$
 $= \frac{1}{5} (48y - 63z + 14xz + 144z)$
 $= \frac{1}{5} (48y + 14xz + 81z)$

SUBSTITUTING FOR M_{DB} AND USING EQS (2)

AND (3) YIELDS..
 $2.28 = \frac{1}{5} [48\left(\frac{24}{7}x\right) + 14x + 81\left(\frac{81}{14}x\right)]$
 OR $x = 0.017614 \text{ m}$


AND THEN (2) $\Rightarrow y = 0.060391 \text{ m}$
 (3) $\Rightarrow z = 0.101909 \text{ m}$

FINALLY, $d = \sqrt{x^2 + y^2 + z^2}$
 $= \sqrt{(0.017614)^2 + (0.060391)^2 + (0.101909)^2}$
 OR $d = 0.1198 \text{ m}$

3.63

GIVEN: FORCES F_1 AND F_2 , $F_1 = F_2 = F$

SHOW: M_{Δ_1} OF $F_2 = M_{\Delta_2}$ OF F_1



FIRST NOTE THAT $F_1 = F \Delta_1$ $F_2 = F \Delta_2$


NOW, BY DEFINITION..
 $M_{\Delta_1} = \Delta_1 \cdot (\Sigma \times F_2)$
 $= \Delta_1 \cdot (\Sigma \times \Delta_2) F$

AND $M_{\Delta_2} = \Delta_2 \cdot (\Sigma \times F_1)$
 $= \Delta_2 \cdot (\Sigma \times \Delta_1) F$

USING EQ. (3.39) $\Delta_2 \cdot (\Sigma \times \Delta_1) = \Delta_1 \cdot (\Sigma \times \Delta_2)$
 SO THAT $M_{\Delta_2} = \Delta_1 \cdot (\Sigma \times \Delta_2) F$

$\therefore M_{\Delta_1} = M_{\Delta_2}$

* 3.64

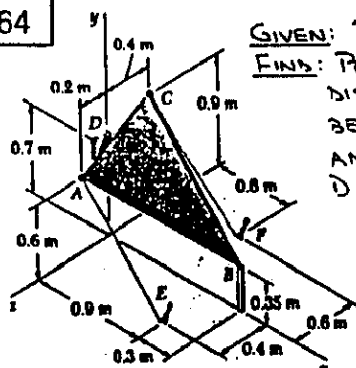

GIVEN: I_{AE} , Δ_{DB} , M_{DB}


FIND: PERPENDICULAR DISTANCE d BETWEEN CABLE AE AND LINE JOINING D AND B

FROM THE SOLUTION TO PROBLEM 3.55..
 $I_{AE} = 55 \text{ N}$, $I_{AE} = 5 [(9 \text{ N}) \mathbf{i} - (6 \text{ N}) \mathbf{j} + (2 \text{ N}) \mathbf{k}]$

$M_{DB} = 2.28 \text{ N}\cdot\text{m}$ $\Delta_{DB} = \frac{1}{25} (24 \mathbf{i} - 7 \mathbf{j})$

BASED ON THE DISCUSSION OF SEC. 3.11, IT (CONTINUED)

* 3.65

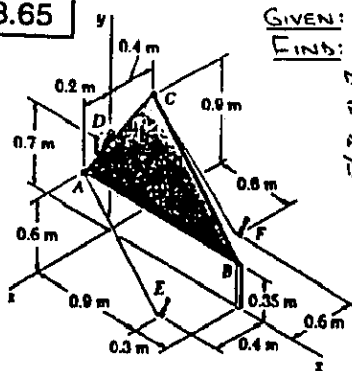

GIVEN: T_{CF} , Δ_{DB} , M_{DB}
 FIND: PERPENDICULAR
 DISTANCE d
 BETWEEN CABLE CF
 AND LINE JOINING
 D AND B

FROM THE SOLUTION TO PROBLEM 3.56..

$$T_{CF} = 33 \text{ N} \quad T_{CF} = 3[(6\text{N})i - (9\text{N})j - (2\text{N})k]$$

$$|M_{DB}| = 9.50 \text{ N}\cdot\text{m} \quad \Delta_{DB} = \frac{1}{25}(24i - 7j)$$

BASED ON THE DISCUSSION OF SEC. 3.11, IT
 FOLLOWS THAT ONLY THE PERPENDICULAR
 COMPONENT OF T_{CF} WILL CONTRIBUTE TO
 THE MOMENT OF T_{CF} ABOUT LINE DB . NOW..

$$(T_{CF})_{\text{PARALLEL}} = T_{CF} \cdot \Delta_{DB}$$

$$= 3(6i - 9j - 2k) \cdot \frac{1}{25}(24i - 7j)$$

$$= \frac{3}{25}[(6)(24) + (-9)(-7)]$$

$$= 24.84 \text{ N}$$

ALSO.. $T_{CF} = (T_{CF})_{\text{PARALLEL}} + (T_{CF})_{\text{PERP.}}$
 SO THAT $(T_{CF})_{\text{PERP.}} = \sqrt{(33)^2 - (24.84)^2}$
 $= 21.725 \text{ N}$


SINCE Δ_{DB} AND $(T_{CF})_{\text{PERP.}}$ ARE PERPENDICULAR,
 IT FOLLOWS THAT

$$|M_{DB}| = d(T_{CF})_{\text{PERP.}}$$

OR $9.50 \text{ N}\cdot\text{m} = d \cdot 21.725 \text{ N}$
 OR $d = 0.437 \text{ m}$

FOR A SECOND METHOD OF SOLUTION, SEE
 THE SOLUTION TO PROBLEM 3.64.

* 3.66

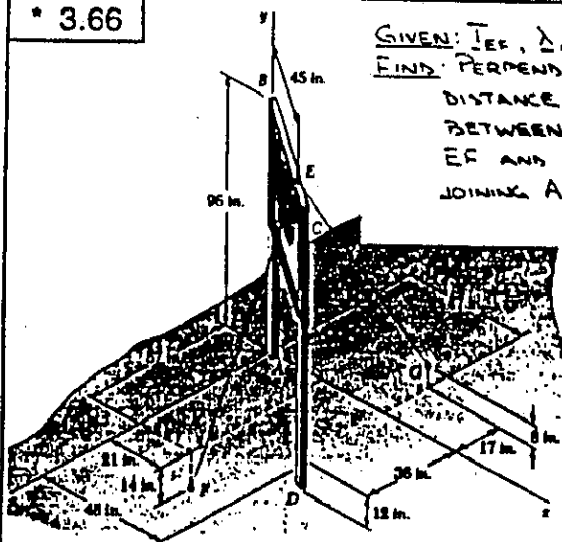

GIVEN: T_{EF} , Δ_{AD} , M_{AD}
 FIND: PERPENDICULAR
 DISTANCE d
 BETWEEN CABLE
 EF AND LINE
 JOINING A AND D

FROM THE SOLUTION TO PROBLEM 3.57..

$$T_{EF} = 46 \text{ lb} \quad T_{EF} = 2[-(3 \text{ lb})i - (22 \text{ lb})j + (6 \text{ lb})k]$$

(CONTINUED)

3.66 CONTINUED

$$M_{AD} = 1359 \text{ lb}\cdot\text{in.} \quad \Delta_{AD} = \frac{1}{\sqrt{26}}(4i - j + 3k)$$

BASED ON THE DISCUSSION OF SEC. 3.11, IT
 FOLLOWS THAT ONLY THE PERPENDICULAR
 COMPONENT OF T_{EF} WILL CONTRIBUTE TO
 THE MOMENT OF T_{EF} ABOUT LINE AD . NOW

$$(T_{EF})_{\text{PARALLEL}} = T_{EF} \cdot \Delta_{AD}$$

$$= 2(-3i - 22j + 6k) \cdot \frac{1}{\sqrt{26}}(4i - j + 3k)$$

$$= \frac{2}{\sqrt{26}}[(-3)(4) + (-22)(-1) + (6)(3)]$$

$$= 10.9825 \text{ lb}$$

ALSO.. $T_{EF} = (T_{EF})_{\text{PARALLEL}} + (T_{EF})_{\text{PERP.}}$
 SO THAT $(T_{EF})_{\text{PERP.}} = \sqrt{(46)^2 - (10.9825)^2}$
 $= 44.670 \text{ lb}$


SINCE Δ_{AD} AND $(T_{EF})_{\text{PERP.}}$ ARE PERPENDICULAR
 IT FOLLOWS THAT

$$M_{AD} = d(T_{EF})_{\text{PERP.}}$$

OR $1359 \text{ lb}\cdot\text{in.} = d \cdot 44.670 \text{ lb}$
 OR $d = 30.4 \text{ in.}$

FOR A SECOND METHOD OF SOLUTION, SEE
 THE SOLUTION TO PROBLEM 3.64.

* 3.67

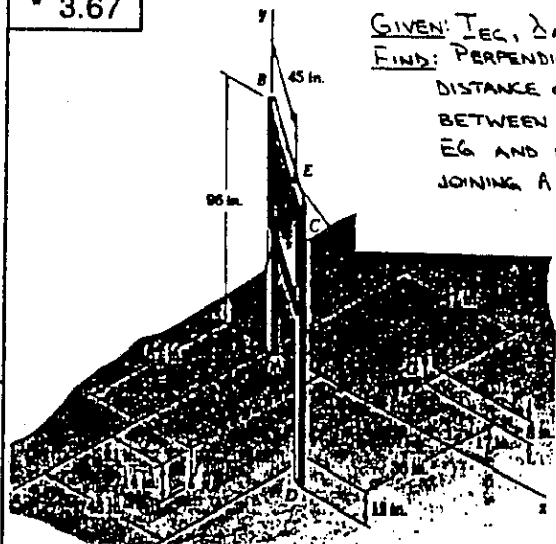

GIVEN: T_{EG} , Δ_{AD} , M_{AD}
 FIND: PERPENDICULAR
 DISTANCE d
 BETWEEN CABLE
 EG AND LINE
 JOINING A AND D

FROM THE SOLUTION TO PROBLEM 3.58..

$$T_{EG} = 54 \text{ lb} \quad T_{EG} = 6[(1 \text{ lb})i - (8 \text{ lb})j - (4 \text{ lb})k]$$

$$|M_{AD}| = 2350 \text{ lb}\cdot\text{in.} \quad \Delta_{AD} = \frac{1}{\sqrt{26}}(4i - j + 3k)$$

BASED ON THE DISCUSSION OF SEC. 3.11, IT
 FOLLOWS THAT ONLY THE PERPENDICULAR
 COMPONENT OF T_{EG} WILL CONTRIBUTE TO
 THE MOMENT OF T_{EG} ABOUT LINE AD . NOW

$$(T_{EG})_{\text{PARALLEL}} = T_{EG} \cdot \Delta_{AD}$$

$$= 6(i - 8j - 4k) \cdot \frac{1}{\sqrt{26}}(4i - j + 3k)$$

$$= \frac{6}{\sqrt{26}}[(1)(4) + (-8)(-1) + (-4)(3)]$$

$$= 0$$

THUS, $(T_{EG})_{\text{PERP.}} = T_{EG} = 54 \text{ lb}$


(CONTINUED)

3.67 CONTINUED

SINCE Δ_{AD} AND $(T_{EG})_{\text{PERP}}$ ARE PERPENDICULAR,
IT FOLLOWS THAT
 $M_{AD} = d(T_{EG})_{\text{PERP}}$
OR $2350 \text{ lb}\cdot\text{in.} = d \cdot 54 \text{ lb}$
OR $d = 43.5 \text{ in.}$

FOR A SECOND METHOD OF SOLUTION, SEE
THE SOLUTION TO PROBLEM 3.64.

3.68

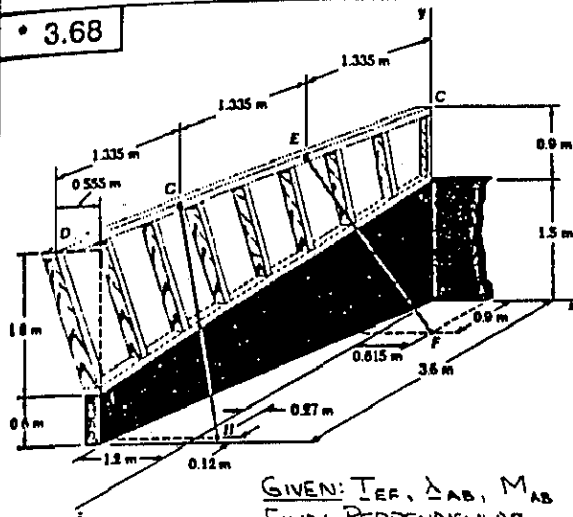

GIVEN: T_{EF} , Δ_{AB} , M_{AB}
FIND: PERPENDICULAR
DISTANCE d BETWEEN
CABLE EF AND SILL AB

FROM THE SOLUTION TO PROBLEM 3.61 --
 $T_{EF} = 63 \text{ N}$ $T_{EF} = 7[(4 \text{ N})_i - (8 \text{ N})_j - (1 \text{ N})_k]$
 $M_{AB} = 18.57 \text{ N}\cdot\text{m}$ $\Delta_{AB} = \frac{1}{13}(4i + 3j - 12k)$

BASED ON THE DISCUSSION OF SEC. 3.11, IT
FOLLOWS THAT ONLY THE PERPENDICULAR
COMPONENT OF T_{EF} WILL CONTRIBUTE TO
THE MOMENT OF T_{EF} ABOUT SILL AB. NOW..

$$(T_{EF})_{\text{PARALLEL}} = T_{EF} \cdot \Delta_{AB}$$

$$= 7(4i - 8j - k) \cdot \frac{1}{13}(4i + 3j - 12k)$$

$$= \frac{7}{13}\{4(4) + (-8)(3) + (-1)(-12)\}$$


$$= 2.1538 \text{ N}$$

ALSO.. $T_{EF} = (T_{EF})_{\text{PARALLEL}} + (T_{EF})_{\text{PERP}}$
SO THAT $(T_{EF})_{\text{PERP}} = \sqrt{(63)^2 - (2.1538)^2}$
 $= 62.963 \text{ N}$

SINCE Δ_{AB} AND $(T_{EF})_{\text{PERP}}$ ARE PERPENDICULAR,
IT FOLLOWS THAT
 $M_{AB} = d(T_{EF})_{\text{PERP}}$
OR $18.57 \text{ N}\cdot\text{m} = d \cdot 62.963 \text{ N}$
OR $d = 0.295 \text{ m}$

FOR A SECOND METHOD OF SOLUTION, SEE
THE SOLUTION TO PROBLEM 3.64.

3.69

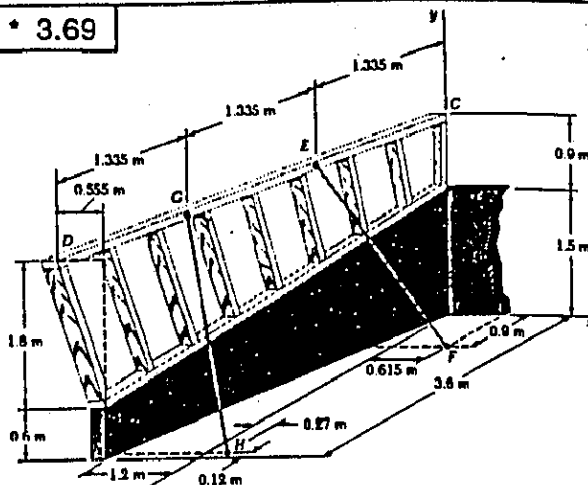

GIVEN: T_{GH} , Δ_{AB} , M_{AB}
FIND: PERPENDICULAR
DISTANCE d BETWEEN
CABLE GH AND SILL AB

FROM THE SOLUTION TO PROBLEM 3.62 --
 $T_{GH} = 75 \text{ N}$ $T_{GH} = 3[(12 \text{ N})_i - (20 \text{ N})_j + (9 \text{ N})_k]$
 $M_{AB} = 44.1 \text{ N}\cdot\text{m}$ $\Delta_{AB} = \frac{1}{13}(4i + 3j - 12k)$

BASED ON THE DISCUSSION OF SEC. 3.11, IT
FOLLOWS THAT ONLY THE PERPENDICULAR
COMPONENT OF T_{GH} WILL CONTRIBUTE TO
THE MOMENT OF T_{GH} ABOUT SILL AB. NOW..

$$(T_{GH})_{\text{PARALLEL}} = T_{GH} \cdot \Delta_{AB}$$

$$= 3(12i - 20j + 9k) \cdot \frac{1}{13}(4i + 3j - 12k)$$

$$= \frac{3}{13}\{(12)(4) + (-20)(3) + (9)(-12)\}$$

$$= -27.692 \text{ N}$$

ALSO.. $T_{GH} = (T_{GH})_{\text{PARALLEL}} + (T_{GH})_{\text{PERP}}$

$$\text{SO THAT.. } (T_{GH})_{\text{PERP}} = \sqrt{(75)^2 - (-27.692)^2}$$

$$= 69.700 \text{ N}$$

SINCE Δ_{AB} AND $(T_{GH})_{\text{PERP}}$ ARE PERPENDICULAR,
IT FOLLOWS THAT


$$M_{AB} = d(T_{GH})_{\text{PERP}}$$

$$\text{OR } 44.1 \text{ N}\cdot\text{m} = d \cdot 69.700 \text{ N}$$

$$\text{OR } d = 0.633 \text{ m}$$

FOR A SECOND METHOD OF SOLUTION, SEE
THE SOLUTION TO PROBLEM 3.64.

3.70

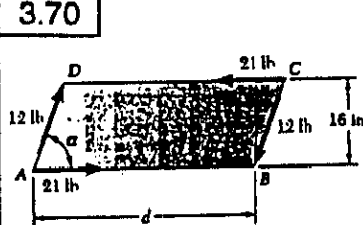



GIVEN: $F_1 = 21 \text{ lb}$
 $F_2 = 12 \text{ lb}$

FIND: (a) M_1
(b) $(d_2)_{\text{PERP}}$, GIVEN
 $M_1 + M_2 = 0$
(c) x , GIVEN
 $M_1 + M_2 = 72 \text{ lb}\cdot\text{in.}$
 $d = 42 \text{ in.}$


(a) HAVE $M_1 = d_1 F_1$ WHERE $d_1 = 16 \text{ in.}$
 $= (16 \text{ in.})(21 \text{ lb})$
OR $M_1 = 336 \text{ lb}\cdot\text{in.}$
(CONTINUES)

3.70 CONTINUED


(b)  HAVE... $M_1 = M_2 = 0$
OR $336 \text{ lb}\cdot\text{in.} - (d_2)_{\text{PERP}}(12 \text{ lb}) = 0$
OR $(d_2)_{\text{PERP}} = 28 \text{ in.}$


(c)  HAVE... $M_{\text{TOTAL}} = M_1 + M_2$
OR $-72 \text{ lb}\cdot\text{in.} = 336 \text{ lb}\cdot\text{in.}$
 $-[(42 \text{ in.} \times \sin \alpha)](12 \text{ lb})$
OR $\sin \alpha = 0.80952$
OR $\alpha = 54.0^\circ$


3.71

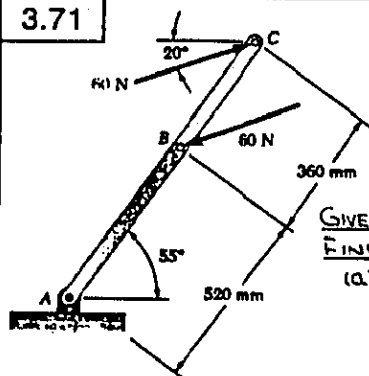


GIVEN: 60-N FORCES
FIND: MOMENT OF COUPLE
(a) BY RESOLVING FORCES INTO HORIZONTAL AND VERTICAL COMPONENTS
(b) BY USING d_{PERP}
(c) BY SUMMING MOMENTS ABOUT A

(a)  EACH 60-N FORCE IS FIRST RESOLVED INTO HORIZONTAL (P) AND VERTICAL (Q) COMPONENTS, WHERE
 $P = (60 \text{ N}) \cos 20^\circ$
 $Q = (60 \text{ N}) \sin 20^\circ$
SINCE P AND -P AND Q AND -Q ARE BOTH COUPLES, THE TOTAL MOMENT IS GIVEN BY...
 $M = -[(0.36 \text{ m})(\sin 55^\circ)][(60 \text{ N})(\cos 20^\circ)] + [(0.36 \text{ m})(\cos 55^\circ)][(60 \text{ N})(\sin 20^\circ)]$
 $= -(0.36)(60) \sin(55^\circ - 20^\circ) \text{ N}\cdot\text{m}$
OR $M = 12.39 \text{ N}\cdot\text{m}$

(b)  HAVE... $M = -dF$
WHERE $d = (0.36 \text{ m}) \sin(55^\circ - 20^\circ)$
THEN...
 $M = -[(0.36 \text{ m}) \sin 35^\circ](60 \text{ N})$
OR $M = 12.39 \text{ N}\cdot\text{m}$

(c)  SINCE ONLY THE PERPENDICULAR COMPONENTS OF THE FORCES WILL CONTRIBUTE TO THE MOMENT ABOUT A, HAVE...
 $M_A = r_{B/A} F_{\text{PERP}} - r_{C/A} F_{\text{PERP}}$
WHERE $F_{\text{PERP}} = F \cos \beta$
 $= (60 \text{ N}) \cos(35^\circ + 20^\circ)$
THEN... $M_A = (0.52 - 0.88) \text{ m} \cdot (60 \text{ N}) \cos 55^\circ$
OR $M = M_A = 12.39 \text{ N}\cdot\text{m}$

3.72

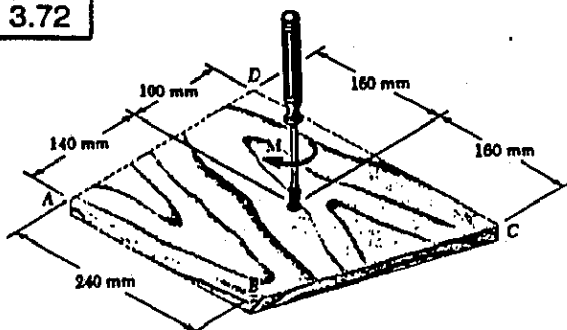


GIVEN: $M = 18 \text{ N}\cdot\text{m}$


FIND: TWO SMALLEST FORCES EQUIVALENT TO M AND APPLIED AT
(a) CORNERS A AND D
(b) CORNERS B AND C
(c) ANYWHERE ON THE BLOCK

FIRST NOTE THAT IF THE TWO FORCES ARE TO BE EQUIVALENT TO M, THEY MUST FORM A COUPLE. FURTHER, THE FORCES WILL BE MINIMUM WHEN THEY ARE PERPENDICULAR TO THE LINE JOINING THEIR POINTS OF APPLICATION. THUS, FOR EACH PART OF THE PROBLEM -- $M = dF$

(a) FORCES AT A AND D

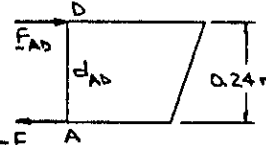
 HAVE... $M = d_{AD} F_{AD}$
OR $18 \text{ N}\cdot\text{m} = 0.24 \text{ m} \cdot F_{AD}$
OR $F_{AD} = 75 \text{ N}$

(b) FORCES AT B AND C

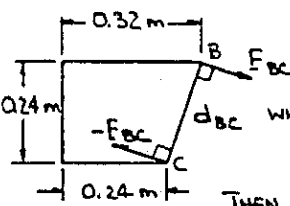
 HAVE... $M = d_{BC} F_{BC}$
WHERE $d_{BC} = \sqrt{(0.32 - 0.24)^2 + (0.24)^2} = 0.25298 \text{ m}$
THEN... $18 \text{ N}\cdot\text{m} = 0.25298 \text{ m} \cdot F_{BC}$
OR $F_{BC} = 71.2 \text{ N}$

(c) F_{MIN}

FOR F_{MIN} , WANT d TO BE MAXIMUM. THUS, $d = d_{AC}$

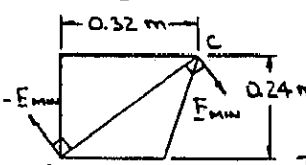 HAVE... $M = d_{AC} F_{\text{MIN}}$
WHERE $d_{AC} = \sqrt{(0.32)^2 + (0.24)^2} = 0.4 \text{ m}$
THEN... $18 \text{ N}\cdot\text{m} = 0.4 \text{ m} \cdot F_{\text{MIN}}$
OR $F_{\text{MIN}} = 45 \text{ N}$

3.73

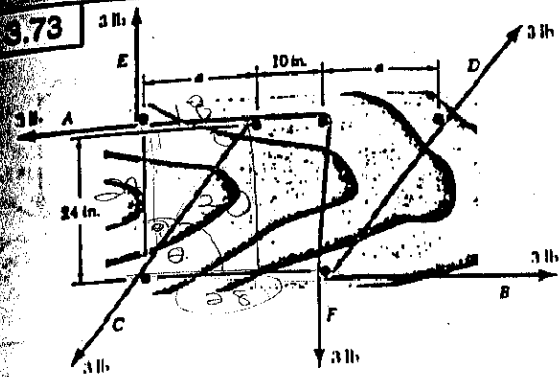


GIVEN: $d_{peg} = 2$ in., $F = 3$ lb, $a = 18$ in


FIND: M FOR

- (a) WIRES AB AND CD
- (b) WIRES AB, CD, AND EF

IN GENERAL, $M = \sum dF$, WHERE d IS THE PERPENDICULAR DISTANCE BETWEEN THE LINES OF ACTION OF THE TWO FORCES ACTING ON A GIVEN WIRE.

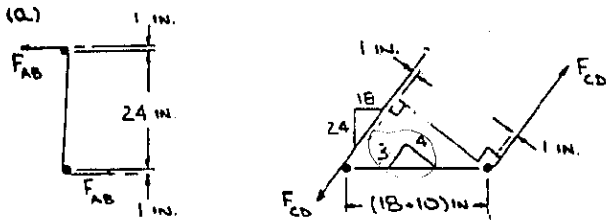


HAVE... $M = d_{AB} F_{AB} + d_{CD} F_{CD}$
 $= (2+24) \text{ in.} \times 3 \text{ lb} + (2+18) \text{ in.} \times 3 \text{ lb}$
 $= 151.2 \text{ lb}\cdot\text{in.}$

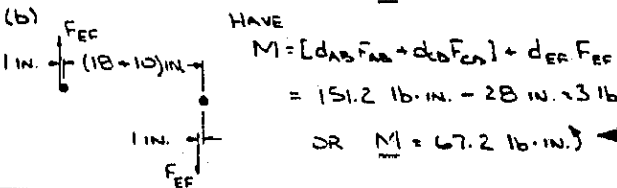

HAVE $M = [d_{AB} F_{AB} + d_{CD} F_{CD}] + d_{EF} F_{EF}$
 $= 151.2 \text{ lb}\cdot\text{in.} - 28 \text{ in.} \times 3 \text{ lb}$
 $= 67.2 \text{ lb}\cdot\text{in.}$

3.74

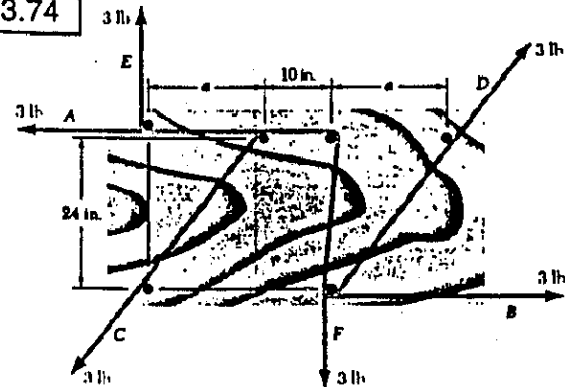


GIVEN: $d_{peg} = 2$ in., $F_{AB} = F_{CD} = 3$ lb,
 $M = 159.6 \text{ lb}\cdot\text{in.}$

FIND: a MIN

HAVE... $M = d_{AB} F_{AB} + d_{CD} F_{CD}$
 (CONTINUED)

3.74 CONTINUED

WHERE d_{AB} AND d_{CD} ARE THE PERPENDICULAR DISTANCES BETWEEN THE LINES OF ACTION OF THE FORCES ACTING ON WIRES AB AND CD, RESPECTIVELY.

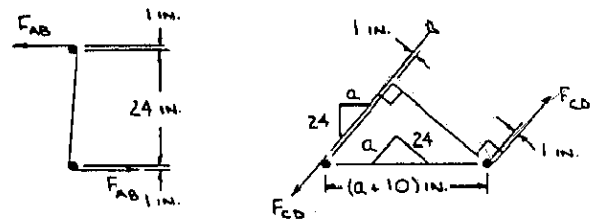

THEN... $159.6 \text{ lb}\cdot\text{in.} = (2+24) \text{ in.} \times 3 \text{ lb}$
 $+ [2 + \frac{24}{\sqrt{24^2+a^2}}] (a+10) \text{ in.} \times 3 \text{ lb}$


OR $25.2 = \frac{24(a+10)}{\sqrt{576+a^2}}$

OR $(25.2)^2 (576+a^2) = (576)(a+10)^2$
 OR $59.04a^2 - 11520a + 308183 = 0$

OR $a = \frac{11520 \pm \sqrt{(-11520)^2 - 4(59.04)(308183)}}{2(59.04)}$

SOLVING YIELDS... $a = 32.0$ in., $a = 163.1$ in.
 TAKING THE SMALLER ROOT... $a = 32.0$ in.

3.75

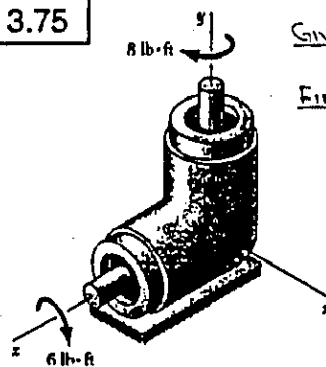


GIVEN: $M_1 = 10 \text{ lb}\cdot\text{ft}$
 $M_2 = 6 \text{ lb}\cdot\text{ft}$
 FIND: $|M_1 + M_2|$, θ_x , θ_y


HAVE... $M = M_1 + M_2$
 $= -(10 \text{ lb}\cdot\text{ft})_j - (6 \text{ lb}\cdot\text{ft})_k$

THEN... $M = \sqrt{(10)^2 + (-6)^2}$
 OR $M = 10 \text{ lb}\cdot\text{ft}$

AND $\cos \theta_x = 0$ $\cos \theta_y = -\frac{10}{10}$ $\cos \theta_z = -\frac{6}{10}$
 OR $\theta_x = 90^\circ$ $\theta_y = 180^\circ$ $\theta_z = 126.9^\circ$

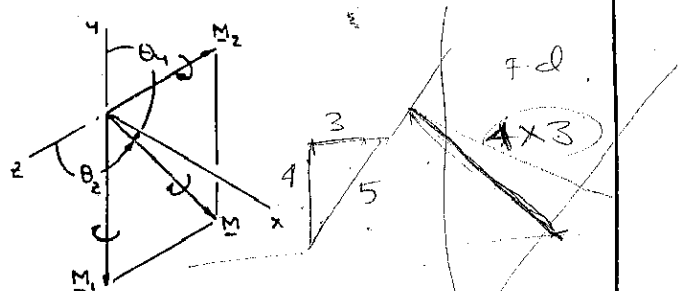

3.76 and 3.79

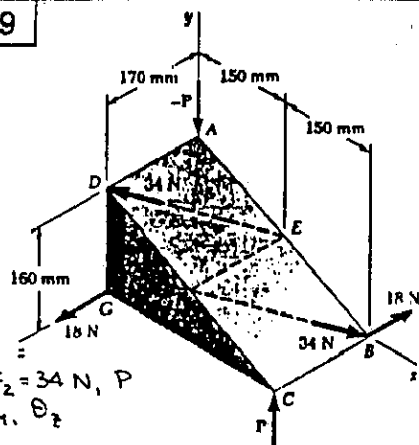


GIVEN: $F_1 = 18 \text{ N}$, $F_2 = 34 \text{ N}$, P
 FIND: M , θ_x , θ_y , θ_z

HAVE .. $\underline{M} = \underline{M}_1 + \underline{M}_2 + \underline{M}_3$
 WHERE $\underline{M}_1 = \underline{r}_{C/G} \times \underline{F}_1 = (0.3 \text{ m})\underline{i} + (-18 \text{ N})\underline{k}$
 $= (5.4 \text{ N}\cdot\text{m})\underline{j}$
 WHERE $\underline{r}_{F/E} = (0.17 \text{ m})\underline{k}$
 AND $\underline{d}_{FB} = \sqrt{(0.15)^2 + (-0.08)^2 + (-0.17)^2}$
 $= 0.17\sqrt{2} \text{ m}$
 THEN $\underline{F}_2 = \frac{34 \text{ N}}{0.17\sqrt{2}} (0.15\underline{j} - 0.08\underline{j} - 0.17\underline{k})$
 $= \sqrt{2} [(15 \text{ N})\underline{i} - (8 \text{ N})\underline{j} - (17 \text{ N})\underline{k}]$
 SO THAT $\underline{M}_2 = 0.17\sqrt{2} \times \sqrt{2} (15\underline{i} - 8\underline{j} - 17\underline{k})$
 $= \sqrt{2} [(1.36 \text{ N}\cdot\text{m})\underline{i} + (2.55 \text{ N}\cdot\text{m})\underline{j}]$
 $\underline{M}_3 = \underline{r}_C \times \underline{P} = [(0.3 \text{ m})\underline{i} + (0.17 \text{ m})\underline{k}] \times P\underline{j}$
 $= P(-0.17\underline{j} + 0.3\underline{k}) \text{ (N}\cdot\text{m)}$

3.76 $P=0 \therefore \underline{M} = \underline{M}_1 + \underline{M}_2$
 OR $\underline{M} = (5.4\underline{j}) + \sqrt{2} (1.36\underline{i} + 2.55\underline{j})$
 $= (1.92333 \text{ N}\cdot\text{m})\underline{i} + (9.0062 \text{ N}\cdot\text{m})\underline{j}$
 THEN .. $M = \sqrt{(1.92333)^2 + (9.0062)^2 + (0)^2} = 9.2093 \text{ N}\cdot\text{m}$
 OR $M = 9.21 \text{ N}\cdot\text{m}$
 AND $\Delta_{\text{axis}} = \frac{\underline{M}}{M} = 0.20885\underline{i} + 0.97195\underline{j}$
 THEN .. $\cos \theta_x = 0.20885$ $\cos \theta_y = 0.97195$ $\cos \theta_z = 0$
 SO THAT $\theta_x = 77.9^\circ$ $\theta_y = 12.05^\circ$ $\theta_z = 90^\circ$

3.79 $P=20 \text{ N} \therefore \underline{M} = \underline{M}_1 + \underline{M}_2 + \underline{M}_3$
 OR $\underline{M} = (1.92333\underline{i} + 9.0062\underline{j}) + 20(-0.17\underline{j} + 0.3\underline{k})$
 $= -(1.47667 \text{ N}\cdot\text{m})\underline{i} + (9.0062 \text{ N}\cdot\text{m})\underline{j} + (6 \text{ N}\cdot\text{m})\underline{k}$
 THEN .. $M = \sqrt{(-1.47667)^2 + (9.0062)^2 + (6)^2} = 10.9221 \text{ N}\cdot\text{m}$
 OR $M = 10.92 \text{ N}\cdot\text{m}$
 AND $\Delta_{\text{axis}} = \frac{\underline{M}}{M} = -0.135200\underline{i} + 0.82459\underline{j} + 0.54934\underline{k}$
 THEN .. $\cos \theta_x = -0.135200$ $\cos \theta_y = 0.82459$ $\cos \theta_z = 0.54934$
 SO THAT $\theta_x = 97.8^\circ$ $\theta_y = 34.5^\circ$ $\theta_z = 56.7^\circ$

3.77 and 3.78

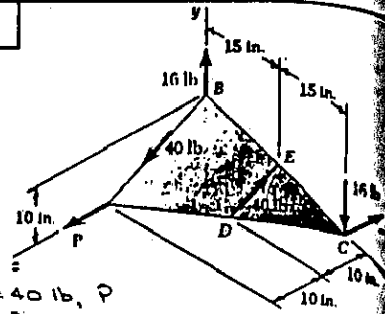

GIVEN: $F_1 = 16 \text{ lb}$, $F_2 = 40 \text{ lb}$, P
 FIND: M , θ_x , θ_y , θ_z


HAVE .. $\underline{M} = \underline{M}_1 + \underline{M}_2 + \underline{M}_3$
 WHERE $\underline{M}_1 = \underline{r}_C \times \underline{F}_1 = (30 \text{ in.})\underline{i} + (-16 \text{ lb})\underline{j}$
 $= -(480 \text{ lb}\cdot\text{in.})\underline{k}$
 $\underline{M}_2 = \underline{r}_{E/B} \times \underline{F}_2$
 WHERE $\underline{r}_{E/B} = (15 \text{ in.})\underline{i} - (5 \text{ in.})\underline{j}$
 AND $\underline{d}_{DE} = \sqrt{(0)^2 + (5)^2 + (-10)^2} = 5\sqrt{5} \text{ in.}$
 THEN .. $\underline{F}_2 = \frac{40 \text{ lb}}{5\sqrt{5}} (5\underline{j} - 10\underline{k})$
 $= 8\sqrt{5} [(1 \text{ lb})\underline{j} - (2 \text{ lb})\underline{k}]$
 SO THAT $\underline{M}_2 = 8\sqrt{5} \begin{vmatrix} \underline{i} & \underline{j} & \underline{k} \\ 0 & 1 & 0 \\ 0 & 0 & -2 \end{vmatrix}$
 $= 8\sqrt{5} [(10 \text{ lb}\cdot\text{in.})\underline{i} + (30 \text{ lb}\cdot\text{in.})\underline{j} + (15 \text{ lb}\cdot\text{in.})\underline{k}]$
 $\underline{M}_3 = \underline{r}_C \times \underline{P} = (30 \text{ in.})\underline{i} + (-P)\underline{k}$
 $= (30P)\underline{j} \text{ (lb}\cdot\text{in.)}$

3.77 $P=0 \therefore \underline{M} = \underline{M}_1 + \underline{M}_2$
 OR $\underline{M} = -(480)\underline{k} + 8\sqrt{5} (10\underline{i} + 30\underline{j} + 15\underline{k})$
 $= (178.885 \text{ lb}\cdot\text{in.})\underline{i} + (536.66 \text{ lb}\cdot\text{in.})\underline{j}$
 $- (211.67 \text{ lb}\cdot\text{in.})\underline{k}$
 THEN .. $M = \sqrt{(178.885)^2 + (536.66)^2 + (-211.67)^2}$
 $= 603.99 \text{ lb}\cdot\text{in.}$
 OR $M = 604 \text{ lb}\cdot\text{in.}$
 AND $\Delta_{\text{axis}} = \frac{\underline{M}}{M} = 0.29617\underline{i} + 0.88852\underline{j} - 0.35045\underline{k}$
 THEN .. $\cos \theta_x = 0.29617$ $\cos \theta_y = 0.88852$ $\cos \theta_z = -0.35045$
 SO THAT $\theta_x = 72.8^\circ$ $\theta_y = 27.3^\circ$ $\theta_z = 110.5^\circ$

3.78 $P=20 \text{ lb} \therefore \underline{M} = \underline{M}_1 + \underline{M}_2 + \underline{M}_3$
 OR $\underline{M} = -(480)\underline{k} + 8\sqrt{5} (10\underline{i} + 30\underline{j} + 15\underline{k})$
 $+ (30 \times 20)\underline{j}$
 $= (178.885 \text{ lb}\cdot\text{in.})\underline{i} + (1136.66 \text{ lb}\cdot\text{in.})\underline{j}$
 $- (211.67 \text{ lb}\cdot\text{in.})\underline{k}$
 THEN .. $M = \sqrt{(178.885)^2 + (1136.66)^2 + (-211.67)^2}$
 $= 1169.96 \text{ lb}\cdot\text{in.}$
 OR $M = 1170 \text{ lb}\cdot\text{in.}$
 AND $\Delta_{\text{axis}} = \frac{\underline{M}}{M} = 0.152898\underline{i} + 0.97154\underline{j} - 0.180921\underline{k}$
 THEN .. $\cos \theta_x = 0.152898$ $\cos \theta_y = 0.97154$ $\cos \theta_z = -0.180921$
 SO THAT $\theta_x = 81.2^\circ$ $\theta_y = 13.7^\circ$ $\theta_z = 100.4^\circ$

3.80

GIVEN: $M_1, M_2,$ AND M_3
 FIND: $M, \theta_x, \theta_y, \theta_z$

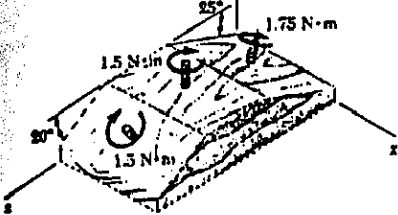


Have.. $M = M_1 + M_2 + M_3$
 OR $M = 1.5(-\cos 20^\circ \mathbf{j} - \sin 20^\circ \mathbf{k})$
 $- 1.5 \mathbf{j} + 1.75(-\cos 25^\circ \mathbf{j} + \sin 25^\circ \mathbf{k})$
 $= -(4.4956 \text{ N}\cdot\text{m})\mathbf{j} + (0.22655 \text{ N}\cdot\text{m})\mathbf{k}$
 THEN.. $M = \sqrt{(0)^2 + (-4.4956)^2 + (0.22655)^2}$
 $= 4.5013 \text{ N}\cdot\text{m}$

OR $M = 4.50 \text{ N}\cdot\text{m}$
 AND $\Delta_{\text{axis}} = \frac{M}{M} = -0.99873\mathbf{j} + 0.050330\mathbf{k}$

THEN.. $\cos \theta_x = 0$ $\cos \theta_y = -0.99873$ $\cos \theta_z = 0.050330$
 SO THAT.. $\theta_x = 90^\circ$ $\theta_y = 177.1^\circ$ $\theta_z = 87.1^\circ$

3.81

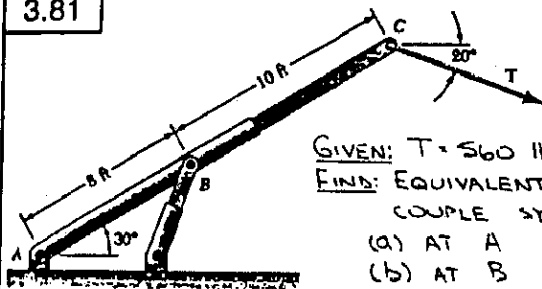


GIVEN: $T = 560 \text{ lb}$
 FIND: EQUIVALENT FORCE-COUPLE SYSTEM
 (a) AT A
 (b) AT B

(a) HAVE.. $E = 560 \text{ lb} \angle 20^\circ$
 AND $M = M_A = -(18 \text{ ft})(560 \text{ lb})\sin 50^\circ$
 $= -7720 \text{ lb}\cdot\text{ft}$
 \therefore THE EQUIVALENT FORCE-COUPLE SYSTEM AT A IS $E = 560 \text{ lb} \angle 20^\circ, M = 7720 \text{ lb}\cdot\text{ft}$

(b) HAVE.. $E = 560 \text{ lb} \angle 20^\circ$
 AND $M = M_B = -(10 \text{ ft})(560 \text{ lb})\sin 50^\circ$
 $= -4290 \text{ lb}\cdot\text{ft}$
 \therefore THE EQUIVALENT FORCE-COUPLE SYSTEM AT B IS $E = 560 \text{ lb} \angle 20^\circ, M = 4290 \text{ lb}\cdot\text{ft}$

3.82

GIVEN: $P = 80 \text{ N}$
 FIND: (a) EQUIVALENT FORCE-COUPLE SYSTEM AT B
 (b) VERTICAL FORCES AT C AND D EQUIVALENT TO COUPLE OF PART A

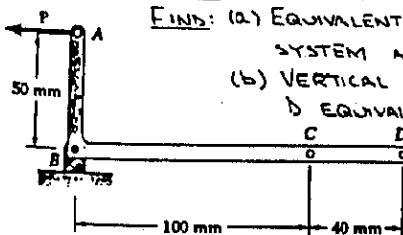


(a) HAVE $E = 80 \text{ N} \leftarrow$
 (CONTINUES)


3.82 CONTINUED

AND $M = M_B = (0.05 \text{ m})(80 \text{ N}) = 4 \text{ N}\cdot\text{m}$
 \therefore THE EQUIVALENT FORCE-COUPLE SYSTEM AT B IS $F = 80 \text{ N} \leftarrow, M = 4 \text{ N}\cdot\text{m}$

(b) IF THE TWO VERTICAL FORCES ARE TO BE EQUIVALENT TO M , THEY MUST BE A COUPLE. FURTHER, THE SENSE OF THE MOMENT OF THIS COUPLE MUST BE COUNTERCLOCKWISE. THEN.. WITH F_C AND F_D ACTING AS SHOWN, HAVE

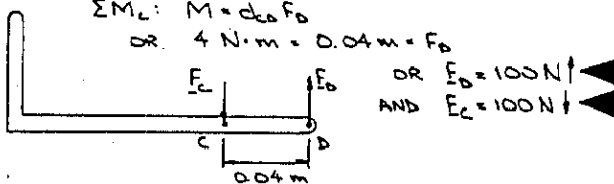


3.83

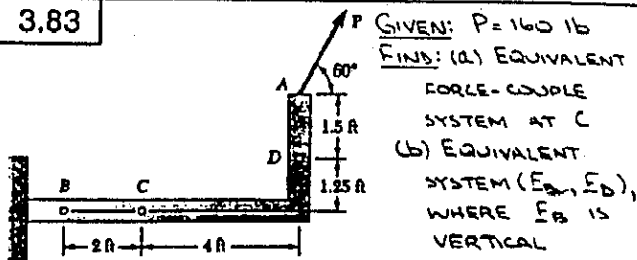

GIVEN: $P = 160 \text{ lb}$
 FIND: (a) EQUIVALENT FORCE-COUPLE SYSTEM AT C
 (b) EQUIVALENT SYSTEM (E_B, E_D), WHERE E_B IS VERTICAL

(a) HAVE.. $E = 160 \text{ lb} \angle 60^\circ$
 AND $M = M_C = xP_y - yP_x$
 $= (2.75 \text{ ft})(160 \text{ lb})\sin 60^\circ - (4 \text{ ft})(160 \text{ lb})\cos 60^\circ$
 $= 334.26 \text{ lb}\cdot\text{ft}$
 \therefore THE EQUIVALENT FORCE-COUPLE SYSTEM AT C IS.. $F = 160 \text{ lb} \angle 60^\circ, M = 334 \text{ lb}\cdot\text{ft}$

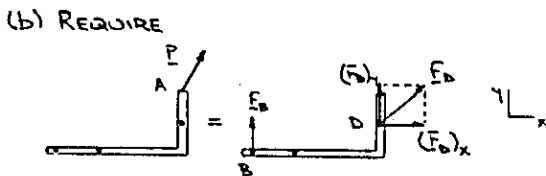


THEN FOR EQUIVALENCE..
 $\Sigma F_x: (160 \text{ lb})\cos 60^\circ = (F_D)_x$
 OR $(F_D)_x = 80 \text{ lb}$
 $\Sigma M_A: 0 = (1.5 \text{ ft})(80 \text{ lb}) - (6 \text{ ft})F_D = 0$
 OR $E_D = 20 \text{ lb} \uparrow$


$\Sigma F_y: (160 \text{ lb})\sin 60^\circ = 20 \text{ lb} + (F_D)_y$
 OR $(F_D)_y = 118.564 \text{ lb}$
 THEN.. $F_D = \sqrt{(80)^2 + (118.564)^2}$
 $= 143.0 \text{ lb}$
 $\tan \theta = \frac{118.564}{80}$
 OR $\theta = 56.0^\circ$

$\therefore E_D = 143.0 \text{ lb} \angle 56.0^\circ$

3.84

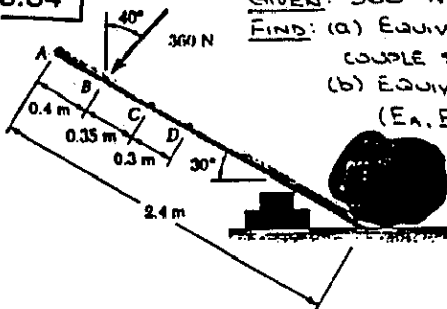



GIVEN: 360-N FORCE
FIND: (a) EQUIVALENT FORCE-COUPLE SYSTEM AT D
(b) EQUIVALENT SYSTEM (E_A, E_D), WHERE E_A IS VERTICAL



HAVE $F = 360 \text{ N} \nearrow 50^\circ$
AND $M = M_D$
 $-(0.65 \text{ m} \times 360 \text{ N}) \cos 10^\circ$
 $= 230.45 \text{ N}\cdot\text{m}$

\therefore THE EQUIVALENT FORCE-COUPLE SYSTEM AT D IS
 $F = 360 \text{ N} \nearrow 50^\circ, M = 230 \text{ N}\cdot\text{m}$

(b) REQUIRE

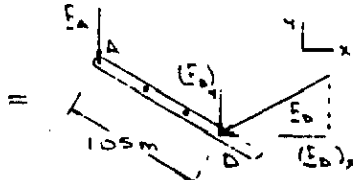

THEN FOR EQUIVALENCE --

$$\sum M_D: M = (0.65 \cos 30^\circ) F_A$$

$$\text{OR } 230.45 \text{ N}\cdot\text{m} = (1.05 \text{ m}) (\cos 30^\circ) F_A$$

$$\text{OR } F_A = 253.43 \text{ N}$$

THEN.. $E_A = 253 \text{ N}$

$$\sum F_x: -(360 \text{ N}) \sin 40^\circ = (F_D)_x$$

$$\text{OR } (F_D)_x = -231.40 \text{ N}$$

$$\sum F_y: -(360 \text{ N}) \cos 40^\circ = -253.43 \text{ N} - (F_D)_y$$


$$\text{OR } (F_D)_y = -22.35 \text{ N}$$

$$\text{THEN.. } F_D = \sqrt{(-231.40)^2 + (-22.35)^2} \quad \tan \theta = \frac{-22.35}{-231.40}$$

$$= 232 \text{ N} \quad \theta = 5.52^\circ$$


$\therefore F_D = 232 \text{ N} \nearrow 5.52^\circ$

3.85

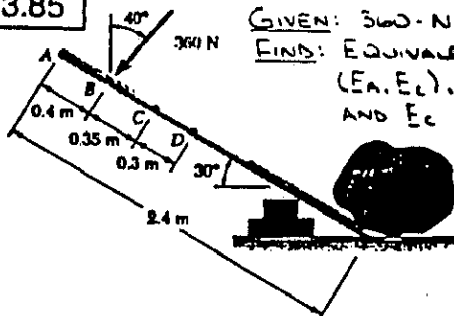

GIVEN: 360-N FORCE
FIND: EQUIVALENT SYSTEM (E_A, E_C), WHERE E_A AND E_C ARE PARALLEL

REQUIRE



(CONTINUES)

3.85 CONTINUED

THEN FOR EQUIVALENCE --

$$\sum F_x: -360 \sin 40^\circ = -F_A \sin \alpha - F_C \sin \alpha \quad (1)$$

$$\sum F_y: -360 \cos 40^\circ = -F_A \cos \alpha - F_C \cos \alpha \quad (2)$$

$$\text{FORMING } \frac{(1)}{(2)} \dots \frac{-360 \sin 40^\circ}{-360 \cos 40^\circ} = \frac{-(F_A + F_C) \sin \alpha}{-(F_A + F_C) \cos \alpha}$$

SIMPLIFYING YIELDS $\alpha = 40^\circ$

AND THEN $F_A + F_C = 360 \text{ N} \quad (3)$

$$\text{NOW.. } \sum M_B: 0 = (0.4 \text{ m}) F_A \cos 10^\circ - (0.35 \text{ m}) F_C \cos 10^\circ$$

$$\text{OR } F_A = \frac{7}{8} F_C \quad (4)$$

SUBSTITUTING FOR F_A IN EQ. (3).


$$\frac{7}{8} F_C + F_C = 360$$

$$\text{OR } F_C = 192 \text{ N}$$

AND THEN $F_A = 168 \text{ N}$

$$\therefore F_A = 168 \text{ N} \nearrow 50^\circ, F_C = 192 \text{ N} \nearrow 50^\circ$$


3.86

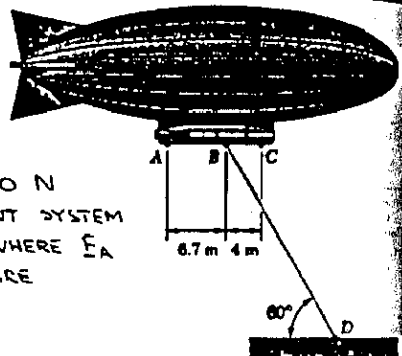

GIVEN: $T_{BD} = 1040 \text{ N}$

FIND: EQUIVALENT SYSTEM (E_A, E_C), WHERE E_A AND E_C ARE PARALLEL

REQUIRE

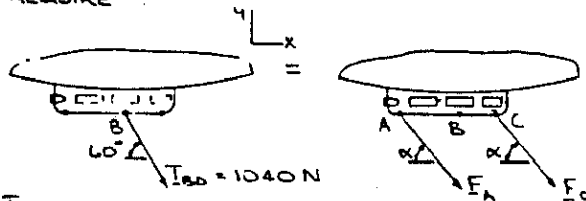

THEN FOR EQUIVALENCE --

$$\sum F_x: 1040 \cos 60^\circ = F_A \cos \alpha + F_C \cos \alpha \quad (1)$$

$$\sum F_y: -1040 \sin 60^\circ = -F_A \sin \alpha - F_C \sin \alpha \quad (2)$$

$$\text{FORMING } \frac{(1)}{(2)} \dots \frac{1040 \cos 60^\circ}{-1040 \sin 60^\circ} = \frac{(F_A + F_C) \cos \alpha}{-(F_A + F_C) \sin \alpha}$$

SIMPLIFYING YIELDS $\alpha = 60^\circ$

AND THEN $F_A + F_C = 1040 \text{ N} \quad (3)$

$$\text{NOW.. } \sum M_B: 0 = (6.7 \text{ m}) F_A \sin 60^\circ - (4 \text{ m}) F_C \sin 60^\circ$$

SUBSTITUTING FOR F_C FROM EQ. (3)...


$$6.7 F_A - 4(1040 - F_A) = 0$$

$$\text{OR } F_A = 388.79 \text{ N}$$

AND THEN $F_C = 651.21 \text{ N}$

$$\therefore F_A = 389 \text{ N} \nabla 60^\circ, F_C = 651 \text{ N} \nabla 60^\circ$$

3.87

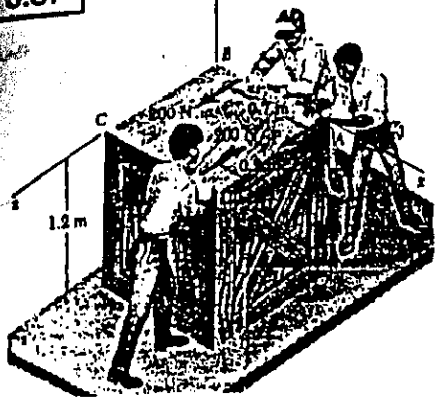


GIVEN: 1.1 x 1.2-m CRATE

- FIND: (a) EQUIVALENT FORCE-COUPLE SYSTEM AT A IF $P = 240$ N
 (b) SINGLE EQUIVALENT FORCE AND POINT OF APPLICATION ON SIDE AB
 (c) P IF THREE FORCES ARE EQUIVALENT TO A SINGLE FORCE AT B


(a) SINCE THE TWO 200-N FORCES FORM A COUPLE, THE THREE FORCES ARE EQUIVALENT TO A FORCE F AND A COUPLE VECTOR M , WHERE
 $F = (240 \text{ N})\mathbf{j}$
 AND $M = (0.7 - 0.2)\text{m} \cdot 200 \text{ N} = 100 \text{ N}\cdot\text{m}$
 \therefore THE EQUIVALENT FORCE-COUPLE SYSTEM AT A IS... $F = (240 \text{ N})\mathbf{j}$, $M = (100 \text{ N}\cdot\text{m})\mathbf{j}$

(b) THE SINGLE EQUIVALENT FORCE F' IS EQUAL TO $(240 \text{ N})\mathbf{j}$ AND IS APPLIED ALONG AB SO THAT ITS MOMENT ABOUT A IS EQUAL TO M . THUS:

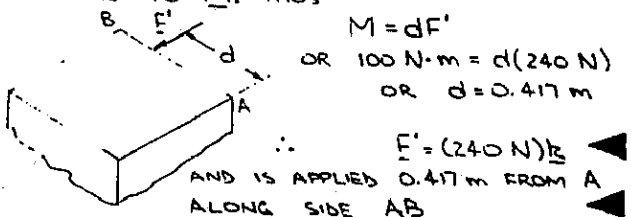

(c) FOR THIS CASE, $d = 1 \text{ m}$. THEN...
 $M = dP$
 OR $100 \text{ N}\cdot\text{m} = (1 \text{ m})P$ OR $P = 100 \text{ N}$

3.88




GIVEN: FORCE-COUPLE SYSTEM
 FIND: (a) SINGLE EQUIVALENT FORCE F AT C, DISTANCE d

(b) F AND d IF THE DIRECTIONS OF THE TWO 360-N FORCES ARE REVERSED

(CONTINUED)


3.88 CONTINUED

(a) HAVE $F = 600 \text{ N}$
 REQUIRE

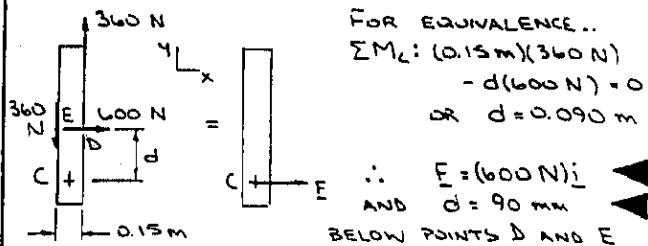


(b) THE ONLY EFFECT OF REVERSING THE DIRECTIONS OF THE TWO 360-N FORCES WILL BE TO CHANGE THE SENSE OF THE MOMENT OF THE COUPLE. THUS
 $F = (600 \text{ N})\mathbf{j}$
 AND $\Sigma M_C: -(0.15 \text{ m})(360 \text{ N}) - d(600 \text{ N}) = 0$
 OR $d = -0.090 \text{ m}$
 $\therefore d = 90 \text{ mm}$ ABOVE POINTS D AND E

3.89

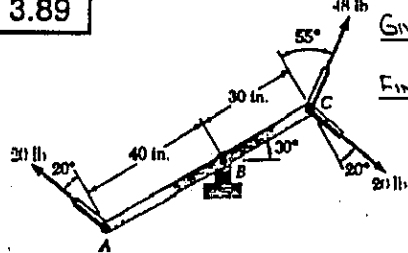

GIVEN: FORCE-COUPLE SYSTEM
 FIND: (a) EQUIVALENT FORCE-COUPLE SYSTEM AT B
 (b) SINGLE EQUIVALENT FORCE, POINT OF APPLICATION

(a) FIRST NOTE THAT THE TWO 20-LB FORCES FORM A COUPLE. THEN

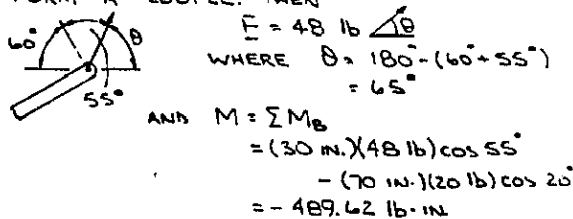


\therefore THE EQUIVALENT FORCE-COUPLE SYSTEM AT B IS
 $F = 48 \text{ lb}$, $M = 490 \text{ lb}\cdot\text{in.}$

(b) THE SINGLE EQUIVALENT FORCE F' IS EQUAL TO F . FURTHER, SINCE THE SENSE OF M IS CLOCKWISE, F' MUST BE APPLIED BETWEEN A AND B. FOR EQUIVALENCE..

$\Sigma M_B: M = -dF' \cos 55^\circ$
 WHERE d IS THE DISTANCE FROM B TO THE POINT OF APPLICATION OF F' . THEN...
 $-489.62 \text{ lb}\cdot\text{in.} = -d(48 \text{ lb}) \cos 55^\circ$
 OR $d = 17.78 \text{ in.}$


$\therefore F' = 48 \text{ lb}$
 AND IS APPLIED TO THE LEVER 17.78 IN. TO THE LEFT OF PIN B

3.90

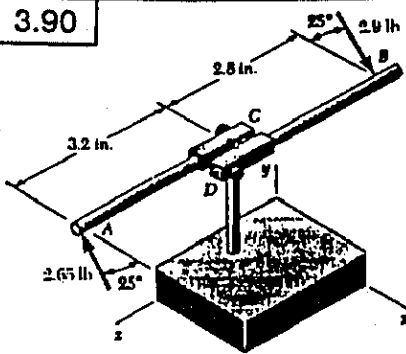

GIVEN: APPLIED FORCES
FIND: SINGLE EQUIVALENT FORCE, POINT OF APPLICATION

FIRST TRANSFER THE 2.65-LB FORCE AT A TO B. THE RESULTING FORCE-COUPLE SYSTEM (F, M) AT B IS THEN --



$$F = (2.9 - 2.65) \text{ lb} = 0.25 \text{ lb}$$

$$\text{AND } M = M_B = (6 \text{ m}) \times (2.65 \text{ lb}) \cos 25^\circ$$

$$\text{OR } M = -(4.4103 \text{ lb} \cdot \text{in.}) \hat{j}$$

THE SINGLE EQUIVALENT FORCE F' IS EQUAL TO F . FURTHER, FOR EQUIVALENCE

$$\sum M_B: M = Q F' \cos 25^\circ$$

WHERE Q IS THE DISTANCE FROM B TO THE POINT OF APPLICATION OF F' . SINCE M ACTS IN THE $-\hat{j}$ DIRECTION, F' WOULD HAVE TO BE APPLIED TO THE RIGHT OF B. THEN..


$$-14.4103 \text{ lb} \cdot \text{in.} = -Q (0.25 \text{ lb}) \cos 25^\circ$$

$$\text{OR } Q = 63.6 \text{ IN.}$$

$$\therefore F' = (0.25 \text{ lb}) (\cos 25^\circ \hat{i} + \sin 25^\circ \hat{j})$$

AND IS APPLIED ON AN EXTENSION OF HANDLE BD AT A DISTANCE OF 63.6 IN. TO THE RIGHT OF B.

3.91

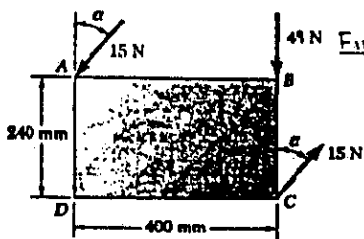

GIVEN: FORCE-COUPLE SYSTEM
FIND: (a) MAGNITUDE OF SINGLE EQUIVALENT FORCE F' AND ITS LINE OF ACTION FOR $\alpha = 40^\circ$
(b) α IF LINE OF ACTION OF F' INTERSECTS CD 300 mm TO THE RIGHT OF D


(a) THE GIVEN FORCE-COUPLE SYSTEM (F, M) AT B IS

$$F = 48 \text{ N}$$

$$\text{AND } M = \sum M_B = (0.4 \text{ m})(15 \text{ N}) \cos 40^\circ + (0.24 \text{ m})(15 \text{ N}) \sin 40^\circ$$

$$\text{OR } M = 6.9103 \text{ N} \cdot \text{m}$$

THE SINGLE EQUIVALENT FORCE F' IS EQUAL TO F . FURTHER, FOR EQUIVALENCE..



$$\sum M_B: M = d F'$$

$$\text{OR } 6.9103 \text{ N} \cdot \text{m} = d \cdot 48 \text{ N}$$

$$\text{OR } d = 0.14396 \text{ m}$$

$$\therefore F' = 48 \text{ N}$$

AND THE LINE OF ACTION OF F' INTERSECTS LINE AB 144 mm TO THE RIGHT OF A.

(CONTINUED)

3.91 CONTINUED

(b) FOLLOWING THE SOLUTION TO PART (a) BUT WITH $d = 0.1 \text{ m}$ AND α UNKNOWN, HAVE

$$\sum M_B: (0.4 \text{ m})(15 \text{ N}) \cos \alpha + (0.24 \text{ m})(15 \text{ N}) \sin \alpha = (0.1 \text{ m})(48 \text{ N})$$

$$\text{OR } 5 \cos \alpha + 3 \sin \alpha = 4$$

REARRANGING AND SQUARING.. $25 \cos^2 \alpha = (4 - 3 \sin \alpha)^2$

USING $\cos^2 \alpha = 1 - \sin^2 \alpha$ AND EXPANDING..

$$25(1 - \sin^2 \alpha) = 16 - 24 \sin \alpha + 9 \sin^2 \alpha$$

$$\text{OR } 34 \sin^2 \alpha - 24 \sin \alpha - 9 = 0$$

$$\text{THEN } \sin \alpha = \frac{24 \pm \sqrt{(-24)^2 - 4(34)(-9)}}{2(34)}$$


$$\text{OR } \sin \alpha = 0.97686$$

$$\sin \alpha = -0.27098$$

$$\text{OR } \alpha = 77.7^\circ$$


$$\alpha = -15.72^\circ$$

3.92



GIVEN: FORCE-COUPLE SYSTEM (P, M)
FIND: P_{MIN} SO THAT (P, M) IS EQUIVALENT TO A SINGLE FORCE AT E

FROM THE STATEMENT OF THE PROBLEM, IT FOLLOWS THAT $\sum M_E = 0$ FOR THE GIVEN FORCE-COUPLE SYSTEM. FURTHER, FOR P_{MIN} , MUST REQUIRE THAT P BE PERPENDICULAR TO \vec{r}_{BE} . THEN..




$$\sum M_E: (0.2 \sin 30^\circ + 0.2) \text{ m} \cdot 300 \text{ N} + (0.2 \text{ m}) \sin 30^\circ \cdot 300 \text{ N} - (0.4 \text{ m}) P_{\text{MIN}} = 0$$

$$\text{OR } P_{\text{MIN}} = 300 \text{ N}$$

$$\therefore P_{\text{MIN}} = 300 \text{ N} \angle 30^\circ$$

3.93



GIVEN: $P = 1220 \text{ N}$
FIND: EQUIVALENT FORCE-COUPLE SYSTEM (F, M) AT G

HAVE $P = -(1220 \text{ N}) \hat{j}$

NOW.. $M = M_G$

$$= \vec{r}_{AG} \times P$$

$$= [-(0.1 \text{ m}) \hat{j} - (0.06 \text{ m}) \hat{k}] \times [-(1220 \text{ N}) \hat{j}]$$


$$= (73.2 \text{ N} \cdot \text{m}) \hat{j} - (122 \text{ N} \cdot \text{m}) \hat{k}$$

\therefore THE EQUIVALENT FORCE-COUPLE SYSTEM AT G IS..

$$F = -(1220 \text{ N}) \hat{j}$$

$$M = (73.2 \text{ N} \cdot \text{m}) \hat{j} - (122 \text{ N} \cdot \text{m}) \hat{k}$$


3.94

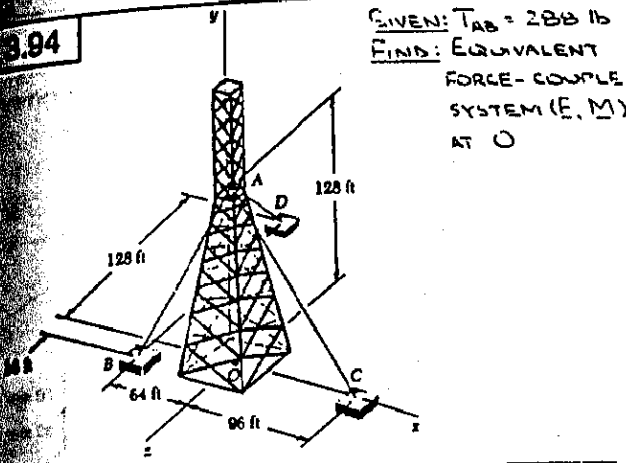

GIVEN: $T_{AB} = 288 \text{ lb}$
 FIND: EQUIVALENT FORCE-COUPLE SYSTEM (F, M) AT O

HAVE .. $d_{AB} = \sqrt{(-64)^2 + (-128)^2 + (16)^2} = 144 \text{ ft}$
 THEN $\underline{T}_{AB} = \frac{288 \text{ lb}}{144} (-64\mathbf{i} - 128\mathbf{j} + 16\mathbf{k})$
 $= (32 \text{ lb})(-4\mathbf{i} - 8\mathbf{j} + \mathbf{k})$
 NOW .. $\underline{M} = \underline{M}_O = \underline{r}_{A/O} \times \underline{T}_{AB}$
 $= 128\mathbf{j} \times 32(-4\mathbf{i} - 8\mathbf{j} + \mathbf{k})$
 $= (4096 \text{ lb}\cdot\text{ft})\mathbf{i} + (16,384 \text{ lb}\cdot\text{ft})\mathbf{k}$
 THE EQUIVALENT FORCE-COUPLE SYSTEM AT O IS ..
 $\underline{F} = -(128 \text{ lb})\mathbf{i} - (256 \text{ lb})\mathbf{j} + (32 \text{ lb})\mathbf{k}$
 $\underline{M} = (4.10 \text{ kip}\cdot\text{ft})\mathbf{i} + (16.38 \text{ kip}\cdot\text{ft})\mathbf{k}$


3.95

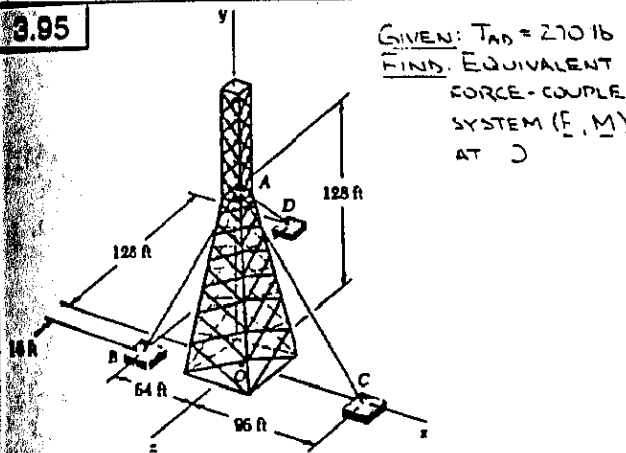

GIVEN: $T_{AD} = 270 \text{ lb}$
 FIND: EQUIVALENT FORCE-COUPLE SYSTEM (F, M) AT O

HAVE .. $d_{AD} = \sqrt{(-64)^2 + (-128)^2 + (-128)^2} = 192 \text{ ft}$
 THEN .. $\underline{T}_{AD} = \frac{270 \text{ lb}}{192} (-64\mathbf{i} - 128\mathbf{j} - 128\mathbf{k})$
 $= (90 \text{ lb})(-\mathbf{i} - 2\mathbf{j} - 2\mathbf{k})$
 NOW .. $\underline{M} = \underline{M}_O = \underline{r}_{A/O} \times \underline{T}_{AD}$
 $= 128\mathbf{j} \times 90(-\mathbf{i} - 2\mathbf{j} - 2\mathbf{k})$
 $= -(23,040 \text{ lb}\cdot\text{ft})\mathbf{i} + (11,520 \text{ lb}\cdot\text{ft})\mathbf{k}$
 THE EQUIVALENT FORCE-COUPLE SYSTEM AT O IS ..
 $\underline{F} = -(90 \text{ lb})\mathbf{i} - (180 \text{ lb})\mathbf{j} - (180 \text{ lb})\mathbf{k}$
 $\underline{M} = -(23.0 \text{ kip}\cdot\text{ft})\mathbf{i} + (11.52 \text{ kip}\cdot\text{ft})\mathbf{k}$


3.96

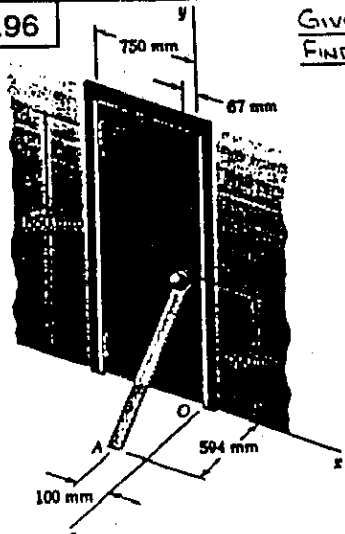

GIVEN: $F_{AB} = 175 \text{ N}$
 FIND: EQUIVALENT FORCE-COUPLE SYSTEM (F, M) AT C

HAVE $d_{AB} = \sqrt{(33)^2 + (990)^2 + (-594)^2} = 1155 \text{ mm}$
 THEN $\underline{F}_{AB} = \frac{175 \text{ N}}{1155} (33\mathbf{i} + 990\mathbf{j} - 594\mathbf{k})$
 $= (5 \text{ N})(\mathbf{i} + 30\mathbf{j} - 18\mathbf{k})$
 NOW .. $\underline{M} = \underline{M}_C = \underline{r}_{B/C} \times \underline{F}_{AB}$
 WHERE $\underline{r}_{B/C} = (0.683 \text{ m})\mathbf{i} - (0.860 \text{ m})\mathbf{j}$
 THEN .. $\underline{M} = 5 \begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 0.683 & -0.860 & 0 \\ 1 & 30 & -18 \end{vmatrix}$
 $= 5\{(-0.860)(-18)\mathbf{i} + (-0.683)(-18)\mathbf{j} + (0.683)(30) - (0.860)(1)\mathbf{k}\}$
 $= (77.4 \text{ N}\cdot\text{m})\mathbf{i} + (61.47 \text{ N}\cdot\text{m})\mathbf{j} + (106.75 \text{ N}\cdot\text{m})\mathbf{k}$
 THE EQUIVALENT FORCE-COUPLE SYSTEM AT C IS ..
 $\underline{F} = (5 \text{ N})\mathbf{i} + (150 \text{ N})\mathbf{j} - (90 \text{ N})\mathbf{k}$
 $\underline{M} = (77.4 \text{ N}\cdot\text{m})\mathbf{i} + (61.5 \text{ N}\cdot\text{m})\mathbf{j} + (106.8 \text{ N}\cdot\text{m})\mathbf{k}$

3.97

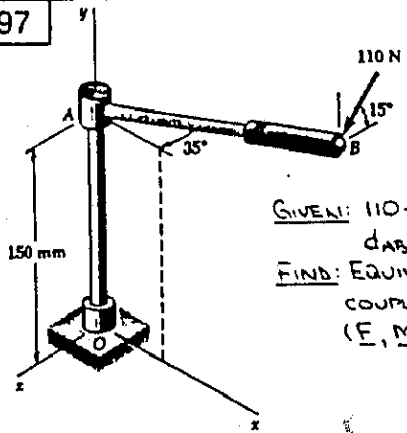

GIVEN: 110-N FORCE P
 $d_{AB} = 220 \text{ mm}$
 FIND: EQUIVALENT FORCE-COUPLE SYSTEM (F, M) AT O


HAVE .. $\underline{P} = (110 \text{ N})(-\sin 15^\circ \mathbf{j} + \cos 15^\circ \mathbf{k})$
 NOW .. $\underline{M} = \underline{M}_O = \underline{r}_{B/O} \times \underline{P}$
 WHERE $\underline{r}_{B/O} = (0.22 \text{ m})\cos 35^\circ \mathbf{j} + (0.15 \text{ m})\mathbf{j} - (0.22 \text{ m})\sin 35^\circ \mathbf{k}$
 THEN .. $\underline{M} = 110 \begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 0 & 0.22 \cos 35^\circ & 0.15 \\ 0 & -\sin 15^\circ & \cos 15^\circ \end{vmatrix}$

(CONTINUED)

3.97 CONTINUED

$$\begin{aligned} \text{OR } \underline{M} &= 110 \mathbf{j} [(0.15)(\cos 15^\circ) - (0.22 \sin 35^\circ)(-\sin 15^\circ)] \mathbf{i} \\ &\quad + [-(0.22 \cos 35^\circ)(\cos 15^\circ)] \mathbf{j} \\ &\quad + [(0.22 \cos 35^\circ)(-\sin 15^\circ)] \mathbf{k} \\ &= (12.345 \text{ N}\cdot\text{m}) \mathbf{i} - (19.148 \text{ N}\cdot\text{m}) \mathbf{j} - (5.131 \text{ N}\cdot\text{m}) \mathbf{k} \\ \therefore \text{ THE EQUIVALENT FORCE-COUPLE SYSTEM AT } \\ \text{O IS } \underline{F} &= (110 \text{ N})(-\sin 15^\circ \mathbf{j} + \cos 15^\circ \mathbf{k}) \\ &= -(28.5 \text{ N}) \mathbf{j} + (106.3 \text{ N}) \mathbf{k} \\ \underline{M} &= (12.35 \text{ N}\cdot\text{m}) \mathbf{i} - (19.15 \text{ N}\cdot\text{m}) \mathbf{j} - (5.13 \text{ N}\cdot\text{m}) \mathbf{k} \end{aligned}$$

3.98

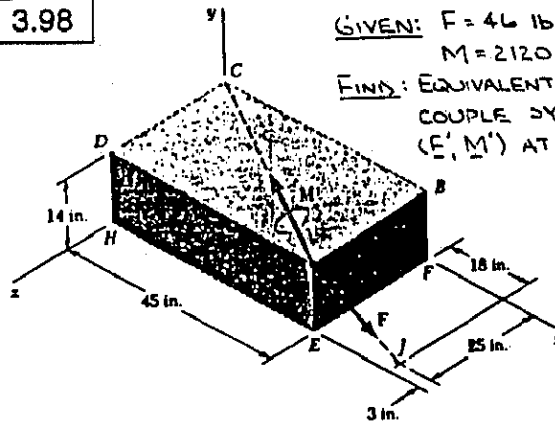

GIVEN: $F = 46 \text{ lb}$
 $M = 2120 \text{ lb}\cdot\text{in.}$
 FIND: EQUIVALENT FORCE-COUPLE SYSTEM (F' , M') AT H

$$\text{HAVE } d_{AH} = \sqrt{(18)^2 + (-14)^2 + (-3)^2} = 23 \text{ in.}$$

$$\text{THEN } \underline{F} = \frac{46 \text{ lb}}{23} (18 \mathbf{j} - 14 \mathbf{j} - 3 \mathbf{k}) = (36 \text{ lb}) \mathbf{j} - (28 \text{ lb}) \mathbf{j} - (6 \text{ lb}) \mathbf{k}$$

$$\text{ALSO } d_{AC} = \sqrt{(45)^2 + (0)^2 + (-28)^2} = 53 \text{ in.}$$

$$\text{THEN } \underline{M} = \frac{2120 \text{ lb}\cdot\text{in.}}{53} (-45 \mathbf{i} - 28 \mathbf{k}) = -(1800 \text{ lb}\cdot\text{in.}) \mathbf{i} - (1120 \text{ lb}\cdot\text{in.}) \mathbf{k}$$


$$\text{NOW } \underline{M}' = \underline{M} + \sum_{A/H} \underline{r} \times \underline{F}$$

WHERE $\sum_{A/H} = (45 \text{ in.}) \mathbf{i} + (14 \text{ in.}) \mathbf{j}$

$$\begin{aligned} \text{THEN } \underline{M}' &= (-1800 \mathbf{i} - 1120 \mathbf{k}) + \begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 45 & 14 & 0 \\ 36 & -28 & -6 \end{vmatrix} \\ &= (-1800 \mathbf{i} - 1120 \mathbf{k}) + [(14)(-6)] \mathbf{i} \\ &\quad + [(45)(-28) - (14)(36)] \mathbf{k} \\ &= (-1800 - 84) \mathbf{i} + (270) \mathbf{j} \\ &\quad + (-1120 - 1764) \mathbf{k} \\ &= -(1884 \text{ lb}\cdot\text{in.}) \mathbf{i} + (270 \text{ lb}\cdot\text{in.}) \mathbf{j} \\ &\quad - (2884 \text{ lb}\cdot\text{in.}) \mathbf{k} \\ &= -(157 \text{ lb}\cdot\text{ft.}) \mathbf{i} + (22.5 \text{ lb}\cdot\text{ft.}) \mathbf{j} \\ &\quad - (240 \text{ lb}\cdot\text{ft.}) \mathbf{k} \end{aligned}$$

\therefore THE EQUIVALENT FORCE-COUPLE SYSTEM AT H IS $\underline{F}' = (36 \text{ lb}) \mathbf{j} - (28 \text{ lb}) \mathbf{j} - (6 \text{ lb}) \mathbf{k}$
 $\underline{M}' = -(157 \text{ lb}\cdot\text{ft.}) \mathbf{i} + (22.5 \text{ lb}\cdot\text{ft.}) \mathbf{j} - (240 \text{ lb}\cdot\text{ft.}) \mathbf{k}$

3.99

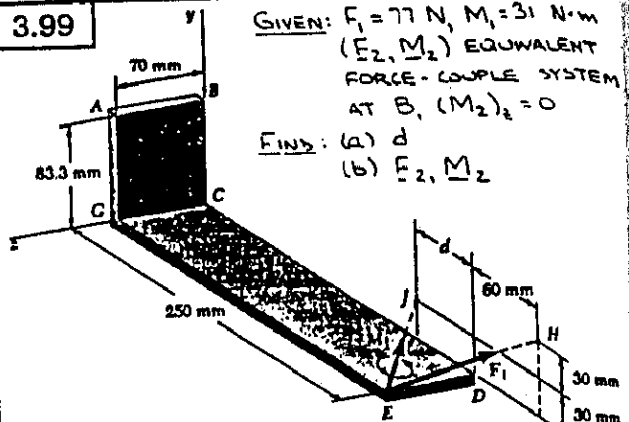

GIVEN: $F_1 = 77 \text{ N}$, $M_1 = 31 \text{ N}\cdot\text{m}$
 (F_2, M_2) EQUIVALENT FORCE-COUPLE SYSTEM AT B, $(M_2)_z = 0$
 FIND: (a) d
 (b) F_2, M_2

$$\text{HAVE } d_{EH} = \sqrt{(60)^2 + (60)^2 + (-70)^2} = 110 \text{ mm}$$

$$\text{THEN } \underline{F}_1 = \frac{77 \text{ N}}{110} (60 \mathbf{i} + 60 \mathbf{j} - 70 \mathbf{k}) = (42 \text{ N}) \mathbf{i} + (42 \text{ N}) \mathbf{j} - (49 \text{ N}) \mathbf{k}$$

$$\text{ALSO } d_{EJ} = \sqrt{(-d)^2 + (30)^2 + (-70)^2} \text{ mm}$$

$$\text{AND } \underline{M}_1 = \frac{31 \text{ N}\cdot\text{m}}{d_{EJ}} [-(d) \mathbf{i} + (30 \text{ mm}) \mathbf{j} - (70 \text{ mm}) \mathbf{k}]$$

$$\text{(a) HAVE } \underline{M}_2 = \underline{M}_1 + \sum_{H/B} \underline{r} \times \underline{F}_1 \quad (1)$$

WHERE $\sum_{H/B} = (0.31 \text{ m}) \mathbf{i} - (0.0233 \text{ m}) \mathbf{j}$

$$\begin{aligned} \text{THEN } \sum_{H/B} \underline{r} \times \underline{F}_1 &= \begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 0.31 & -0.0233 & 0 \\ 42 & 42 & -49 \end{vmatrix} \\ &= [(-0.0233)(-49)] \mathbf{i} + [(0.31)(-49)] \mathbf{j} \\ &\quad + [(0.31)(42) - (-0.0233)(42)] \mathbf{k} \\ &= (1.1417 \text{ N}\cdot\text{m}) \mathbf{i} + (15.19 \text{ N}\cdot\text{m}) \mathbf{j} \\ &\quad + (13.9986 \text{ N}\cdot\text{m}) \mathbf{k} \end{aligned}$$

EQ. (1) CAN THEN BE EXPRESSED AS

$$\begin{aligned} (M_2)_x \mathbf{i} + (M_2)_y \mathbf{j} &= \frac{31 \text{ N}\cdot\text{m}}{d_{EJ}} [-(d) \mathbf{i} + (30 \text{ mm}) \mathbf{j} - (70 \text{ mm}) \mathbf{k}] \\ &\quad + [(1.1417 \text{ N}\cdot\text{m}) \mathbf{i} + (15.19 \text{ N}\cdot\text{m}) \mathbf{j} + (13.9986 \text{ N}\cdot\text{m}) \mathbf{k}] \end{aligned}$$

EQUATING THE \mathbf{k} COEFFICIENTS..

$$0 = \frac{31 \text{ N}\cdot\text{m}}{d_{EJ}} (-70 \text{ mm}) + 13.9986 \text{ N}\cdot\text{m}$$

$$\text{THEN } d_{EJ}^2 = \left(\frac{31}{13.9986} \cdot 70 \text{ mm} \right)^2 = [(d)^2 + (30)^2 + (-70)^2] \text{ mm}^2$$


OR $d = 135.018 \text{ mm}$ $d = 135.0 \text{ mm}$

$$\text{(b) FIRST NOTE } d_{EJ} = \sqrt{(135.018)^2 + (30)^2 + (-70)^2} = 155.016 \text{ mm}$$

USING EQ. (2), \underline{M}_2 IS THEN..


$$\begin{aligned} \underline{M}_2 &= \left(-\frac{31 \times 135.018}{155.016} + 1.1417 \right) \mathbf{i} \\ &\quad + \left(\frac{31 \times 30}{155.016} + 15.19 \right) \mathbf{j} \\ &= -(25.859 \text{ N}\cdot\text{m}) \mathbf{i} + (21.189 \text{ N}\cdot\text{m}) \mathbf{j} \end{aligned}$$

$$\begin{aligned} \therefore \underline{F}_2 &= (42 \text{ N}) \mathbf{i} + (42 \text{ N}) \mathbf{j} - (49 \text{ N}) \mathbf{k} \\ \underline{M}_2 &= -(25.9 \text{ N}\cdot\text{m}) \mathbf{i} + (21.2 \text{ N}\cdot\text{m}) \mathbf{j} \end{aligned}$$

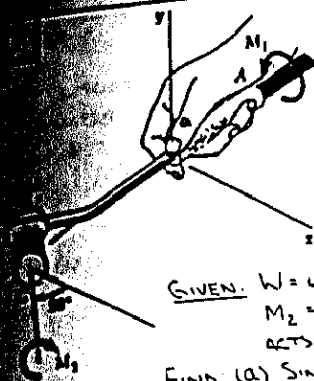


GIVEN: $W = 0.6 \text{ lb}$, $M_1 = 0.68 \text{ lb}\cdot\text{in.}$
 $M_2 = 0.65 \text{ lb}\cdot\text{in.}$, W
 ACTS ALONG y AXIS
 FIND (a) SINGLE EQUIVALENT
 FORCE F
 (b) POINT WHERE LINE OF
 ACTION OF F
 INTERSECTS xz PLANE

ASSUME THAT THE GIVEN FORCE W AND
 MOMENTS M_1 AND M_2 ACT AT THE ORIGIN.
 $W = -W_2 \mathbf{j}$
 $M = M_1 \mathbf{i} + M_2 \mathbf{k}$
 $= -(M_2 \cos 25^\circ) \mathbf{i} + (M_1 - M_2 \sin 25^\circ) \mathbf{k}$
 THAT SINCE W AND M ARE
 PERPENDICULAR, IT FOLLOWS THAT THEY CAN BE
 REPLACED WITH A SINGLE EQUIVALENT FORCE.
 WE HAVE $F = W$ OR $F = 10.6 \text{ lb} \mathbf{j}$
 ASSUME THAT THE LINE OF ACTION OF
 F PASSES THROUGH POINT $P(x, 0, z)$. THEN




EQUIVALENCE...
 $M = \Sigma r \times F$
 $(0.65 \cos 25^\circ) \mathbf{i} + (0.68 - 0.65 \sin 25^\circ) \mathbf{k}$
 $= (x \mathbf{i} + z \mathbf{k}) \times (-0.6 \mathbf{j})$
 EQUATING THE \mathbf{i} AND \mathbf{k} COEFFICIENTS
 $0.65 \cos 25^\circ = 0.6z$ OR $z = 0.982 \text{ m}$
 $0.68 - 0.65 \sin 25^\circ = -0.6x$ OR $x = -0.675 \text{ m}$

3.101 and 3.102

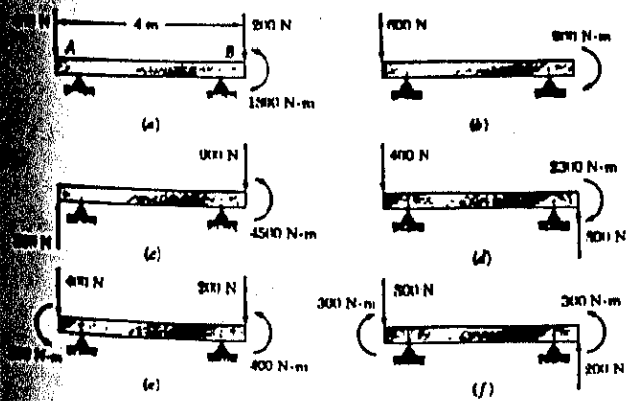

(CONTINUED)


3.101 and 3.102 CONTINUED

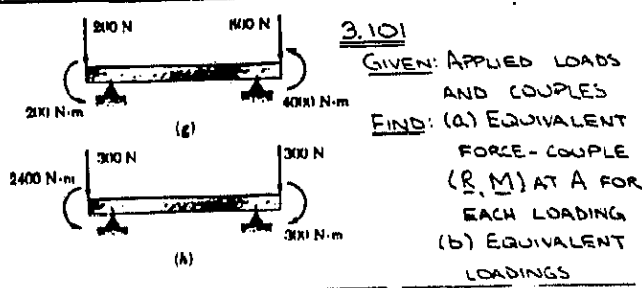

3.101
 GIVEN: APPLIED LOADS
 AND COUPLES
 FIND: (a) EQUIVALENT
 FORCE-COUPLE
 (R, M) AT A FOR
 EACH LOADING
 (b) EQUIVALENT
 LOADINGS

- (a) HAVE...
 a. $R_a = \Sigma F = -400 - 200$ OR $R_a = 600 \text{ N} \uparrow$
 $M_a = \Sigma M_A = 1800 \text{ N}\cdot\text{m} - (4\text{m})(200 \text{ N})$
 OR $M_a = 1000 \text{ N}\cdot\text{m}$
 b. $R_b = \Sigma F = -600$ OR $R_b = 600 \text{ N} \downarrow$
 $M_b = \Sigma M_A = -900 \text{ N}\cdot\text{m}$ OR $M_b = 900 \text{ N}\cdot\text{m}$
 c. $R_c = \Sigma F = 300 - 900$ OR $R_c = 600 \text{ N} \uparrow$
 $M_c = \Sigma M_A = 4500 \text{ N}\cdot\text{m} - (4\text{m})(900 \text{ N})$
 OR $M_c = 900 \text{ N}\cdot\text{m}$
 d. $R_d = \Sigma F = -400 + 800$ OR $R_d = 400 \text{ N} \uparrow$
 $M_d = \Sigma M_A = -2300 \text{ N}\cdot\text{m} + (4\text{m})(800 \text{ N})$
 OR $M_d = 900 \text{ N}\cdot\text{m}$
 e. $R_e = \Sigma F = -400 - 200$ OR $R_e = 600 \text{ N} \uparrow$
 $M_e = \Sigma M_A = 200 \text{ N}\cdot\text{m} + 400 \text{ N}\cdot\text{m} - (4\text{m})(200 \text{ N})$
 OR $M_e = 200 \text{ N}\cdot\text{m}$
 f. $R_f = \Sigma F = -800 + 200$ OR $R_f = 600 \text{ N} \uparrow$
 $M_f = \Sigma M_A = -300 \text{ N}\cdot\text{m} + 300 \text{ N}\cdot\text{m} + (4\text{m})(200 \text{ N})$
 OR $M_f = 800 \text{ N}\cdot\text{m}$
 g. $R_g = \Sigma F = -200 - 800$ OR $R_g = 1000 \text{ N} \uparrow$
 $M_g = \Sigma M_A = 200 \text{ N}\cdot\text{m} + 4000 \text{ N}\cdot\text{m} - (4\text{m})(800 \text{ N})$
 OR $M_g = 1000 \text{ N}\cdot\text{m}$
 h. $R_h = \Sigma F = -300 - 300$ OR $R_h = 600 \text{ N} \uparrow$
 $M_h = \Sigma M_A = 2400 \text{ N}\cdot\text{m} - 300 \text{ N}\cdot\text{m} - (4\text{m})(300 \text{ N})$
 OR $M_h = 900 \text{ N}\cdot\text{m}$
 (b) \therefore LOADINGS (c) AND (h) ARE EQUIVALENT


3.102

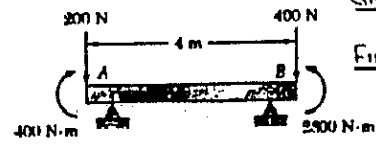

GIVEN: APPLIED LOADS
 AND COUPLES
 FIND: LOADING OF
 PROB. 3.101
 EQUIVALENT TO
 THE GIVEN LOADING

FIRST REPLACE THE GIVEN LOADING WITH AN
 EQUIVALENT FORCE-COUPLE SYSTEM (R, M) AT
 A. THUS...
 $R = \Sigma F = -200 - 400$
 OR $R = 600 \text{ N} \uparrow$
 AND $M = \Sigma M_A = -400 \text{ N}\cdot\text{m} + 2800 \text{ N}\cdot\text{m} - (4\text{m})(400 \text{ N})$
 OR $M = 800 \text{ N}\cdot\text{m}$
 \therefore THE GIVEN LOADING IS EQUIVALENT TO
 LOADING (f)
 OF PROB. 3.101.

3.103

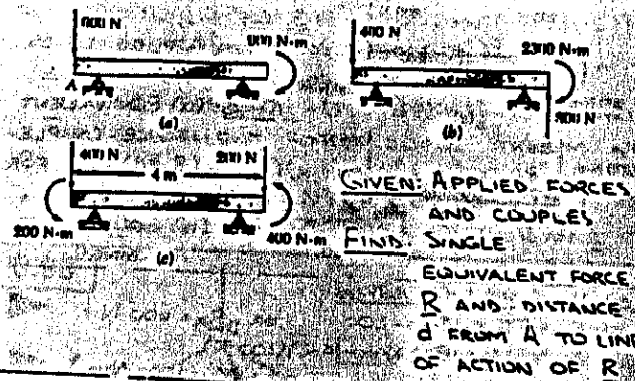

GIVEN: APPLIED FORCES AND COUPLES
 FIND: SINGLE EQUIVALENT FORCE R AND DISTANCE d FROM A TO LINE OF ACTION OF R

FOR EACH LOADING, FIRST DETERMINE THE EQUIVALENT FORCE-COUPLE SYSTEM (R, M) AT A

(a)

Now... $R = \sum F_x = -600$ OR $R = 600 \text{ N}$
 AND $M = \sum M_A = -900 \text{ N}\cdot\text{m}$
 THEN FOR EQUIVALENCE...
 $\sum M_A = -900 \text{ N}\cdot\text{m} = d(600 \text{ N})$
 OR $d = 1.5 \text{ m}$

(b)

Now... $R = \sum F_x = -400 + 800$ OR $R = 400 \text{ N}$
 AND $M = \sum M_A = -2300 \text{ N}\cdot\text{m} + (4 \text{ m})(800 \text{ N}) = 900 \text{ N}\cdot\text{m}$
 THEN FOR EQUIVALENCE...
 $\sum M_A = 900 \text{ N}\cdot\text{m} = d(400 \text{ N})$
 OR $d = 2.25 \text{ m}$

(c)


Now... $R = \sum F_x = -400 - 200$ OR $R = 600 \text{ N}$
 AND $M = \sum M_A = 200 \text{ N}\cdot\text{m} - 400 \text{ N}\cdot\text{m} - (4 \text{ m})(200 \text{ N}) = -200 \text{ N}\cdot\text{m}$
 THEN FOR EQUIVALENCE...
 $\sum M_A = -200 \text{ N}\cdot\text{m} = d(600 \text{ N})$
 OR $d = 0.333 \text{ m}$

3.104 CONTINUED

FIRST NOTE THAT THE FORCE-COUPLE SYSTEM AT F CANNOT BE EQUIVALENT BECAUSE OF THE DIRECTION OF THE FORCE [THE FORCE OF THE OTHER FOUR SYSTEMS IS $(10 \text{ lb})_j$]. NEXT MOVE EACH OF THE SYSTEMS TO THE ORIGIN O , THE FORCES REMAIN UNCHANGED.

A. $M_A = \sum M_O = (5 \text{ lb}\cdot\text{ft})_j - (15 \text{ lb}\cdot\text{ft})_j - (2 \text{ ft})(10 \text{ lb})_j$
 $= (25 \text{ lb}\cdot\text{ft})_j + (15 \text{ lb}\cdot\text{ft})_j$
 $= (40 \text{ lb}\cdot\text{ft})_j$
 D. $M_D = \sum M_O = -(5 \text{ lb}\cdot\text{ft})_j + (25 \text{ lb}\cdot\text{ft})_j + [(4.5 \text{ ft})_i + (1 \text{ ft})_j] \cdot (2 \text{ ft})_k$
 $= (15 \text{ lb}\cdot\text{ft})_j + (15 \text{ lb}\cdot\text{ft})_j$
 $= (30 \text{ lb}\cdot\text{ft})_j$
 G. $M_G = \sum M_O = (15 \text{ lb}\cdot\text{ft})_j + (15 \text{ lb}\cdot\text{ft})_j$
 $= (30 \text{ lb}\cdot\text{ft})_j$
 I. $M_I = \sum M_O = (15 \text{ lb}\cdot\text{ft})_j - (15 \text{ lb}\cdot\text{ft})_j$
 $= [(4.5 \text{ ft})_i + (1 \text{ ft})_j] \cdot (10 \text{ lb})_j$
 $= (15 \text{ lb}\cdot\text{ft})_j - (15 \text{ lb}\cdot\text{ft})_j$
 THE EQUIVALENT FORCE-COUPLE SYSTEM IS THE SYSTEM AT CORNER D

3.105

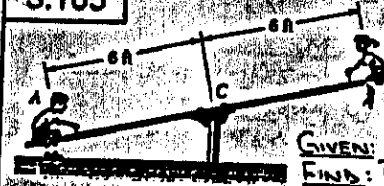

GIVEN: $W_A = 84 \text{ lb}$, $W_B = 64 \text{ lb}$
 FIND: POSITION OF THIRD CHILD D SO THAT RESULTANT OF THE WEIGHTS PASSES THROUGH C WHEN
 (a) $W_D = 60 \text{ lb}$
 (b) $W_D = 52 \text{ lb}$


FROM THE STATEMENT OF THE PROBLEM IT FOLLOWS THAT THE THREE WEIGHTS ARE EQUIVALENT TO A SINGLE FORCE AT C ; THAT THE SEESAW WILL BE BALANCED THEN.

AND $\sum M_C: (6 \text{ ft})(84 \text{ lb}) - d(W_D \text{ lb}) - (6 \text{ ft})(64 \text{ lb}) = 0$
 OR $d = \frac{120}{W_D} \text{ (ft)}$

(a) $W_D = 60 \text{ lb}$ $d = \frac{120}{60} = 2 \text{ ft}$
 \therefore THE THIRD CHILD SHOULD SIT 2 ft TO THE RIGHT OF C .


(b) $W_D = 52 \text{ lb}$ $d = \frac{120}{52} = 2.31 \text{ ft}$
 \therefore THE THIRD CHILD SHOULD SIT 2.31 ft TO THE RIGHT OF C .

3.104

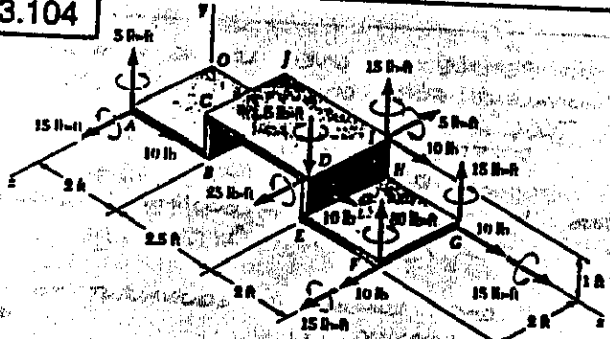


GIVEN: FIVE FORCE-COUPLE SYSTEMS
 FIND: WHICH OF THE SYSTEMS IS EQUIVALENT TO $F = (10 \text{ lb})_j$, $M = (15 \text{ lb}\cdot\text{ft})_i + (15 \text{ lb}\cdot\text{ft})_j$ AT S (CONTINUED)

3.106

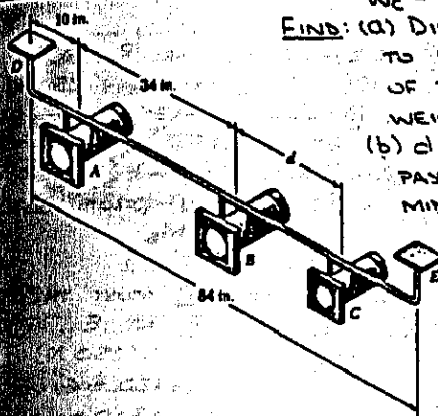

GIVEN: $W_A = W_B = 4.1 \text{ lb}$
 $W_C = 3.5 \text{ lb}$
 FIND: (a) DISTANCE FROM D TO RESULTANT R OF THE THREE WEIGHTS IF $d = 25 \text{ IN}$
 (b) d SO THAT R PASSES THROUGH MIDPOINT OF PIPE

HAVE ..



OR EQUIVALENCE ..

$$\sum F_y = 4.1 + 4.1 + 3.5 = -R \text{ OR } R = 11.7 \text{ lb}$$

$$\sum M_D = -(10 \text{ in.})(4.1 \text{ lb}) - (4 \text{ in.})(4.1 \text{ lb}) - ((4 + d) \text{ in.})(3.5 \text{ lb}) = -(L \text{ in.})(11.7 \text{ lb})$$

$$\text{OR } 375.4 + 3.5d = 11.7L \quad (d, L \text{ IN IN.})$$

IF $d = 25 \text{ IN}$

$$\text{HAVE } 375.4 + 3.5(25) = 11.7L \text{ OR } L = 39.6 \text{ IN.}$$


THE RESULTANT PASSES THROUGH A POINT 39.6 IN. TO THE RIGHT OF D.

(b) $L = 42 \text{ IN.}$


$$\text{HAVE } 375.4 + 3.5d = 11.7(42)$$

$$\text{OR } d = 33.1 \text{ IN.}$$

3.107

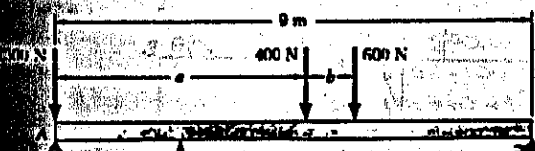

GIVEN: APPLIED LOADS, $b = 1.5 \text{ M}$
 LOADS ARE EQUIVALENT TO A SINGLE FORCE R
 FIND: (a) a SO THAT DISTANCE L FROM A TO R IS MAXIMUM
 (b) R AND POINT OF APPLICATION ON THE BEAM



OR EQUIVALENCE ..

$$\sum F_y = 400 + 600 = -R \text{ OR } R = 1000 \text{ N}$$

$$\sum M_A = \frac{1}{2}(400 \text{ N}) - a(400) - (a+b)(600) = -LR$$

(CONTINUED)

3.107 CONTINUED

$$\text{OR } L = \frac{1000a - 600b - 200 \frac{a^2}{b}}{2300 - 400 \frac{a}{b}}$$

$$\text{THEN WITH } b = 1.5 \text{ M } \dots L = \frac{100 + 9 - \frac{4}{3}a^2}{23 - \frac{4}{3}a} \quad (2)$$

WHERE a, L ARE IN M

(a) FIND VALUE OF a TO MAXIMIZE L ..

$$\frac{dL}{da} = \frac{(10 - \frac{4}{3}a)(23 - \frac{4}{3}a) - (100 + 9 - \frac{4}{3}a^2)(-\frac{4}{3})}{(23 - \frac{4}{3}a)^2}$$

$$\text{OR } 230 - \frac{194}{3}a - \frac{80}{3}a + \frac{4}{9}a^2 - \frac{4}{3}a^2 + 24 - \frac{32}{9}a^2 = 0$$

$$\text{OR } 16a^2 - 276a + 1143 = 0$$

$$\text{THEN } a = \frac{276 \pm \sqrt{(-276)^2 - 4(16)(1143)}}{2(16)}$$

OR $a = 10.3435 \text{ M}$ AND $a = 6.9065 \text{ M}$
 SINCE $AB = 9 \text{ M}$, a MUST BE LESS THAN 9 M
 $\therefore a = 6.91 \text{ M}$

(b) USING EQ. (1) ..


$$R = 2300 - 400 \frac{6.9065}{1.5} \text{ OR } R = 458 \text{ N}$$

AND USING EQ. (2) ..

$$L = \frac{10(6.9065) + 9 - \frac{4}{3}(6.9065)^2}{23 - \frac{4}{3}(6.9065)} = 3.16 \text{ M}$$


$\therefore R$ IS APPLIED 3.16 M TO THE RIGHT OF A.

3.108

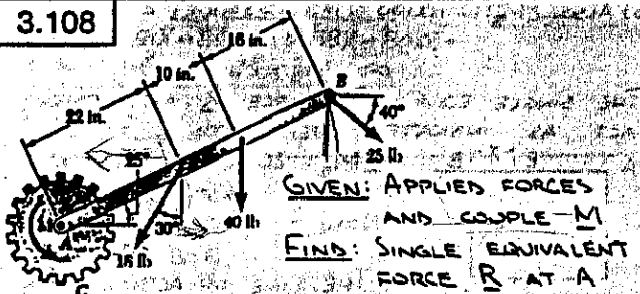

GIVEN: APPLIED FORCES AND COUPLE M
 FIND: SINGLE EQUIVALENT FORCE R AT A AND M

HAVE ..

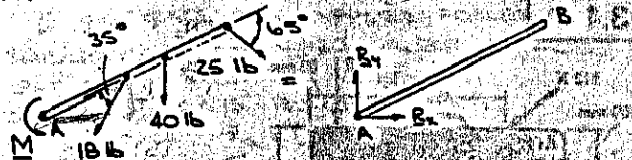

FOR EQUIVALENCE ..

$$\sum F_x = -18 \sin 30 + 25 \cos 40 = R_x$$

$$\text{OR } R_x = 10.1511 \text{ lb}$$

$$\sum F_y = -18 \cos 30 - 40 - 25 \sin 40 = R_y$$

$$\text{OR } R_y = -71.658 \text{ lb}$$

$$\text{THEN } R = \sqrt{(10.1511)^2 + (71.658)^2} = 72.4 \text{ lb}$$

$$\tan \theta = \frac{71.658}{10.1511}$$

$$\text{OR } \theta = 81.9^\circ$$


$$\therefore R = 72.4 \text{ lb } \angle 81.9^\circ$$

$$\text{ALSO } \sum M_A = M - (22 \text{ in.})(18 \text{ lb}) \sin 35 - (32 \text{ in.})(40 \text{ lb}) \cos 25 - (18 \text{ in.})(25 \text{ lb}) \sin 65 = 0$$

$$\text{OR } M = 2474.8 \text{ lb-in.}$$


$$\text{OR } M = 206 \text{ lb-ft}$$

3.109

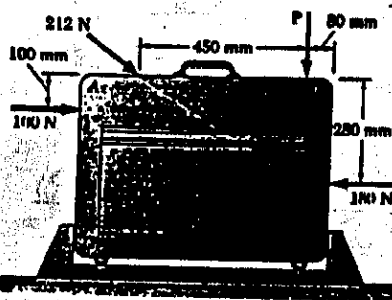

GIVEN: $P = 88 \text{ N}$
 FIND: (a) RESULTANT R OF THE APPLIED FORCES
 (b) POINTS WHERE THE LINE OF ACTION OF R INTERSECTS SIDES OF THE SUITCASE

(a) FIRST DETERMINE THE EQUIVALENT FORCE-COUPLE SYSTEM (R , M_B) AT B. HAVE..

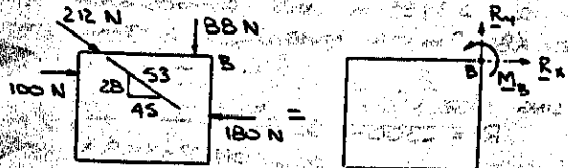

THEN FOR EQUIVALENCE..
 $\Sigma F_x: 100 + \frac{45}{53}(212) - 180 = R_x$ OR $R_x = 100 \text{ N}$
 $\Sigma F_y: -\frac{28}{53}(212) - 88 = R_y$ OR $R_y = -200 \text{ N}$
 $\therefore R = (100 \text{ N})_i - (200 \text{ N})_j$
 OR $R = 224 \text{ N}$ $\angle 63.4^\circ$
 (b) ALSO.. $\Sigma M_B: (0.1 \text{ m})(100 \text{ N}) + (0.53 \text{ m})(\frac{28}{53} \cdot 212 \text{ N}) + (0.08 \text{ m})(88 \text{ N}) - (0.28 \text{ m})(180 \text{ N}) = M_B$
 OR $M_B = 26 \text{ N}\cdot\text{m}$


THE SINGLE EQUIVALENT FORCE R MUST THEN ACT AS INDICATED. THEN WITH R AT E..
 $\Sigma M_B: 26 \text{ N}\cdot\text{m} = x(200 \text{ N})$
 OR $x = 130 \text{ mm}$
 NOW $\frac{x}{y} = \frac{3}{4} \Rightarrow y = 260 \text{ mm}$
 \therefore THE LINE OF ACTION OF R INTERSECTS TOP AB 130 mm TO THE LEFT OF B AND INTERSECTS SIDE BC 260 mm BELOW B.

3.110 CONTINUED


THEN FOR EQUIVALENCE..
 $\Sigma F_x: 100 - \frac{45}{53}(212) - 180 = R_x$ OR $R_x = 100 \text{ N}$
 $\Sigma F_y: -\frac{28}{53}(212) - 138 = R_y$ OR $R_y = -250 \text{ N}$
 $\therefore R = (100 \text{ N})_i - (250 \text{ N})_j$
 OR $R = 269 \text{ N}$ $\angle 68.2^\circ$
 (b) ALSO.. $\Sigma M_B: (0.1 \text{ m})(100 \text{ N}) + (0.53 \text{ m})(\frac{28}{53} \cdot 212 \text{ N}) + (0.08 \text{ m})(138 \text{ N}) - (0.28 \text{ m})(180 \text{ N}) = M_B$
 OR $M_B = 30 \text{ N}\cdot\text{m}$

THE SINGLE EQUIVALENT FORCE R MUST THEN ACT AS INDICATED. THEN WITH R AT E..
 $\Sigma M_B: 30 \text{ N}\cdot\text{m} = x(250 \text{ N})$
 OR $x = 120 \text{ mm}$
 NOW $\frac{x}{y} = \frac{3}{2} \Rightarrow y = 300 \text{ mm}$
 \therefore THE LINE OF ACTION OF R INTERSECTS TOP AB 120 mm TO THE LEFT OF B AND INTERSECTS SIDE BC 300 mm BELOW B.

3.111



GIVEN: APPLIED FORCES ARE EQUIVALENT TO A SINGLE FORCE R APPLIED ALONG AB
 FIND: (a) R AND DISTANCE FROM A TO ITS POINT OF APPLICATION IF $\alpha = 30^\circ$
 (b) IF R IS AT B




HAVE..
 $\Sigma F_x: -100 \cos 30^\circ + 400 \cos 65^\circ + 90 \cos 65^\circ = R_x$
 OR $R_x = 120.480 \text{ lb}$
 $\Sigma F_y: 100 \sin 30^\circ + 160 + 400 \sin 65^\circ + 90 \sin 65^\circ = R_y$
 OR $R_y = (604.09 + 100 \sin 30^\circ) \text{ lb}$ (1)
 WITH $\alpha = 30^\circ$.. $R_x = 654.09 \text{ lb}$
 THEN.. $R = \sqrt{(120.480)^2 + (654.09)^2}$ $\tan \theta = \frac{654.09}{120.480}$
 $= 665 \text{ lb}$ OR $\theta = 79.6^\circ$

ALSO.. $\Sigma M_A: (46 \text{ in.})(160 \text{ lb}) - (66 \text{ in.})(400 \text{ lb}) \sin 65^\circ + (26 \text{ in.})(400 \text{ lb}) \cos 65^\circ + (66 \text{ in.})(90 \text{ lb}) \sin 65^\circ - (36 \text{ in.})(90 \text{ lb}) \cos 65^\circ = d(654.09 \text{ lb})$
 OR.. $\Sigma M_A = 42,435 \text{ lb}\cdot\text{in.}$ AND $d = 64.9 \text{ in.}$
 $\therefore R = 665 \text{ lb}$ $\angle 79.6^\circ$


AND R IS APPLIED 64.9 in. TO THE RIGHT OF A.
 (b) HAVE.. $d = 66 \text{ in.}$
 THEN.. $\Sigma M_A: 42,435 \text{ lb}\cdot\text{in.} = (66 \text{ in.}) R_y$
 OR $R_y = 642.95 \text{ lb}$
 USING Eq (1) $642.95 = 604.09 + 100 \sin \alpha$
 OR $\alpha = 22.9^\circ$

3.110

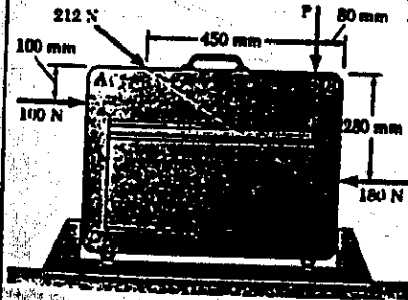


GIVEN: $P = 138 \text{ N}$
 FIND: (a) RESULTANT R OF THE APPLIED FORCES
 (b) POINTS WHERE THE LINE OF ACTION OF R INTERSECTS SIDES OF THE SUITCASE

(a) FIRST DETERMINE THE EQUIVALENT FORCE-COUPLE SYSTEM (R , M_B) AT B. HAVE..

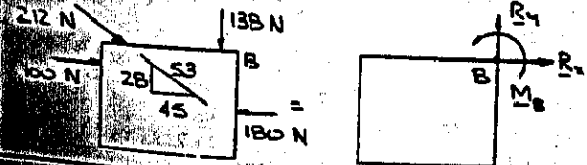

THEN FOR EQUIVALENCE..
 $\Sigma F_x: 100 + \frac{45}{53}(212) - 180 = R_x$ OR $R_x = 100 \text{ N}$
 $\Sigma F_y: -\frac{28}{53}(212) - 138 = R_y$ OR $R_y = -250 \text{ N}$
 $\therefore R = (100 \text{ N})_i - (250 \text{ N})_j$
 OR $R = 269 \text{ N}$ $\angle 68.2^\circ$
 (b) ALSO.. $\Sigma M_B: (0.1 \text{ m})(100 \text{ N}) + (0.53 \text{ m})(\frac{28}{53} \cdot 212 \text{ N}) + (0.08 \text{ m})(138 \text{ N}) - (0.28 \text{ m})(180 \text{ N}) = M_B$
 OR $M_B = 30 \text{ N}\cdot\text{m}$


3.112

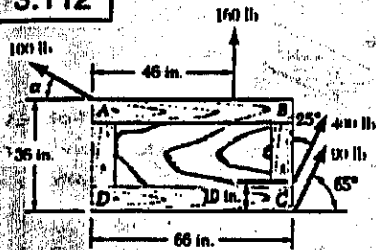

GIVEN: 90-lb FORCE REMOVED, APPLIED FORCES ARE EQUIVALENT TO A SINGLE FORCE R APPLIED ALONG AB

FIND: (a) R AND DISTANCE FROM A TO ITS POINT OF APPLICATION IF $\alpha = 30^\circ$

(b) α IF R IS AT B

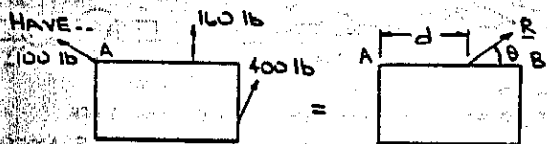

(a) FOR EQUIVALENCE..

$$\sum F_x: -100 \cos 30^\circ + 400 \cos 65^\circ = R_x$$

OR $R_x = 82.445 \text{ lb}$

$$\sum F_y: 100 \sin 30^\circ + 160 + 400 \sin 65^\circ = R_y$$

OR $R_y = (572.52 + 100 \sin \alpha) \text{ lb}$ (i)

WITH $\alpha = 30^\circ$ $R_y = 572.52 \text{ lb}$

$$\text{THEN } R = \sqrt{(82.445)^2 + (572.52)^2} \quad \text{TAN } \theta = \frac{572.52}{82.445}$$

$= 578 \text{ lb}$ OR $\theta = 81.8^\circ$

ALSO.. $\sum M_A: (46 \text{ in.})(160 \text{ lb}) + (66 \text{ in.})(400 \text{ lb}) \sin 65^\circ + (26 \text{ in.})(400 \text{ lb}) \cos 65^\circ = d(572.52 \text{ lb})$

OR $\sum M_A = 35,682 \text{ lb}\cdot\text{in.}$ AND $d = 62.3 \text{ in.}$

OR $\sum M_A = 35,682 \text{ lb}\cdot\text{in.}$ AND $d = 62.3 \text{ in.}$

$\therefore R = 578 \text{ lb}$ $\angle 81.8^\circ$

AND R IS APPLIED 62.3 IN. TO THE RIGHT OF A.

(b) HAVE $d = 66 \text{ in.}$


THEN.. $\sum M_A: 35,682 \text{ lb}\cdot\text{in.} = (66 \text{ in.})R_y$

OR $R_y = 540.64 \text{ lb}$

USING EQ. (i).. $540.64 = 522.52 + 100 \sin \alpha$


OR $\alpha = 10.44^\circ$

3.113

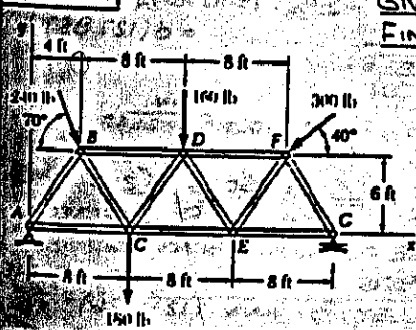

GIVEN: APPLIED FORCES

FIND: SINGLE EQUIVALENT FORCE R AND POINT WHERE ITS LINE OF ACTION INTERSECTS A LINE DRAWN THROUGH AG

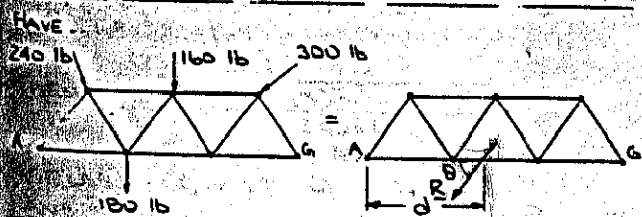

HAVE..

(CONTINUED)

3.113 CONTINUED

FOR EQUIVALENCE..

$$\sum F_x: 240 \cos 70^\circ - 300 \cos 40^\circ = R_x$$

OR $R_x = -147.728 \text{ lb}$

$$\sum F_y: -240 \sin 70^\circ - 180 - 160 - 300 \sin 40^\circ = R_y$$

OR $R_y = -758.36 \text{ lb}$

THEN.. $R = \sqrt{(147.728)^2 + (758.36)^2}$ $\text{TAN } \theta = \frac{758.36}{147.728}$

$= 773 \text{ lb}$ OR $\theta = 79.0^\circ$


ALSO.. $\sum M_A: (4 \text{ ft})(240 \text{ lb}) \sin 70^\circ - (6 \text{ ft})(240 \text{ lb}) \cos 70^\circ - (8 \text{ ft})(180 \text{ lb}) - (12 \text{ ft})(160 \text{ lb}) - (20 \text{ ft})(300 \text{ lb}) \sin 40^\circ + (6 \text{ ft})(300 \text{ lb}) \cos 40^\circ = -d(758.36 \text{ lb})$

OR $d = 9.54 \text{ ft}$

$\therefore R = 773 \text{ lb}$ $\angle 79.0^\circ$

AND THE LINE OF ACTION OF R INTERSECTS LINE AG 9.54 FT TO THE RIGHT OF A

3.114 and 3.115

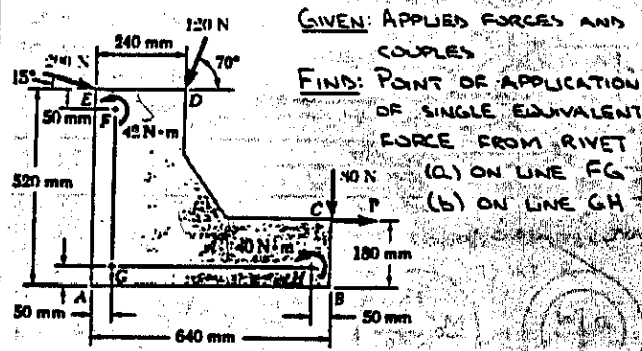


GIVEN: APPLIED FORCES AND COUPLES

FIND: POINT OF APPLICATION OF SINGLE EQUIVALENT FORCE FROM RIVET

(a) ON LINE FG

(b) ON LINE GH

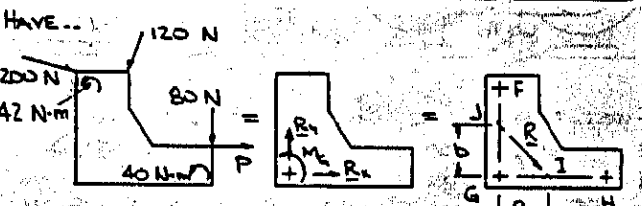

HAVE..

FIRST REPLACE THE APPLIED FORCES AND COUPLES WITH AN EQUIVALENT FORCE-COUPLE SYSTEM AT G. THUS..

$$\sum F_x: 200 \cos 15^\circ - 120 \cos 70^\circ + P = R_x$$

OR $R_x = (152.142 + P) \text{ N}$

$$\sum F_y: -200 \sin 15^\circ - 120 \sin 70^\circ - 80 = R_y$$

OR $R_y = -244.53 \text{ N}$

$$\sum M_G: -(0.47 \text{ m})(200 \text{ N}) \cos 15^\circ + (0.05 \text{ m})(200 \text{ N}) \sin 15^\circ + (0.47 \text{ m})(120 \text{ N}) \cos 70^\circ - (0.19 \text{ m})(120 \text{ N}) \sin 70^\circ - (0.13 \text{ m})(P \text{ N}) - (0.09 \text{ m})(80 \text{ N}) + 42 \text{ N}\cdot\text{m} + 40 \text{ N}\cdot\text{m} = M_G$$

OR $M_G = -(55.544 + 0.13P) \text{ N}\cdot\text{m}$

3.114 P=0

NOW.. WITH R AT I.. $\sum M_G: -55.544 \text{ N}\cdot\text{m} = -a(244.53 \text{ N})$

OR $a = 0.227 \text{ m}$

AND WITH R AT J.. $\sum M_G: -55.544 \text{ N}\cdot\text{m} = -b(152.142 \text{ N})$

OR $b = 0.365 \text{ m}$

\therefore (a) THE RIVET HOLE IS 0.365 m ABOVE G. (CONTINUED)

3.114 and 3.115 CONTINUED

(b) THE RIVET HOLE IS 0.227 m TO THE RIGHT OF G.

3.115 $P = 60 \text{ N}$

HAVE $R_x = (152.142 + 60) = 212.14 \text{ N}$

$M_G = -[55.544 + 0.13(60)] = -63.344 \text{ N}\cdot\text{m}$

THEN, WITH R AT I.. $\Sigma M_G: -63.344 \text{ N}\cdot\text{m} = -a(244.53 \text{ N})$

OR $a = 0.259 \text{ m}$



AND WITH R AT J.. $\Sigma M_G: -63.344 \text{ N}\cdot\text{m} = -b(212.14 \text{ N})$

OR $b = 0.299 \text{ m}$

\therefore (a) THE RIVET HOLE IS 0.299 m ABOVE G.

(b) THE RIVET HOLE IS 0.259 m TO THE RIGHT OF G.

3.116

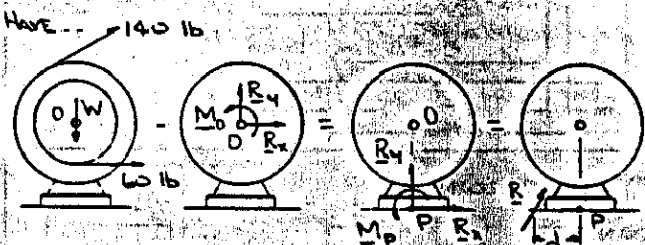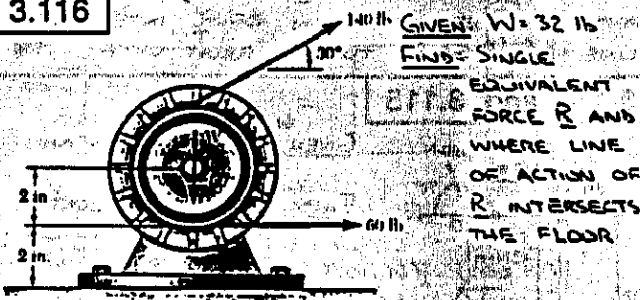

FIRST REDUCE THE GIVEN FORCES TO AN EQUIVALENT FORCE-COUPLE SYSTEM AT D.

THEN FOR EQUIVALENCE..

$\Sigma F_x: 140 \cos 30^\circ + 60 = R_x$ OR $R_x = 181.244 \text{ lb}$

$\Sigma F_y: 140 \sin 30^\circ - 32 = R_y$ OR $R_y = 38 \text{ lb}$

$\Sigma M_D: -(2 \text{ in.}) \times (140 \text{ lb}) + (2 \text{ in.}) \times (60 \text{ lb}) = M_D$
OR $M_D = -160 \text{ lb}\cdot\text{in.}$

NEXT MOVE THE EQUIVALENT FORCE-COUPLE SYSTEM TO THE POINT P WHICH LIES ON THE FLOOR DIRECTLY BELOW D. THUS..

AT P. $R_x = 181.244 \text{ lb}$ $R_y = 38 \text{ lb}$

AND $\Sigma M_P: -160 \text{ lb}\cdot\text{in.} - (4 \text{ in.}) \times (181.244 \text{ lb}) = M_P$
OR $M_P = -894.98 \text{ lb}\cdot\text{in.}$

FINALLY, REPLACE (R, M_P) WITH THE SINGLE EQUIVALENT FORCE R , WHERE..

$R = \frac{38}{\sqrt{(181.244)^2 + (38)^2}}$ $\tan \theta = \frac{38}{181.244}$
 $= 185.2 \text{ lb}$

OR $\theta = 11.84^\circ$


AND.. $\Sigma M_P: -894.98 \text{ lb}\cdot\text{in.} = d(38 \text{ lb})$

OR $d = 23.3 \text{ in.}$


$\therefore R = 185.2 \text{ lb} \angle 11.84^\circ$

AND THE LINE OF ACTION OF R INTERSECTS THE FLOOR AT A POINT 23.3 IN. TO THE LEFT OF THE VERTICAL CENTER LINE OF THE MOTOR.

3.117

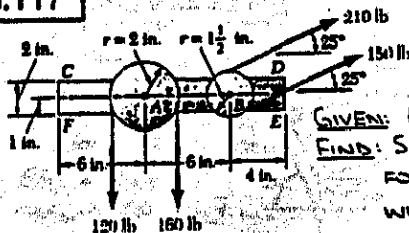

GIVEN: APPLIED FORCES
FIND: SINGLE EQUIVALENT FORCE R AND WHERE LINE OF ACTION OF R INTERSECTS EF

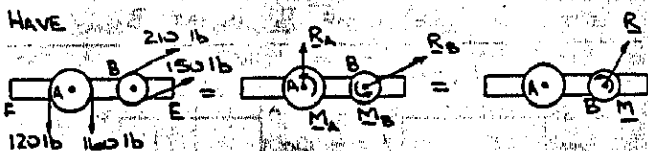

FIRST REPLACE THE FORCES ACTING ON EACH PULLEY WITH AN EQUIVALENT FORCE-COUPLE SYSTEM ACTING AT THE CENTER OF EACH PULLEY.

PULLEY A: $\Sigma F_y: -120 - 160 = R_A$ OR $R_A = -280 \text{ lb}$
 $\Sigma M_A: (2 \text{ in.}) \times (120 \text{ lb}) - (2 \text{ in.}) \times (160 \text{ lb}) = M_A$
OR $M_A = -80 \text{ lb}\cdot\text{in.}$

PULLEY B: $\Sigma F_x: 210 - 150 = R_B$
OR $R_B = 360 \text{ lb} \angle 25^\circ$
 $\Sigma M_B: (1.5 \text{ in.}) \times (150 \text{ lb}) - (1.5 \text{ in.}) \times (210 \text{ lb}) = M_B$
OR $M_B = -90 \text{ lb}\cdot\text{in.}$

NEXT COMBINE (R_A, M_A) AND (R_B, M_B) INTO AN EQUIVALENT FORCE-COUPLE SYSTEM (R, M) AT B. HAVE..

$\Sigma F_x: 360 \cos 25^\circ = R_x$ OR $R_x = 326.27 \text{ lb}$

$\Sigma F_y: -280 + 360 \sin 25^\circ = R_y$ OR $R_y = -127.857 \text{ lb}$

$\Sigma M_B: -80 \text{ lb}\cdot\text{in.} + (6 \text{ in.}) \times (280 \text{ lb}) - 90 \text{ lb}\cdot\text{in.} = M$
OR $M = 1510 \text{ lb}\cdot\text{in.}$

FINALLY, REPLACE (R, M) WITH THE SINGLE EQUIVALENT FORCE R , WHERE..

$R = \frac{127.857}{\sqrt{(326.27)^2 + (127.857)^2}}$ $\tan \theta = \frac{127.857}{326.27}$
 $= 350 \text{ lb}$ OR $\theta = 21.4^\circ$

ALSO..

$\Sigma M_B: 1510 \text{ lb}\cdot\text{in.} = d(127.857 \text{ lb})$
OR $d = 11.810 \text{ in.}$


AND $a = \frac{1 \text{ in.}}{\tan 21.4^\circ} = 2.552 \text{ in.}$

$\therefore R = 350 \text{ lb} \angle 21.4^\circ$

AND THE LINE OF ACTION OF R INTERSECTS THE LOWER EDGE OF THE BRACKET $(11.810 - 2.552) 9.26 \text{ in.}$ TO THE LEFT OF THE CENTER OF PULLEY B AND $(12 - 9.26) 2.74 \text{ in.}$ TO THE RIGHT OF CORNER F.

3.118

GIVEN: F IS PERPENDICULAR TO THE SURFACE
 FIND: (a) EQUIVALENT FORCE-COUPLE SYSTEM (R, M) AT D
 (b) x FOR M MAX IF $a = 1\text{ m}, b = 2\text{ m}$

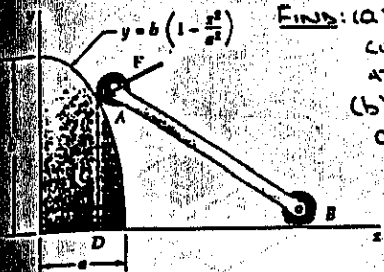

(a) THE SLOPE AT ANY POINT ON THE SURFACE OF MEMBER C IS..

$$\frac{dy}{dx} = \frac{d}{dx} \left[b \left(1 - \frac{x^2}{a^2} \right) \right]$$

$$= -\frac{2b}{a^2} x$$

SINCE F IS PERPENDICULAR TO THE SURFACE, IT FOLLOWS THAT

$$\tan \alpha = \frac{a^2}{2bx}$$

WHERE α IS THE ANGLE THAT F FORMS WITH THE HORIZONTAL. THEN FOR EQUIVALENCE..

$$\sum \mathbf{F}: \mathbf{F} = \mathbf{R}$$


$$\sum M_D: \int_0^a F \cos \alpha \, dx = M$$

SINCE A IS A POINT ON THE SURFACE HAVE

$$dx = y' \text{ AT A}$$

ALSO,

$$\cos \alpha = \frac{2bx}{\sqrt{a^2 + 4b^2x^2}}$$



THEN..

$$M = \left[b \left(1 - \frac{x^2}{a^2} \right) \right] \cdot F \cdot \frac{2bx}{\sqrt{a^2 + 4b^2x^2}}$$

$$= \frac{2Fb^2(x - \frac{x^3}{a^2})}{\sqrt{a^2 + 4b^2x^2}}$$

THE EQUIVALENT FORCE-COUPLE SYSTEM AT D IS..

$$\mathbf{R} = F \mathbf{j} \tan^{-1} \left(\frac{a^2}{2bx} \right)$$

$$\mathbf{M} = \frac{2Fb^2(x - \frac{x^3}{a^2})}{\sqrt{a^2 + 4b^2x^2}}$$

(b) SUBSTITUTING $a = 1\text{ m}, b = 2\text{ m}$ IN THE EXPRESSION FOR M YIELDS..

$$M = \frac{8F(x - x^3)}{\sqrt{1 + 16x^2}}$$

TO FIND THE VALUE OF x TO MAXIMIZE M ..

$$\frac{dM}{dx} = 8F \frac{(1 - 3x^2)\sqrt{1 + 16x^2} - (x - x^3) \cdot \frac{1}{2}(32x)(1 + 16x^2)^{-1/2}}{(1 + 16x^2)^2} = 0$$

$$\text{OR } (1 - 3x^2)(1 + 16x^2) - 16x(x - x^3) = 0$$

$$\text{OR } 32x^4 + 3x^2 - 1 = 0$$

$$\text{WHEN } x^2 = \frac{-3 \pm \sqrt{(3)^2 - 4(32)(-1)}}{2(32)}$$


TAKING THE POSITIVE ROOT SINCE $x^2 > 0$ YIELDS

$$x^2 = 0.136011 \text{ m}^2$$

AND THEN $x = 0.369 \text{ m}$ FOR M MAX.

3.119

GIVEN: DIAMETER = 60 mm, APPLIED FORCES
 FIND: EQUIVALENT FORCE-COUPLE SYSTEM (R, M) AT C

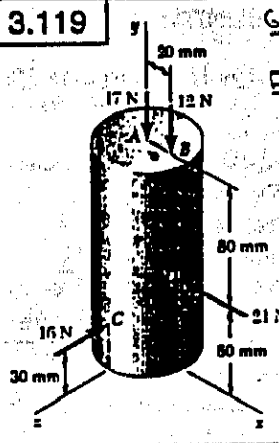

FOR EQUIVALENCE..

$$\sum \mathbf{F}: \mathbf{R} = \mathbf{F}_A + \mathbf{F}_B + \mathbf{F}_C + \mathbf{F}_D$$

$$= -17\mathbf{j} - 12\mathbf{j}$$

$$+ 12\mathbf{i} - 21\mathbf{j}$$

$$= -(21\text{ N})\mathbf{j} - (29\text{ N})\mathbf{j}$$

$$= -(16\text{ N})\mathbf{j}$$

$$\sum M_C: \mathbf{M} = \sum \mathbf{r}_{AC} \times \mathbf{F}_A$$

$$+ \sum \mathbf{r}_{BC} \times \mathbf{F}_B$$

$$+ \sum \mathbf{r}_{DC} \times \mathbf{F}_D$$

$$\text{OR } \mathbf{M} = [(0.11\text{ m})\mathbf{j} - (0.03\text{ m})\mathbf{k}] \times [-(17\text{ N})\mathbf{j}]$$

$$+ [(0.02\text{ m})\mathbf{j} + (0.11\text{ m})\mathbf{k}] \times (12\text{ N})\mathbf{i}$$

$$+ [(0.03\text{ m})\mathbf{j} + (0.03\text{ m})\mathbf{k}] \times (21\text{ N})\mathbf{j}$$

$$= -(0.51\text{ N}\cdot\text{m})\mathbf{i} + [-(0.24\text{ N}\cdot\text{m})\mathbf{j} - (0.36\text{ N}\cdot\text{m})\mathbf{k}]$$

$$+ [(0.63\text{ N}\cdot\text{m})\mathbf{j} + (0.63\text{ N}\cdot\text{m})\mathbf{k}]$$


\(\therefore\) THE EQUIVALENT FORCE-COUPLE SYSTEM AT C IS..

$$\mathbf{R} = -(21\text{ N})\mathbf{j} - (29\text{ N})\mathbf{j} - (16\text{ N})\mathbf{j}$$

$$\mathbf{M} = -(0.87\text{ N}\cdot\text{m})\mathbf{i} + (0.63\text{ N}\cdot\text{m})\mathbf{j} - (0.39\text{ N}\cdot\text{m})\mathbf{k}$$

3.120

GIVEN: DIAMETER = 150 mm
 FIND: EQUIVALENT FORCE-COUPLE SYSTEM (R, M) AT A

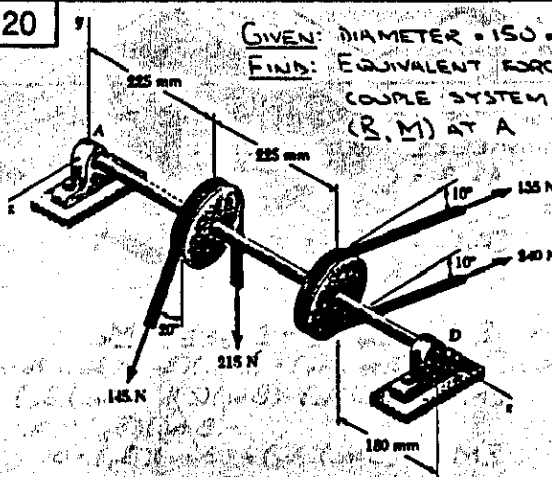

FIRST REPLACE THE BELT FORCES ON EACH PULLEY WITH AN EQUIVALENT FORCE-COUPLE SYSTEM AT THE CENTER OF THE PULLEY, THIS ELIMINATES THE NEED TO DETERMINE WHERE THE BELTS CONTACT THE PULLEYS.

PULLEY B: $\sum \mathbf{F}: \mathbf{R}_B = -215\mathbf{j} + 145(\cos 20^\circ\mathbf{j} + \sin 20^\circ\mathbf{i})$

$$= -(351.26\text{ N})\mathbf{j} + (49.593\text{ N})\mathbf{i}$$

$$\sum M_B: \mathbf{M}_B = [(0.075\text{ m})(145\text{ N}) - (0.075\text{ m})(215\text{ N})]\mathbf{k}$$

$$= -(5.25\text{ N}\cdot\text{m})\mathbf{k}$$

PULLEY C: $\sum \mathbf{F}: \mathbf{R}_C = (155 + 240\cos 10^\circ)\mathbf{j} - (240\sin 10^\circ)\mathbf{i}$

$$= -(68.591\text{ N})\mathbf{j} - (389.00\text{ N})\mathbf{i}$$

$$\sum M_C: \mathbf{M}_C = [(0.075\text{ m})(240\text{ N}) - (0.075\text{ m})(155\text{ N})]\mathbf{k}$$

$$= (6.375\text{ N}\cdot\text{m})\mathbf{k}$$

THE EQUIVALENT FORCE-COUPLE SYSTEM AT A IS THEN

$$\sum \mathbf{F}: \mathbf{R} = \mathbf{R}_B + \mathbf{R}_C$$

$$= (-351.26\mathbf{j} + 49.593\mathbf{i}) + (-68.591\mathbf{j} - 389.00\mathbf{i})$$


$$= -(420\text{ N})\mathbf{j} - (339\text{ N})\mathbf{i}$$

(CONTINUED)

3.120 CONTINUED


AND: $\Sigma M_A = M = [(\Sigma B_x = R_x) + M_B] + [(\Sigma C_x = B_c) + M_C]$
 $= (0.22 \text{ m})i + [-(351.2 \text{ N})j - (49.59 \text{ N})k]$
 $= (5.25 \text{ N}\cdot\text{m})i$
 $+ (0.450 \text{ m})i + [-(168.59 \text{ N})j - (389.00 \text{ N})k]$
 $+ (6.375 \text{ N}\cdot\text{m})i$
 $= (11.625 \text{ N}\cdot\text{m})i$
 $+ [(-11.584 + 175.05) \text{ N}\cdot\text{m}]j$
 $- [(79.034 - 30.866) \text{ N}\cdot\text{m}]k$
 $= (11.25 \text{ N}\cdot\text{m})i + (163.9 \text{ N}\cdot\text{m})j - (109.9 \text{ N}\cdot\text{m})k$

3.122

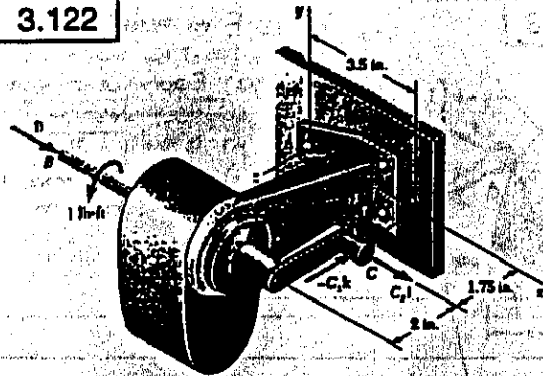

3.121

KNOWN: $A_2 = 2 \text{ lb}$, FORCES A AND B ARE EQUIVALENT TO $C = -(8 \text{ lb})i + (4 \text{ lb})j$, $M_c = (360 \text{ lb}\cdot\text{in})k$ AT C
 FIND: FORCES A AND B

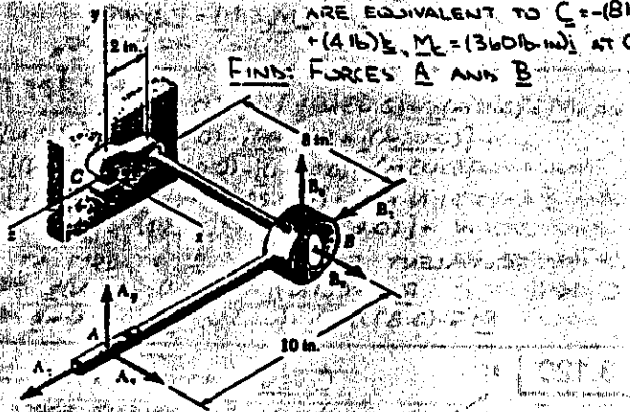

FROM THE STATEMENT OF THE PROBLEM, EQUIVALENCE REQUIRES...

$\Sigma F: A = B = C$
 OR $\Sigma F_x: A_x + B_x = -8 \text{ lb}$ (1)
 $\Sigma F_y: A_y + B_y = 0$ (2)
 $\Sigma F_z: 2 \text{ lb} + B_z = 4 \text{ lb}$ (3)

AND $\Sigma M_C: (\Sigma M_C = B + M_B) + (\Sigma M_C = B_c) = M_C$
 OR $\Sigma M_x: -(8 \text{ in.})(A_y) + (2 \text{ in.})(B_y) = 360 \text{ lb}\cdot\text{in.}$ (4)
 $\Sigma M_y: (8 \text{ in.})(A_x) - (8 \text{ in.})(2 \text{ lb}) - (2 \text{ in.})(B_x) - (8 \text{ in.})(B_z) = 0$ (5)
 $\Sigma M_z: (8 \text{ in.})(A_y) + (8 \text{ in.})(B_y) = 0$ (6)

Eq. (2) OR (6) $\Rightarrow A_y = -B_y$
 SUBSTITUTING INTO EQ. (4) $\dots -B(-B_y) + 2B_y = 360$
 OR $B_y = 36 \text{ lb}$
 AND $A_y = -36 \text{ lb}$

Eq. (3) $\Rightarrow B_z = 2 \text{ lb}$
 Eq. (1) $\Rightarrow B_x = -(8 + A_x) \text{ lb}$
 SUBSTITUTING INTO EQ. (5) \dots
 $8A_x - 16 - 2[-(8 + A_x)] - 8(2) = 0$
 OR $A_x = 1.6 \text{ lb}$
 AND $B_x = -9.6 \text{ lb}$

$A = (1.6 \text{ lb})i - (36 \text{ lb})j + (2 \text{ lb})k$
 $B = (-9.6 \text{ lb})i + (36 \text{ lb})j + (2 \text{ lb})k$


KNOWN: FORCES B AND C ARE EQUIVALENT TO $R = (2.6 \text{ lb})i - R_y j - (0.7 \text{ lb})k$, $M_A = M_x i + (1 \text{ lb}\cdot\text{ft})j - (0.72 \text{ lb}\cdot\text{ft})k$ AT A
 FIND: (a) FORCES B AND C (b) R_y, M_x

(a) FROM THE STATEMENT OF THE PROBLEM, EQUIVALENCE REQUIRES...

$\Sigma F: B + C = R$
 OR $\Sigma F_x: B_x + C_x = 2.6 \text{ lb}$ (1)
 $\Sigma F_y: -C_y = R_y$ (2)
 $\Sigma F_z: -C_z = -0.7 \text{ lb}$ OR $C_z = 0.7 \text{ lb}$
 AND $\Sigma M_A: (\Sigma M_A = B + M_B) + (\Sigma M_A = C) = M_A$
 OR $\Sigma M_x: (1 \text{ lb}\cdot\text{ft}) + (1.75 \text{ ft})(C_y) = M_x$ (3)
 $\Sigma M_y: (\frac{3.75}{12} \text{ ft})(B_x) + (\frac{1.75}{12} \text{ ft})(C_x) + (\frac{3.5}{12} \text{ ft})(0.7 \text{ lb}) = 1 \text{ lb}\cdot\text{ft}$

OR $3.75B_x + 1.75C_x = 9.55$
 USING EQ. (1) $\dots 3.75B_x + 1.75(2.6 - B_x) = 9.55$
 OR $B_x = 2.5 \text{ lb}$
 AND $C_x = 0.1 \text{ lb}$
 $\Sigma M_z: -(\frac{3.5}{12} \text{ ft})(C_y) = -0.72 \text{ lb}\cdot\text{ft}$
 OR $C_y = 2.4686 \text{ lb}$
 $\therefore B = (2.5 \text{ lb})i + (2.47 \text{ lb})j - (0.7 \text{ lb})k$
 (b) EQ. (2) $\Rightarrow R_y = -2.47 \text{ lb}$
 USING EQ. (3) $\dots 1 + (\frac{1.75}{12})(2.4686) = M_x$
 OR $M_x = 1.360 \text{ lb}\cdot\text{ft}$

3.123

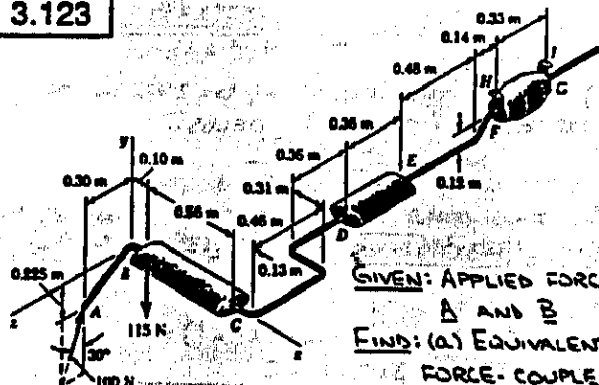

KNOWN: APPLIED FORCES A AND B
 FIND: (a) EQUIVALENT FORCE-COUPLE SYSTEM (R, M_o) AT D (b) DIRECTION OF ROTATION OF PIPE CD RELATIVE TO MUFFLER DE (CONTINUED)

3.123 CONTINUED

(a) EQUIVALENCE REQUIRES...

$$\sum \underline{E}: \underline{R} = \underline{A} + \underline{B}$$

$$= (100 \text{ N})(\cos 30^\circ \underline{j} - \sin 30^\circ \underline{k}) - (115 \text{ N})\underline{j}$$

$$= -(28.4 \text{ N})\underline{j} - (50 \text{ N})\underline{k}$$

AND $\sum \underline{M}_O: \underline{M}_D = \underline{r}_{A/D} \times \underline{F}_A + \underline{r}_{B/D} \times \underline{F}_B$

WHERE $\underline{r}_{A/D} = -(0.48 \text{ m})\underline{i} - (0.225 \text{ m})\underline{j} - (1.12 \text{ m})\underline{k}$

$\underline{r}_{B/D} = (0.38 \text{ m})\underline{i} + (0.82 \text{ m})\underline{k}$

THEN

$$\underline{M}_D = 100 \begin{vmatrix} \underline{i} & \underline{j} & \underline{k} \\ -0.48 & -0.225 & -1.12 \\ 0 & \cos 30^\circ & -\sin 30^\circ \end{vmatrix}$$

$$+ 115 \begin{vmatrix} \underline{i} & \underline{j} & \underline{k} \\ 0 & -0.38 & 0 \\ 0 & 0 & 0.82 \end{vmatrix}$$

$$= 100 [(0.225 \sin 30^\circ - 1.12 \cos 30^\circ)\underline{j}$$

$$+ (-0.48 \cos 30^\circ)\underline{j} + (-0.48 \cos 30^\circ)\underline{k}]$$

$$+ 115 [(0.82)\underline{j} + (0.38)\underline{k}]$$

$$= 8.56 \underline{j} - 24.0 \underline{j} + 2.13 \underline{k}$$


THE EQUIVALENT FORCE-COUPLE SYSTEM AT D IS...

$$\underline{R} = -(28.4 \text{ N})\underline{j} - (50 \text{ N})\underline{k}$$

$$\underline{M}_D = (8.56 \text{ N}\cdot\text{m})\underline{j} - (24.0 \text{ N}\cdot\text{m})\underline{j} - (2.13 \text{ N}\cdot\text{m})\underline{k}$$

(b) SINCE $(M_D)_z$ IS POSITIVE, PIPE CD WILL TEND TO ROTATE COUNTERCLOCKWISE RELATIVE TO MUFFLER DE.

3.124

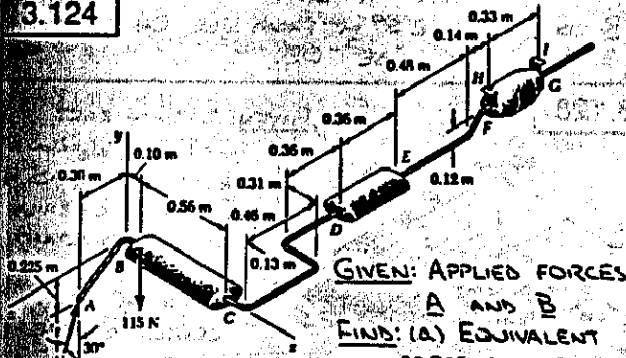

GIVEN: APPLIED FORCES A AND B
FIND: (a) EQUIVALENT FORCE-COUPLE SYSTEM $(\underline{R}, \underline{M}_F)$ AT F
(b) DIRECTION OF ROTATION OF PIPE EF RELATIVE TO THE MECHANIC

(a) EQUIVALENCE REQUIRES...

$$\sum \underline{E}: \underline{R} = \underline{A} + \underline{B}$$

$$= (100 \text{ N})(\cos 30^\circ \underline{j} - \sin 30^\circ \underline{k}) - (115 \text{ N})\underline{j}$$

$$= -(28.4 \text{ N})\underline{j} - (50 \text{ N})\underline{k}$$

AND $\underline{M}_F = \underline{r}_{A/F} \times \underline{F}_A + \underline{r}_{B/F} \times \underline{F}_B$

WHERE $\underline{r}_{A/F} = -(0.48 \text{ m})\underline{i} - (0.345 \text{ m})\underline{j} + (2.10 \text{ m})\underline{k}$

$\underline{r}_{B/F} = -(0.38 \text{ m})\underline{i} - (0.12 \text{ m})\underline{j} + (1.80 \text{ m})\underline{k}$

THEN

$$\underline{M}_F = 100 \begin{vmatrix} \underline{i} & \underline{j} & \underline{k} \\ -0.48 & -0.345 & 2.10 \\ 0 & \cos 30^\circ & -\sin 30^\circ \end{vmatrix}$$

$$+ 115 \begin{vmatrix} \underline{i} & \underline{j} & \underline{k} \\ 0 & -0.38 & -0.12 \\ 0 & 0 & 1.80 \end{vmatrix}$$

(CONTINUES)

3.124 CONTINUED

$$\underline{M}_F = 100 [(0.345 \sin 30^\circ - 2.10 \cos 30^\circ)\underline{j}$$

$$+ (-0.48 \sin 30^\circ)\underline{j} - (0.48 \cos 30^\circ)\underline{k}]$$

$$+ 115 [(1.80)\underline{j} + (0.38)\underline{k}]$$

$$= 42.4 \underline{j} - 24.0 \underline{j} - 2.13 \underline{k}$$


∴ THE EQUIVALENT FORCE-COUPLE SYSTEM AT F IS...

$$\underline{R} = -(28.4 \text{ N})\underline{j} - (50 \text{ N})\underline{k}$$


$$\underline{M}_F = (42.4 \text{ N}\cdot\text{m})\underline{j} - (24.0 \text{ N}\cdot\text{m})\underline{j} + (2.13 \text{ N}\cdot\text{m})\underline{k}$$

(b) SINCE $(M_F)_z$ IS POSITIVE, PIPE EF WILL TEND TO ROTATE COUNTERCLOCKWISE RELATIVE TO THE MECHANIC.

3.125

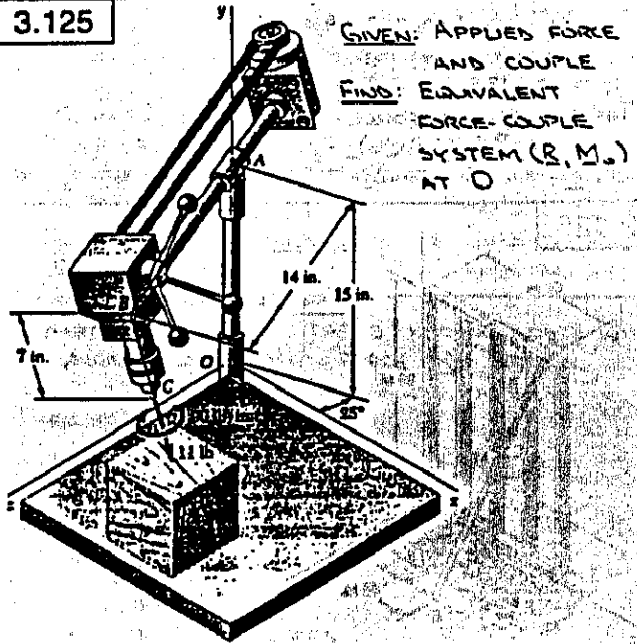

GIVEN: APPLIED FORCE AND COUPLE
FIND: EQUIVALENT FORCE-COUPLE SYSTEM $(\underline{R}, \underline{M}_O)$ AT O



EQUIVALENCE REQUIRES...

$$\sum \underline{E}: \underline{R} = \underline{E}_c$$

$$= (11 \text{ lb})(\sin 20^\circ \cos 25^\circ \underline{j} - \cos 20^\circ \underline{j}$$

$$- \sin 20^\circ \sin 25^\circ \underline{k})$$

$$= (3.41 \text{ lb})\underline{j} - (10.34 \text{ lb})\underline{j} - (1.590 \text{ lb})\underline{k}$$

TO SIMPLIFY THE COMPUTATION OF \underline{M}_O , SLIDE FORCE \underline{E}_c ALONG ITS LINE OF ACTION TO B.


THEN...

$$\sum \underline{M}_O: \underline{M}_O = \underline{r}_{B/O} \times \underline{E}_c + \underline{M}_c$$

WHERE

$$\underline{r}_{B/O} = (14 \text{ in.})\sin 25^\circ \underline{j} + (15 \text{ in.})\underline{j}$$

$$+ (14 \text{ in.})\cos 25^\circ \underline{k}$$



$$\underline{M}_c = (90 \text{ lb}\cdot\text{in.})(\sin 20^\circ \cos 25^\circ \underline{j} - \cos 20^\circ \underline{j}$$

$$- \sin 20^\circ \sin 25^\circ \underline{k})$$

(CONTINUED)

3.125 CONTINUED

THEN

$$\underline{M}_O = 11 \begin{vmatrix} \underline{i} & \underline{j} & \underline{k} \\ 14 \sin 25^\circ & 15 & 14 \cos 25^\circ \\ \sin 20^\circ \cos 25^\circ & -\cos 20^\circ & -\sin 20^\circ \sin 25^\circ \\ 90(\sin 20^\circ \cos 25^\circ) & -\cos 20^\circ & -\sin 20^\circ \sin 25^\circ \end{vmatrix}$$

$$= [11(-15 \sin 20^\circ \sin 25^\circ + 14 \cos 25^\circ \cos 20^\circ) + 90(\sin 20^\circ \cos 25^\circ)] \underline{j}$$

$$= [11(14 \sin 20^\circ \cos^2 25^\circ + 14 \sin 20^\circ \sin^2 25^\circ) + 90(-\cos 20^\circ)] \underline{j}$$

$$= [11(-14 \sin 25^\circ \cos 20^\circ - 15 \sin 20^\circ \cos 25^\circ) + 90(-\sin 20^\circ \sin 25^\circ)] \underline{k}$$

$$= (-23.849 + 131.154 + 27.898) \underline{j}$$

$$= (43.263 + 9.407 - 84.572) \underline{k}$$

$$= (-6.158 - 51.146 - 13.095) \underline{k}$$


$$= 135.2 \underline{i} - 319 \underline{j} - 125.3 \underline{k}$$

THE EQUIVALENT FORCE-COUPLE SYSTEM AT O IS

$$\underline{R} = (3.41 \text{ lb}) \underline{i} - (10.34 \text{ lb}) \underline{j} - (1.590 \text{ lb}) \underline{k}$$

$$\underline{M}_O = (135.2 \text{ lb}\cdot\text{in}) \underline{i} - (319 \text{ lb}\cdot\text{in}) \underline{j} - (125.3 \text{ lb}\cdot\text{in}) \underline{k}$$

3.126

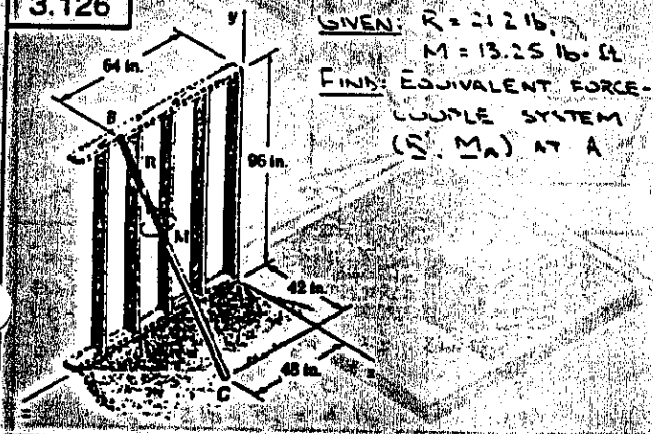

FIRST NOTE: $d_{BC} = \sqrt{(42)^2 + (96)^2 + (16)^2} = 106 \text{ in.}$

THEN: $\underline{R} = \frac{21.2 \text{ lb}}{106} (42 \underline{i} - 96 \underline{j} - 16 \underline{k})$

$$= (0.4 \text{ lb})(21 \underline{i} - 48 \underline{j} - 8 \underline{k})$$

AND $\underline{M} = \frac{13.25 \text{ lb}\cdot\text{ft}}{106} (-42 \underline{i} - 96 \underline{j} + 16 \underline{k})$

$$= (0.25 \text{ lb}\cdot\text{ft})(-21 \underline{i} + 48 \underline{j} - 8 \underline{k})$$

EQUIVALENCE REQUIRES:

$$\Sigma \underline{F}: \underline{R}' = \underline{R}$$

$$\Sigma \underline{M}_A: \underline{M}_A = \underline{r}_{CA} \times \underline{R} + \underline{M}$$

WHERE $\underline{r}_{CA} = (42 \text{ in.}) \underline{i} + (48 \text{ in.}) \underline{j} + (35 \text{ ft.}) \underline{k} + (4 \text{ ft.}) \underline{k}$

THEN:

$$\underline{M}_A = 0.4 \begin{vmatrix} \underline{i} & \underline{j} & \underline{k} \\ 21 & -48 & -8 \\ 21 & -48 & -8 \end{vmatrix} + (5.25 \underline{i} + 12 \underline{j} + 2 \underline{k})$$

$$= [0.4(192) - 5.25] \underline{i}$$

$$+ [0.4(84 + 28) + 12] \underline{j}$$

$$- [0.4(-168) + 2] \underline{k}$$



$$= 71.55 \underline{i} + 56.8 \underline{j} - 65.2 \underline{k}$$

THE EQUIVALENT FORCE-COUPLE SYSTEM AT A IS:

$$\underline{R}' = (8.4 \text{ lb}) \underline{i} - (19.2 \text{ lb}) \underline{j} - (3.2 \text{ lb}) \underline{k}$$

$$\underline{M}_A = (71.6 \text{ lb}\cdot\text{ft}) \underline{i} + (56.8 \text{ lb}\cdot\text{ft}) \underline{j} - (65.2 \text{ lb}\cdot\text{ft}) \underline{k}$$

3.127

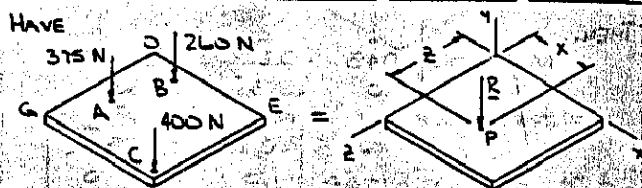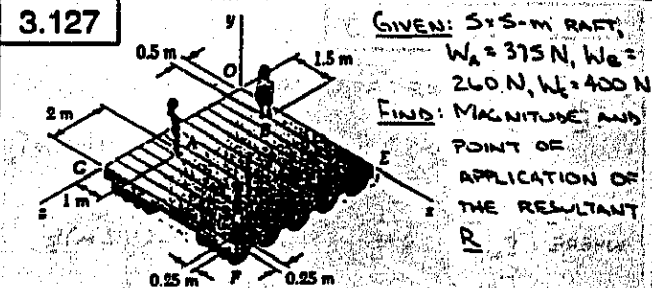

EQUIVALENCE REQUIRES:

$$\Sigma F_y = -375 - 260 - 400 = -R$$

$$R = 1035 \text{ N}$$

LET R BE APPLIED AT POINT P WHOSE COORDINATES ARE $(x, 0, z)$. THEN:

$$\Sigma M_x = (3 \text{ m})(375 \text{ N}) + (0.5 \text{ m})(260 \text{ N}) + (4.75 \text{ m})(400 \text{ N})$$

$$= z(1035 \text{ N})$$

OR $z = 3.05 \text{ m}$



$$\Sigma M_z = -(1 \text{ m})(375 \text{ N}) - (1.5 \text{ m})(260 \text{ N}) - (4.75 \text{ m})(400 \text{ N})$$

$$= -x(1035 \text{ N})$$

OR $x = 2.57 \text{ m}$

$\therefore R$ IS APPLIED 2.57 m FROM SIDE OG AND 3.05 m FROM SIDE OE.

3.128

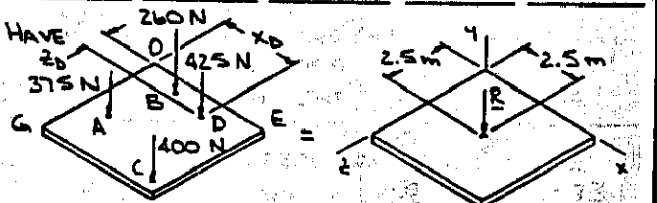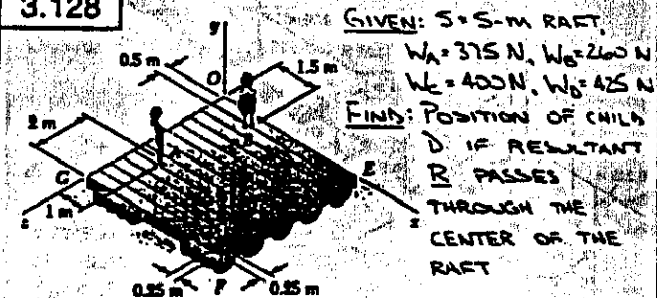

EQUIVALENCE REQUIRES:

$$\Sigma F_y = -375 - 260 - 400 - 425 = -R$$

OR $R = 1460 \text{ N}$

$$\Sigma M_x = (3 \text{ m})(375 \text{ N}) + (0.5 \text{ m})(260 \text{ N}) + (4.75 \text{ m})(400 \text{ N}) + z_D(425 \text{ N}) = (2.5 \text{ m})(1460 \text{ N})$$


OR $z_D = 1.165 \text{ m}$

$$\Sigma M_z = -(1 \text{ m})(375 \text{ N}) - (1.5 \text{ m})(260 \text{ N}) - (4.75 \text{ m})(400 \text{ N}) - x_D(425 \text{ N}) = -(2.5 \text{ m})(1460 \text{ N})$$


OR $x_D = 2.32 \text{ m}$

\therefore THE CHILD SHOULD STAND 2.32 m FROM SIDE OG AND 1.165 m FROM SIDE OE

3.129

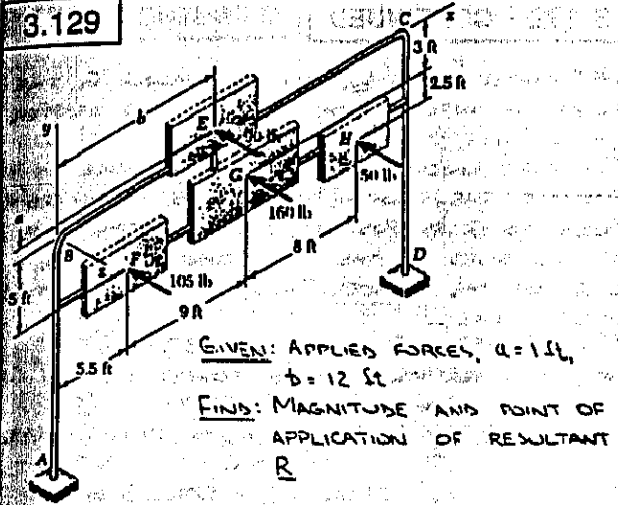


GIVEN: APPLIED FORCES, $a = 1 \text{ ft}$,
 $b = 12 \text{ ft}$
 FIND: MAGNITUDE AND POINT OF APPLICATION OF RESULTANT R

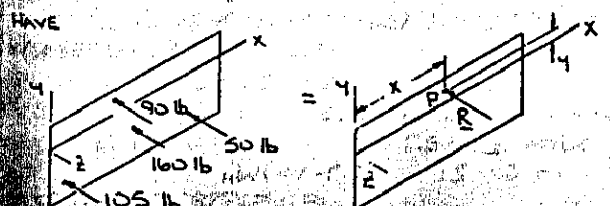

HAVE
 ASSUME THAT THE RESULTANT R IS APPLIED AT POINT P WHOSE COORDINATES ARE $(x, y, 0)$.
 EQUIVALENCE THEN REQUIRES...
 $\sum F_y = -105 - 90 - 160 - 50 = -R$
 OR $R = 405 \text{ lb}$
 $\sum M_x = (5 \text{ ft})(105 \text{ lb}) - (1 \text{ ft})(90 \text{ lb}) + (3 \text{ ft})(160 \text{ lb}) + (5.5 \text{ ft})(50 \text{ lb}) = -y(405 \text{ lb})$
 OR $y = -2.94 \text{ ft}$
 $\sum M_y = (5.5 \text{ ft})(105 \text{ lb}) + (12 \text{ ft})(90 \text{ lb}) + (14.5 \text{ ft})(160 \text{ lb}) + (22.5 \text{ ft})(50 \text{ lb}) = x(405 \text{ lb})$
 OR $x = 12.60 \text{ ft}$
 R ACTS 12.60 ft TO THE RIGHT OF MEMBER AB AND 2.94 ft BELOW MEMBER BC .

3.130

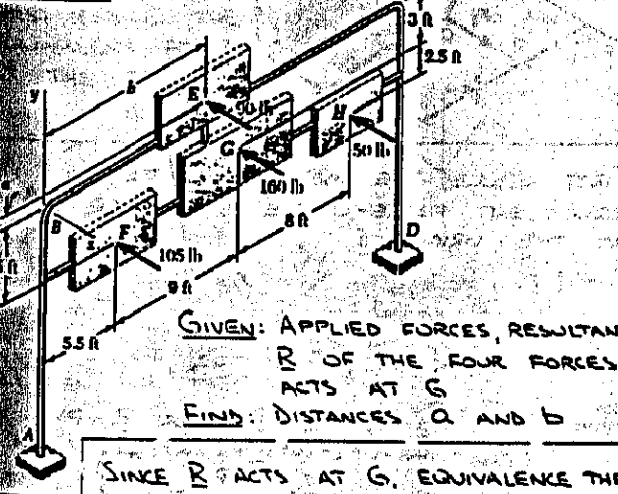


GIVEN: APPLIED FORCES, RESULTANT R OF THE FOUR FORCES ACTS AT G
 FIND: DISTANCES a AND b

SINCE R ACTS AT G , EQUIVALENCE THEN REQUIRES THAT $\sum M_G$ OF THE APPLIED (CONTINUED)

3.130 CONTINUED


SYSTEM OF FORCES ALSO BE ZERO. THEN...
 AT G : $\sum M_x = -(a+3) \text{ ft} \cdot (90 \text{ lb}) - (2 \text{ ft})(105 \text{ lb}) + (2.5 \text{ ft})(50 \text{ lb}) = 0$
 OR $a = 0.722 \text{ ft}$
 $\sum M_y = -(9 \text{ ft})(105 \text{ lb}) - (14.5 - b) \text{ ft} \cdot (90 \text{ lb}) + (8 \text{ ft})(50 \text{ lb}) = 0$
 OR $b = 20.6 \text{ ft}$

3.131

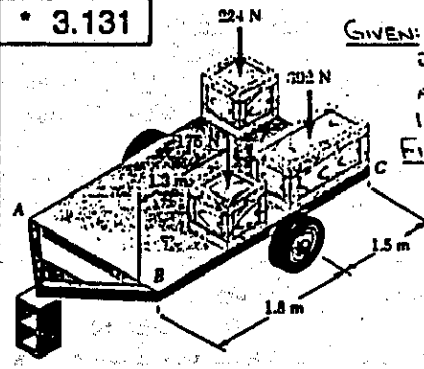

GIVEN: $z = 3.3\text{-m}$ TRAILER, $0.66 + 0.66 = 0.66 \text{ m}$ AND $0.66 + 0.66 = 1.2 \text{ m}$ BOXES
 FIND: SMALLEST LOAD AND LOCATION IF RESULTANT OF FOUR WEIGHTS PASSES THROUGH CENTER LINES OF AXLE AND TRAILER

FIRST REPLACE THE THREE KNOWN LOADS WITH A SINGLE EQUIVALENT FORCE R_K APPLIED AT POINT K WHOSE COORDINATES ARE $(x_k, 0, z_k)$. THEN...

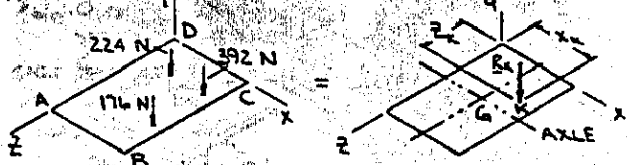

EQUIVALENCE REQUIRES...
 $\sum F_y = -224 - 392 - 176 = -R_k$ OR $R_k = 792 \text{ N}$
 $\sum M_x = (0.33 \text{ m})(224 \text{ N}) + (0.6 \text{ m})(392 \text{ N}) + (2 \text{ m})(176 \text{ N}) = z_k(792 \text{ N})$
 OR $z_k = 0.83475 \text{ m}$
 $\sum M_z = -(0.33 \text{ m})(224 \text{ N}) - (1.67 \text{ m})(392 \text{ N}) - (1.67 \text{ m})(176 \text{ N}) = -x_k(792 \text{ N})$
 OR $x_k = 1.29101 \text{ m}$

FROM THE STATEMENT OF THE PROBLEM, IT IS KNOWN THAT THE RESULTANT OF R_k AND THE LIGHTEST LOAD W_L PASSES THROUGH G , THE POINT OF INTERSECTION OF THE TWO CENTER LINES. THUS, $\sum M_G = 0$.
 FURTHER, SINCE W_L IS TO BE AS SMALL AS POSSIBLE, THE FOURTH BOX SHOULD BE PLACED AS FAR FROM G AS POSSIBLE. THESE TWO REQUIREMENTS IMPLY...
 $0.33 \text{ m} \leq x_L \leq 1.0 \text{ m}$ AND $1.5 \text{ m} \leq z_L \leq 2.97 \text{ m}$
 WHERE THE LOWER BOUND ON x AND THE UPPER BOUND ON z ARE IMPOSED SO THAT THE BOX DOES NOT OVERHANG THE TRAILER. SINCE THE BOX IS TO BE AS FAR FROM G AS POSSIBLE, CONSIDER FIRST IF THESE BOUNDS ARE PHYSICALLY POSSIBLE.

(CONTINUED)

WRENCH AND THE PRESCRIBED LINE OF ACTION (LINE AA') ARE KNOWN, IT FOLLOWS THAT THE DISTANCE Q CAN BE DETERMINED. IN THE FOLLOWING SOLUTION, IT IS ASSUMED THAT Q IS KNOWN. THEN, FOR EQUIVALENCE

$$\Sigma F_x: 0 = A\lambda_1 + B_x \quad (1)$$

$$\Sigma F_y: R = A\lambda_1 + B_y \quad (2)$$

$$\Sigma F_z: 0 = A\lambda_2 + B_z \quad (3)$$

$$\Sigma M_x: 0 = -2B_y \quad (4)$$

$$\Sigma M_y: M = -QA\lambda_2 + 2B_x - \lambda B_z \quad (5)$$

$$\Sigma M_z: 0 = QA\lambda_1 + \lambda B_y \quad (6)$$

THUS, THERE ARE SIX UNKNOWN(S) (A, B_x, B_y, B_z, λ, Q) AND SIX INDEPENDENT EQUATIONS. THEREFORE, IT WILL BE POSSIBLE TO OBTAIN A SOLUTION.

CASE 1: EQ (4) ⇒ z = 0

Now.. EQ (2) ⇒ Aλ₁ = R - B_y

EQ (3) ⇒ B_z = -Aλ₂

EQ (6) ⇒ x = -QAλ₁ / λ = -QA / λ (R - B_y)

SUBSTITUTING INTO EQ. (5)

$$M = -QA\lambda_2 - \left[-\frac{QA}{\lambda} (R - B_y) \right] (-A\lambda_2)$$

OR A = -1/λ₂ * M / QR B_y

SUBSTITUTING INTO EQ (2)

$$R = -\frac{1}{\lambda_2} \frac{M}{QR} B_y (\lambda_1) + B_y$$

OR B_y = λ₂QR / (λ₂QR - λ₁M)

THEN

$$A = \frac{MR}{\lambda_2 QR - \lambda_1 M}$$

$$B_x = \frac{\lambda_2 MR}{\lambda_2 QR - \lambda_1 M}$$

$$B_z = \frac{\lambda_2 MR}{\lambda_2 QR - \lambda_1 M}$$

IN SUMMARY

$$A = \frac{R}{\lambda_1 - \frac{QR}{M} \lambda_2} \Delta$$

$$B = \frac{R}{\lambda_2 QR - \lambda_1 M} (\lambda_2 M i + \lambda_2 QR j + \lambda_2 M k)$$

Also: x = Q(1 - R/B_y) = Q(1 - R / (λ₂QR / (λ₂QR - λ₁M)))

$$= \frac{\lambda_1}{\lambda_2} \frac{M}{R}$$

NOTE THAT FOR THIS CASE, THE LINES OF ACTION OF BOTH A AND B INTERSECT THE X AXIS.

CASE 2: EQ (4) ⇒ B_y = 0

THEN EQ (2) ⇒ A = R / λ₁

(CONTINUED)

AND EQ (1) ⇒ B_x = -R / λ₁

EQ (3) ⇒ B_z = -R / λ₂

EQ (6) ⇒ QAλ₁ = 0 WHICH REQUIRES THAT Q = 0

THEN, SUBSTITUTING INTO EQ. (5)

$$M = z(-R/\lambda_1 \lambda_2) - \lambda(-R/\lambda_2 \lambda_2)$$


OR λ₂x - λ₂z = M / R λ₁

THIS LAST EXPRESSION IS THE EQUATION OF THE LINE OF ACTION OF FORCE B. IN SUMMARY

$$A = \frac{R}{\lambda_1} \Delta$$

$$B = \frac{R}{\lambda_1} (-\lambda_2 i - \lambda_2 k)$$



ASSUMING THAT λ₁, λ₂, λ₂ > 0, THE EQUIVALENT FORCE SYSTEM IS..

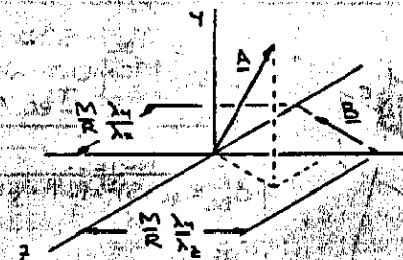

NOTE THAT THE COMPONENT OF A LYING IN THE XZ PLANE IS PARALLEL TO B.

3.147

GIVEN: F_{AB} = 1.5 kN
FIND: MOMENT OF F_{AB} ABOUT C




Using (a)

$$M_c = y_1 (F_{AB})_x + x_1 (F_{AB})_y = (0.028 \text{ m}) (\frac{1}{25} \cdot 1500 \text{ N}) + (0.021 \text{ m}) (\frac{24}{25} \cdot 1500 \text{ N}) = 42 \text{ N}\cdot\text{m}$$

Using (b)

$$M_c = y_2 (F_{AB})_x = (0.1 \text{ m}) (\frac{1}{25} \cdot 1500 \text{ N}) = 42 \text{ N}\cdot\text{m}$$

3.148

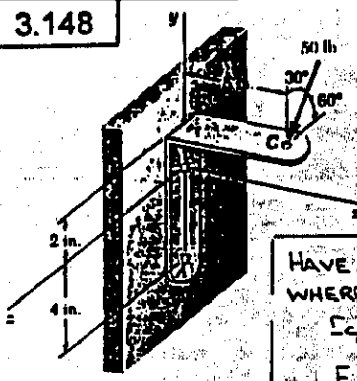

GIVEN: FORCE F_C
FIND: MOMENT OF
 F_C ABOUT A

HAVE.. $M_A = r_{CA} \times F_C$
WHERE

$$r_{CA} = (5 \text{ in.})_i + (6 \text{ in.})_j$$

$$F_C = -(50 \text{ lb}) \cos 30^\circ j + (50 \text{ lb}) \sin 30^\circ k$$


THEN..

$$M_A = 50 \begin{vmatrix} i & j & k \\ 5 & 6 & 0 \\ 0 & -\cos 30^\circ & \sin 30^\circ \end{vmatrix}$$

$$= 50 [(6 \sin 30^\circ)_i - (5 \sin 30^\circ)_j - (5 \cos 30^\circ)_k]$$

OR $M_A = (150 \text{ lb}\cdot\text{in.})_i - (125 \text{ lb}\cdot\text{in.})_j - (217 \text{ lb}\cdot\text{in.})_k$

3.149



GIVEN: $T_{BC} = 570 \text{ lb}$
FIND: MOMENT ABOUT
A OF T_{BC} AT B

FIRST NOTE..

$$d_{BC} = \sqrt{(-15)^2 + (-6)^2 + (-10)^2}$$

$$= 19 \text{ ft}$$

THEN..

$$T_{BC} = \frac{570 \text{ lb}}{19} (-15i - 6j - 10k)$$


$$= -(450 \text{ lb})_i - (180 \text{ lb})_j - (300 \text{ lb})_k$$

HAVE.. $M_A = r_{BA} \times T_{BC}$ WHERE $r_{BA} = (15 \text{ ft})_i$

THEN.. $M_A = 15i \times (-450j + 180j - 300k)$

OR $M_A = (4500 \text{ lb}\cdot\text{ft})_j + (2700 \text{ lb}\cdot\text{ft})_k$

3.150

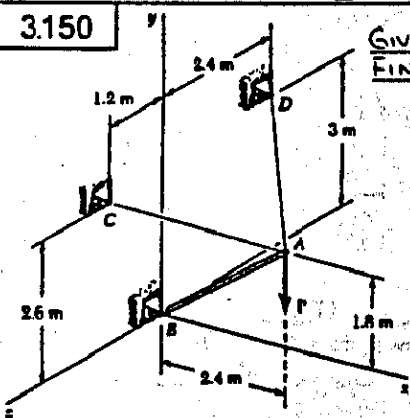

GIVEN: $T_{AC} = 1260 \text{ N}$
FIND: (a) ANGLE θ
FORMED BY
CABLE AC AND
BOOM AB
(b) PROJECTION
ON AB OF T_{AC}
AT A

(a) FIRST NOTE.. $AC = \sqrt{(-2.4)^2 + (0.8)^2 + (1.2)^2}$
 $= 2.8 \text{ m}$

$$AB = \sqrt{(-2.4)^2 + (-1.8)^2 + (0)^2}$$

$$= 3.0 \text{ m}$$

AND $AC = -(2.4 \text{ m})_i + (0.8 \text{ m})_j + (1.2 \text{ m})_k$
 $AB = -(2.4 \text{ m})_i - (1.8 \text{ m})_j$


(CONTINUED)

3.150 CONTINUED

BY DEFINITION.. $AC \cdot AB = (AC)(AB) \cos \theta$
OR $(-2.4i + 0.8j + 1.2k) \cdot (-2.4i - 1.8j) = (2.8)(3.0) \cos \theta$
OR $(-2.4)(-2.4) + (0.8)(-1.8) + (1.2)(0) = 8.4 \cos \theta$
OR $\cos \theta = 0.51429$
OR $\theta = 59.0^\circ$

(b) HAVE.. $(T_{AC})_{AB} = T_{AC} \cdot \Delta_{AB}$
 $= T_{AC} \cos \theta$
 $= (1260 \text{ N})(0.51429)$
OR $(T_{AC})_{AB} = 648 \text{ N}$

3.151

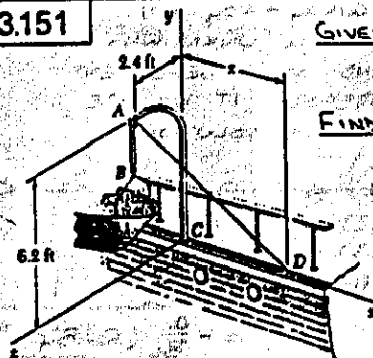

GIVEN: M_A OF R_A AT
A $= 160 \text{ lb}\cdot\text{ft}$
 $x = 4.8 \text{ ft}$
FIND: T_{MAX}

FIRST NOTE THAT $R_A = 2T_{AB} + T_{AD}$
AND THEN OBSERVE THAT ONLY T_{AD} WILL
CONTRIBUTE TO THE MOMENT ABOUT THE
Z AXIS. NOW..

$$d_{AD} = \sqrt{(4.8)^2 + (-6.2)^2 + (-2.4)^2} = 8.2 \text{ ft}$$

THEN $T_{AD} = \frac{T}{8.2} (4.8i - 6.2j - 2.4k)$
 $= \frac{T}{41} (24i - 31j - 12k)$

NOW.. $M_z = k \cdot (r_{AC} \times T_{AD})$
WHERE $r_{AC} = (6.2 \text{ ft})_j + (2.4 \text{ ft})_k$


THEN FOR T_{MAX} ..

$$160 = \begin{vmatrix} T_{MAX} & 0 & 0 & 1 \\ 41 & 0 & 6.2 & 2.4 \\ & 24 & -31 & -12 \end{vmatrix}$$

$$= \frac{T_{MAX}}{41} |-(1)(6.2)(24)|$$

OR $T_{MAX} = 44.1 \text{ lb}$

3.152

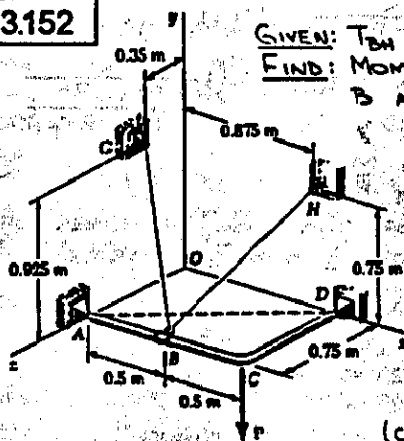

GIVEN: $T_{BH} = 450 \text{ N}$
FIND: MOMENT OF T_{BH} AT
B ABOUT DIAGONAL AD

(CONTINUED)

3.152 CONTINUED

$$M_{AD} = \sum_{AD} (\Sigma_{B/A} + I_{BH})$$

WHERE $\sum_{AD} = \frac{1}{3}(4\mathbf{j} - 3\mathbf{k})$
 $\Sigma_{B/A} = (0.5\text{ m})\mathbf{i}$

AND THEN $d_{BH} = \sqrt{(0.375)^2 + (0.75)^2 + (-0.75)^2} = 1.125\text{ m}$

$$I_{BH} = \frac{450\text{ N}}{1.125} (0.375\mathbf{j} + 0.75\mathbf{j} - 0.75\mathbf{k})$$


$$= (150\text{ N})\mathbf{j} + (300\text{ N})\mathbf{j} - (300\text{ N})\mathbf{k}$$

FINALLY... $M_{AD} = \frac{1}{3} \begin{vmatrix} 4 & 0 & -3 \\ 0.5 & 0 & 0 \\ 150 & 300 & -300 \end{vmatrix}$

$$= \frac{1}{3} [(-3)(0.5)(300)]$$

OR $M_{AD} = -90\text{ N}\cdot\text{m}$

3.153

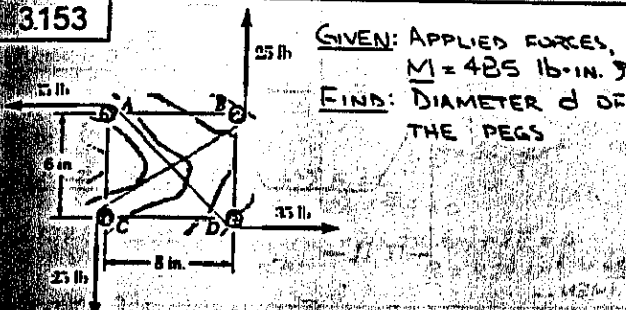


GIVEN: APPLIED FORCES, $M = 425\text{ lb}\cdot\text{in.}$
 FIND: DIAMETER d OF THE PEGS

HAVE... $M = M_{AD} = M_{BC}$


OR $M = d_{AD}F_{AD} + d_{BC}F_{BC}$
 OR $425\text{ lb}\cdot\text{in.} = [(6+d)\text{ in.}](35\text{ lb}) + [(8+d)\text{ in.}](25\text{ lb})$
 OR $d = 1.25\text{ in.}$

3.154



GIVEN: $P = 250\text{ N}$, $\alpha = 30^\circ$, $\beta = 60^\circ$
 FIND: (a) EQUIVALENT FORCE-COUPLE SYSTEM (F, M) AT B
 (b) EQUIVALENT SYSTEM (F_A, F_B) , WHERE F_A AND F_B ARE PARALLEL


(a) EQUIVALENCE REQUIRES...
 $\Sigma F: E = P$ OR $E = 250\text{ N} \nabla 60^\circ$
 $\Sigma M_B: M = -(0.3\text{ m})(250\text{ N}) = -75\text{ N}\cdot\text{m}$
 THE EQUIVALENT FORCE-COUPLE SYSTEM AT B IS... $F = 250\text{ N} \nabla 60^\circ$, $M = 75\text{ N}\cdot\text{m}$

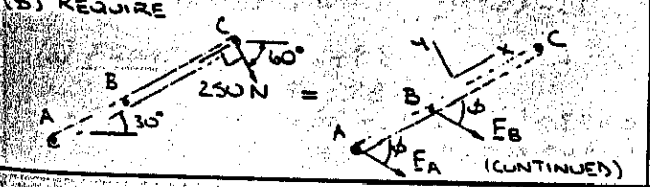

3.154 CONTINUED

EQUIVALENCE THEN REQUIRES...
 $\Sigma F_x: 0 = F_A \cos \phi + F_B \cos \phi$
 $\therefore F_A = -F_B$ OR $\cos \phi = 0$
 $\Sigma F_y: -250 = -F_A \sin \phi - F_B \sin \phi$
 NOW... IF $F_A = F_B \Rightarrow -250 = 0$.. REJECT
 $\therefore \cos \phi = 0$
 OR $\phi = 90^\circ$
 AND $F_A + F_B = 250$
 ALSO... $\Sigma M_B: -(0.3\text{ m})(250\text{ N}) = (0.2\text{ m})F_A$
 OR $F_A = -375\text{ N}$
 AND $F_B = 625\text{ N}$
 $\therefore F_A = 375\text{ N} \nabla 60^\circ$, $F_B = 625\text{ N} \nabla 60^\circ$


3.155



GIVEN: 150-N FORCE
 FIND: EQUIVALENT FORCE-COUPLE SYSTEM (F, M) AT A

EQUIVALENCE REQUIRES...
 $\Sigma F: E = (150\text{ N})(-\cos 35^\circ \mathbf{j} - \sin 35^\circ \mathbf{k})$
 $= -(122.873\text{ N})\mathbf{j} - (86.036\text{ N})\mathbf{k}$
 $\Sigma M_A: M = \Sigma_{A/A} \times E$
 WHERE $\Sigma_{A/A} = (0.18\text{ m})\mathbf{i} - (0.12\text{ m})\mathbf{j} + (0.1\text{ m})\mathbf{k}$
 THEN... $M = \begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 0.18 & -0.12 & 0.1 \\ 0 & -122.873 & -86.036 \end{vmatrix}$
 $= [(-0.12)(-86.036) - (0.1)(-122.873)]\mathbf{i}$
 $+ [-(0.18)(-86.036)]\mathbf{j}$
 $+ [(0.18)(-122.873)]\mathbf{k}$
 $= (22.6\text{ N}\cdot\text{m})\mathbf{i} + (15.49\text{ N}\cdot\text{m})\mathbf{j} - (22.1\text{ N}\cdot\text{m})\mathbf{k}$
 \therefore THE EQUIVALENT FORCE-COUPLE SYSTEM AT A IS...
 $F = -(122.9\text{ N})\mathbf{j} - (86.0\text{ N})\mathbf{k}$
 $M = (22.6\text{ N}\cdot\text{m})\mathbf{i} + (15.49\text{ N}\cdot\text{m})\mathbf{j} - (22.1\text{ N}\cdot\text{m})\mathbf{k}$

3.156




GIVEN: $M = 54\text{ lb}\cdot\text{in.}$, APPLIED FORCES
 FIND: (a) RESULTANT R
 (b) POINTS WHERE LINE OF ACTION OF R INTERSECTS LINES AB AND BC

(a) HAVE... $\Sigma F: R = (-10\mathbf{j}) + (30 \cos 60^\circ \mathbf{i} + 30 \sin 60^\circ \mathbf{j}) + (-45\mathbf{j})$
 $= -(30\text{ lb})\mathbf{j} + (15.9808\text{ lb})\mathbf{j}$
 OR $R = 34.0\text{ lb} \nabla 28.0^\circ$
 (CONTINUED)

3.156 CONTINUED

(b) FIRST REDUCE THE GIVEN FORCES AND COUPLE TO AN EQUIVALENT FORCE-COUPLE SYSTEM (R, M_B) AT B. HAVE

$$\Sigma M_B: M_B = (54 \text{ lb}\cdot\text{in.}) + (12 \text{ in.})(10 \text{ lb}) - (8 \text{ in.})(45 \text{ lb}) = -186 \text{ lb}\cdot\text{in.}$$



THEN WITH R AT D:

$$\Sigma M_B: -186 \text{ lb}\cdot\text{in.} = a(15.9808 \text{ lb}) \quad \text{OR } a = 11.64 \text{ IN.}$$

AND WITH R AT E:

$$\Sigma M_B: -186 \text{ lb}\cdot\text{in.} = c(30 \text{ lb}) \quad \text{OR } c = 6.2 \text{ IN.}$$


\therefore THE LINE OF ACTION OF R INTERSECTS LINE AB 11.64 IN TO THE LEFT OF B AND INTERSECTS LINE BC 6.2 IN. BELOW B.

3.157

GIVEN $K = -(30 \text{ N})_i - R_1 j - R_2 k$
 $M_A^R = -(12 \text{ N}\cdot\text{m})_i$

FIND: (a) B AND C WHICH ARE EQUIVALENT TO (R, M_A^R)

(b) R_1 AND R_2 (c) ORIENTATION OF SLOT TO MINIMIZE SLIPPING

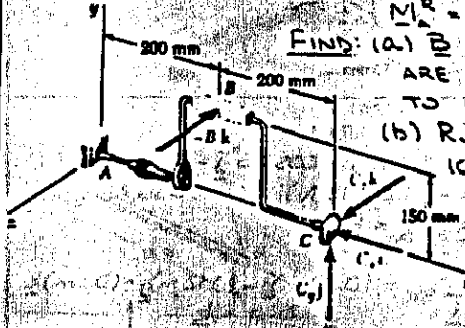

(a) EQUIVALENCE REQUIRES...

$$\Sigma F: R = B + C \quad \text{OR } -(30 \text{ N})_i - R_1 j - R_2 k = -B_1 k - (C_1)_i - (C_2)_j - (C_3)_k$$

EQUATING THE i COEFFICIENTS...
 $i: -30 \text{ N} = -C_1 \quad \text{OR } C_1 = 30 \text{ N}$

ALSO... $\Sigma M_A: M_A^R = r_{BA} \times B = r_{CA} \times C$

$$\text{OR } -(12 \text{ N}\cdot\text{m})_i = [(0.2 \text{ m})_j - (0.15 \text{ m})_k] \times (-B_1)_k + [(0.4 \text{ m})_j - (0.4 \text{ m})_k] \times [-(30 \text{ N})_i + C_1 j + C_2 k]$$

EQUATING COEFFICIENTS...

$$i: -12 \text{ N}\cdot\text{m} = -(0.15 \text{ m})B_1 \quad \text{OR } B_1 = 80 \text{ N}$$

$$j: 0 = (0.4 \text{ m})C_1 \quad \text{OR } C_1 = 0$$

$$k: 0 = (0.2 \text{ m})(80 \text{ N}) - (0.4 \text{ m})C_2 \quad \text{OR } C_2 = 40 \text{ N}$$

$$\therefore B = -(80 \text{ N})_k \quad C = -(30 \text{ N})_i + (40 \text{ N})_k$$

(b) NOW HAVE FOR THE EQUIVALENCE OF FORCES...

$$-(30 \text{ N})_i - R_1 j - R_2 k = -(80 \text{ N})_k - (30 \text{ N})_i + (40 \text{ N})_k$$

EQUATING COEFFICIENTS...


$$i: R_1 = 0 \quad \text{OR } R_1 = 0$$

$$k: R_2 = -80 + 40 \quad \text{OR } R_2 = -40 \text{ N}$$


(c) FIRST NOTE THAT $R = -(30 \text{ N})_i - (40 \text{ N})_k$. THUS, THE SCREW IS BEST ABLE TO RESIST THE LATERAL FORCE R_2 WHEN THE SLOT IN THE HEAD OF THE SCREW IS VERTICAL.

3.158

GIVEN: RESULTANT R PASSES THROUGH POINT O
 FIND: VERTICAL FORCES F_B AND F_E



FROM THE STATEMENT OF THE PROBLEM IT CAN BE CONCLUDED THAT THE SIX APPLIED LOADS ARE EQUIVALENT TO THE RESULTANT R AT D. IT THEN FOLLOWS THAT $\Sigma M_O = 0$ OR $\Sigma M_x = 0, \Sigma M_z = 0$ FOR THE APPLIED LOADS.

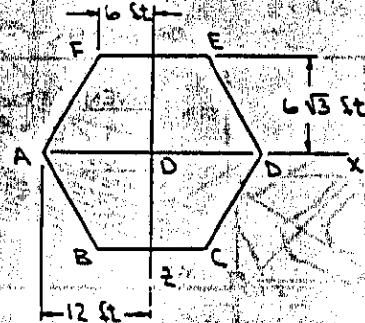


THEN...

$$\Sigma M_x = 0: (6\sqrt{3} \text{ ft})F_B + (6\sqrt{3} \text{ ft})(10 \text{ kips}) - (6\sqrt{3} \text{ ft})(20 \text{ kips}) - (6\sqrt{3} \text{ ft})F_E = 0 \quad \text{OR } F_B - F_E = 10 \quad (1)$$


$$\Sigma M_z = 0: (12 \text{ ft})(15 \text{ kips}) + (6 \text{ ft})F_B - (6 \text{ ft})(10 \text{ kips}) - (12 \text{ ft})(30 \text{ kips}) - (6 \text{ ft})(20 \text{ kips}) - (6 \text{ ft})F_F = 0 \quad \text{OR } F_B = F_F = 60 \quad (2)$$

THEN (1) + (2) $\Rightarrow F_B = 35 \text{ kips} \downarrow$ AND $F_F = 25 \text{ kips} \downarrow$

4.1

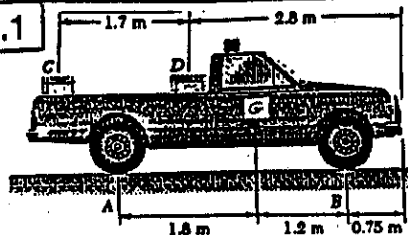

GIVEN:
TRUCK, 1400 kg
CRATES,
350 kg (EACH)
FIND:
REACTIONS AT
EACH WHEEL

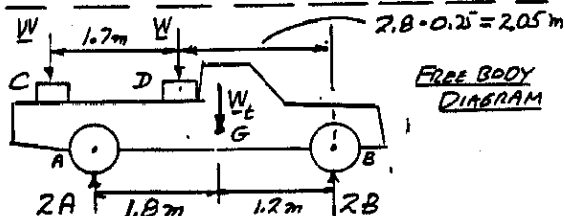

$$W = (350 \text{ kg})(9.81 \text{ m/s}^2) = 3.434 \text{ kN}$$

$$W_G = (1400 \text{ kg})(9.81 \text{ m/s}^2) = 13.734 \text{ kN}$$

(a) REAR WHEELS $\rightarrow \sum M_B = 0$

$$W(1.7 \text{ m} + 2.05 \text{ m}) + W_D(2.05 \text{ m}) + W_G(1.2 \text{ m}) - 2A(3 \text{ m}) = 0$$

$$(3.434 \text{ kN})(3.75 \text{ m}) + (3.434 \text{ kN})(2.05 \text{ m}) + (13.734 \text{ kN})(1.2 \text{ m}) - 2A(3 \text{ m}) = 0$$

$$A = +6.066 \text{ kN} \quad A = 6.07 \text{ kN} \uparrow$$


(b) FRONT WHEELS $\rightarrow \sum F_y = 0$

$$-W - W_D - W_G + 2A + 2B = 0$$


$$-3.434 \text{ kN} - 3.434 \text{ kN} - 13.734 \text{ kN} + 2(6.066 \text{ kN}) + 2B = 0$$

$$B = +4.235 \text{ kN} \quad B = 4.24 \text{ kN} \uparrow$$

4.2

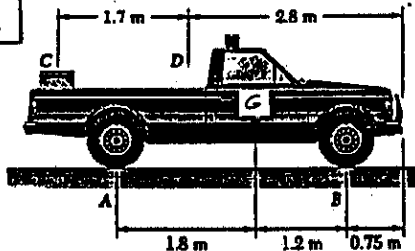

GIVEN:
TRUCK: 1400 kg
CRATE C:
350 kg
(CRATE D HAS
BEEN REMOVED)
FIND: REACTIONS
AT EACH WHEEL

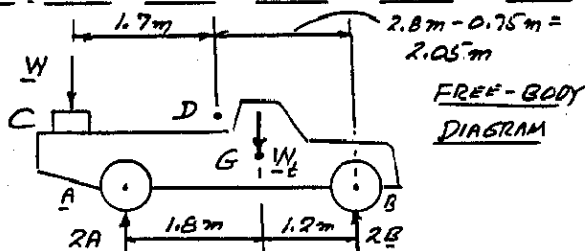

$$W = (350 \text{ kg})(9.81 \text{ m/s}^2) = 3.434 \text{ kN}$$

$$W_G = (1400 \text{ kg})(9.81 \text{ m/s}^2) = 13.734 \text{ kN}$$

(a) REAR WHEELS $\rightarrow \sum M_B = 0$

$$W(1.7 \text{ m} + 2.05 \text{ m}) + W_G(1.2 \text{ m}) - 2A(3 \text{ m}) = 0$$

$$(3.434 \text{ kN})(3.75 \text{ m}) + (13.734 \text{ kN})(1.2 \text{ m}) - 2A(3 \text{ m}) = 0$$

$$A = +4.893 \text{ kN} \quad A = 4.89 \text{ kN} \uparrow$$


(b) FRONT WHEELS $\rightarrow \sum F_y = 0$

$$-W - W_G + 2A + 2B = 0$$


$$-3.434 \text{ kN} - 13.734 \text{ kN} + 2(4.893 \text{ kN}) + 2B = 0$$

$$B = +3.691 \text{ kN} \quad B = 3.69 \text{ kN} \uparrow$$

4.3

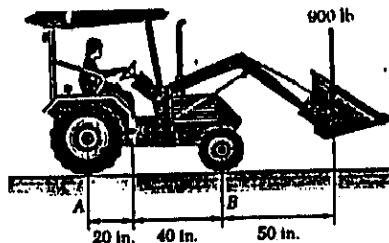

GIVEN:
2100-lb
TRACTOR
FIND:
REACTIONS AT
EACH WHEEL

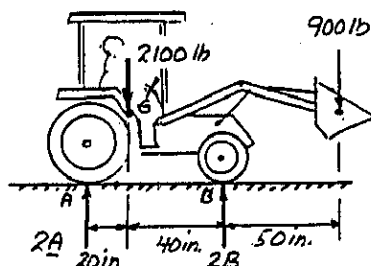

(a) REAR WHEELS $\rightarrow \sum M_B = 0$

$$+(2100 \text{ lb})(40 \text{ in}) - (900 \text{ lb})(50 \text{ in}) + 2A(60 \text{ in}) = 0$$

$$A = +325 \text{ lb} \quad A = 325 \text{ lb} \uparrow$$

(b) FRONT WHEELS $\rightarrow \sum M_A = 0$

$$(2100 \text{ lb})(20 \text{ in}) - (900 \text{ lb})(110 \text{ in}) - 2B(60 \text{ in}) = 0$$


$$B = +1175 \text{ lb} \quad B = 1175 \text{ lb} \uparrow$$

CHECK: $\rightarrow \sum F_y = 0$ $2A + 2B - 2100 \text{ lb} - 900 \text{ lb} = 0$

$$2(325 \text{ lb}) + 2(1175 \text{ lb}) - 2100 \text{ lb} - 900 \text{ lb} = 0$$


$$0 = 0 \quad (\text{CHECKS})$$

4.4



FIND:
(a) REACTION AT A
(b) TENSION IN
CABLE BC

FREE-BODY DIAGRAM



(a) REACTION AT A: $\sum F_x = 0 \quad A_x = 0$

$$\rightarrow \sum M_B = 0:$$

$$(15 \text{ lb})(28 \text{ in}) + (20 \text{ lb})(22 \text{ in}) + (35 \text{ lb})(14 \text{ in}) + (20 \text{ lb})(6 \text{ in}) - A_y(6 \text{ in}) = 0$$

$$A_y = +245 \text{ lb} \quad A = 245 \text{ lb} \uparrow$$

(b) TENSION IN BC

$$\rightarrow \sum M_A = 0$$

$$(15 \text{ lb})(22 \text{ in}) + (20 \text{ lb})(16 \text{ in}) + (35 \text{ lb})(8 \text{ in}) - (15 \text{ lb})(6 \text{ in}) - F_{BC}(6 \text{ in}) = 0$$

$$F_{BC} = +140 \text{ lb} \quad F_{BC} = 140 \text{ lb}$$


CHECK: $\rightarrow \sum F_y = 0:$

$$-15 \text{ lb} - 20 \text{ lb} - 35 \text{ lb} - 15 \text{ lb} + A - F_{BC} = 0$$


$$-105 \text{ lb} + 245 \text{ lb} - 140 \text{ lb} = 0$$

$$0 = 0 \quad (\text{CHECKS})$$

4.5

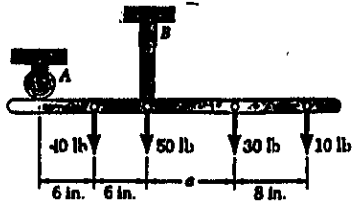

FIND:
REACTIONS
AT A AND B

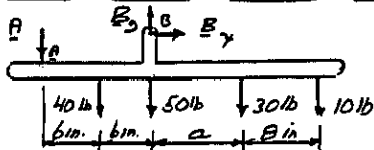

FREE-BODY
DIAGRAM

$$\sum F_x = 0: B_x = 0$$

$$+\sum M_B = 0: (40 \text{ lb})(6 \text{ in}) - (30 \text{ lb})a - (10 \text{ lb})(a + 8 \text{ in}) + (12 \text{ in})A = 0$$

$$A = (40a - 160)/12 \quad (1)$$

$$+\sum M_A = 0:$$

$$-(40 \text{ lb})(6 \text{ in}) - (50 \text{ lb})(12 \text{ in}) - (30 \text{ lb})(a + 12 \text{ in}) - (10 \text{ lb})(a + 20 \text{ in}) + (12 \text{ in})B_y = 0$$

$$B_y = (1400 + 40a)/12$$

SINCE $B_x = 0$, $B = (1400 + 40a)/12 \quad (2)$

(a) FOR $a = 10 \text{ in}$

$$\text{EQ. (1): } A = (40 \times 10 - 160)/12 = +20 \text{ lb} \quad \begin{matrix} A = 20 \text{ lb} \downarrow \\ B = 150 \text{ lb} \uparrow \end{matrix}$$


$$\text{EQ. (2): } B = (1400 + 40 \times 10)/12 = +150 \text{ lb}$$

(b) FOR $a = 7 \text{ in}$


$$\text{EQ. (1): } A = (40 \times 7 - 160)/12 = +10 \text{ lb} \quad \begin{matrix} A = 10 \text{ lb} \downarrow \\ B = 140 \text{ lb} \uparrow \end{matrix}$$

$$\text{EQ. (2): } B = (1400 + 40 \times 7)/12 = +140 \text{ lb}$$

4.6



FIND:
SMALLEST
DISTANCE a
FOR NO MOTION

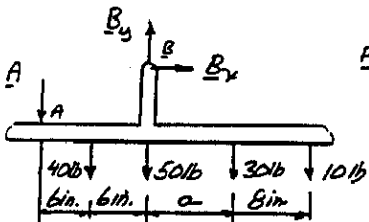

FREE-BODY
DIAGRAM

FOR NO MOTION REACTION AT A
MUST BE DOWNWARD OR ZERO
SMALLEST DISTANCE a FOR NO MOTION
CORRESPONDS TO $A = 0$


$$+\sum M_B = 0$$

$$(40 \text{ lb})(6 \text{ in}) - (30 \text{ lb})a - (10 \text{ lb})(a + 8 \text{ in}) + (12 \text{ in})A = 0$$

$$A = (40a - 160)/12$$

$$A = 0: (40a - 160) = 0 \quad \alpha = 4 \text{ in.}$$

4.7 and 4.8

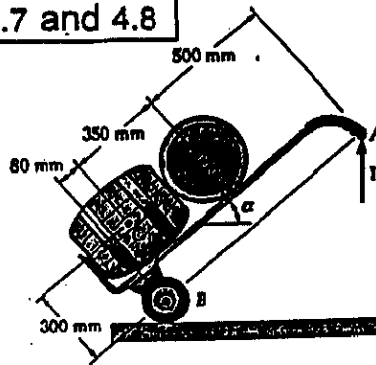


MASS OF EACH
WHEEL IS 40 kg

FIND:
(a) P
(b) REACTION AT
EACH WHEEL

FOR EACH WHEEL: $W = mg = (40 \text{ kg})(9.81 \text{ m/s}^2) = 392.4 \text{ N}$


FREE-BODY
DIAGRAM

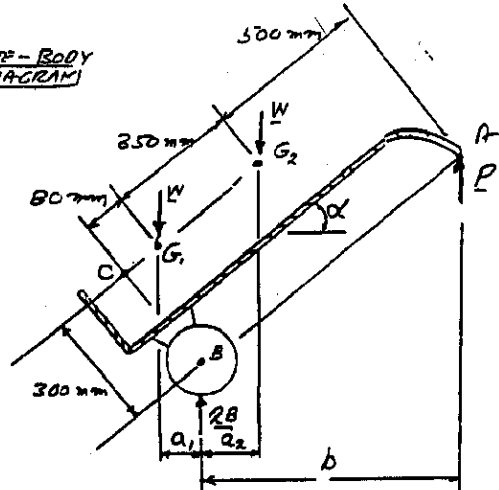

$$+\sum M_B = 0: W a_1 - W a_2 + P b = 0 \quad P = W(a_2 - a_1)/b \quad (1)$$

$$+\sum F_y = 0: -W - W + P + 2B = 0 \quad B = W - \frac{1}{2}P \quad (2)$$

GEOMETRY FIND a_1 AND a_2 IN TERMS OF α
 $BC = 300 \text{ mm}$, $CG_1 = 80 \text{ mm}$, $CG_2 = 80 + 300 = 430 \text{ mm}$
 $AB = 80 + 350 + 500 = 930 \text{ mm}$

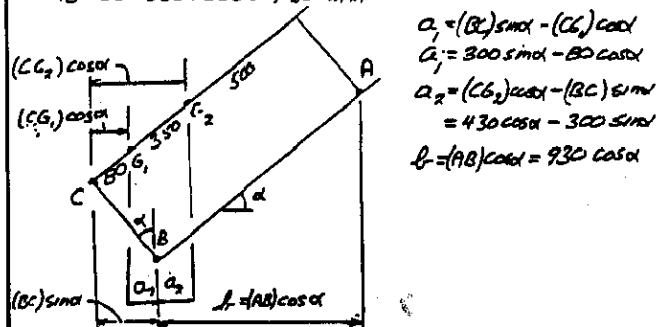

$$a_1 = (BC) \sin \alpha - (CG_1) \cos \alpha$$

$$a_2 = (CG_2) \cos \alpha - (BC) \sin \alpha$$

$$= 430 \cos \alpha - 300 \sin \alpha$$

$$b = (AB) \cos \alpha = 930 \cos \alpha$$

$$\text{EQ. (1): } P = W(a_2 - a_1)/b$$

$$P = W[(430 \cos \alpha - 300 \sin \alpha) - (300 \sin \alpha - 80 \cos \alpha)] / 930 \cos \alpha$$

$$= (392.4 \text{ kg})(0.5104 \cos \alpha - 600 \sin \alpha) / 930 \cos \alpha$$

$$P = (392.4)(0.5404 - 0.6452 \tan \alpha)$$

PROB. 4.7 $\alpha = 35^\circ$

$$P = 392.4(0.5404 - 0.6452 \tan 35^\circ) = +37.9 \text{ N} \quad \begin{matrix} P = 37.9 \text{ N} \uparrow \\ B = 374 \text{ N} \uparrow \end{matrix}$$


$$\text{EQ. (2): } B = W - \frac{1}{2}P = 392.4 \text{ N} - \frac{1}{2}(37.9 \text{ N}) = +374 \text{ N}$$

PROB. 4.8 $\alpha = 40^\circ$


$$P = 392.4(0.5404 - 0.6452 \tan 40^\circ) = +2.76 \text{ N} \quad \begin{matrix} P = 2.76 \text{ N} \uparrow \\ B = 391 \text{ N} \uparrow \end{matrix}$$

$$\text{EQ. (2): } B = W - \frac{1}{2}P = 392.4 \text{ N} - \frac{1}{2}(2.76 \text{ N}) = +391 \text{ N}$$

4.9



FIND: RANGE OF VALUES OF P FOR EQUILIBRIUM

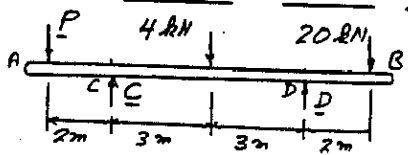


FREE-BODY DIAGRAM

$\sum M_C = 0: P(2m) - (4kN)(3m) - (20kN)(5m) + D(6m) = 0$
 $P = 86kN - 3D$ (1)


$\sum M_D = 0: P(8m) + (4kN)(3m) - (20kN)(2m) - C(6m) = 0$
 $P = 3.5kN + 0.75C$ (2)

FOR NO MOTION $C \geq 0$ AND $D \geq 0$
 FOR $C \geq 0$ FROM (2) $P \leq 3.5kN$
 FOR $D \geq 0$ FROM (1) $P \leq 86kN$
 RANGE OF P FOR NO MOTION: $3.5kN \leq P \leq 86kN$

4.10



FIND: RANGE OF VALUES OF P IF REACTIONS MUST BE $\leq 50kN$ AND BE DIRECTED UPWARD

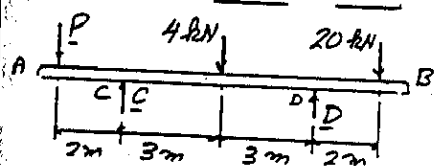

FREE-BODY DIAGRAM

$\sum M_C = 0: P(2m) - (4kN)(3m) - (20kN)(5m) + D(6m) = 0$
 $P = 86kN - 3D$ (1)

$\sum M_D = 0: P(8m) + (4kN)(3m) - (20kN)(2m) - C(6m) = 0$
 $P = 3.5kN + 0.75C$ (2)


FOR $C \geq 0$, FROM (2): $P \geq 3.5kN$
 FOR $D \geq 0$, FROM (1): $P \leq 86kN$

FOR $C \leq 50kN$, FROM (2):
 $P \leq 3.5kN + 0.75(50kN)$
 $P \leq 41kN$


FOR $D \leq 50kN$, FROM (1):
 $P \geq 86kN - 3(50kN)$
 $P \geq -64kN$

COMPARING THE FOUR CRITERIA, WE FIND
 $3.5kN \leq P \leq 41kN$

4.11

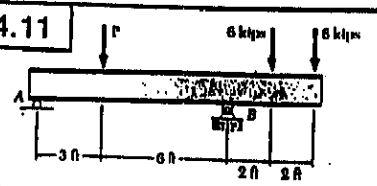

FIND: P MAX FOR REACTIONS $\leq 30kips$ AND REACTION AT A UPWARD

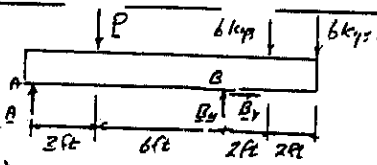

$\sum F_x = 0: B_x = 0$
 $\therefore B = B_y \uparrow$

$\sum M_A = 0: -P(3ft) + B(9ft) - (6kips)(11ft) - (6kips)(13ft) = 0$
 $P = 3B - 48kips$ (1)


$\sum M_B = 0: -A(9ft) + P(6ft) - (6kips)(2ft) - (6kips)(4ft) = 0$
 $P = 1.5A + 6kips$ (2)

SINCE $B \leq 30kips$, EQ. (1) YIELDS
 $P \leq (3)(30kips) - 48kips$ $P \leq 42kips$


SINCE $0 \leq A \leq 30kips$, EQ. (2) YIELDS
 $0 + 6kips \leq P \leq (1.5)(30kips) + 6kips$
 $6kips \leq P \leq 51kips$

RANGE OF VALUES OF P FOR WHICH BEAM WILL BE SAFE:
 $6kips \leq P \leq 42kips$

4.12

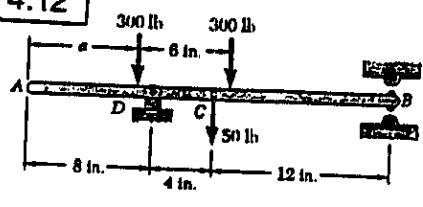


FIND: RANGE OF DISTANCE a FOR WHICH $B \leq 100lb \downarrow$ AND $B \leq 200lb \uparrow$

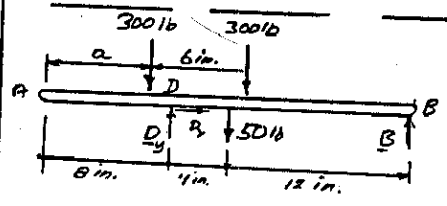

ASSUME ϵ IS POSITIVE WHEN DIRECTED \uparrow

SKETCH SHOWING DISTANCE FROM D TO FORCES.
 $(a + 6in) - 8in = a - 2in$

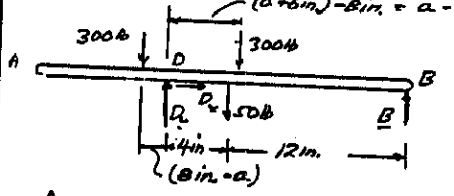


$\sum M_D = 0$
 $(300lb)(8in - a) - (300lb)(a - 2in) - (50lb)(4in) - 16B = 0$
 $-600a + 2800 + 16B = 0$
 $a = (2800 + 16B) / 600$ (1)

FOR $B = 100lb \downarrow = -100lb$, EQ. (1) YIELDS:
 $a \geq [2800 + 16(-100)] / 600 = \frac{1200}{600} = 2in$
 $a \geq 2in$


FOR $B = 200lb \uparrow = +200lb$, EQ. (1) YIELDS:
 $a \leq [2800 + 16(200)] / 600 = \frac{6000}{600} = 10in$
 $a \leq 10in$

REQUIRED RANGE: $2in \leq a \leq 10in$

4.13

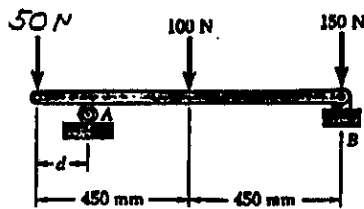

FIND: RANGE OF DISTANCE d FOR WHICH THE REACTIONS ARE $\leq 180\text{N}$

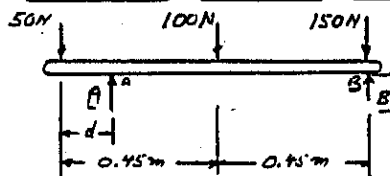

$$\sum F_x = 0: B_x = 0$$

$$\therefore B = B_y$$

$$+\sum M_A = 0:$$

$$(50\text{N})d - (100\text{N})(0.45\text{m} - d) - (150\text{N})(0.9\text{m} - d) + B(0.9\text{m} - d) = 0$$

$$50d - 45 + 100d - 135 + 150d + 0.9B - Bd = 0$$

$$d = \frac{180\text{N}\cdot\text{m} - (0.9\text{m})B}{300\text{N} - B} \quad (1)$$

$$+\sum M_B = 0:$$

$$(50\text{N})(0.9\text{m}) - A(0.9\text{m} - d) + (100\text{N})(0.45\text{m}) = 0$$

$$45 - 0.9A + Ad + 45 = 0$$

$$d = \frac{(0.9\text{m})A - 90\text{N}\cdot\text{m}}{A} \quad (2)$$

SINCE $B \leq 180\text{N}$, EQ. (1) YIELDS.


$$d \geq \frac{180 - (0.9)180}{300 - 180} = \frac{18}{120} = 0.15\text{m} \quad d \geq 150\text{mm}$$

SINCE $A \leq 180\text{N}$, EQ. (2) YIELDS.


$$d \leq \frac{(0.9)180 - 90}{180} = \frac{72}{180} = 0.40\text{m} \quad d \leq 400\text{mm}$$

$$\text{RANGE: } 150\text{mm} \leq d \leq 400\text{mm}$$

4.14



FIND: RANGE OF DISTANCE d FOR WHICH REACTIONS ARE $\leq 180\text{N}$

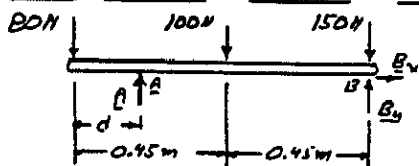

$$\sum F_x = 0: B_x = 0$$

$$\therefore B = B_y$$

$$+\sum M_A = 0: (100\text{N})d - (100\text{N})(0.45\text{m} - d) - (150\text{N})(0.9\text{m} - d) + B(0.9\text{m} - d) = 0$$

$$80d - 45 + 100d - 135 + 150d + 0.9B - Bd = 0$$

$$d = \frac{180\text{N}\cdot\text{m} - 0.9B}{330\text{N} - B} \quad (1)$$

$$+\sum M_B = 0: (80\text{N})(0.9\text{m}) - A(0.9\text{m} - d) + (100\text{N})(0.45\text{m}) = 0$$

$$d = \frac{0.9A - 117}{A} \quad (2)$$

SINCE $B \leq 180\text{N}$, EQ. (1) YIELDS.


$$d \geq (180 - 0.9 \times 180) / (330 - 180) = \frac{18}{150} = 0.12\text{m} \quad d \geq 120\text{mm}$$

SINCE $A \leq 180\text{N}$, EQ. (2) YIELDS.

$$d \leq (0.9 \times 180 - 117) / 180 = \frac{45}{180} = 0.25\text{m} \quad d \leq 250\text{mm}$$


$$\text{RANGE: } 120\text{mm} \leq d \leq 250\text{mm}$$

4.15

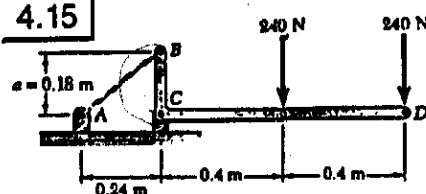

FIND:

- (a) TENSION IN AB
(b) REACTION AT C

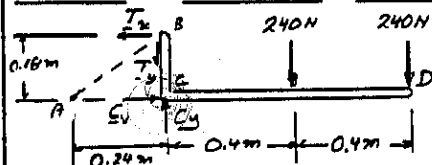

AT B:

$$\frac{T_x}{T_y} = \frac{0.18\text{m}}{0.24\text{m}}$$

$$\frac{T_x}{T_y} = \frac{3}{4} \quad (1)$$

$$+\sum M_C = 0: T_x(0.18\text{m}) - (240\text{N})(0.4\text{m}) - (240\text{N})(0.8\text{m}) = 0$$

$$T_x = +1600\text{N}$$

$$\text{EQ. (1)} \quad T_y = \frac{4}{3}(1600\text{N}) = 1700\text{N}$$

$$T = \sqrt{T_x^2 + T_y^2} = \sqrt{1600^2 + 1700^2} = 2000\text{N}$$

$$T = 2.0\text{kN}$$

$$\pm \sum F_x = 0: C_x - T_x = 0$$

$$C_x - 1600\text{N} = 0 \quad C_x = +1600\text{N}$$

$$C_y = 1600\text{N} \rightarrow$$

$$+\sum F_y = 0: C_y - T_y - 240\text{N} - 240\text{N} = 0$$

$$C_y - 1700\text{N} - 480\text{N} = 0$$

$$C_y = +1680\text{N}$$

$$C_y = 1680\text{N} \uparrow$$

$$C_y = 1680\text{N}$$


$$\alpha = 46.4^\circ$$

$$C = 2320\text{N}$$

$$C_x = 1680\text{N}$$


$$C = 2.32\text{kN} \angle 46.4^\circ$$

4.16

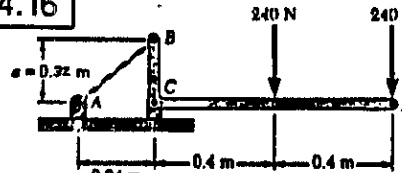

FIND:

- (a) TENSION IN AB
(b) REACTION AT C

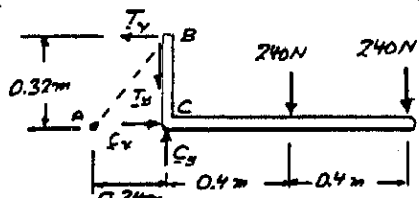

AT B:

$$\frac{T_x}{T_y} = \frac{0.32\text{m}}{0.24\text{m}}$$

$$\frac{T_x}{T_y} = \frac{4}{3} \quad (1)$$

$$+\sum M_C = 0: T_x(0.32\text{m}) - (240\text{N})(0.4\text{m}) - (240\text{N})(0.8\text{m}) = 0$$

$$T_x = 900\text{N}$$

$$\text{EQ. (1)} \quad T_y = \frac{4}{3}(900\text{N}) = 1200\text{N}$$

$$T = \sqrt{T_x^2 + T_y^2} = \sqrt{900^2 + 1200^2} = 1500\text{N}$$

$$T = 1.5\text{kN}$$

$$\pm \sum F_x = 0: C_x - T_x = 0$$

$$C_x - 900\text{N} = 0 \quad C_x = +900\text{N}$$

$$C_x = 900\text{N} \rightarrow$$

$$+\sum F_y = 0: C_y - T_y - 240\text{N} - 240\text{N} = 0$$

$$C_y - 1200\text{N} - 480\text{N} = 0$$

$$C_y = +1680\text{N}$$

$$C_y = 1680\text{N} \uparrow$$

$$C_y = 1680\text{N}$$


$$\alpha = 61.8^\circ$$

$$C = 1906\text{N}$$


$$C_x = 900\text{N}$$

$$C = 1.906\text{kN} \angle 61.8^\circ$$

4.17



GIVEN:
 $T_{AB} = 200 \text{ lb}$
FIND:
 (a) FORCE P
 (b) REACTION AT C

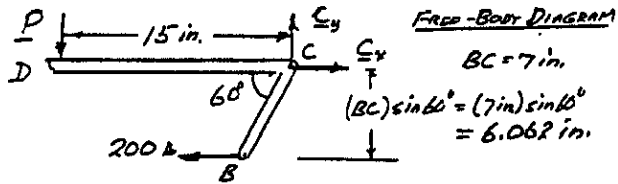


$+\sum M_C = 0: P(15 \text{ in.}) - (200 \text{ lb})(6.062 \text{ in.}) = 0$
 $P = 80.83 \text{ lb}$

$\pm \sum F_x = 0: C_x - 200 \text{ lb} = 0 \Rightarrow C_x = 200 \text{ lb} \rightarrow$
 $+\uparrow \sum F_y = 0: C_y - P = 0; C_y - 80.83 \text{ lb} = 0 \Rightarrow C_y = 80.83 \text{ lb} \uparrow$

$C = 216 \text{ lb} \angle 22.0^\circ$

4.19 CONTINUED



FREE-BODY DIAGRAM

$BC = \sqrt{60^2 + 80^2} = 100 \text{ mm}$


$+\sum M_C = 0:$
 $T(BC) - (400 \text{ N})(CD) = 0$
 $T(100 \text{ mm}) - (400 \text{ N})(150 \text{ mm}) = 0$
 $T = 600 \text{ N}$

$\pm \sum F_x = 0:$
 $400 \text{ N} + C_x + \frac{3}{5}T = 0$
 $400 \text{ N} + C_x + \frac{3}{5}(600 \text{ N}) = 0$
 $C_x = -760 \text{ N} \quad C_x = 760 \text{ N} \leftarrow$


$+\uparrow \sum F_y = 0: C_y + \frac{4}{5}T = 0$
 $C_y + \frac{4}{5}(600 \text{ N}) = 0; C_y = -480 \text{ N}; C_y = 480 \text{ N} \downarrow$

$C = 899 \text{ N} \angle 32.3^\circ$

4.18




GIVEN: REACTION AT C = 250 lb
FIND: MAXIMUM ALLOWABLE TENSION IN AB

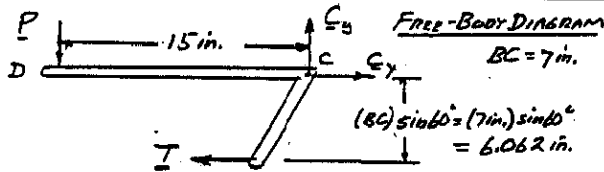

$+\sum M_C = 0: P(15 \text{ in.}) - T(6.062 \text{ in.}) = 0 \Rightarrow P = 0.40415T$
 $+\uparrow \sum F_y = 0: -P + C_y = 0; -0.40415P + C_y = 0 \Rightarrow C_y = 0.40415T$
 $\pm \sum F_x = 0: -T + C_x = 0 \Rightarrow C_x = T$


$C = \sqrt{C_x^2 + C_y^2} = \sqrt{T^2 + (0.40415T)^2} = 1.0786T$
 For $C = 250 \text{ lb}$, $250 \text{ lb} = 1.0786T \Rightarrow T = 232 \text{ lb}$

4.20



GIVEN: REACTION AT C = 1000 N

FIND: MAXIMUM ALLOWABLE FORCE P



FREE-BODY DIAGRAM

$BC = \sqrt{60^2 + 80^2} = 100 \text{ mm}$

$+\sum M_C = 0:$
 $T(BC) - P(CD) = 0$
 $T(100 \text{ mm}) - P(150 \text{ mm}) = 0 \Rightarrow T = 1.5P$


$\pm \sum F_x = 0:$
 $P + C_x + \frac{3}{5}T = 0$
 $P + C_x + \frac{3}{5}(1.5P) = 0$
 $C_x = -1.9P \quad C_x = 1.9P \leftarrow$

$+\uparrow \sum F_y = 0: C_y + \frac{4}{5}T = 0$
 $C_y + \frac{4}{5}(1.5P) = 0 \Rightarrow C_y = -1.2P \quad C_y = 1.2P \downarrow$

$C = \sqrt{C_x^2 + C_y^2} = \sqrt{(1.9P)^2 + (1.2P)^2} = 2.2472P$

For $C = 1000 \text{ N}$, $1000 \text{ N} = 2.2472P \Rightarrow P = 444.99 \text{ N} \approx 445 \text{ lb}$


4.19




GIVEN: $P = 400 \text{ N}$
FIND:
 (a) TENSION IN ROD AB
 (b) REACTION AT C

(CONTINUED)

4.21

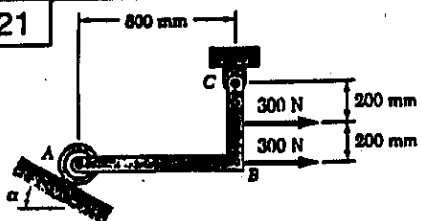

FIND:
REACTIONS
AT A AND C
WHEN
(a) $\alpha = 0$
(b) $\alpha = 30^\circ$

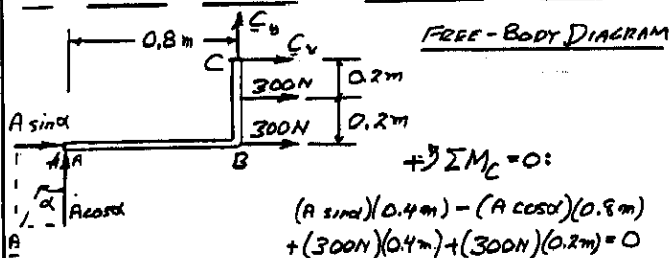

$\sum M_C = 0:$

$(A \sin \alpha)(0.4 \text{ m}) - (A \cos \alpha)(0.8 \text{ m}) + (300 \text{ N})(0.4 \text{ m}) + (300 \text{ N})(0.2 \text{ m}) = 0$

$A = \frac{180}{0.8 \cos \alpha - 0.4 \sin \alpha} \quad (1)$

$\sum F_x = 0: C_x + 300 \text{ N} + 300 \text{ N} + A \sin \alpha = 0$


$C_x = -600 - A \sin \alpha \quad (2)$

$\sum F_y = 0: C_y + A \cos \alpha = 0 \quad C_y = -A \cos \alpha \quad (3)$

(a) WHEN $\alpha = 0$: EQ.(1), $A = \frac{180}{0.8} = 225 \text{ N} \quad A = 225 \text{ N} \uparrow$

EQ.(2), $C_x = -600 \text{ N}$

EQ.(3), $C_y = -225 \text{ N}$



$C = 640.8 \text{ N} \angle 20.6^\circ$


(b) WHEN $\alpha = 30^\circ$:

EQ.(1), $A = \frac{180}{0.8 \cos 30^\circ - 0.4 \sin 30^\circ} = 365.2 \text{ N}$

$A = 365 \text{ N} \angle 60^\circ$


EQ.(2), $C_x = -600 - (365.2) \sin 30^\circ = -782.6 \text{ N}$

EQ.(3), $C_y = -(365.2) \cos 30^\circ = -316.3 \text{ N}$




$C = 844.1 \text{ N} \angle 22.0^\circ$

4.22

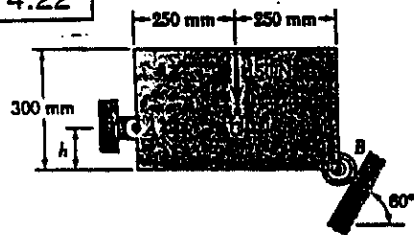

FIND:
REACTIONS
AT A AND B
WHEN
(a) $h = 0$
(b) $h = 200 \text{ mm}$

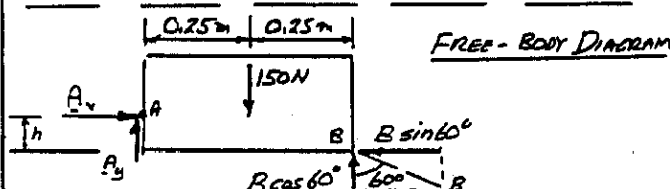

$\sum M_A = 0: (B \cos 60^\circ)(0.5 \text{ m}) - (B \sin 60^\circ)h - (150 \text{ N})(0.25 \text{ m}) = 0$

$B = \frac{37.5}{0.25 - 0.866 h} \quad (1)$

(CONTINUED)

4.22 CONTINUED

(a) WHEN $h = 0$:


EQ.(1): $B = \frac{37.5}{0.25} = 150 \text{ N} \quad B = 150 \text{ N} \angle 30^\circ$

$\sum F_x = 0: A_x - B \sin 60^\circ = 0$

$A_x = (150) \sin 60^\circ = 129.9 \text{ N} \quad A_x = 129.9 \text{ N} \rightarrow$

$\sum F_y = 0: A_y - 150 + B \cos 60^\circ = 0$

$A_y = 150 - (150) \cos 60^\circ = 75 \text{ N} \quad A_y = 75 \text{ N} \uparrow$



(b) WHEN $h = 200 \text{ mm} = 0.2 \text{ m}$

EQ.(1): $B = \frac{37.5}{0.25 - 0.866(0.2)} = 488.3 \text{ N}$

$B = 488 \text{ N} \angle 30^\circ$


$\sum F_x = 0: A_x - B \sin 60^\circ = 0$

$A_x = (488.3) \sin 60^\circ = 422.88 \text{ N} \quad A_x = 422.88 \text{ N} \rightarrow$

$\sum F_y = 0: A_y - 150 + B \cos 60^\circ = 0$

$A_y = 150 - (488.3) \cos 60^\circ = -94.15 \text{ N}$

$A_y = 94.15 \text{ N} \downarrow$



4.23





PLATE a

FIND:
REACTIONS
AT A AND B

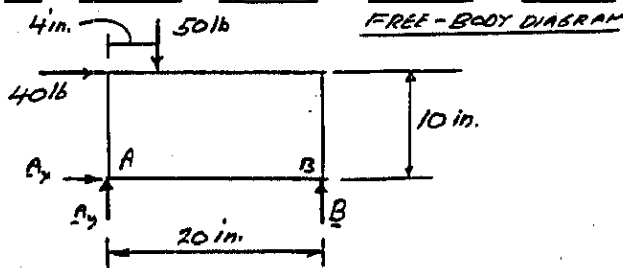

$\sum M_A = 0:$

$B(20 \text{ in}) - (50 \text{ lb})(4 \text{ in}) - (40 \text{ lb})(10 \text{ in}) = 0$

$B = +30 \text{ lb} \quad B = 30 \text{ lb} \uparrow$


$\sum F_x = 0: A_x + 40 \text{ lb} = 0$

$A_x = -40 \text{ lb} \quad A_x = 40 \text{ lb} \leftarrow$

$\sum F_y = 0: A_y + B - 50 \text{ lb} = 0$

$A_y + 30 \text{ lb} - 50 \text{ lb} = 0$


$A_y = +20 \text{ lb} \quad A_y = 20 \text{ lb} \uparrow$



(CONTINUED)


4.23 CONTINUED

PLATE b:

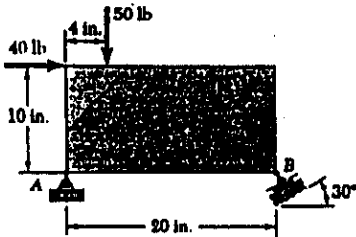


FIND:
REACTIONS
AT A AND B

(b)

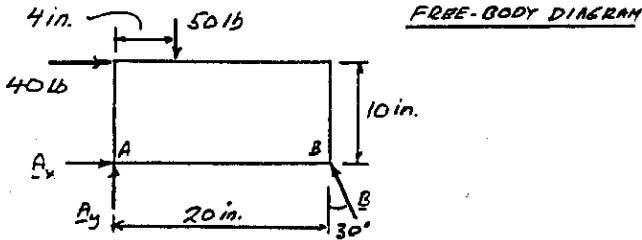


$$\begin{aligned} +\sum M_A = 0: & (B \cos 30^\circ)(20 \text{ in}) - (40 \text{ lb})(10 \text{ in}) - (50 \text{ lb})(4 \text{ in}) = 0 \\ & B = 34.64 \text{ lb} \quad B = 34.6 \text{ lb} \nearrow 60^\circ \\ \pm \sum F_x = 0: & A_x - B \sin 30^\circ + 40 \text{ lb} = 0 \\ & A_x - (34.64 \text{ lb}) \sin 30^\circ + 40 \text{ lb} = 0 \\ & A_x = -22.68 \text{ lb} \quad A_x = 22.68 \text{ lb} \leftarrow \\ +\sum F_y = 0: & A_y + B \cos 30^\circ - 50 \text{ lb} = 0 \\ & A_y + (34.64 \text{ lb}) \cos 30^\circ - 50 \text{ lb} = 0 \\ & A_y = +20 \text{ lb} \quad A_y = 20 \text{ lb} \uparrow \end{aligned}$$




4.24 CONTINUED

PLATE b:




FIND:
REACTIONS
AT A AND B

(b)

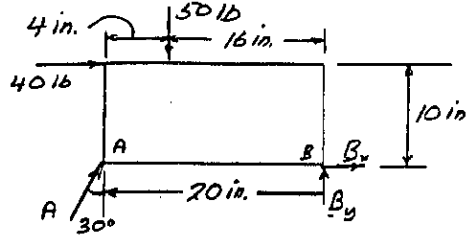

$$\begin{aligned} +\sum M_B = 0: & -(A \cos 30^\circ)(20 \text{ in}) - (40 \text{ lb})(10 \text{ in}) + (50 \text{ lb})(16 \text{ in}) = 0 \\ & A = 23.09 \text{ lb} \quad A = 23.1 \text{ lb} \nearrow 60^\circ \\ \pm \sum F_x = 0: & A \sin 30^\circ + 40 \text{ lb} + B_x = 0 \\ & (23.09 \text{ lb}) \sin 30^\circ + 40 \text{ lb} + B_x = 0 \\ & B_x = -51.55 \text{ lb} \quad B_x = 51.55 \text{ lb} \leftarrow \\ +\sum F_y = 0: & A \cos 30^\circ - B_y - 50 \text{ lb} = 0 \\ & (23.09 \text{ lb}) \cos 30^\circ + B_y - 50 \text{ lb} = 0 \\ & B_y = +30 \text{ lb} \quad B_y = 30 \text{ lb} \uparrow \end{aligned}$$



4.24






PLATE a:

FIND:
REACTIONS
AT A AND B

(a)

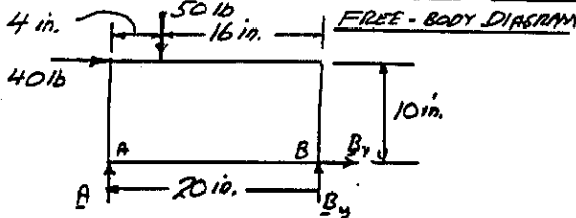


$$\begin{aligned} +\sum M_B = 0: & -A(20 \text{ in}) + (50 \text{ lb})(16 \text{ in}) - (40 \text{ lb})(10 \text{ in}) = 0 \\ & A = +20 \text{ lb} \quad A = 20 \text{ lb} \uparrow \\ \pm \sum F_x = 0: & 40 \text{ lb} + B_x = 0 \\ & B_x = -40 \text{ lb} \quad B_x = 40 \text{ lb} \leftarrow \\ +\sum F_y = 0: & A + B_y - 50 \text{ lb} = 0 \\ & 20 \text{ lb} + B_y - 50 \text{ lb} = 0 \\ & B_y = +30 \text{ lb} \quad B_y = 30 \text{ lb} \uparrow \end{aligned}$$



(CONTINUED)

4.25

NOTE: $d = 200 \text{ mm}$

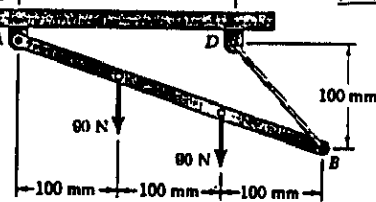


FIND:
(a) TENSION
IN CABLE BD
(b) REACTION
AT A




MOVE T ALONG BD UNTIL IT ACTS AT POINT D .

$$\begin{aligned} +\sum M_A = 0: & (T \sin 45^\circ)(0.2 \text{ m}) + (90 \text{ N})(0.1 \text{ m}) + (90 \text{ N})(0.2 \text{ m}) = 0 \\ & T = 190.92 \text{ N} \quad T = 190.9 \text{ N} \\ \pm \sum F_x = 0: & A_x - (190.92 \text{ N}) \cos 45^\circ = 0 \\ & A_x = +135 \text{ N} \quad A_x = 135 \text{ N} \leftarrow \\ +\sum F_y = 0: & A_y - 90 \text{ N} - 90 \text{ N} + (190.92 \text{ N}) \sin 45^\circ = 0 \\ & A_y = +45 \text{ N} \quad A_y = 45 \text{ N} \uparrow \end{aligned}$$


4.26

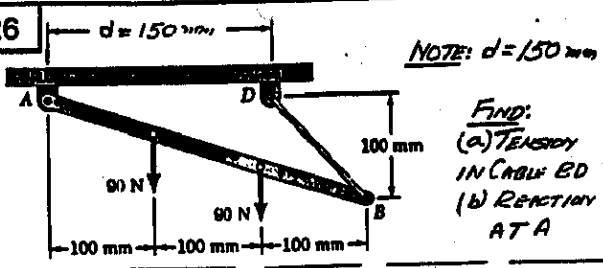

NOTE: $d = 150 \text{ mm}$
 FIND:
 (a) TENSION IN CABLE BD
 (b) REACTION AT A

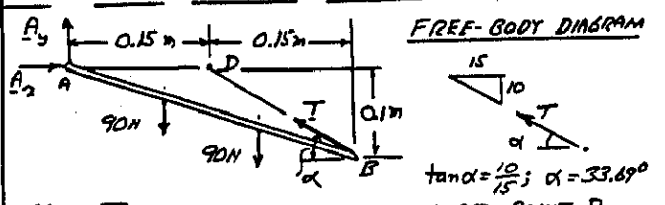

FREE-BODY DIAGRAM

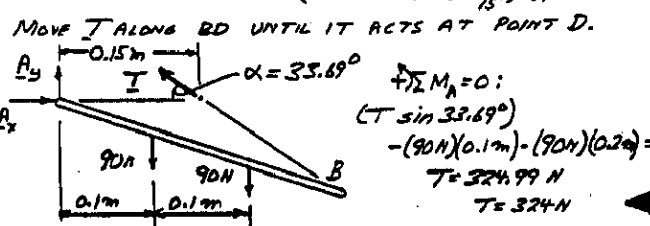

MOVE T ALONG BD UNTIL IT ACTS AT POINT D .

$$\sum M_A = 0: (T \sin 33.69^\circ)(0.1 \text{ m}) - (90 \text{ N})(0.1 \text{ m}) - (90 \text{ N})(0.2 \text{ m}) = 0$$


$$T = 324.99 \text{ N} \quad T = 324 \text{ N}$$

$$\sum F_x = 0: A_x - (324.99 \text{ N}) \cos 33.69^\circ = 0 \quad A_x = 270 \text{ N} \rightarrow$$

$$\sum F_y = 0: A_y - 90 \text{ N} - 90 \text{ N} + (324.99 \text{ N}) \sin 33.69^\circ = 0 \quad A_y = 0$$


$A = 270 \text{ N} \rightarrow$

4.27

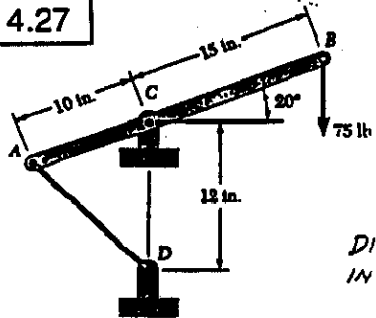

FIND:
 (a) TENSION IN CABLE AD
 (b) REACTION AT C

DRAW FREE-BODY DIAGRAM WITH TENSION IN AD ACTING AT D

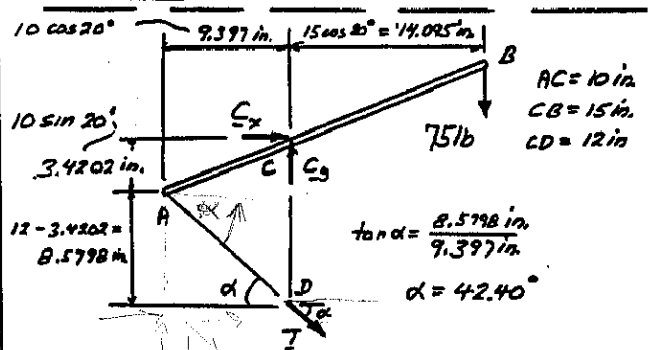

$$\sum M_C = 0: (T \cos \alpha)(12 \text{ in}) - (75 \text{ lb})(14.095 \text{ in}) = 0$$

$$(T \cos 42.40^\circ)(12 \text{ in}) - (75 \text{ lb})(14.095 \text{ in}) = 0$$

$$T = 119.29 \text{ lb} \quad T = 119.3 \text{ lb}$$


$$\sum F_x = 0: C_x + (119.29 \text{ lb}) \cos 42.40^\circ = 0 \quad C_x = -88.094 \text{ lb} \quad C_x = 88.094 \text{ lb} \leftarrow$$

$$\sum F_y = 0: C_y - 75 \text{ lb} - (119.29 \text{ lb}) \sin 42.40^\circ = 0$$


$$C_y = +155.44 \text{ lb} \quad C_y = 155.44 \text{ lb} \uparrow$$

$C = 178.7 \text{ lb} \nearrow 60.5^\circ$

4.28

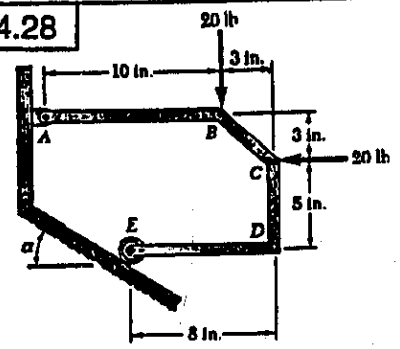

FIND: REACTIONS AT A AND E WHEN
 (a) $\alpha = 30^\circ$
 (b) $\alpha = 45^\circ$

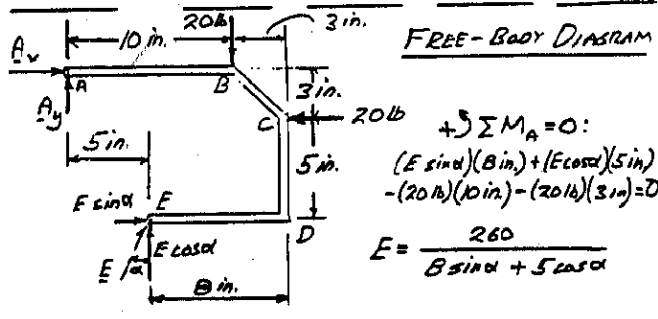

FREE-BODY DIAGRAM

$$\sum M_A = 0: (E \sin \alpha)(8 \text{ in}) + (E \cos \alpha)(5 \text{ in}) - (20 \text{ lb})(10 \text{ in}) - (20 \text{ lb})(3 \text{ in}) = 0$$

$$E = \frac{260}{8 \sin \alpha + 5 \cos \alpha}$$

(a) WHEN $\alpha = 30^\circ: E = \frac{260}{8 \sin 30^\circ + 5 \cos 30^\circ} = 31.212 \text{ lb}$
 $E = 31.2 \text{ lb} \nearrow 60^\circ$

$$\sum F_x = 0: A_x - 20 \text{ lb} + (31.212 \text{ lb}) \sin 30^\circ = 0$$

$$A_x = +4.394 \text{ lb} \quad A_x = 4.394 \text{ lb} \rightarrow$$

$$\sum F_y = 0: A_y - 20 + (31.212 \text{ lb}) \cos 30^\circ = 0$$

$$A_y = -7.03 \text{ lb} \quad A_y = 7.03 \text{ lb} \downarrow$$

$A = 8.29 \text{ lb} \searrow 58.0^\circ$


(b) WHEN $\alpha = 45^\circ: E = \frac{260}{8 \sin 45^\circ + 5 \cos 45^\circ} = 28.28 \text{ lb}$
 $E = 28.3 \text{ lb} \nearrow 45^\circ$

$$\sum F_x = 0: A_x - 20 \text{ lb} + (28.28 \text{ lb}) \sin 45^\circ = 0 \quad A_x = 0$$

$$\sum F_y = 0: A_y - 20 \text{ lb} + (28.28 \text{ lb}) \cos 45^\circ = 0 \quad A_y = 0$$


$A = 0$

4.29



FIND:
TENSION IN
CABLE ABD,
REACTION
AT C.

LET T EQUAL
TENSION IN CABLE



FREE-BODY DIAGRAM

$$+\circlearrowleft \Sigma M_C = 0$$

$$T(0.25\text{m}) - T(0.1\text{m}) - (120\text{N})(0.1\text{m}) = 0$$


$$T = 80\text{N} \quad \triangleleft$$

$$+\rightarrow \Sigma F_x = 0: C_x - 80\text{N} = 0; C_x = +80\text{N}; C_x = 80\text{N} \rightarrow$$

$$+\uparrow \Sigma F_y = 0: C_y - 120\text{N} + 80\text{N} = 0; C_y = +40\text{N}; C_y = 40\text{N} \uparrow$$

$C = 89.4\text{N} \angle 26.6^\circ \triangleleft$


4.31 and 4.32

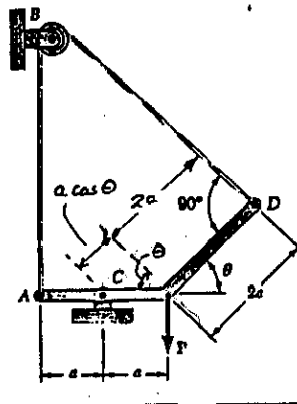

FIND:
TENSION IN CABLE ABD
REACTION AT C

WE NOTE THAT THE
PERPENDICULAR DISTANCE
FROM POINT C TO
PORTION CD OF CABLE IS
 $2a + a \cos \theta$

LET T EQUAL THE
TENSION IN CABLE



$$+\circlearrowleft \Sigma M_C = 0:$$

$$T(2a + a \cos \theta) - T a - P a = 0$$

$$T = \frac{P}{1 + \cos \theta} \quad (1)$$

$$+\rightarrow \Sigma F_x = 0: C_x - T \sin \theta = 0$$

$$C_x = T \sin \theta = \frac{P \sin \theta}{1 + \cos \theta}$$

$$+\uparrow \Sigma F_y = 0: C_y + T + T \cos \theta - P = 0$$

$$C_y = P - T(1 + \cos \theta) = P - P \frac{1 + \cos \theta}{1 + \cos \theta}; C_y = 0$$

SINCE $C_y = 0, C = C_x \quad C = P \frac{\sin \theta}{1 + \cos \theta} \rightarrow (2)$

FOR PROB 4.31 $\theta = 60^\circ$:

$$\text{EQ(1): } T = \frac{P}{1 + \cos 60^\circ} = \frac{P}{1 + \frac{1}{2}} \quad T = \frac{2}{3}P \quad \triangleleft$$


$$\text{EQ(2): } C = P \frac{\sin 60^\circ}{1 + \cos 60^\circ} = P \frac{0.866}{1 + \frac{1}{2}} \quad C = 0.577P \quad \triangleleft$$

FOR PROB 4.32 $\theta = 45^\circ$


$$\text{EQ(1): } T = \frac{P}{1 + \cos 45^\circ} = \frac{P}{1.707} \quad T = 0.586P \quad \triangleleft$$

$$\text{EQ(2): } C = P \frac{\sin 45^\circ}{1 + \cos 45^\circ} = P \frac{0.707}{1.707} \quad C = 0.414P \quad \triangleleft$$

THE FOLLOWING IS A PLOT OF
 T AND C FOR $0 \leq \theta \leq 90^\circ$

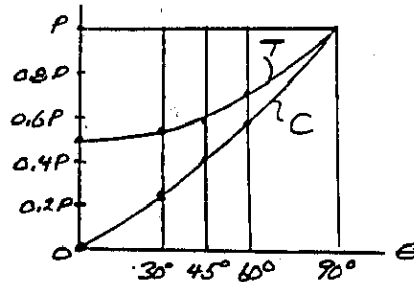


4.30

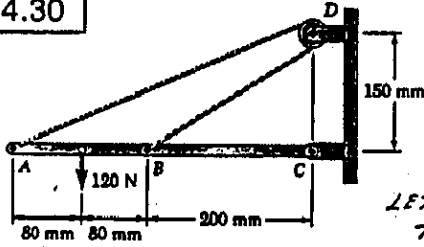

FIND:
(a) TENSION IN
CABLE ABD,
(b) REACTION
AT C.

LET T EQUAL
TENSION IN CABLE.

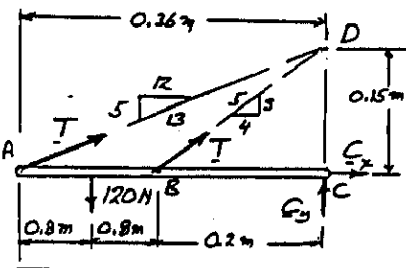

FREE-BODY DIAGRAM

IN ΔBCD :

$$\frac{0.15}{0.2} \Rightarrow \frac{5}{4}$$

IN ΔACD :

$$\frac{0.3}{0.36} \Rightarrow \frac{5}{12}$$

$$+\circlearrowleft \Sigma M_C = 0: (120\text{N})(0.28\text{m}) - (\frac{5}{13}T)(0.36\text{m}) - (\frac{5}{12}T)(0.2\text{m}) = 0$$

$$33.6 - T(0.13846 + 0.12) = 0$$

$$T = 130.00\text{N} \quad T = 130\text{N} \quad \triangleleft$$

$$+\rightarrow \Sigma F_x = 0: C_x + \frac{12}{13}(130\text{N}) + \frac{5}{12}(130\text{N}) = 0$$

$$C_x = -224\text{N} \quad C_x = 224\text{N} \leftarrow$$

$$+\uparrow \Sigma F_y = 0: C_y - 120\text{N} + \frac{5}{13}(130\text{N}) + \frac{5}{12}(130\text{N}) = 0$$


$$C_y = -8.00\text{N} \quad C_y = 8\text{N} \downarrow$$

$$C_x = 224\text{N} \quad C_y = 8\text{N}$$


$$C = 224.14\text{N} \quad \alpha = 2.045^\circ$$

$$C = 224\text{N} \angle 2.0^\circ \quad \triangleleft$$

4.33 and 4.34



FIND:
REACTION
(a) AT B
(b) AT C



FREE-BODY DIAGRAM

$$\begin{aligned} +\sum M_D = 0: & C_x(R) - P(R) = 0 \\ & C_x = +P \\ +\sum F_x = 0: & C_x - B \sin \theta = 0 \\ & P - B \sin \theta = 0 \\ & B = P / \sin \theta \\ & B = \frac{P}{\sin \theta} \quad \checkmark \end{aligned}$$

$$\begin{aligned} +\sum F_y = 0: & C_y + B \cos \theta - P = 0 \\ & C_y + (P / \sin \theta) \cos \theta - P = 0 \\ & C_y = P \left(1 - \frac{1}{\tan \theta}\right) \end{aligned}$$

FOR PROB. 4.33 $\theta = 30^\circ$

$$\begin{aligned} (a) & B = P / \sin 30^\circ = 2P & B = 2P \quad \Delta 60^\circ \\ (b) & C_x = +P & C_x = P \rightarrow \\ & C_y = P \left(1 - \frac{1}{\tan 30^\circ}\right) = -0.7321P & C_y = 0.7321P \downarrow \end{aligned}$$


$$C_y = 0.7321P \quad C_x = P \quad C = 1.239P \quad \Delta 36.2^\circ$$

FOR PROB. 4.34 $\theta = 60^\circ$


$$\begin{aligned} (a) & B = P / \sin 60^\circ = 1.1547P & B = 1.155P \quad \Delta 30^\circ \\ (b) & C_x = +P & C_x = P \rightarrow \\ & C_y = P \left(1 - \frac{1}{\tan 60^\circ}\right) = +0.4226P & C_y = 0.4226P \downarrow \end{aligned}$$

$$C_y = 0.4226P \quad C_x = P \quad C = 1.028P \quad \Delta 22.9^\circ$$

4.35

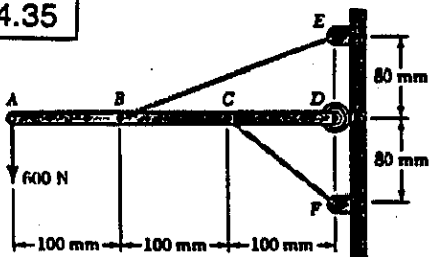

FIND:
TENSION IN
EACH CABLE
REACTION AT D

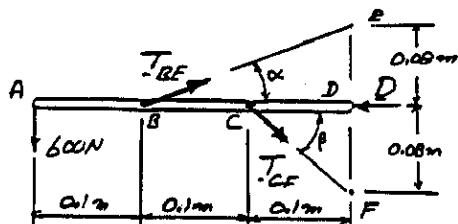

$$\tan \alpha = \frac{0.08 \text{ m}}{0.2 \text{ m}}$$

$$\alpha = 21.80^\circ$$

$$\tan \beta = \frac{0.08 \text{ m}}{0.1 \text{ m}}$$


$$\beta = 38.66^\circ$$

(CONTINUED)


4.35 CONTINUED

$$\begin{aligned} \sum M_B = 0: & (600 \text{ N})(0.1 \text{ m}) - (T_{CF} \sin 38.66^\circ)(0.1 \text{ m}) = 0 \\ & T_{CF} = 960.47 \text{ N} \quad T_{CF} = 960 \text{ N} \\ +\sum M_C = 0: & (600 \text{ N})(0.2 \text{ m}) - (T_{BE} \sin 21.80^\circ)(0.1 \text{ m}) = 0 \\ & T_{BE} = 3231.1 \text{ N} \quad T_{BE} = 3230 \text{ N} \\ \pm \sum F_y = 0: & T_{BE} \cos \alpha + T_{CF} \cos \beta - D = 0 \\ & (3231.1 \text{ N}) \cos 21.80^\circ + (960.47 \text{ N}) \cos 38.66^\circ - D = 0 \\ & D = 3750.03 \text{ N} \quad D = 3750 \text{ N} \end{aligned}$$

4.36

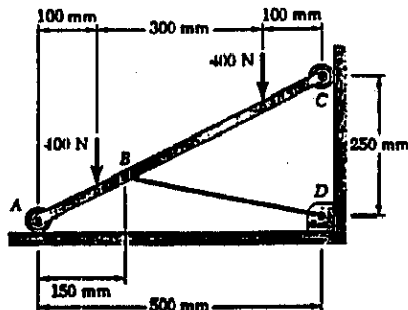


FIND:
(a) TENSION IN
CABLE BE,
(b) REACTION
AT A,
(c) REACTION
AT C.

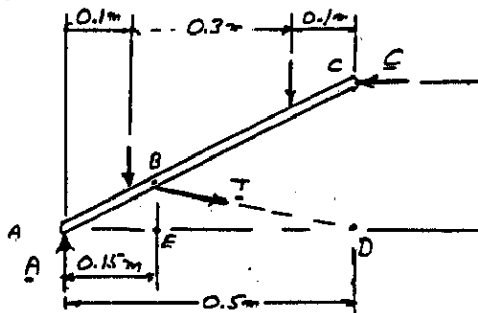

SIMILAR TRIANGLES: ABE AND ACD

$$\frac{AE}{AD} = \frac{BE}{CD}; \quad \frac{0.15 \text{ m}}{0.5 \text{ m}} = \frac{BE}{0.25 \text{ m}}; \quad BE = 0.075 \text{ m}$$

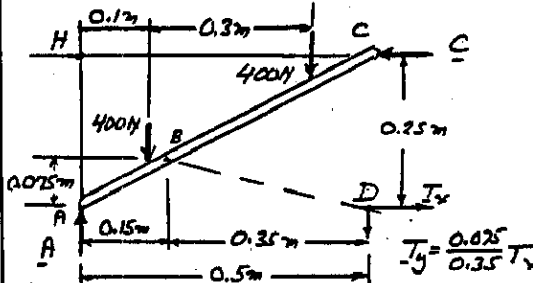

$$\begin{aligned} +\sum M_A = 0: & T_x(0.25 \text{ m}) - \left(\frac{0.075}{0.35} T_x\right)(0.5 \text{ m}) - (400 \text{ N})(0.1 \text{ m}) - (400 \text{ N})(0.4 \text{ m}) = 0 \\ & T_x = 1400 \text{ N} \end{aligned}$$

$$T_y = \frac{0.075}{0.35} (1400 \text{ N}) = 300 \text{ N}$$


$$T_x = 300 \text{ N} \quad T_x = 1400 \text{ N}$$

$$T = 1432 \text{ lb}$$


$$\begin{aligned} (b) +\sum F_y = 0: & A - 300 \text{ N} - 400 \text{ N} - 400 \text{ N} = 0 \\ & A = +1100 \text{ N} \quad A = 1100 \text{ N} \uparrow \end{aligned}$$

$$\begin{aligned} (c) \pm \sum F_x = 0: & -C + 1400 \text{ N} = 0 \\ & C = +1400 \text{ N} \quad C = 1400 \text{ N} \leftarrow \end{aligned}$$

4.37

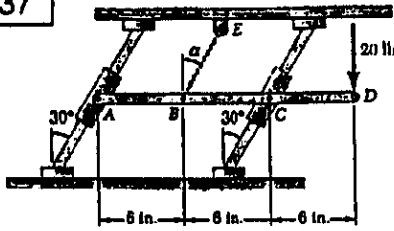

IF CORD BE
IS VERTICAL
 $\alpha = 0$,
FIND:
TENSION IN BE
REACTIONS
AT A AND C



FREE-BODY
DIAGRAM

$$+\uparrow \Sigma F_y = 0: -T \cos 30^\circ + (20 \text{ lb}) \cos 30^\circ = 0 \quad T = 20 \text{ lb} \leftarrow$$


$$+\rightarrow \Sigma M_C = 0: (A \sin 30^\circ)(12 \text{ in.}) - (20 \text{ lb})(6 \text{ in.}) - (20 \text{ lb})(6 \text{ in.}) = 0$$

$$A = +40 \text{ lb} \quad A = 40 \text{ lb} \angle 30^\circ \leftarrow$$


$$+\rightarrow \Sigma M_A = 0: (20 \text{ lb})(6 \text{ in.}) - (20 \text{ lb})(18 \text{ in.}) + (C \sin 30^\circ)(12 \text{ in.}) = 0$$

$$C = +40 \text{ lb} \quad C = 40 \text{ lb} \angle 30^\circ \leftarrow$$

4.38

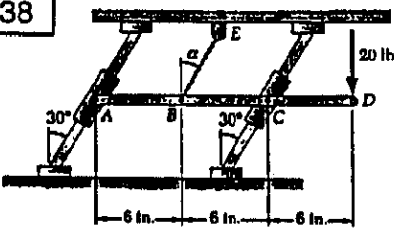

IF $\alpha = 30^\circ$,
FIND:
TENSION IN BE
REACTIONS
AT A AND C

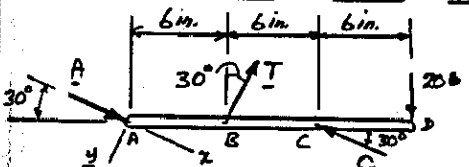

FREE-BODY
DIAGRAM

$$+\uparrow \Sigma F_y = 0: -T + (20 \text{ lb}) \cos 30^\circ = 0 \quad T = 17.32 \text{ lb} \leftarrow$$


$$+\rightarrow \Sigma M_C = 0: -(17.32 \text{ lb}) \cos 30^\circ (6 \text{ in.}) - (20 \text{ lb})(6 \text{ in.}) - (A \sin 30^\circ)(12 \text{ in.}) = 0$$

$$A = +35 \text{ lb} \quad A = 35 \text{ lb} \angle 30^\circ \leftarrow$$

$$+\rightarrow \Sigma M_A = 0: +(17.32 \text{ lb}) \cos 30^\circ (6 \text{ in.}) - (20 \text{ lb})(18 \text{ in.}) + (C \sin 30^\circ)(12 \text{ in.}) = 0$$


$$C = +45 \text{ lb} \quad C = 45 \text{ lb} \angle 30^\circ \leftarrow$$

4.39

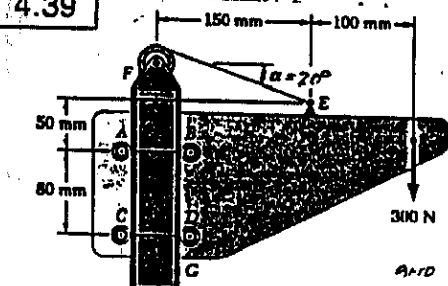

FIND: FORCE
EXERTED ON
POST BY
EACH ROLLER.

Denote force
at A+B by F_{AB}
and at C+D by F_{CD}

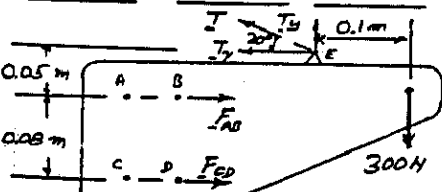

FREE-BODY DIAGRAM

$$T_x = T \cos 20^\circ$$

$$T_y = T \sin 20^\circ \quad (1)$$

$$+\uparrow \Sigma F_y = 0:$$

$$T_y = 300 \text{ N}$$

NOTE THAT T_y AND 300 N
FORM A COUPLE: $(300 \text{ N})(0.1 \text{ m}) = 30 \text{ N}\cdot\text{m}$
(CONTINUED)

4.39 CONTINUED

"COUPLE"

$$+\rightarrow \Sigma M_C = 0: -F_{AB}(0.08 \text{ m}) + (T \cos 20^\circ)(0.130 \text{ m}) - 30 \text{ N}\cdot\text{m} = 0$$

FROM EQ. (1) $T = T_y / \sin 20^\circ = (300 \text{ N}) / \sin 20^\circ$

$$-F_{AB}(0.08 \text{ m}) + (300 \text{ N}) \frac{\cos 20^\circ}{\sin 20^\circ} (0.130 \text{ m}) - 30 \text{ N}\cdot\text{m} = 0$$

$$F_{AB} = +964 \text{ lb} \quad F_{AB} = 964 \text{ lb} \rightarrow$$

THUS F_{AB} ACTS AT B, ON BRACKET: $B = 964 \text{ lb} \rightarrow$, $A = 0$
ON POST: $B = 964 \text{ lb} \leftarrow$; $A = 0$


$$+\rightarrow \Sigma M_A = 0: +F_{CD}(0.08 \text{ m}) + (T \cos 20^\circ)(0.05 \text{ m}) - 30 \text{ N}\cdot\text{m} = 0$$

$$F_{CD}(0.08 \text{ m}) + (300 \text{ N}) \frac{\cos 20^\circ}{\sin 20^\circ} (0.05 \text{ m}) - 30 \text{ N}\cdot\text{m} = 0$$

$$F_{CD} = -140.2 \text{ N} \quad F_{CD} = 140.2 \text{ N} \leftarrow$$


THUS F_{CD} ACTS AT C, ON BRACKET: $C = 140.2 \text{ N} \leftarrow$, $D = 0$
ON POST: $C = 140.2 \text{ N} \rightarrow$; $D = 0$

4.40

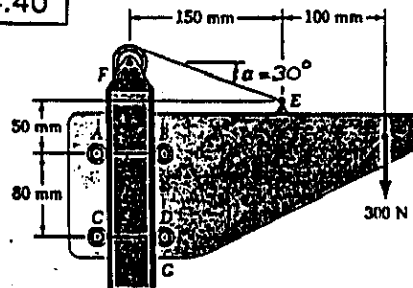

FIND: FORCE
EXERTED ON
POST BY
EACH ROLLER.

Denote force at A and B by F_{AB} and
force at C and D by F_{CD}

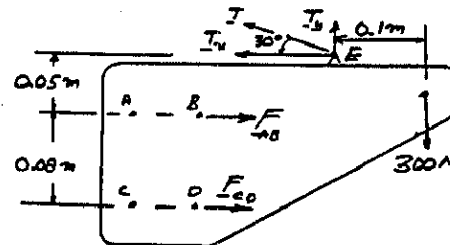

FREE-BODY
DIAGRAM

$$+\uparrow \Sigma F_y = 0: T_y - 300 \text{ N} = 0 \quad T_y = 300 \text{ N} \uparrow$$

$$T_y = T_x \tan 30^\circ; 300 \text{ N} = T_x \tan 30^\circ \quad T_x = 519.62 \text{ N} \leftarrow$$

NOTE THAT T_y AND 300-N LOAD

FORM A COUPLE: $(300 \text{ N})(0.1 \text{ m}) = 30 \text{ N}\cdot\text{m}$

$$+\rightarrow \Sigma M_C = 0: -F_{AB}(0.08 \text{ m}) + T_x(0.130 \text{ m}) - 30 \text{ N}\cdot\text{m} = 0$$

$$-F_{AB}(0.08 \text{ m}) + (519.62 \text{ N})(0.130 \text{ m}) - 30 \text{ N}\cdot\text{m} = 0$$

$$F_{AB} = +469.4 \text{ lb} \quad F_{AB} = 469.4 \text{ N} \rightarrow$$


THUS F_{AB} ACTS AT B, ON BRACKET: $B = 469 \text{ N} \rightarrow$, $A = 0$
ON POST: $B = 469 \text{ N} \leftarrow$; $A = 0$

$$+\rightarrow \Sigma M_A = 0: F_{CD}(0.08 \text{ m}) + T_x(0.05 \text{ m}) - 30 \text{ N}\cdot\text{m} = 0$$


$$F_{CD}(0.08 \text{ m}) + (519.62 \text{ N})(0.05 \text{ m}) - 30 \text{ N}\cdot\text{m} = 0$$

$$F_{CD} = +50.2 \text{ N} \quad F_{CD} = 50.2 \text{ N} \rightarrow$$

THUS F_{CD} ACTS AT D, ON BRACKET: $C = 0$; $D = 50.2 \text{ N} \rightarrow$
ON POST: $C = 0$; $D = 50.2 \text{ N} \leftarrow$

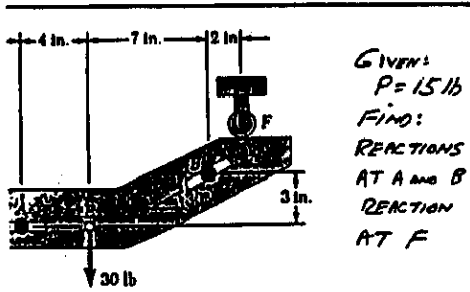

GIVEN:
 $P = 15 \text{ lb}$
 FIND:
 REACTIONS
 AT A AND B
 REACTION
 AT F

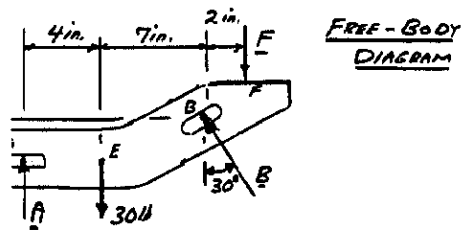

FREE-BODY DIAGRAM

$$-B \sin 30^\circ = 0 \quad B = 30 \text{ lb} \nearrow 60^\circ$$

$$4(4 \text{ in}) + B \sin 30^\circ(3 \text{ in}) + B \cos 30^\circ(11 \text{ in}) - F(13 \text{ in}) = 0$$


$$+ (30 \text{ lb}) \sin 30^\circ(3 \text{ in}) + (30 \text{ lb}) \cos 30^\circ(11 \text{ in}) - F(13 \text{ in}) = 0$$

$$+ 16.2145 \text{ lb} \quad F = 16.21 \text{ lb} \downarrow$$


$$0 \text{ lb} + B \cos 30^\circ - F = 0$$

$$+ 16 + (30 \text{ lb}) \cos 30^\circ - 16.2145 \text{ lb} = 0$$

$$20.23 \text{ lb} \quad A = 20.2 \text{ lb} \uparrow$$

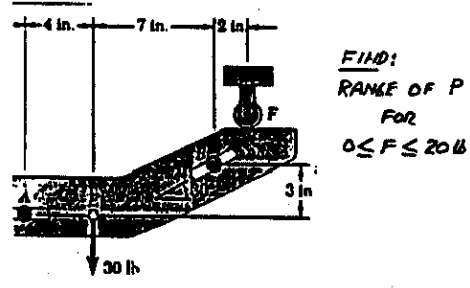

FIND:
 RANGE OF P
 FOR
 $0 \leq F \leq 20 \text{ lb}$

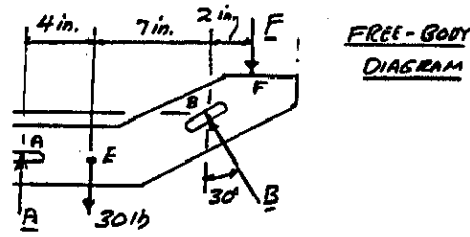

FREE-BODY DIAGRAM

$$-B \sin 30^\circ = 0 \quad B = 2P \nearrow 60^\circ$$

$$11(4 \text{ in}) + B \sin 30^\circ(3 \text{ in}) + B \cos 30^\circ(11 \text{ in}) - F(13 \text{ in}) = 0$$

$$+ 2P \sin 30^\circ(3 \text{ in}) + 2P \cos 30^\circ(11 \text{ in}) - F(13 \text{ in}) = 0$$


$$+ 19.0525 P - 13 F = 0$$

$$\frac{13F + 120}{22.0525} \quad (1)$$

i: $P = \frac{13(0) + 120}{22.0525} = 5.442 \text{ lb}$

b: $P = \frac{13(20) + 120}{22.0525} = 17.232 \text{ lb}$

20 lb: $5.44 \text{ lb} \leq P \leq 17.23 \text{ lb}$

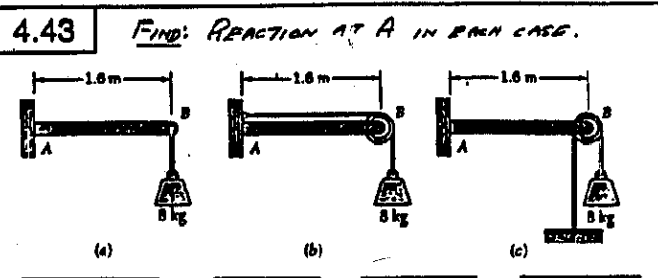


4.43 FIND: REACTION AT A IN EACH CASE.

$W = mg = (8 \text{ kg})(9.81 \text{ m/s}^2) = 78.48 \text{ N}$

(a) $\sum F_x = 0: A_x = 0$
 $\sum F_y = 0: A_y - W = 0 \quad A_y = 78.48 \text{ N} \uparrow$
 $\sum M_A = 0: M_A - W(1.6 \text{ m}) = 0$
 $M_A = +(78.48 \text{ N})(1.6 \text{ m}) \quad M_A = 125.56 \text{ N}\cdot\text{m}$
 $A = 78.5 \text{ N} \uparrow; M_A = 125.6 \text{ N}\cdot\text{m}$

(b) $\sum F_x = 0: A_x - W = 0 \quad A_x = 78.48 \text{ N} \leftarrow$
 $\sum F_y = 0: A_y - W = 0 \quad A_y = 78.48 \text{ N} \uparrow$
 $A = (78.48 \text{ N})\sqrt{2} = 110.99 \text{ N} \angle 45^\circ$
 $\sum M_A = 0: M_A - W(1.6 \text{ m}) = 0$
 $M_A = +(78.48 \text{ N})(1.6 \text{ m}) \quad M_A = 125.56 \text{ N}\cdot\text{m}$
 $A = 111.0 \text{ N} \angle 45^\circ; M_A = 125.6 \text{ N}\cdot\text{m}$

(c) $\sum F_x = 0: A_x = 0$
 $\sum F_y = 0: A_y - 2W = 0$
 $A_y = 2W = 2(78.48 \text{ N}) = 156.96 \text{ N} \uparrow$
 $\sum M_A = 0: M_A - 2W(1.6 \text{ m}) = 0$
 $M_A = +2(78.48 \text{ N})(1.6 \text{ m}) \quad M_A = 251.1 \text{ N}\cdot\text{m}$
 $A = 157.0 \text{ N} \uparrow; M_A = 251 \text{ N}\cdot\text{m}$

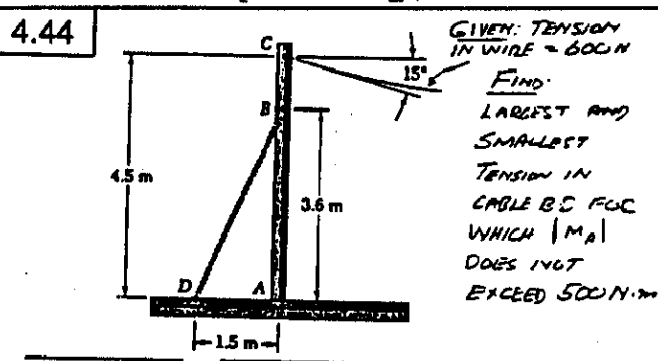

GIVEN: TENSION
 IN WIRE = 600 N
 FIND:
 LARGEST AND
 SMALLEST
 TENSION IN
 CABLE B.C. FOR
 WHICH $|M_A|$
 DOES NOT
 EXCEED 500 N·m

4.44

FREE-BODY DIAGRAM

$\sum M_A = 0:$

$$\frac{5}{13}T(3.6 \text{ m}) - (600 \text{ N}) \cos 15^\circ(4.5 \text{ m}) + M_A = 0$$

$$(1.3846 \text{ m})T - 2608 \text{ N}\cdot\text{m} + M_A = 0$$

$$T = \frac{2608 \text{ N}\cdot\text{m} + M_A}{1.3846 \text{ m}}$$


FOR $M_A = +500 \text{ N}\cdot\text{m}: T = \frac{2608 + 500}{1.3846} = 2244.7 \text{ N}$

FOR $M_A = -500 \text{ N}\cdot\text{m}: T = \frac{2608 - 500}{1.3846} = 1522.4 \text{ N}$


$T_{\max} = 2240 \text{ N}; T_{\min} = 1522 \text{ N}$

4.45 and 4.46

NOTE: RADII OF PULLEYS BY a .

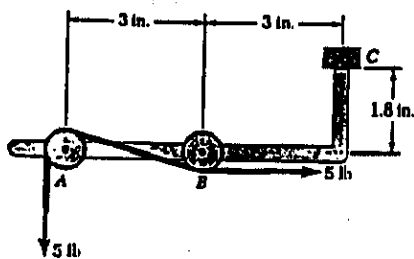

FIND:
REACTION AT C
Prob. 4.45: $a = 0.4$ in.
Prob. 4.46: $a = 0.6$ in.

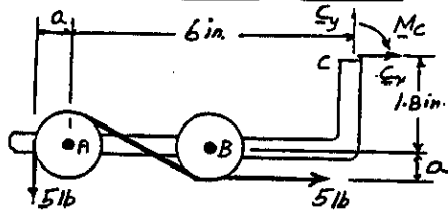

FREE-BODY DIAGRAM

$$\begin{aligned} \pm \sum F_x = 0: C_x + 5 lb = 0; C_x = -5 lb & \quad C_x = 5 lb \leftarrow \\ \uparrow \sum F_y = 0: C_y - 5 lb = 0; C_y = +5 lb & \quad C_y = 5 lb \uparrow \\ C = 7.0716 \angle 45^\circ \end{aligned}$$

$$\uparrow \sum M_C = 0: (5 lb)(6 in. + a) + (5 lb)(1.8 in. + a) - M_C = 0$$

$$M_C = 39 lb \cdot in. + (10 lb)a \quad (1)$$


Prob. 4.45 with $a = 0.4$ in.

Eq(1): $M_C = 39 lb \cdot in. + (10 lb)(0.4 in.) = +43.0 lb \cdot in.$
 $C = 7.0716 \angle 45^\circ; M_C = 43 lb \cdot in.$

Prob. 4.46 with $a = 0.6$ in.


Eq(1): $M_C = 39 lb \cdot in. + (10 lb)(0.6 in.) = +45 lb \cdot in.$
 $C = 7.0716 \angle 45^\circ; M_C = 45 lb \cdot in.$

4.47

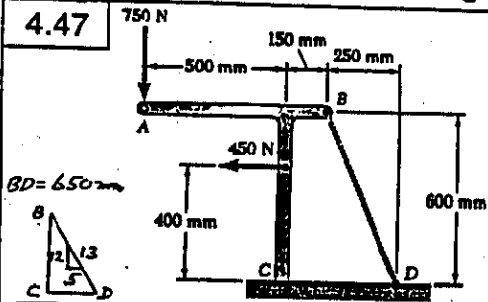

GIVEN:
 $T_{BD} = 1300 N$


FIND:
REACTION AT C

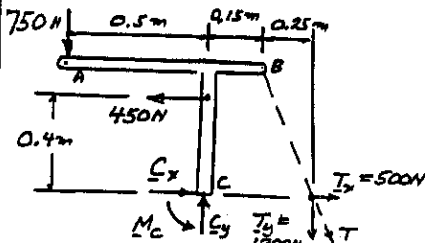


$$\begin{aligned} T &= 1300 N \\ T_x &= \frac{5}{13} T = 500 N \\ T_y &= \frac{12}{13} T = 1200 N \end{aligned}$$

$$\begin{aligned} \pm \sum F_x = 0: C_x - 450 N + 500 N = 0; C_x = -50 N; C_x = 50 N \leftarrow \\ \uparrow \sum F_y = 0: C_y - 750 N - 1200 N = 0; C_y = +1950 N; C_y = 1950 N \uparrow \\ C = 1951 N \angle 88.5^\circ \\ \uparrow \sum M_C = 0: M_C + (750 N)(0.5 m) + (450 N)(0.4 m) - (1200 N)(0.4 m) = 0 \\ M_C = -75 N \cdot m \quad M_C = 75 N \cdot m \end{aligned}$$

4.48

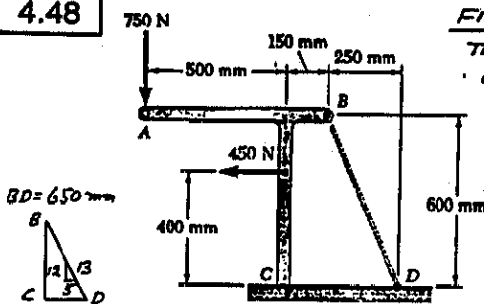

FIND RANGE OF TENSION IN CABLE BD FOR WHICH $|M_C| \leq 100 N \cdot m$

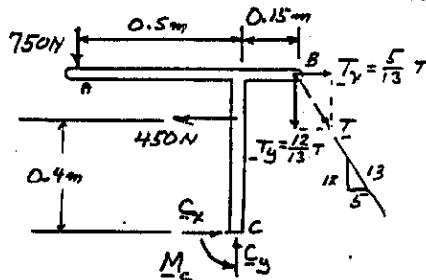


$$\begin{aligned} \uparrow \sum M_C = 0: (750 N)(0.5 m) + (450 N)(0.4 m) - \left(\frac{5}{13} T\right)(0.6 m) - \left(\frac{12}{13} T\right)(0.15 m) + M_C = 0 \\ 375 N \cdot m + 180 N \cdot m - \left(\frac{4.8}{13}\right) T + M_C = 0 \\ T = \frac{13}{4.8} (555 - M_C) \end{aligned}$$

FOR $M_C = +100 N \cdot m$: $T = \frac{13}{4.8} (555 - 100) = 1232 N$
 FOR $M_C = -100 N \cdot m$: $T = \frac{13}{4.8} (555 - (-100)) = 1774 N$

FOR $|M_C| \leq 100 N \cdot m$: $1232 N \leq T \leq 1774 N$

4.49



FIND:
REACTION AT D
(a) WHEN $W = 100 lb$
(b) WHEN $W = 90 lb$


FREE-BODY DIAGRAM
TENSION IN CORD: $T = W$

$$\begin{aligned} \pm \sum F_x = 0: D_x = 0 \\ \uparrow \sum F_y = 0: D_y - 40 lb - 40 lb + T = 0 \\ D_y = 80 lb - T \\ \uparrow \sum M_D = 0: M_D + (40 lb)(8 ft) + (40 lb)(4 ft) - T(5 ft) = 0 \\ M_D = -480 lb \cdot ft + T(5 ft) \end{aligned}$$


a. WHEN $W = 100 lb$: $T = 100 lb$, $D_x = 0$
 Eq(1): $D_y = 80 lb - 100 lb = -20 lb$ $D_y = 20 lb \downarrow$
 Eq(2): $M_D = -480 lb \cdot ft + (100 lb)(5 ft)$
 $M_D = +20 lb \cdot ft$ $M_D = 20 lb \cdot ft$

b. WHEN $W = 90 lb$: $T = 90 lb$, $D_x = 0$
 Eq(1): $D_y = 80 lb - 90 lb = -10 lb$ $D_y = 10 lb \downarrow$
 Eq(2): $M_D = -480 lb \cdot ft + (90 lb)(5 ft)$
 $M_D = -30 lb \cdot ft$ $M_D = 30 lb \cdot ft$

4.50



FIND: RANGE OF
W FOR WHICH
 $|M_D| \leq 40 \text{ lb}\cdot\text{ft}$



FREE-BODY DIAGRAM

TENSION IN CORD: $T = W$

$$\uparrow \Sigma M_D = 0: M_D + (40 \text{ lb})(8 \text{ ft}) + (40 \text{ lb})(4 \text{ ft}) - T(5 \text{ ft}) = 0$$


$$T = \frac{1}{5 \text{ ft}} (480 \text{ lb}\cdot\text{ft} + M_D)$$

FOR $M_D = +40 \text{ lb}\cdot\text{ft}$: $T = \frac{1}{5} (480 + 40) = 104 \text{ lb}$


FOR $M_D = -40 \text{ lb}\cdot\text{ft}$: $T = \frac{1}{5} (480 - 40) = 88 \text{ lb}$

RECALL THAT WEIGHT $W = \text{TENSION } T$, WE HAVE
FOR $|M_D| \leq 40 \text{ lb}\cdot\text{ft}$: $88 \text{ lb} \leq W \leq 104 \text{ lb}$

4.51

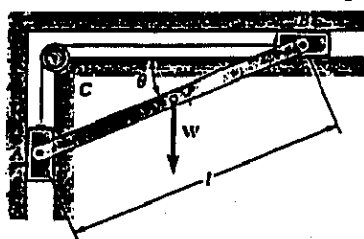

FIND:
(a) TENSION
IN CORD
IN TERMS
OF W AND θ
(b) VALUE OF
 θ FOR $T = 3W$

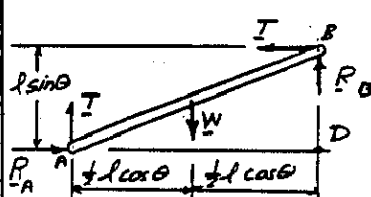

(a) $\uparrow \Sigma M_D = 0$:
 $T(l \sin \theta) - T(l \cos \theta)$
 $+ W(\frac{1}{2} l \cos \theta) = 0$

$$T = \frac{1}{2} W \frac{\cos \theta}{\cos \theta - \sin \theta}$$


$$T = \frac{1}{2} W / (1 - \tan \theta)$$

(b) FOR $T = 3W$: $3W = \frac{1}{2} W / (1 - \tan \theta)$

$$3 - 3 \tan \theta = \frac{1}{2} W$$

$$\tan \theta = \frac{2.5}{3} = \frac{5}{6} \quad \theta = 39.8^\circ$$

4.52



FOR EQUILIBRIUM

FIND:

(a) EQUATION IN θ, P, M , AND l

(b) VALUE OF θ ,
FOR $M = 150 \text{ N}\cdot\text{m}$
 $P = 200 \text{ N}$
 $l = 600 \text{ mm}$

(CONTINUED)

4.52 CONTINUED

FREE-BODY DIAGRAM

(a) $\uparrow \Sigma M_C = 0$:

$$P l \cos \theta + P l \sin \theta - M = 0$$

$$\sin \theta + \cos \theta = \frac{M}{P l}$$

(b) FOR $M = 150 \text{ N}\cdot\text{m}$,
 $P = 200 \text{ N}$, AND $l = 600 \text{ mm}$

$$\sin \theta + \cos \theta = \frac{150 \text{ N}\cdot\text{m}}{(200 \text{ N})(0.6 \text{ m})}$$

$$\sin \theta + \cos \theta = 1.25$$

$$l \sin \theta \quad \sin \theta + (1 - \sin^2 \theta)^{1/2} = 1.25$$

$$(1 - \sin^2 \theta)^{1/2} = 1.25 - \sin \theta$$


$$1 - \sin^2 \theta = 1.5625 - 2.5 \sin \theta + \sin^2 \theta$$

$$2 \sin^2 \theta - 2.5 \sin \theta + 0.5625 = 0$$

$$\sin \theta = 0.2943 \quad \text{and} \quad \sin \theta = 0.9557$$

$$\theta = 17.1^\circ \quad \text{and} \quad \theta = 72.9^\circ$$

4.53

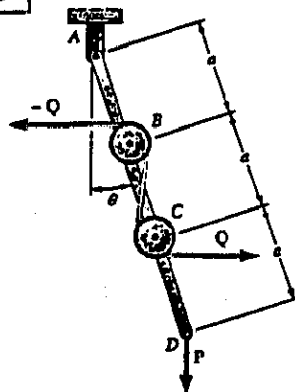FOR EQUILIBRIUM
FIND:

(a) $P = f(Q, a, d, \theta)$


(b) MAGNITUDE
OF P FOR

$$Q = 10 \text{ lb}$$

$$a = 5 \text{ in.}$$

$$d = 0.8 \text{ in.}$$

$$\theta = 30^\circ$$

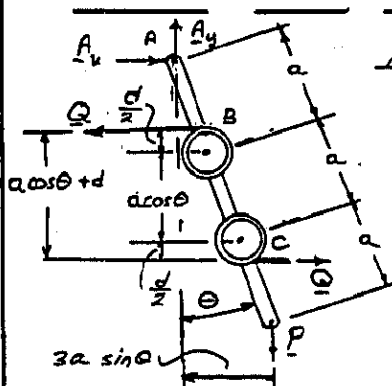

FREE-BODY DIAGRAM

(a) $\uparrow \Sigma M_A = 0$

$$Q(a \cos \theta + d) - P(3a \sin \theta) = 0$$

$$P = \frac{Q}{3} \cdot \frac{a \cos \theta + d}{a \sin \theta}$$


(b) FOR $Q = 10 \text{ lb}$, $a = 5 \text{ in.}$, $d = 0.8 \text{ in.}$, $\theta = 30^\circ$

$$P = \frac{10 \text{ lb}}{3} \cdot \frac{(5 \text{ in.}) \cos 30^\circ + 0.8 \text{ in.}}{(5 \text{ in.}) \sin 30^\circ}$$

$$P = 6.840 \text{ lb}$$


$$P = 6.84 \text{ lb}$$

4.54

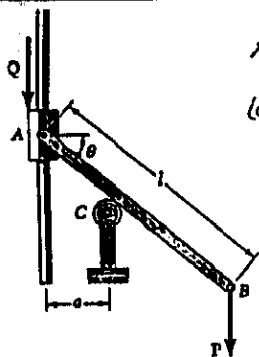

FOR EQUILIBRIUM
FIND:
(a) EQUATION
IN $P, Q, a, l,$ AND θ .

(b) VALUE OF θ ,
FOR $P=16 \text{ lb}$,
 $Q=12 \text{ lb}$, $l=20 \text{ in}$,
AND $a=5 \text{ in}$.



FREE-BODY DIAGRAM

$$+\uparrow \Sigma F_y = 0:$$

$$C \cos \theta - P - Q = 0$$

$$C = \frac{P+Q}{\cos \theta}$$

$$(a) +\uparrow \Sigma M_A = 0: C \frac{a}{\cos \theta} - P l \cos \theta = 0$$

$$\frac{P+Q}{\cos \theta} \cdot \frac{a}{\cos \theta} - P l \cos \theta = 0$$


$$\cos^3 \theta = \frac{a(P+Q)}{P l}$$

(b) FOR $P=16 \text{ lb}$, $Q=12 \text{ lb}$, $l=20 \text{ in}$, AND $a=5 \text{ in}$:

$$\cos^3 \theta = \frac{(5 \text{ in})(16 \text{ lb} + 12 \text{ lb})}{(16 \text{ lb})(20 \text{ in})} = 0.4375$$


$$\cos \theta = 0.75915 \quad \theta = 40.6^\circ$$

4.55



FOR EQUILIBRIUM
FIND:

(a) $\theta = f(P, l, k)$.
(b) VALUE OF θ
WHEN $P = \frac{1}{4} k l$.



GEOMETRY
 $AB = 2 l \sin \theta$

$$CD = l \cos \theta$$

LET ELONGATION OF SPRING = S

$$S = (AB)_\theta - (AB)_{\theta=90^\circ}$$


$$S = 2 l \sin \theta - 2 l \sin 45^\circ$$

$$S = 2 l \left(\sin \theta - \frac{1}{\sqrt{2}} \right)$$

(CONTINUED)

4.55 CONTINUED

FREE-BODY DIAGRAM



TENSION IN SPRING
 $T = k S = 2 k l \left(\sin \theta - \frac{1}{\sqrt{2}} \right)$

$$(a) +\uparrow \Sigma M_C = 0:$$

$$T(CD) - P l \sin \theta = 0$$

$$2 k l \left(\sin \theta - \frac{1}{\sqrt{2}} \right) (l \cos \theta) - P l \sin \theta = 0$$

$$2 k l^2 \left(\sin \theta - \frac{1}{\sqrt{2}} \right) \cos \theta - P l \left(2 \sin \theta \cos \theta \right) = 0$$

$$\cos \theta \left[2 \left(k l - P \right) \sin \theta - \frac{2}{\sqrt{2}} k l \right] = 0$$

$$\cos \theta = 0 \quad \text{OR} \quad \sin \theta = \frac{1}{\sqrt{2}} \cdot \frac{k l}{k l - P}$$

(TRIVIAL) $\theta = 90^\circ$


$$\theta = 2 \sin^{-1} \left[\frac{1}{\sqrt{2}} \frac{k l}{k l - P} \right]$$

(b) FOR $P = \frac{1}{4} k l$:

$$\theta = 2 \sin^{-1} \left[\frac{1}{\sqrt{2}} \frac{k l}{k l - \frac{1}{4} k l} \right] = 2 \sin^{-1} (0.97726)$$

$$\theta = 2(70.529^\circ) = 141.06^\circ \quad \theta = 141.1^\circ$$


4.56



GIVEN:
 $W =$ WEIGHT OF COLLAR
SPRING IS
UNDEFORMED FOR $\theta = 0$

FIND: FOR EQUILIBRIUM

(a) EQUATION IN θ, W, l, S
(b) VALUE OF θ WHEN
 $W = 300 \text{ N}$, $l = 500 \text{ mm}$,
AND $k = 800 \text{ N/m}$.



FREE-BODY DIAGRAM

LET $S =$ ELONGATION OF SPRING

$$S = \frac{l}{\cos \theta} - l$$

TENSION IN SPRING
 $T = k S = k l \left(\frac{1}{\cos \theta} - 1 \right)$

$$(a) +\uparrow \Sigma F_y = 0: T \sin \theta - W = 0$$

$$k l \left(\frac{1}{\cos \theta} - 1 \right) \sin \theta - W = 0$$

$$\frac{\sin \theta}{\cos \theta} - \sin \theta = \frac{W}{k l}$$

$$\tan \theta - \sin \theta = \frac{W}{k l}$$

(b) $W = 300 \text{ N}$, $l = 500 \text{ mm}$, $k = 800 \text{ N/m}$


$$\tan \theta - \sin \theta = \frac{300 \text{ N}}{(800 \text{ N/m})(0.5 \text{ m})}$$

$$\tan \theta - \sin \theta = 0.75$$


SOLVE BY TRIAL + ERROR: $\theta = 57.96^\circ$

$$\theta = 58.0^\circ$$


4.57

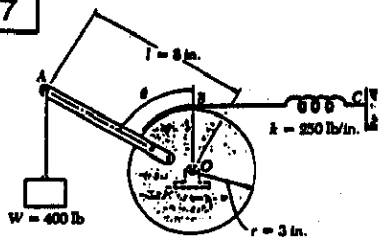


GIVEN:
SPRING IS UNDEFORMED WHEN $\theta = 90^\circ$.
FIND: POSITION OF EQUILIBRIUM

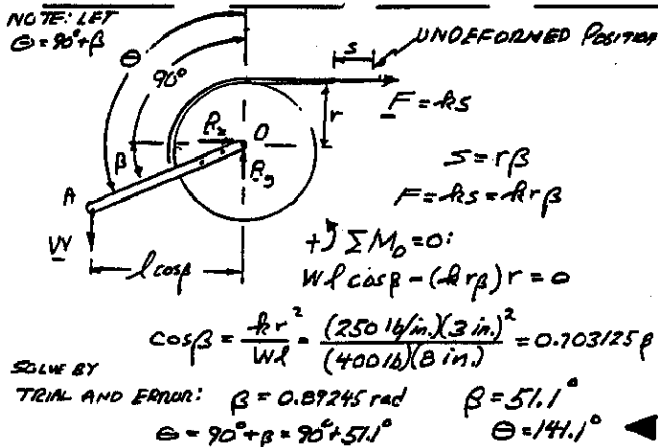

4.58

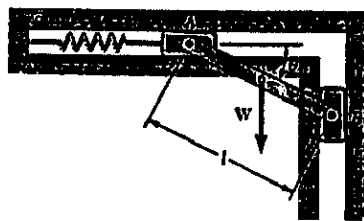

GIVEN: SPRING IS UNDEFORMED WHEN $\theta = 0^\circ$.
FIND: FOR EQUILIBRIUM,
(a) EQUATION IN W, l, A, θ
(b) VALUE OF θ WHEN $W = 75 \text{ lb}$, $l = 30 \text{ in.}$, AND $k = 3 \text{ lb/in.}$

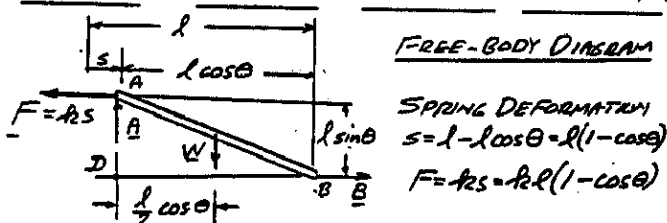

(a) $\sum M_A = 0$: $F \cdot l \cdot \sin \theta - W \left(\frac{l}{2} \cos \theta \right) = 0$

$k \cdot l(1 - \cos \theta) \cdot l \cdot \sin \theta - \frac{1}{2} W l \cos \theta = 0$

$(1 - \cos \theta) \tan \theta = \frac{W}{2 \cdot k \cdot l}$

(b) WHEN $W = 75 \text{ lb}$, $l = 30 \text{ in.}$, AND $k = 3 \text{ lb/in.}$

$(1 - \cos \theta) \tan \theta = \frac{75 \text{ lb}}{2(3 \text{ lb/in.})(30 \text{ in.})}$


$(1 - \cos \theta) \tan \theta = 0.41667$

SOLVE BY TRIAL AND ERROR

$\theta = 49.71^\circ$

$\theta = 49.7^\circ$

4.59

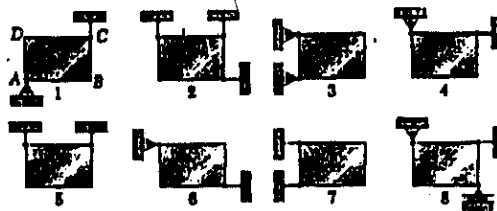

DETERMINE WHETHER (a) PLATE IS CONSTRAINED, (b) REACTIONS ARE DETERMINATE, (c) IF POSSIBLE, FIND REACTIONS. $m = 40 \text{ kg}$; $W = (40 \text{ kg})(9.81 \text{ m/s}^2) = 392.4 \text{ N}$

1. THREE NON-COINCIDENT, NON-PARALLEL REACTIONS:

(a) PLATE: COMPLETELY CONSTRAINED
(b) REACTIONS: DETERMINATE
(c) EQUILIBRIUM MAINTAINED
 $A = C = 196.2 \text{ N} \uparrow$

2. THREE NON-COINCIDENT, NON-PARALLEL REACTIONS:

(a) PLATE: COMPLETELY CONSTRAINED
(b) REACTIONS: DETERMINATE
(c) EQUILIBRIUM MAINTAINED
 $B_x = 0, C = D = 196.2 \text{ N} \uparrow$

3. FOUR NON-COINCIDENT, NON-PARALLEL REACTIONS:

(a) PLATE: COMPLETELY CONSTRAINED
(b) REACTIONS: INDETERMINATE
(c) EQUILIBRIUM MAINTAINED
 $B_x = 294 \text{ N} \rightarrow, D_x = 294 \text{ N} \leftarrow$
 $(A_y + D_y = 392 \text{ N} \uparrow)$

4. THREE COINCIDENT REACTIONS (Improperly constrained):

(a) PLATE: IMPROPERLY CONSTRAINED
(b) REACTIONS: INDETERMINATE
(c) NO EQUILIBRIUM ($\sum M_C \neq 0$)

5. TWO REACTIONS

(a) PLATE: IMPROPERLY CONSTRAINED
(b) REACTIONS: DETERMINATE
(c) EQUILIBRIUM MAINTAINED
 $C = D = 196.2 \text{ N} \uparrow$

6. THREE NON-COINCIDENT, NON-PARALLEL REACTIONS:

(a) PLATE: COMPLETELY CONSTRAINED
(b) REACTIONS: DETERMINATE
(c) EQUILIBRIUM MAINTAINED
 $B = 294 \text{ N} \rightarrow, D = 491 \text{ N} \uparrow 53.1^\circ$

7. TWO REACTIONS


(a) PLATE: IMPROPERLY CONSTRAINED
(b) REACTIONS DETERMINED BY DYNAMICS
(c) NO EQUILIBRIUM ($\sum F_y \neq 0$)

8. FOUR NON-COINCIDENT, NON-PARALLEL REACTIONS:


(a) PLATE: COMPLETELY CONSTRAINED
(b) REACTIONS: INDETERMINATE
(c) EQUILIBRIUM MAINTAINED
 $B = D_y = 196.2 \text{ N} \uparrow$
 $(C + D_x = 0)$

4.60


DETERMINE WHETHER (a) BRACKET IS CONSTRAINED, (b) REACTIONS ARE DETERMINATE, (c) IF POSSIBLE, FIND REACTIONS. $P = 100 \text{ lb}$.

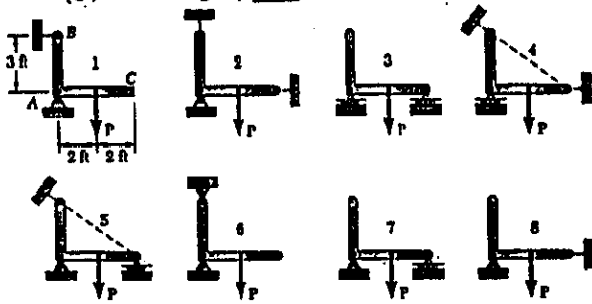

1. THREE NON-CONCURRENT, NON-PARALLEL REACTIONS
 (a) BRACKET: COMPLETE CONSTRAINT
 (b) REACTIONS: DETERMINATE
 (c) EQUILIBRIUM MAINTAINED
 $A = 120.2 \text{ lb} \angle 56.3^\circ$, $B = 66.7 \text{ lb} \leftarrow$




2. FOUR CONCURRENT REACTIONS (THROUGH A)
 (a) BRACKET: IMPROPER CONSTRAINT
 (b) REACTIONS: INDETERMINATE
 (c) NO EQUILIBRIUM ($\sum M_A \neq 0$)




3. TWO REACTIONS

(a) BRACKET: PARTIAL CONSTRAINT
 (b) REACTIONS: DETERMINATE
 (c) EQUILIBRIUM MAINTAINED
 $A = 50 \text{ lb} \uparrow$, $C = 50 \text{ lb} \uparrow$




4. THREE NON-CONCURRENT, NON-PARALLEL REACTIONS

(a) BRACKET: COMPLETE CONSTRAINT
 (b) REACTIONS: DETERMINATE
 (c) EQUILIBRIUM MAINTAINED
 $A = 50 \text{ lb} \uparrow$, $B = 83.3 \text{ lb} \angle 36.9^\circ$, $C = 66.7 \text{ lb} \leftarrow$




5. FOUR NON-CONCURRENT, NON-PARALLEL REACTIONS

(a) BRACKET: COMPLETE CONSTRAINT
 (b) REACTIONS: INDETERMINATE
 (c) EQUILIBRIUM MAINTAINED ($\sum M_C = 0$) $A_y = 50 \text{ lb} \uparrow$




6. FOUR NON-CONCURRENT, NON-PARALLEL REACTIONS

(a) BRACKET: COMPLETE CONSTRAINT
 (b) REACTIONS: INDETERMINATE
 (c) EQUILIBRIUM MAINTAINED
 $A_x = 66.7 \text{ lb} \rightarrow$, $B_x = 66.7 \text{ lb} \leftarrow$
 $(A_y + B_y = 100 \text{ lb} \uparrow)$




7. THREE NON-CONCURRENT, NON-PARALLEL REACTIONS

(a) BRACKET: COMPLETE CONSTRAINT
 (b) REACTIONS: DETERMINATE
 (c) EQUILIBRIUM MAINTAINED
 $A = C = 50 \text{ lb} \uparrow$




8. THREE CONCURRENT REACTIONS (THROUGH B)

(a) BRACKET: IMPROPER CONSTRAINT
 (b) REACTIONS: INDETERMINATE
 (c) NO EQUILIBRIUM ($\sum M_B \neq 0$)



4.61



GIVEN: $a = 180 \text{ mm}$


FIND: REACTIONS

FREE-BODY DIAGRAM

(THREE-FORCE MEMBER)
 REACTION AT B MUST PASS THROUGH D WHERE B AND 300-N LOAD INTERSECT.

$\Delta BCD: \tan \beta = \frac{240}{180}$; $\beta = 53.13^\circ$

FORCE TRIANGLE




$A = (300 \text{ N}) \tan 53.13^\circ = 400 \text{ N}$

$B = \frac{300 \text{ N}}{\cos 53.13^\circ} = 500 \text{ N}$

$A = 400 \text{ N} \uparrow$
 $B = 500 \text{ N} \angle 53.1^\circ$

4.62




FIND: RANGE OF DISTANCE a FOR WHICH $B \leq 600 \text{ N}$

FREE-BODY DIAGRAM (THREE-FORCE MEMBER)
 REACTION AT B MUST PASS THROUGH D WHERE B AND 300-N LOAD INTERSECT.

$a = \frac{240 \text{ mm}}{\sin \beta}$ (1)

FORCE TRIANGLE (WITH $B = 600 \text{ N}$)




$\cos \beta = \frac{300 \text{ N}}{600 \text{ N}} = 0.5$

$\beta = 60^\circ$

EQ. (1) $a = \frac{240 \text{ mm}}{\sin 60^\circ} = 138.56 \text{ mm}$


FOR $B \leq 600 \text{ N}$; $a \geq 138.6 \text{ mm}$

4.63



GIVEN: TENSION IN AB = 200 lb.

FIND:
(a) FORCE P.
(b) REACTION AT C.

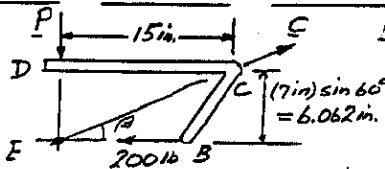


FREE-BODY DIAGRAM (3-FORCE BODY)
REACTION AT C MUST PASS THROUGH E, WHERE D AND 200-lb. FORCE INTERSECT.

WHERE D AND 200-lb. FORCE INTERSECT
 $\tan \beta = \frac{6.062 \text{ in.}}{15 \text{ in.}}; \beta = 22.005^\circ$


FORCE TRIANGLE
(a) $P = (200 \text{ lb}) \tan 22.005^\circ$
 $P = 80.83 \text{ lb}$
(b) $C = \frac{200 \text{ lb}}{\cos 22.005^\circ} = 215.7 \text{ lb}$
 $C = 216 \text{ lb} \angle 22.0^\circ$

4.64




GIVEN: REACTION AT C = 250 lb.

FIND: TENSION IN CABLE AB.

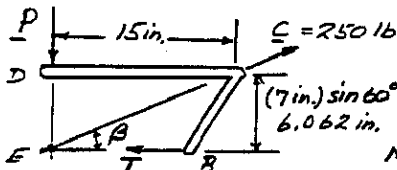


FREE-BODY DIAGRAM (3-FORCE BODY)
REACTION AT C MUST PASS THROUGH E, WHERE D AND THE FORCE T INTERSECT.

$\tan \beta = \frac{6.062 \text{ in.}}{15 \text{ in.}}; \beta = 22.005^\circ$



FORCE TRIANGLE
 $T = (250 \text{ lb}) \cos 22.005^\circ$
 $T = 231.8 \text{ lb}$
 $T = 232 \text{ lb}$

4.65



GIVEN: $b = 60 \text{ mm}$

FIND: REACTIONS AT B AND D.

SINCE CD IS A TWO-FORCE MEMBER, THE LINE OF ACTION OF REACTION AT D MUST PASS THROUGH POINTS C AND D.




(CONTINUED)

4.65 CONTINUED


FREE-BODY DIAGRAM (3-FORCE BODY)

REACTION AT B MUST PASS THROUGH E, WHERE THE REACTION AT D AND 80-N FORCE INTERSECT.

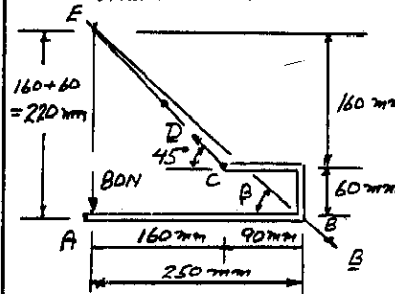

$\tan \beta = \frac{220 \text{ mm}}{250 \text{ mm}}$
 $\beta = 41.348^\circ$

FORCE TRIANGLE

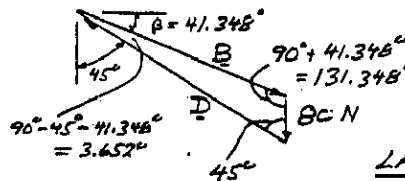


LAW OF SINES

$\frac{80 \text{ N}}{\sin 3.652^\circ} = \frac{B}{\sin 45^\circ} = \frac{D}{\sin 131.348^\circ}$


$B = 888.0 \text{ N}$ $D = 942.8 \text{ N}$
 $B = 888 \text{ N} \angle 41.3^\circ$ $D = 943 \text{ N} \angle 45^\circ$

4.66



GIVEN: $b = 120 \text{ mm}$
FIND: REACTIONS AT B AND D


SINCE CD IS A 2-FORCE MEMBER, LINE OF ACTION OF REACTION AT D MUST PASS THROUGH C & D

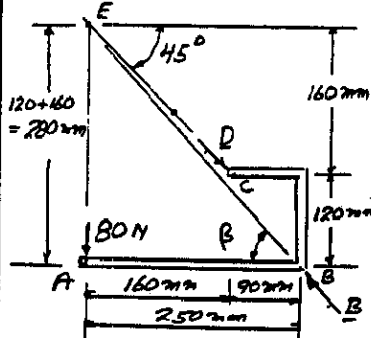

FREE-BODY DIAGRAM (3-FORCE BODY)
REACTION AT B MUST PASS THROUGH E, WHERE THE REACTION AT D AND 80-N FORCE INTERSECT.

$\tan \beta = \frac{180 \text{ mm}}{250 \text{ mm}}$
 $\beta = 48.24^\circ$

FORCE TRIANGLE

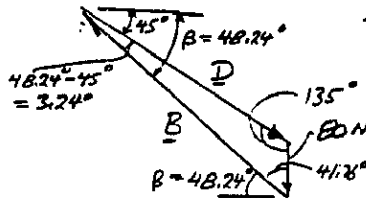


LAW OF SINES

$\frac{80 \text{ N}}{\sin 3.24^\circ} = \frac{B}{\sin 135^\circ} = \frac{D}{\sin 41.76^\circ}$

$B = 1000.9 \text{ N}$ $D = 942.8 \text{ N}$


$B = 1001 \text{ N} \angle 48.2^\circ$ $D = 943 \text{ N} \angle 45^\circ$

4.67




FIND:
REACTIONS
AT A AND C

SINCE AB IS A TWO-FORCE MEMBER, THE REACTION AT A MUST PASS THROUGH POINTS A AND B.

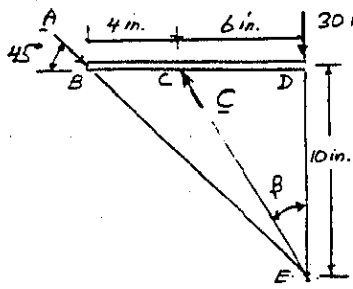

FREE-BODY DIAGRAM
(3-FORCE BODY)
REACTION AT C MUST PASS THROUGH E WHERE REACTION AT A AND 30-LB FORCE INTERSECT, ΔCDE :
 $\tan \beta = \frac{6 \text{ in.}}{10 \text{ in.}}$; $\beta = 30.964^\circ$




FORCE TRIANGLE
LAW OF SINES

$$\frac{30 \text{ lb}}{\sin 14.036^\circ} = \frac{A}{\sin 30.964^\circ} = \frac{C}{\sin 135^\circ}$$


$A = 63.64 \text{ lb}$, $C = 87.46 \text{ lb}$
 $A = 63.6 \text{ lb} \angle 45^\circ \blacktriangleleft$
 $C = 87.5 \text{ lb} \angle 59.0^\circ \blacktriangleleft$

4.68




FIND:
REACTIONS
AT C AND D

SINCE BD IS A TWO-FORCE MEMBER, THE REACTION AT D MUST PASS THROUGH POINTS B AND D.

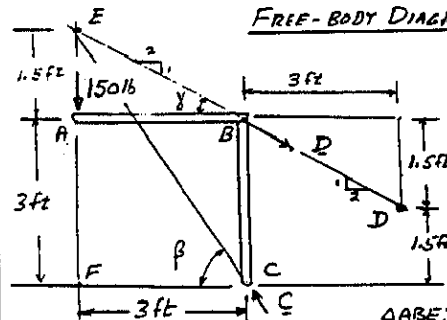

FREE-BODY DIAGRAM (3-FORCE BODY)
REACTION AT C MUST PASS THROUGH E WHERE REACTION AT D AND 150-LB LOAD INTERSECT ΔCEF :
 $\tan \beta = \frac{4.5 \text{ ft}}{3 \text{ ft}}$
 $\beta = 56.31^\circ$




FORCE TRIANGLE LAW OF SINES


$$\frac{150 \text{ lb}}{\sin 29.745^\circ} = \frac{C}{\sin 116.565^\circ} = \frac{D}{\sin 33.69^\circ}$$

$C = 270.4 \text{ lb}$, $D = 167.7 \text{ lb}$
 $C = 270 \text{ lb} \angle 56.3^\circ \blacktriangleleft$
 $D = 167.7 \text{ lb} \angle 26.6^\circ \blacktriangleleft$

4.69




GIVEN:
 $\beta = 30^\circ$
FIND: REACTIONS
AT A AND D.

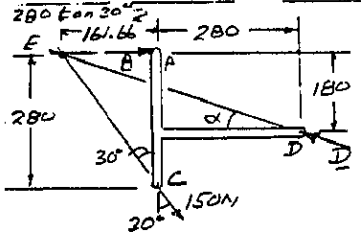

FREE-BODY DIAGRAM
(3-FORCE BODY)
REACTION AT D MUST PASS THROUGH POINT E WHERE REACTION AT A AND 150-N LOAD INTERSECT

DIMENSIONS IN mm. $\tan \alpha = \frac{180}{161.66 + 280}$; $\alpha = 22.174^\circ$

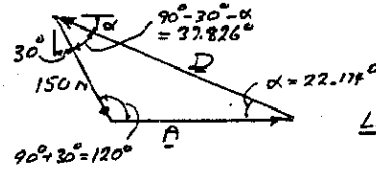


FORCE TRIANGLE

LAW OF SINES


$$\frac{150 \text{ N}}{\sin 22.174^\circ} = \frac{A}{\sin 37.826^\circ} = \frac{D}{\sin 120^\circ}$$

$A = 243.7 \text{ N}$
 $D = 344.2 \text{ N}$
 $A = 244 \text{ N} \rightarrow$; $D = 344 \text{ N} \angle 22.2^\circ \blacktriangleleft$

4.70




GIVEN:
 $\beta = 60^\circ$
FIND: REACTIONS
AT A AND D

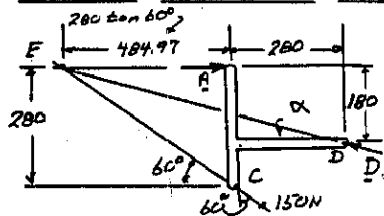

FREE-BODY DIAGRAM
(3-FORCE BODY)
REACTION AT D MUST PASS THROUGH E WHERE REACTION AT A AND 150-N LOAD INTERSECT.

DIMENSIONS IN mm

$$\tan \alpha = \frac{180}{484.97 + 280}$$
; $\alpha = 13.24^\circ$




FORCE TRIANGLE

LAW OF SINES

$$\frac{150 \text{ N}}{\sin 13.24^\circ} = \frac{A}{\sin 16.76^\circ} = \frac{D}{\sin 150^\circ}$$


$A = 188.2 \text{ N}$, $D = 327.4 \text{ N}$
 $A = 188.4 \text{ N} \rightarrow$; $D = 327 \text{ N} \angle 13.2^\circ \blacktriangleleft$

4.71



FIND:
 (a) TENSION IN CORD BD
 (b) REACTION AT C

3-FORCE BODY: 3-kip load AND T_{BD} INTERSECT AT E

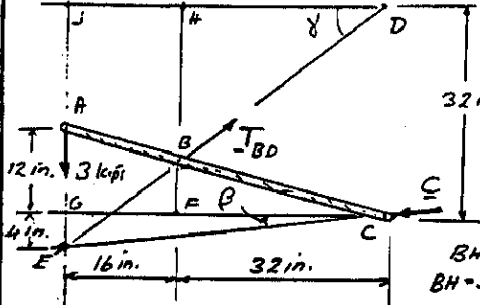

GEOMETRY

$$\frac{BF}{AG} = \frac{CF}{CG}$$

$$\frac{BF}{12 \text{ in.}} = \frac{32 \text{ in.}}{48 \text{ in.}}$$

$$BF = 8 \text{ in.}$$

$$BH = 32 \text{ in.} - BF = 24 \text{ in.}$$


$$\frac{JE}{BH} = \frac{DJ}{DH}; \frac{JE}{24 \text{ in.}} = \frac{48 \text{ in.}}{32 \text{ in.}}; JE = 36 \text{ in.}$$

$$EG = JE - JG = 36 \text{ in.} - 32 \text{ in.} = 4 \text{ in.}$$

$$\text{IN } \triangle CEG: \tan \beta = \frac{EG}{CG} = \frac{4 \text{ in.}}{48 \text{ in.}}; \beta = 4.764^\circ$$

$$\text{IN } \triangle BDH: \tan \gamma = \frac{BH}{DH} = \frac{24 \text{ in.}}{32 \text{ in.}}; \gamma = 36.87^\circ$$

FORCE TRIANGLE FOR 3 FORCES INTERSECTING AT E

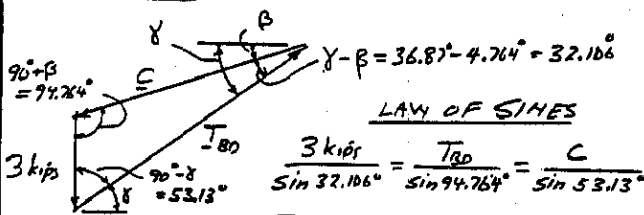

LAW OF SINES


$$\frac{3 \text{ kips}}{\sin 32.106^\circ} = \frac{T_{BD}}{\sin 94.764^\circ} = \frac{C}{\sin 53.13^\circ}$$

$$T_{BD} = 5.625 \text{ kips}; C = 4.516 \text{ kips}$$

$$(a) T_{BD} = 5.63 \text{ kips}$$

$$(b) C = 4.52 \text{ kips} \angle 4.8^\circ$$


4.72

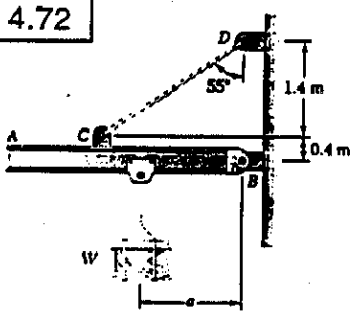

GIVEN:
 $a = 1.5 \text{ m}$
 $W = 50 \text{ lb}$

FIND:
 (a) TENSION IN CABLE CD
 (b) REACTION AT B

3-FORCE BODY: W AND T_{CD} INTERSECT AT E

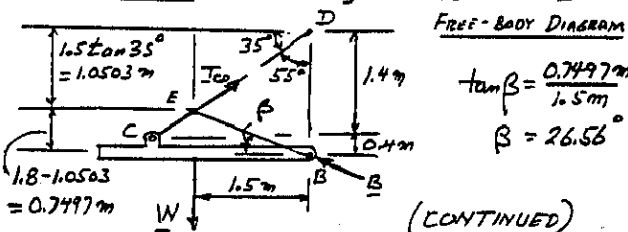

FREE-BODY DIAGRAM


$$\tan \beta = \frac{0.7497 \text{ m}}{1.5 \text{ m}}$$

$$\beta = 26.56^\circ$$

(CONTINUED)

4.72 CONTINUED

FORCE TRIANGLE
 3 FORCES INTERSECT AT E
 $W = (50 \text{ lb}) 9.81 \text{ m/s}^2 = 490.5 \text{ N}$

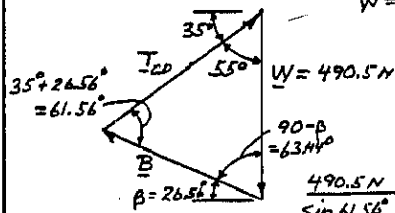


$$T_{CD} = 490.9 \text{ N}; B = 456.9 \text{ N}$$

$$(a) T_{CD} = 499 \text{ N}$$

$$(b) B = 457 \text{ N} \angle 76.6^\circ$$


4.73




GIVEN:
 $a = 3 \text{ m}$
 $W = 50 \text{ lb}$

FIND:
 (a) TENSION IN CABLE CD
 (b) REACTION AT B

3-FORCE BODY W AND T_{CD} INTERSECT AT E
 FREE-BODY DIAGRAM

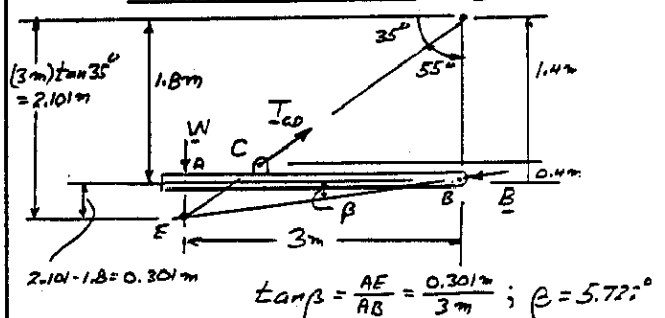

FORCE TRIANGLE (3 FORCES INTERSECT AT E)
 $W = (50 \text{ lb}) 9.81 \text{ m/s}^2 = 490.5 \text{ N}$

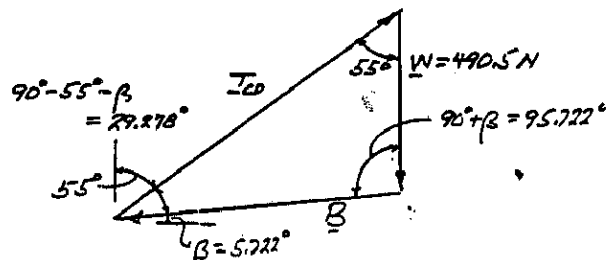

LAW OF SINES


$$\frac{490.5 \text{ N}}{\sin 29.278^\circ} = \frac{T_{CD}}{\sin 95.722^\circ} = \frac{B}{\sin 55^\circ}$$

$$T_{CD} = 992.99 \text{ N}; B = 821.59 \text{ N}$$

$$(a) T_{CD} = 998 \text{ N}$$

$$(b) B = 822 \text{ N} \angle 5.7^\circ$$

4.74



GIVEN:
 $\beta = 50^\circ$

FIND: REACTIONS
AT A AND B.

FREE-BODY DIAGRAM (3-FORCE BODY)

REACTION A MUST PASS THROUGH POINT D WHERE 100-N FORCE AND B INTERSECT

IN RIGHT $\triangle BCD$:
 $\alpha = 90^\circ - 75^\circ = 15^\circ$


$BD = 250 \tan 75^\circ = 933.0 \text{ mm}$

IN RIGHT $\triangle ABD$:

$\tan \gamma = \frac{AB}{BD} = \frac{150 \text{ mm}}{933 \text{ mm}}$

$\gamma = 9.13^\circ$

DIMENSIONS
IN mm.

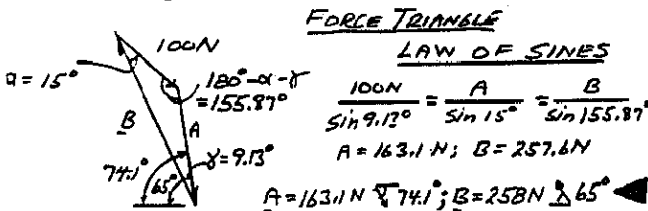

FORCE TRIANGLE


LAW OF SINES

$\frac{100N}{\sin 9.13^\circ} = \frac{A}{\sin 15^\circ} = \frac{B}{\sin 155.87^\circ}$

$A = 163.1N$; $B = 257.6N$

$A = 163.1N \angle 74.1^\circ$; $B = 258N \angle 65^\circ$

4.75



GIVEN:
 $\beta = 80^\circ$

FIND:
REACTIONS
AT A AND B

FREE-BODY DIAGRAM (3-FORCE BODY)

REACTION A MUST PASS THROUGH POINT D WHERE 100-N FORCE AND B INTERSECT

IN RIGHT $\triangle BCD$:

$\alpha = 90^\circ - 75^\circ = 15^\circ$


$BD = BC \tan 75^\circ = 250 \tan 75^\circ$

$BD = 933.0 \text{ mm}$

IN RIGHT $\triangle ABD$:

$\tan \gamma = \frac{AB}{BD} = \frac{150 \text{ mm}}{933 \text{ mm}}$

$\gamma = 9.13^\circ$

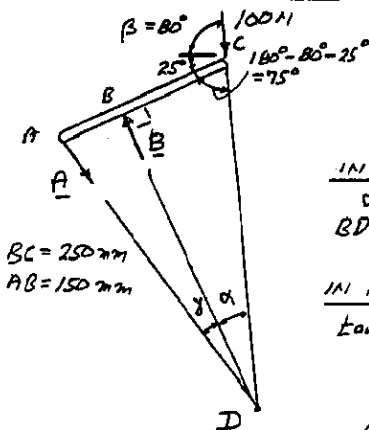

(CONTINUED)

4.75 CONTINUED

FORCE TRIANGLE

LAW OF SINES

$\frac{100N}{\sin 9.13^\circ} = \frac{A}{\sin 15^\circ} = \frac{B}{\sin 155.87^\circ}$


$A = 163.1N$

$B = 257.6N$

$A = 163.1N \angle 55.9^\circ$

$B = 258N \angle 65^\circ$

4.76



GIVEN: 40-lb ROLLER OF DIAMETER 6 in. THICKNESS OF TILE IS 0.3 in.


FIND: FORCE P TO MOVE ROLLER ON TO TILES IF ROLLER IS (a) PUSHED ←, (b) PULLED →

GEOMETRY FOR EACH

CASE AS ROLLER COMES INTO CONTACT WITH TILE

$\alpha = \cos^{-1} \frac{2.7 \text{ in.}}{3 \text{ in.}}$


$\alpha = 22.33^\circ$



(a) ROLLER PUSHED TO LEFT (3-FORCE BODY)

FORCES MUST PASS THROUGH O.

FORCE TRIANGLE



$\alpha = 22.33^\circ$

40 lb

$90^\circ + 30^\circ = 120^\circ$

$180^\circ - 120^\circ - 22.33^\circ = 37.67^\circ$

LAW OF SINES


$\frac{40 \text{ lb}}{\sin 37.67^\circ} = \frac{P}{\sin 22.33^\circ}$; $P = 24.86 \text{ lb}$

$P = 24.9 \text{ lb} \angle 30^\circ$

(b) ROLLER PULLED TO RIGHT (3-FORCE BODY)

FORCES MUST PASS THROUGH C

FORCE TRIANGLE



$\alpha = 22.33^\circ$

$180^\circ - 60^\circ - 22.33^\circ = 97.67^\circ$

40 lb


$\alpha = 22.33^\circ$

LAW OF SINES


$\frac{40 \text{ lb}}{\sin 97.67^\circ} = \frac{P}{\sin 22.33^\circ}$; $P = 15.33 \text{ lb}$

$P = 15.33 \text{ lb} \angle 30^\circ$


4.77



FIND:
TENSION
IN CORD
REACTION AT B

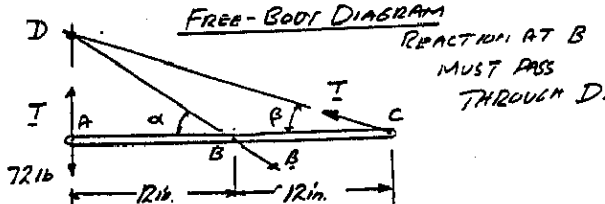

$$\tan \alpha = \frac{7 \text{ in.}}{12 \text{ in.}}; \alpha = 30.256^\circ \quad \tan \beta = \frac{7 \text{ in.}}{24 \text{ in.}}; \beta = 16.26^\circ$$

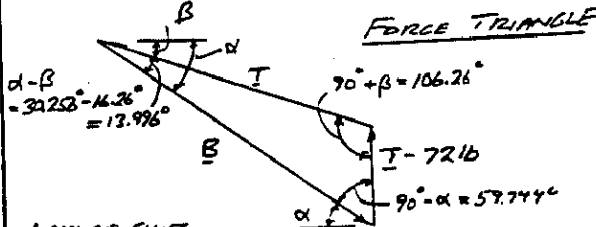

LAW OF SINES

$$\frac{T}{\sin 59.744^\circ} = \frac{T-72 \text{ lb}}{\sin 13.996^\circ} = \frac{B}{\sin 106.26^\circ}$$


$$T(\sin 13.996^\circ) = (T-72)(\sin 59.744^\circ)$$

$$T(0.24185) = (T-72)(0.86372)$$



$$T = 100.00 \text{ lb}$$

$$B = (100 \text{ lb}) \frac{\sin 106.26^\circ}{\sin 59.744^\circ} = 111.14 \text{ lb} \quad B = 111 \text{ lb} \angle 30.3^\circ$$

4.78



FIND:
TENSION
IN CORD
REACTION
AT B




$$\frac{T}{4} = \frac{T-75 \text{ lb}}{3} = \frac{B}{5}$$

$$3T = 4T - 300; T = 300 \text{ lb}$$



$$B = \frac{5}{4}T = \frac{5}{4}(300 \text{ lb}) = 375 \text{ lb}$$

$$B = 375 \text{ lb} \angle 36.9^\circ$$

4.79

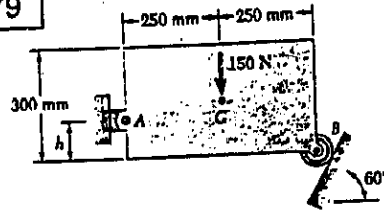


FIND:
REACTIONS AT
A AND B WHEN
(a) $h=0$
(b) $h=200 \text{ mm}$




$$A = 150 \text{ N} \angle 30^\circ$$

$$B = 150 \text{ N} \angle 30^\circ$$

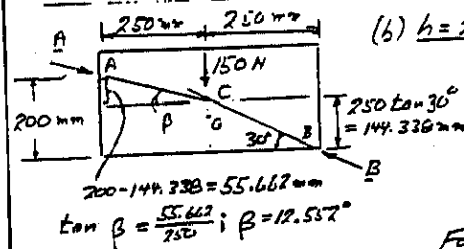

$$\tan \beta = \frac{55.662}{250}; \beta = 12.552^\circ$$




$$\frac{150 \text{ N}}{\sin 17.448^\circ} = \frac{A}{\sin 60^\circ} = \frac{B}{\sin 102.552^\circ}$$

$$A = 433.247 \text{ N}; B = 488.31 \text{ N}$$


$$A = 433 \text{ N} \angle 12.6^\circ$$

$$B = 488 \text{ N} \angle 30^\circ$$

4.80

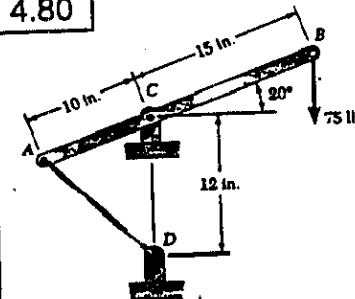

FIND:
(a) TENSION
IN CABLE AD
(b) REACTION AT C

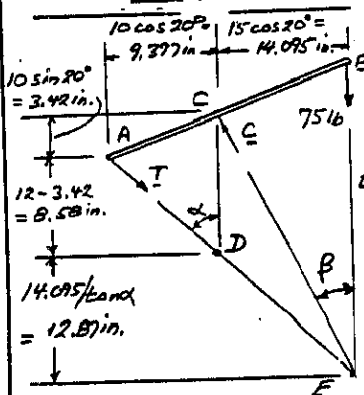

$$\tan \alpha = \frac{9.377 \text{ in.}}{8.58 \text{ in.}}; \alpha = 47.8^\circ$$


$$\tan \beta = \frac{14.095 \text{ in.}}{CD + 12.87 \text{ in.}} = \frac{14.095}{24.87}$$

$$B = 29.543^\circ$$


(CONTINUED)

4.80 CONTINUED

FORCE TRIANGLE
LAW OF SINES

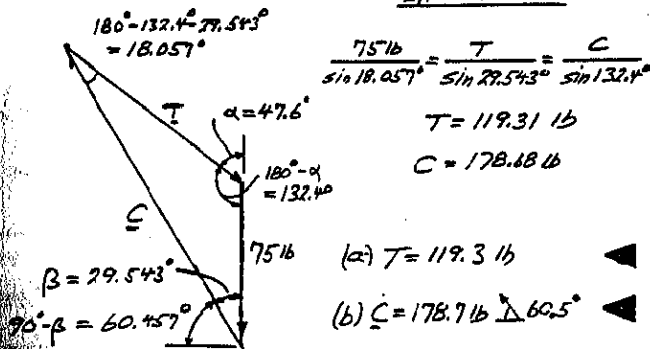


4.82



GIVEN:
 $\theta = 60^\circ$


FIND: REACTION
(a) AT B
(b) AT C

FREE-BODY DIAGRAM (3-FORCE BODY)
REACTION AT C MUST PASS THROUGH D WHERE
FORCE P AND REACTION AT B INTERSECT.

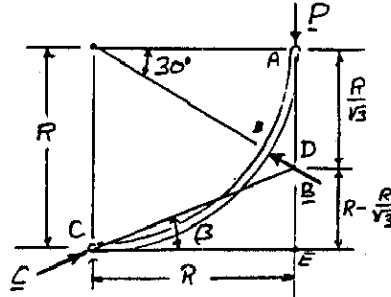

IN ΔCDE :
 $\tan \beta = \frac{R - R/3}{R} = 1 - \frac{1}{3}$
 $\beta = 22.9^\circ$


4.81



GIVEN:
 $\theta = 30^\circ$


FIND: REACTION
(a) AT B
(b) AT C

FREE-BODY DIAGRAM (3-FORCE BODY)
REACTION AT C MUST PASS THROUGH D WHERE
FORCE P AND REACTION AT B INTERSECT



IN ΔCDE :
 $\tan \beta = \frac{(\sqrt{3}-1)R}{R} = \sqrt{3}-1$
 $\beta = 36.2^\circ$

FORCE TRIANGLE
LAW OF SINES



$\frac{P}{\sin 57.9^\circ} = \frac{B}{\sin 67.1^\circ} = \frac{C}{\sin 60^\circ}$
 $B = 1.155 P$; $C = 1.086 P$
 (a) $B = 1.155 P \angle 30^\circ$
 (b) $C = 1.086 P \angle 22.9^\circ$

4.83 and 4.84

FOR EQUILIBRIUM,
PROB. 4.83:


FIND: $\theta = f(\beta)$.

PROB. 4.84:


GIVEN: $m = 8Rg$, $\beta = 30^\circ$.

FIND: (a) ANGLE θ .

(b) REACTIONS
AT A AND B.



PROB. 4.83




FREE-BODY DIAGRAM (3-FORCE
BODY) FORCES INTERSECT AT C.

IN ΔBCD

$\tan \beta = \frac{\frac{1}{2} L \sin \theta}{L \cos \theta} = \frac{1}{2} \frac{\sin \theta}{\cos \theta}$

$\tan \theta = 2 \tan \beta$

FORCE TRIANGLE



PROB. 4.84

GIVEN: $m = 8Rg$; $W = (8Rg) 9.81 \text{ m/s}^2 = 78.48 \text{ N}$, $\beta = 30^\circ$

(a) $\tan \theta = 2 \tan 30^\circ = 1.1547$ $\theta = 49.1^\circ$

(b) $A = W \tan \theta = (78.48 \text{ N}) \tan 30^\circ$ $A = 45.3 \text{ N}$

$B = W / \cos \beta = (78.48 \text{ N}) / \cos 30^\circ$ $B = 90.6 \text{ N} \angle 60^\circ$

LAW OF SINES


$\frac{P}{\sin 36.2^\circ} = \frac{B}{\sin 126.2^\circ} = \frac{C}{\sin 30^\circ}$

$B = 2.00 P$; $C = 1.239 P$

(a) $B = 2 P \angle 60^\circ$

(b) $C = 1.239 P \angle 36.2^\circ$


4.85 and 4.86



PROB. 4.85:
FIND: EXPRESSION FOR h
IN TERMS OF S AND L

PROB. 4.86:
GIVEN: $L=20$ in., $S=30$ in.,
AND $W=10$ lb
FIND: (a) DISTANCE h
(b) TENSION IN AC
(c) REACTION AT B

PROB. 4.85:
 $AC = S$
 $AB = L$



FREE-BODY DIAGRAM
(3-FORCE BODY)
THE FORCES W AND B
MUST INTERSECT AT D
ON LINE OF ACTION OF T .

IN $\triangle ACE$: $(2h)^2 + (AE)^2 = S^2$ (1)
IN $\triangle ABE$: $h^2 + (AE)^2 = L^2$ (2)
EQ(1) - EQ(2): $3h^2 = S^2 - L^2$ (3)

$$h = \sqrt{(S^2 - L^2)/3}$$



AS LENGTH S INCREASES
RELATIVE TO L , ANGLE θ
INCREASES UNTIL ROD
AB IS VERTICAL AND
 $h \geq S - L$

$$\sqrt{(S^2 - L^2)/3} \geq S - L$$

$$S^2 - L^2 \geq 3(S^2 - 2SL + L^2)$$

$$0 \geq 2S^2 - 6SL + 4L^2$$

$$0 \geq 2(S - L)(S - 2L)$$



\therefore NO SOLUTION FOR $S > 2L$

PROB. 4.86 $L=20$ in., $S=30$ in., $W=10$ lb


$$h = \sqrt{(S^2 - L^2)/3} = \sqrt{(30^2 - 20^2)/3} = \sqrt{500/3}$$

(a) $h = 12.91$ in.

IN $\triangle ACE$: $\cos \beta = \frac{2h}{S} = \frac{2(12.91 \text{ in.})}{30 \text{ in.}} = 0.8607$

$\beta = 30.609^\circ$

FORCE TRIANGLE




$$T = \frac{W}{\cos \beta} = \frac{10 \text{ lb}}{\cos 30.609^\circ}$$

(b) $T = 11.62$ lb

$B = W \tan \beta = (10 \text{ lb}) \tan 30.609^\circ$


(c) $B = 5.92$ lb

4.87



GIVEN:
 $a = 20$ mm
 $R = 100$ mm

FIND: DISTANCE c
CORRESPONDING
TO EQUILIBRIUM



SLOPE OF DE IS $\triangle 45^\circ$
 \therefore SLOPE OF CH IS $\triangle 45^\circ$

$DE = \sqrt{2} a$
 $DH = HE = \frac{1}{2} DE = \frac{\sqrt{2}}{2} a$

IN $\triangle DHC$ AND IN $\triangle CEN$:

$$\sin \beta = \frac{\frac{\sqrt{2}}{2} a}{R} = \frac{a}{\sqrt{2} R}$$


$c = R \sin(45^\circ - \beta)$

FOR $a = 20$ mm, $R = 100$ mm

$$\sin \beta = \frac{20 \text{ mm}}{\sqrt{2}(100 \text{ mm})} ; \beta = 8.13^\circ$$

$c = (100 \text{ mm}) \sin(45^\circ - 8.13^\circ) \quad c = 60.0 \text{ mm}$


4.88



GIVEN: RADIUS
OF BOWL IS R .

FIND: ANGLE θ
FOR EQUILIBRIUM

FREE-BODY DIAGRAM
(3-FORCE BODY)



POINT E IS POINT OF
INTERSECTION OF
 A AND E .

SINCE A PASSES
THROUGH O AND SINCE
 C IS PERPENDICULAR
TO ROD, TRIANGLE ACE IS A
RIGHT TRIANGLE INSCRIBED IN
THE CIRCLE. THUS E IS A POINT
ON THE CIRCLE.

NOTE THAT $\angle DOA$ IS THE CENTRAL ANGLE
CORRESPONDING TO THE INSCRIBED ANGLE DCA .

THUS $\angle DOA = 2\theta$

HORIZONTAL PROJECTIONS OF AE AND AB ARE EQUAL.

$(AE) \cos 2\theta = (AB) \cos \theta$

$(2R) \cos 2\theta = (R) \cos \theta$

SET: $\cos 2\theta = 2 \cos^2 \theta - 1$

$4 \cos^2 \theta - 2 = \cos \theta$

$4 \cos^2 \theta - \cos \theta - 2 = 0$


$\cos \theta = 0.84307$

$\theta = 32.5^\circ$

$\cos \theta = -0.59307$


$\theta = 126.4^\circ$ (DISCARD)

4.89 and 4.90

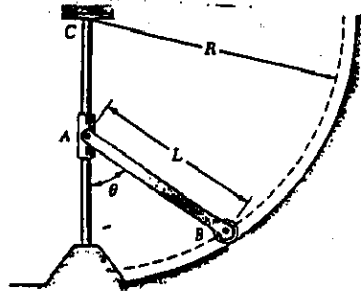

PROB. 4.89:
DERIVE EQUATION
IN θ , L, AND R
FOR POSITION OF
EQUILIBRIUM

PROB. 4.90:
GIVEN: $L = 15$ in.,
 $R = 20$ in. AND $W = 10$ lb
FIND: ANGLE θ FOR
EQUILIBRIUM

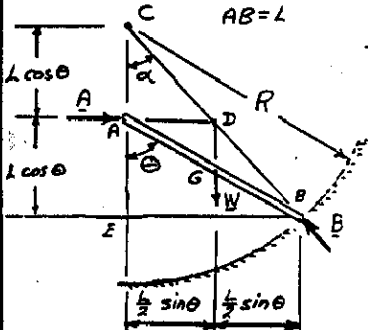

FREE-BODY DIAGRAM
(3-FORCE BODY)
REACTION B MUST
PASS THROUGH D
WHERE B AND W
INTERSECT.

NOTE THAT $\triangle ABC$ AND
 $\triangle BGD$ ARE SIMILAR.
 $\therefore AC = AE = L \cos \theta$

PROB. 4.89

IN $\triangle ABC$: $(CE)^2 + (BE)^2 = (BC)^2$
 $(2L \cos \theta)^2 + (L \sin \theta)^2 = L^2$
 $(RL)^2 = 4 \cos^2 \theta + \sin^2 \theta$
 $(RL)^2 = 4 \cos^2 \theta + 1 - \cos^2 \theta$
 $(RL)^2 = 3 \cos^2 \theta + 1$

$\cos^2 \theta = \frac{1}{3} \left[\left(\frac{R}{L} \right)^2 - 1 \right]$


PROB. 4.90. FOR $L = 15$ in., $R = 20$ in., AND $W = 10$ lb.

$\cos^2 \theta = \frac{1}{3} \left[\left(\frac{20 \text{ in.}}{15 \text{ in.}} \right)^2 - 1 \right]$; $\cos \theta = 57.39^\circ$; $\theta = 57.4^\circ$

IN $\triangle ABC$: $\tan \alpha = \frac{BE}{CE} = \frac{L \sin \theta}{2L \cos \theta} = \frac{1}{2} \tan \theta$

$\tan \alpha = \frac{1}{2} \tan 57.39^\circ = 0.8452$; $\alpha = 40.2^\circ$

FORCE TRIANGLE

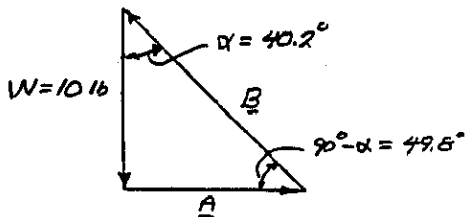


$A = W \tan \alpha = (10 \text{ lb}) \tan 40.2^\circ = 8.45 \text{ lb}$

$B = W / \cos \alpha = (10 \text{ lb}) / \cos 40.2^\circ = 13.09 \text{ lb}$

$A = 8.45 \text{ lb}$


$B = 13.09 \text{ lb}$ $\nearrow 49.8^\circ$

4.91

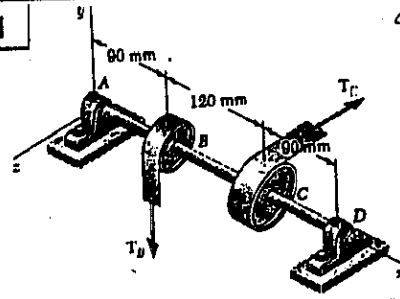

GIVEN: $T_B = 80$ N
 $R_B = 30$ mm
 $T_C = 40$ N

FIND:
REACTIONS
AT A AND D.

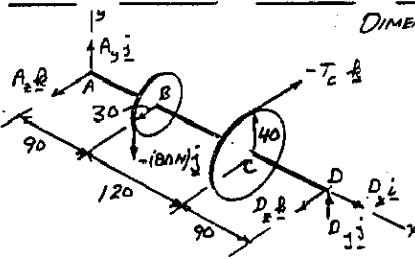

DIMENSIONS IN mm

WE HAVE 6 UNKNOWN
AND 6 EQS. OF
EQUILIBRIUM.

$\sum M_A = 0: (90 \hat{i} + 30 \hat{j}) \times (-80 \hat{j}) + (210 \hat{i} + 40 \hat{j}) \times (-T_C \hat{j}) + (300 \hat{i}) \times (D_x \hat{i} + D_y \hat{j} + D_z \hat{k}) = 0$
 $-7200 \hat{k} + 2400 \hat{k} + 210 T_C \hat{j} - 40 T_C \hat{i} + 300 D_x \hat{j} - 300 D_y \hat{i} = 0$

EQUATE COEFFICIENTS OF UNIT VECTORS TO ZERO:

- ① $2400 - 40 T_C = 0$ $T_C = 60$ N
- ② $210 T_C - 300 D_x = 0$; $(210 \times 60) - 300 D_x = 0$; $D_x = 42$ N
- ③ $-7200 + 300 D_y = 0$ $D_y = 24$ N


$\sum F_x = 0: D_x = 0$

$\sum F_y = 0: A_y + D_y - 80 = 0$ $A_y = 80 - 24 = 56$ N

$\sum F_z = 0: A_z + D_z - 60 = 0$ $A_z = 60 - 42 = 18$ N


$A = (56 \text{ N}) \hat{j} + (18 \text{ N}) \hat{k}$; $D = (24 \text{ N}) \hat{j} + (42 \text{ N}) \hat{k}$

4.92

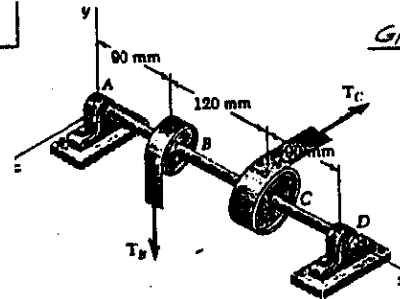

GIVEN: $T_B = 80$ N
 $R_B = 30$ mm
 $T_C = 50$ N

FIND:
REACTIONS
AT A AND D

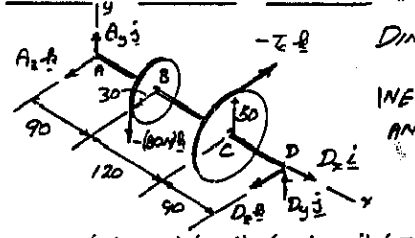

DIMENSIONS IN mm

WE HAVE 6 UNKNOWN
AND 6 EQS. OF
EQUILIBRIUM

$\sum M_A = 0: (90 \hat{i} + 30 \hat{j}) \times (-80 \hat{j}) + (210 \hat{i} + 50 \hat{j}) \times (-T_C \hat{j}) + (300 \hat{i}) \times (D_x \hat{i} + D_y \hat{j} + D_z \hat{k}) = 0$
 $-7200 \hat{k} + 2400 \hat{k} + 210 T_C \hat{j} - 50 T_C \hat{i} + 300 D_x \hat{j} - 300 D_y \hat{i} = 0$

EQUATE COEFFICIENTS OF UNIT VECTORS TO ZERO:

- ① $2400 - 50 T_C = 0$ $T_C = 48$ N
- ② $210 T_C - 300 D_x = 0$; $(210 \times 48) - 300 D_x = 0$; $D_x = 33.6$ N
- ③ $-7200 + 300 D_y = 0$ $D_y = 24$ N


$\sum F_x = 0: D_x = 0$

$\sum F_y = 0: A_y + D_y - 80 = 0$; $A_y = 80 - 24 = 56$ N

$\sum F_z = 0: A_z + D_z - 48 = 0$; $A_z = 48 - 33.6 = 14.4$ N


$A = (56 \text{ N}) \hat{j} + (14.4 \text{ N}) \hat{k}$
 $D = (24 \text{ N}) \hat{j} + (33.6 \text{ N}) \hat{k}$

4.93

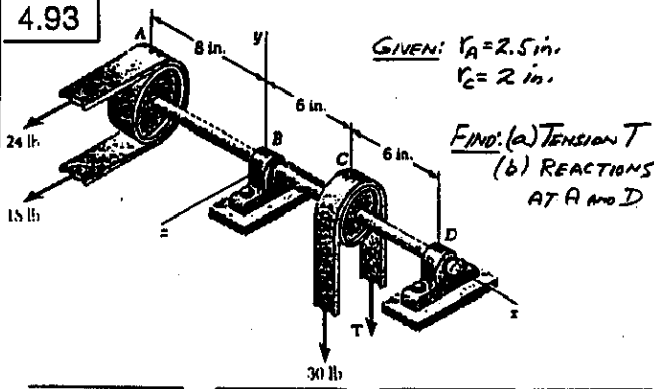

GIVEN: $r_A = 2.5 \text{ in.}$
 $r_C = 2 \text{ in.}$

FIND: (a) TENSION T
(b) REACTIONS AT A AND D

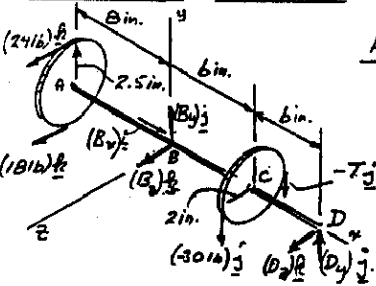

FREE-BODY DIAGRAM
WE HAVE 6 UNKNOWN
AND 6 EQUATIONS OF
EQUILIBRIUM

$$\sum M_B = 0: (-8\hat{i} + 2.5\hat{j}) \times (24\hat{e}_x) + (-8\hat{i} - 2.5\hat{j}) \times (15\hat{e}_x) + (6\hat{i} + 2\hat{j}) \times (-30\hat{e}_y) + (6\hat{i} - 2\hat{j}) \times (-T\hat{j}) + (12\hat{i}) \times (D_y\hat{j} + D_z\hat{k}) = 0$$

$$192\hat{j} + 60\hat{i} + 144\hat{j} - 45\hat{i} - 180\hat{k} + 60\hat{i} - 6T\hat{k} - 2T\hat{i} + 12D_y\hat{k} - 12D_z\hat{j} = 0$$


EQUATING TO ZERO THE COEFFICIENTS OF UNIT VECTORS:

- ① $60 - 45 + 60 - 2T = 0 \quad T = 37.5 \text{ lb}$
- ② $192 + 144 - 12D_z = 0 \quad D_z = 28 \text{ lb}$
- ③ $-180 - 6(37.5) + 12D_y = 0 \quad D_y = 33.75 \text{ lb}$

$$\begin{aligned} \sum F_x = 0: B_x = 0 & \quad B_x = 0 \\ \sum F_y = 0: B_y - 30 - 37.5 + 33.75 = 0 & \quad B_y = 33.75 \text{ lb} \\ \sum F_z = 0: B_z + 24 + 15 + 28 = 0 & \quad B_z = -70 \text{ lb} \end{aligned}$$

$$\begin{aligned} B &= (33.75\hat{i})\hat{j} - (70\hat{k})\hat{k} \\ D &= (33.75\hat{i})\hat{j} + (28\hat{k})\hat{k} \end{aligned}$$


4.94

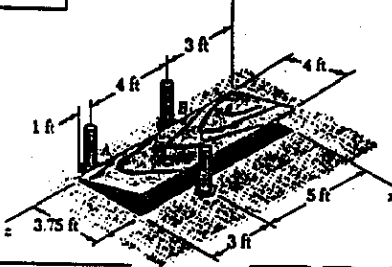

GIVEN: WEIGHT = 34 lb

FIND: REACTIONS AT A, B, AND C

NEGLECT THE EFFECT OF FRICTION

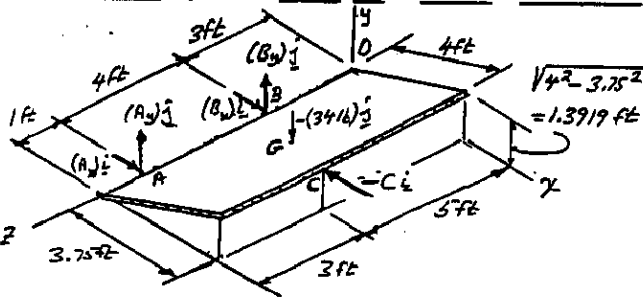

$$r_{CB} = \frac{3.75}{2}\hat{i} + \frac{1.399}{2}\hat{j} + \hat{k}$$

(CONTINUED)

4.94 CONTINUED

WE HAVE 5 UNKNOWN AND 6 EQS. OF EQUILIBRIUM.

PLYWOOD SHEET IS FREE TO MOVE IN Z DIRECTION, BUT EQUILIBRIUM IS MAINTAINED ($\sum F_z = 0$)

$$\sum M_B = 0: r_{NB} \times (A_x\hat{i} + A_y\hat{j}) + r_{CB} \times (-C\hat{i}) + r_{DB} \times (-W\hat{j}) = 0$$

$$\begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 0 & 0 & 4 \\ 0 & 0 & 4 \end{vmatrix} + \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 3.75 & 1.399 & 2 \\ 0 & 0 & 0 \end{vmatrix} + \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 1.875 & 0.696 & 1 \\ 0 & -34 & 0 \end{vmatrix} = 0$$

$-4A_y\hat{i} + 4A_x\hat{j} - 2C\hat{i} + 1.399C\hat{k} + 34\hat{i} - 63.75\hat{k} = 0$
EQUATING COEFFICIENTS OF UNIT VECTORS TO ZERO:

- ① $-4A_y + 34 = 0 \quad A_y = 8.5 \text{ lb}$
- ② $-2C + 4A_x = 0; \quad A_x = \frac{1}{2}C = \frac{1}{2}(45.80) = 22.9 \text{ lb}$
- ③ $1.399C - 63.75 = 0; \quad C = 45.80 \text{ lb} \quad C = 45.8 \text{ lb}$

$$\sum F_x = 0: A_x + B_x - C = 0; \quad B_x = 45.8 - 22.9 = 22.9 \text{ lb}$$


$$\sum F_y = 0: A_y + B_y - W = 0; \quad B_y = 34 - 8.5 = 25.5 \text{ lb}$$

$$A = (22.9\hat{i})\hat{i} + (8.5\hat{j})\hat{j}; \quad B = (22.9\hat{i})\hat{i} + (25.5\hat{j})\hat{j}; \quad C = (-45.8\hat{i})\hat{i}$$

4.95 and 4.96

GIVEN: MASS OF PLATE = 12 kg

FIND: (a) TENSION T
(b) REACTIONS AT A AND B

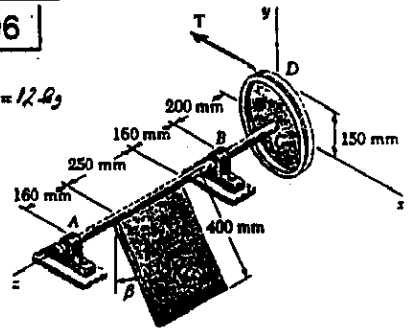


PROB. 4.95: $\beta = 30^\circ$

PROB. 4.96: $\beta = 60^\circ$

FREE-BODY DIAGRAM
DIMENSIONS IN mm

WE HAVE 6 UNKNOWN AND 6 EQS. OF EQUIL.

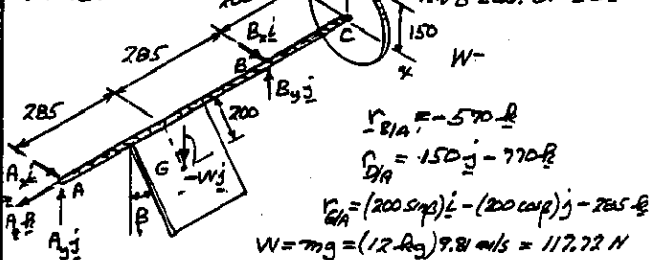

$$r_{B/A} = -570\hat{k}$$

$$r_{D/A} = 150\hat{j} - 770\hat{k}$$

$$r_{G/A} = (200\sin\beta)\hat{i} - (200\cos\beta)\hat{j} - 285\hat{k}$$

$$W = mg = (12 \text{ kg})(9.81 \text{ m/s}^2) = 117.72 \text{ N}$$

$$\sum M_A = 0: r_{G/A} \times (W\hat{j}) + r_{D/A} \times (-T\hat{i}) + r_{B/A} \times (B_x\hat{i} + B_y\hat{j}) = 0$$

$$\begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 200\sin\beta & -200\cos\beta & -285 \\ 0 & -W & 0 \end{vmatrix} + \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 0 & 150 & -770 \\ -T & 0 & 0 \end{vmatrix} + \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 0 & 0 & -570 \\ B_x & B_y & 0 \end{vmatrix} = 0$$

$$-285W\hat{i} - (200\sin\beta)W\hat{k} + 770T\hat{j} + 150T\hat{k} + 570B_x\hat{i} - 570B_y\hat{j} = 0$$

EQUATING COEFFICIENTS OF UNIT VECTORS

- ① $-285W + 570B_x = 0; \quad B_x = (285/570)W \quad (1)$
- ② $770T - 570B_y = 0; \quad B_y = (770/570)T \quad (2)$
- ③ $-(200\sin\beta)W + 150T = 0; \quad T = (200/150)\sin\beta W \quad (3)$

$$\sum F_x = 0: A_x + B_x - T = 0 \quad A_x = T - B_x \quad (4)$$

$$\sum F_y = 0: A_y + B_y - W = 0 \quad A_y = W - B_y \quad (5)$$

$$\sum F_z = 0: A_z = 0 \quad A_z = 0 \quad (6)$$

(CONTINUED)

4.95 and 4.96 CONTINUED

PROB 4.95: $\beta = 30^\circ$; $W = 117.72 \text{ N}$

EQ.(1): $B_y = (285/570)117.72 \text{ N} = 58.86 \text{ N}$

EQ.(2): $T = (200/150)(\sin 30^\circ)117.72 \text{ N} = 78.48 \text{ N}$

EQ.(3): $B_x = (770/570)78.48 \text{ N} = 106.02 \text{ N}$

EQ.(4): $A_x = 78.48 \text{ N} - 106.02 \text{ N} = -27.54 \text{ N}$

EQ.(5): $A_y = 117.72 \text{ N} - 58.86 \text{ N} = 58.86 \text{ N}$

EQ.(6): $A_z = 0$

(a) $T = 78.5 \text{ N}$

(b) $A = -(27.5 \text{ N})\hat{i} + (58.9 \text{ N})\hat{j}$; $B = (106.0 \text{ N})\hat{i} + (58.9 \text{ N})\hat{j}$

PROB 4.96: $\beta = 60^\circ$; $W = 117.72 \text{ N}$

EQ.(1): $B_y = (285/570)117.72 \text{ N} = 58.86 \text{ N}$

EQ.(2): $T = (200/150)(\sin 60^\circ)117.72 \text{ N} = 135.93 \text{ N}$

EQ.(3): $B_x = (770/570)135.93 \text{ N} = 183.63 \text{ N}$

EQ.(4): $A_x = 135.93 \text{ N} - 183.63 \text{ N} = -47.70 \text{ N}$


EQ.(5): $A_y = 117.72 \text{ N} - 58.86 \text{ N} = 58.86 \text{ N}$

EQ.(6): $A_z = 0$

(a) $T = 135.9 \text{ N}$


(b) $A = -(47.7 \text{ N})\hat{i} + (58.9 \text{ N})\hat{j}$; $B = (183.6 \text{ N})\hat{i} + (58.9 \text{ N})\hat{j}$

4.97

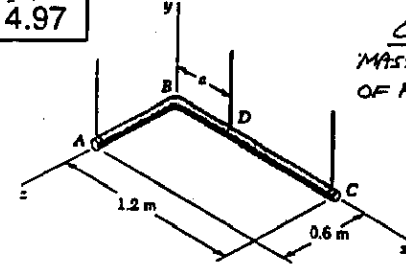

GIVEN: $a = 0.4 \text{ m}$,
MASS PER UNIT LENGTH
OF PIPES: $m' = 8.8 \text{ kg/m}$

FIND: TENSION
IN WIRES AT
A, B, AND C.

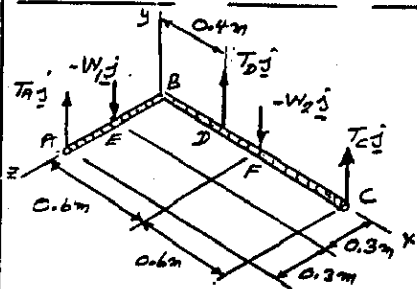

$W_1 = 0.6 \text{ m}'g$
 $W_2 = 1.2 \text{ m}'g$

$\Sigma M_D = 0: \int_{A \rightarrow D} r_{AD} \times T_A \hat{j} + r_{ED} \times (-W_1 \hat{j}) + \int_{D \rightarrow C} r_{FD} \times (-W_2 \hat{j}) + r_{CD} \times T_C \hat{j} = 0$
 $(-0.4\hat{i} + 0.6\hat{j}) \times T_A \hat{j} + (-0.4\hat{i} + 0.3\hat{j}) \times (-W_1 \hat{j}) + 0.2\hat{i} \times (-W_2 \hat{j}) + 0.8\hat{j} \times T_C \hat{j} = 0$

$-0.4T_A \hat{k} - 0.6T_A \hat{i} + 0.4W_1 \hat{k} + 0.3W_1 \hat{i} - 0.2W_2 \hat{k} + 0.8T_C \hat{k} = 0$

EQUATE COEFFICIENTS OF UNIT VECTORS TO ZERO.

(C) $-0.6T_A + 0.3W_1 = 0$; $T_A = \frac{1}{2}W_1 = \frac{1}{2}(0.6 \text{ m})g = 0.3 \text{ m}'g$

(A) $-0.4T_A + 0.4W_1 - 0.2W_2 + 0.8T_C = 0$
 $-0.4(0.3 \text{ m}'g) + 0.4(0.6 \text{ m}'g) - 0.2(1.2 \text{ m}'g) + 0.8T_C = 0$
 $T_C = (0.12 - 0.24 + 0.24) \text{ m}'g / 0.8 = 0.15 \text{ m}'g$

$\Sigma F_y = 0: T_A + T_C + T_D - W_1 - W_2 = 0$
 $0.3 \text{ m}'g + 0.15 \text{ m}'g + T_D - 0.6 \text{ m}'g - 1.2 \text{ m}'g = 0$
 $T_D = 1.35 \text{ m}'g$

$m'g = (8.8 \text{ kg/m})(9.81 \text{ m/s}^2) = 78.45 \text{ N/m}$


$T_A = 0.3 \text{ m}'g = 0.3 \times 78.45$ $T_A = 23.5 \text{ N}$

$T_C = 0.15 \text{ m}'g = 0.15 \times 78.45$ $T_C = 11.77 \text{ N}$


$T_D = 1.35 \text{ m}'g = 1.35 \times 78.45$ $T_D = 105.9 \text{ N}$

4.98

GIVEN: MASS PER UNIT
LENGTH OF PIPES: $m' = 8.8 \text{ kg/m}$

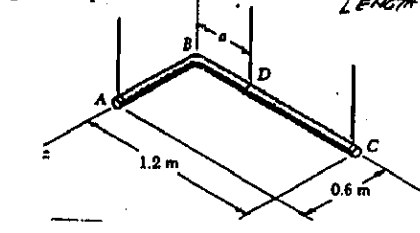

FIND: (a) LARGEST
VALUE OF a FOR
NO TIPPING
(b) CORRES-
PONDING TENSION
IN EACH WIRE

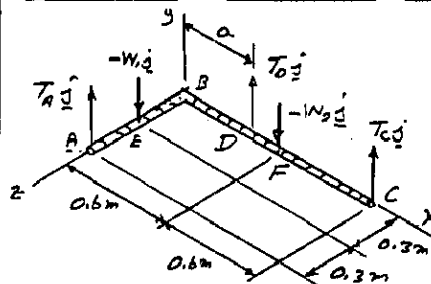

$W_1 = 0.6 \text{ m}'g$
 $W_2 = 1.2 \text{ m}'g$

$\Sigma M_D = 0: \int_{A \rightarrow D} r_{AD} \times T_A \hat{j} + r_{ED} \times (-W_1 \hat{j}) + \int_{D \rightarrow C} r_{FD} \times (-W_2 \hat{j}) + r_{CD} \times T_C \hat{j} = 0$
 $(-a\hat{i} + 0.6\hat{j}) \times T_A \hat{j} + (-a\hat{i} + 0.3\hat{j}) \times (-W_1 \hat{j}) + (0.6 - a)\hat{i} \times (-W_2 \hat{j}) + (1.2 - a)\hat{j} \times T_C \hat{j} = 0$

$-T_A a \hat{k} - 0.6T_A \hat{i} + W_1 a \hat{k} + 0.3W_1 \hat{i} - W_2(0.6 - a)\hat{k} + T_C(1.2 - a)\hat{k} = 0$

EQUATE COEFFICIENTS OF UNIT VECTORS TO ZERO

(C) $-0.6T_A + 0.3W_1 = 0$; $T_A = \frac{1}{2}W_1 = \frac{1}{2}(0.6 \text{ m})g = 0.3 \text{ m}'g$

(A) $-T_A a + W_1 a - W_2(0.6 - a) + T_C(1.2 - a) = 0$

$-0.3 \text{ m}'g a + 0.6 \text{ m}'g a - 1.2 \text{ m}'g(0.6 - a) + T_C(1.2 - a) = 0$

$T_C = \frac{0.3a - 0.6a + 1.2(0.6 - a)}{1.2 - a}$ FOR MAX a AND NO TIPPING, $T_C = 0$

(a) $-0.3a + 1.2(0.6 - a) = 0$

$-0.3a + 0.72 - 1.2a = 0$

$1.5a = 0.72$

$a = 0.48 \text{ m}$

(b) REACTIONS: $m'g = (8.8 \text{ kg/m})(9.81 \text{ m/s}^2) = 78.45 \text{ N/m}$

$T_A = 0.3 \text{ m}'g = 0.3 \times 78.45 = 23.535 \text{ N}$

$T_A = 23.5 \text{ N}$


$\Sigma F_y = 0: T_A + T_C + T_D - W_1 - W_2 = 0$

$T_A + 0 + T_D - 0.6 \text{ m}'g - 1.2 \text{ m}'g = 0$

$T_D = 1.8 \text{ m}'g - T_A = 1.8 \times 78.45 - 23.535 = 117.67 \text{ N}$


$T_D = 117.7 \text{ N}$

4.99

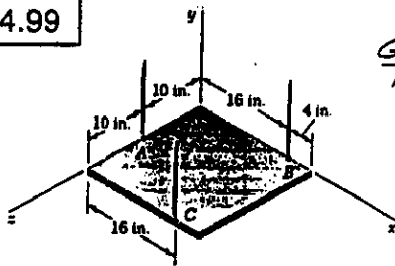

GIVEN: WEIGHT OF PLATE $W = 56 \text{ lb}$

FIND: TENSION IN EACH WIRE

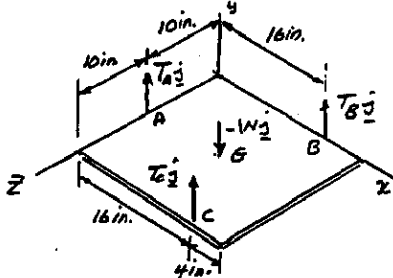

$$\sum M_A = 0: \int_{CA} \times T_C \hat{j} + \int_{GA} \times (-W \hat{j}) = 0$$

$$(16\hat{i} - 10\hat{j}) \times T_C \hat{j} + (16\hat{i} + 10\hat{j}) \times (-W \hat{j}) = 0$$

$$16T_C \hat{k} + 10T_C \hat{i} + 16T_C \hat{i} - 10W \hat{k} = 0$$

EQUATE COEFFICIENTS OF UNIT VECTORS TO ZERO

① $10T_B - 10T_C = 0; T_B = T_C$

② $16T_B + 16T_C - 10W = 0$


$16T_B + 16T_B - 10(56 \text{ lb}) = 0; T_B = T_C = 17.5 \text{ lb}$

$\sum F_y = 0; T_A + T_B + T_C - W = 0$

$T_A + 17.5 + 17.5 - 56 = 0$


$T_A = 21.0 \text{ lb}$

4.100

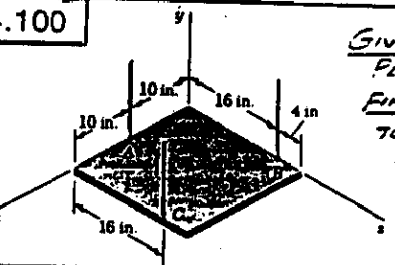

GIVEN WEIGHT OF PLATE $W = 56 \text{ lb}$

FIND: LONGEST BLOCK TO P. ON PLATE FOR WHICH TENSIONS IN THE 3 WIRES ARE DOWN

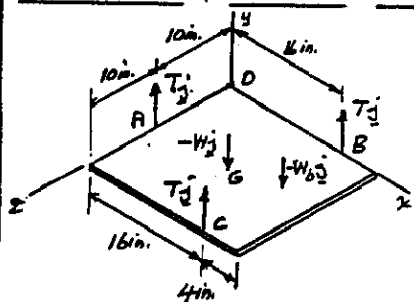

LET $-W_b \hat{j}$ BE THE WEIGHT OF BLOCK AND x AND z THE BLOCK'S COORDINATES.

SINCE TENSIONS IN WIRES ARE EQUAL, LET $T_A = T_B = T_C = T$

$$\sum M_G = 0: \int_{GA} \times T_A \hat{j} + \int_{GB} \times T_B \hat{j} + \int_{GC} \times T_C \hat{j} + \int_{GP} \times (-W_b \hat{j}) + \int_{GP} \times (-W \hat{j}) = 0$$

$$(10\hat{i} + 10\hat{j}) \times T \hat{j} + (16\hat{i}) \times T \hat{j} + (16\hat{i} + 20\hat{j}) \times T \hat{j} + (10\hat{i} + 10\hat{j}) \times (-W_b \hat{j}) + (x\hat{i} + z\hat{j}) \times (-W_b \hat{j}) = 0$$

$$-10T \hat{k} + 16T \hat{k} + 16T \hat{k} - 20T \hat{k} - 10W_b \hat{k} + 10W_b \hat{k} - W_b x \hat{i} + W_b z \hat{i} = 0$$

EQUATE COEFFICIENTS OF UNIT VECTORS TO ZERO

① $-30T + 10W_b + W_b z = 0$ (1)

② $32T - 10W - W_b x = 0$ (2)

ALSO $\sum F_y = 0: 3T - W - W_b = 0$ (3)

(CONTINUED)

4.100 CONTINUED

NOV, ELIMINATE T:

(EQ.1) + 10(EQ.3): $(2-10)W_b = 0$ (4)

3(EQ.2) - 32(EQ.3): $2W + (-2x+32)W_b = 0$ (5)

NOTE THAT $x \leq 20 \text{ in.}$ AND $z \leq 20 \text{ in.}$


FROM EQ.(4): $z = 10 \text{ in.}$ OR

FROM EQ.(5): $\frac{W_b}{W} = \frac{2}{3x-32} \geq \frac{2}{2(20)-32} = \frac{2}{8} = \frac{1}{4}$


$\therefore W_b = \frac{1}{4}W = \frac{1}{4}(56 \text{ lb}) = 14 \text{ lb}$

$W = 4 \text{ lb AT } x = 20 \text{ in.}, z = 10 \text{ in.}$

4.101



GIVEN: $P = 100 \text{ lb}$, TABLE, $W = 30 \text{ lb}$, $r = 2 \text{ ft}$.
FIND: MINIMUM α FOR NO TIPPING



$r = 2 \text{ ft}$ $b = r \sin 30^\circ = 1 \text{ ft}$
WE SHALL SUM MOMENTS ABOUT AB

$(b+r)C + (a-b)P - bW = 0$

$(1+2)C + (a-1)100 - (1)30 = 0$


$C = \frac{1}{3}[30 - (a-1)100]$

IF TABLE IS NOT TO TIP, $C \geq 0$

$[30 - (a-1)100] \geq 0$


$30 \geq (a-1)100$

$a - 1 \leq 0.1$ $a \leq 1.3 \text{ ft}$ $a = 1.300 \text{ ft}$




ONLY \perp DISTANCE FROM P TO AB MATTERS. SAME CONDITION MUST BE SATISFIED FOR EACH LEG. \therefore P MUST BE LOCATED IN SHADED AREA FOR NO TIPPING

4.102

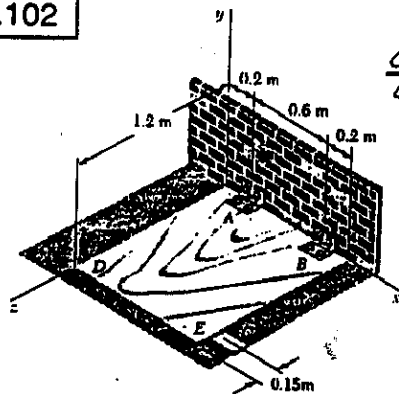

GIVEN: MASS OF PLYWOOD SHEET, $m = 18 \text{ kg}$

FIND: REACTIONS (a) AT A, (b) AT B, (c) AT C.

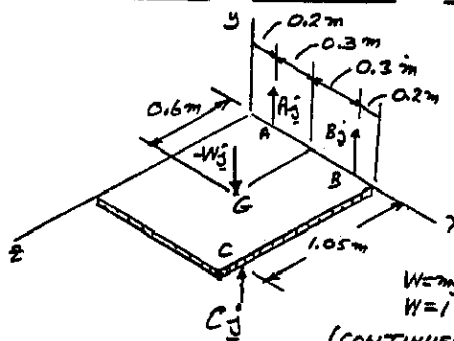

$\int_{GA} = 0.6 \hat{i}$

$\int_{GB} = 0.8 \hat{i} + 1.05 \hat{j}$

$\int_{GC} = 0.3 \hat{i} + 0.6 \hat{j}$

$W = mg = (18 \text{ kg})9.81$

$W = 176.58 \text{ N}$

(CONTINUED)

4.102 CONTINUED

$$\Sigma M_A = 0: r_{BA} \times B_j + r_{CA} \times C_j + r_{GA} \times (-W_j) = 0$$

$$(0.6i) \times B_j + (0.2i + 1.05j) \times C_j + (0.3i + 0.6j) \times (-W_j) = 0$$

$$0.6B_k + 0.6C_k - 1.05C_l - 0.3W_k + 0.6W_l = 0$$

EQUATE COEFFICIENTS OF UNIT VECTORS TO ZERO.

(1) $-1.05C + 0.6W = 0; C = (0.6/1.05)176.58N = 100.90N$

(2) $0.6B + 0.6C - 0.3W = 0$


$$0.6B + 0.6(100.90N) - 0.3(176.58N) = 0; B = -46.24N$$

$$\Sigma F_y = 0: A + B + C - W = 0$$

$$A - 46.24N + 100.90N + 176.58N = 0; A = 121.92N$$


(a) $A = 121.9N$ (b) $B = -46.2N$. (c) $C = 100.9N$

4.103

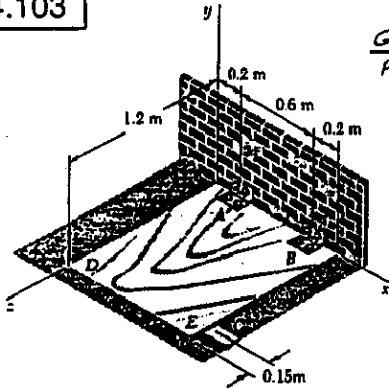

GIVEN: MASS OF PLYWOOD SHEET
 $m = 10 \text{ kg}$

FIND: REACTIONS
 (a) AT A.
 (b) AT B.
 (c) AT C.

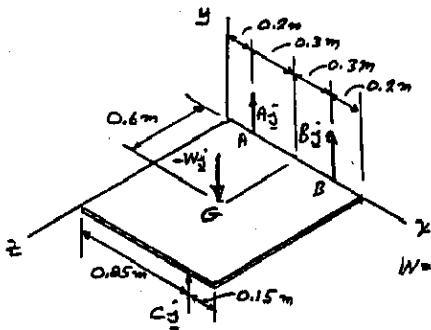

$$r_{B/A} = 0.6i$$

$$r_{C/A} = 0.65i + 1.2j$$

$$r_{G/A} = 0.3i + 0.6j$$

$$W = mg = (10 \text{ kg})9.81 \text{ m/s}^2$$

$$W = 176.58N$$

$$\Sigma M_A = 0: r_{BA} \times B_j + r_{CA} \times C_j + r_{GA} \times (-W_j) = 0$$

$$0.6i \times B_j + (0.65i + 1.2j) \times C_j + (0.3i + 0.6j) \times (-W_j) = 0$$

$$0.6B_k + 0.65C_k - 1.2C_l - 0.3W_k + 0.6W_l = 0$$

EQUATE COEFFICIENTS OF UNIT VECTORS TO ZERO.

(1) $-1.2C + 0.6W = 0; C = (0.6/1.2)176.58N = 88.29N$

(2) $0.6B + 0.65C - 0.3W = 0$

$$0.6B + 0.65(88.29N) - 0.3(176.58N) = 0$$

$$B = -7.36N$$


$$\Sigma F_y = 0: A + B + C - W = 0$$

$$A - 7.36N + 88.29N - 176.58N = 0$$


$$A = 95.648N$$

(a) $A = 95.6N$. (b) $-7.36N$. (c) $88.3N$

4.104



GIVEN: WEIGHT OF PLATE $W = 2416$
 FIND: (a) WIRE TENSIONS WHEN $a = 10 \text{ in.}$
 (b) VALUE OF a FOR WHICH TENSION IN EACH WIRE IS 816

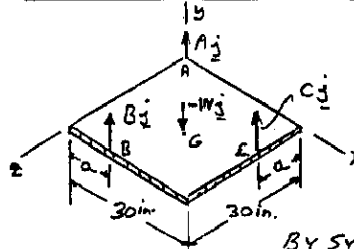

$$r_{B/A} = a_i + 30j$$

$$r_{C/A} = 30i + a_j$$

$$r_{G/A} = 15i + 15j$$

BY SYMMETRY: $B = C$

$$\Sigma M_A = 0: r_{BA} \times B_j + r_{CA} \times C_j + r_{GA} \times (-W_j) = 0$$

$$(a_i + 30j) \times B_j + (30i + a_j) \times C_j + (15i + 15j) \times (-W_j) = 0$$

$$Ba_k - 30B_l + 30C_k - Ba_l - 15W_k + 15W_l = 0$$

EQUATE COEFFICIENT OF UNIT VECTOR i TO ZERO

(1) $-30B - Ba + 15W = 0$

$$B = \frac{15W}{30+a} \quad C = B = \frac{15W}{30+a} \quad (1)$$

$$\Sigma F_y = 0: A + B + C - W = 0$$

$$A + 2\left[\frac{15W}{30+a}\right] - W = 0; A = \frac{aW}{30+a} \quad (2)$$

(a) For $a = 10 \text{ in.}$

EQ.(1) $C = B = \frac{15(2416)}{30+10} = 916$

EQ.(2) $A = \frac{10(2416)}{30+10} = 616$

$$A = 616; B = C = 916$$


(b) FOR TENSION IN EACH WIRE = 816

EQ.(1) $816 = \frac{15(2416)}{30+a}$

$$30 \text{ in.} + a = 45$$


$$a = 15 \text{ in.}$$

4.105



FIND: TENSION IN EACH CABLE AND REACTION AT A.

FREE-BODY DIAGRAM WE HAVE 5 UNKNOWN AND 6 EQS. OF EQUIL. BUT EQUILIBRIUM IS MAINTAINED ($\Sigma M_x = 0$)

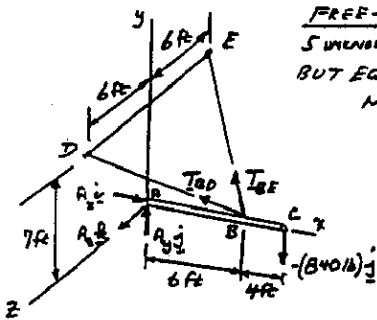

$$\vec{BD} = (-6\hat{i})\hat{i} + (7\hat{j})\hat{j} + (6\hat{k})\hat{k} \quad BD = 11 \text{ ft}$$

$$\vec{BE} = (-6\hat{i})\hat{i} + (7\hat{j})\hat{j} - (6\hat{k})\hat{k} \quad BE = 11 \text{ ft}$$

$$T_{BD} = T_{ED} \frac{\vec{BD}}{BD} = \frac{T_{BD}}{11} (-6\hat{i} + 7\hat{j} + 6\hat{k})$$

$$T_{BE} = T_{EE} \frac{\vec{BE}}{BE} = \frac{T_{BE}}{11} (-6\hat{i} + 7\hat{j} - 6\hat{k})$$

$$\Sigma M_A = 0: \hat{j} \times T_{BD} + \hat{j} \times T_{BE} + \hat{k} \times (-840\hat{j}) = 0$$

$$6\hat{i} \times \frac{T_{BD}}{11} (-6\hat{i} + 7\hat{j} + 6\hat{k}) + 6\hat{i} \times \frac{T_{BE}}{11} (-6\hat{i} + 7\hat{j} - 6\hat{k}) + 10\hat{i} \times (-840\hat{j}) = 0$$

$$\frac{42}{11} T_{BD} \hat{k} - \frac{36}{11} T_{BD} \hat{j} + \frac{42}{11} T_{BE} \hat{k} + \frac{36}{11} T_{BE} \hat{j} - 8400 \hat{k} = 0$$

EQUATE COEFFICIENTS OF UNIT VECTORS TO ZERO.

$$\textcircled{1} -\frac{36}{11} T_{BD} + \frac{36}{11} T_{BE} = 0; \quad T_{BE} = T_{BD}$$

$$\textcircled{2} \frac{42}{11} T_{BD} + \frac{42}{11} T_{BE} - 8400 = 0$$

$$2\left(\frac{42}{11} T_{BD}\right) = 8400; \quad T_{BD} = 1100 \text{ lb}$$

$$T_{BE} = 1100 \text{ lb}$$

$$\Sigma F_x = 0: A_x - \frac{6}{11}(1100 \text{ lb}) - \frac{6}{11}(1100 \text{ lb}) = 0$$

$$A_x = 1200 \text{ lb}$$

$$\Sigma F_y = 0: A_y + \frac{7}{11}(1100 \text{ lb}) + \frac{7}{11}(1100 \text{ lb}) - 840 \text{ lb} = 0$$


$$A_y = -560 \text{ lb}$$

$$\Sigma F_z = 0: A_z + \frac{6}{11}(1100 \text{ lb}) - \frac{6}{11}(1100 \text{ lb}) = 0$$

$$A_z = 0$$


$$\underline{A} = (1200 \text{ lb})\hat{i} - (560 \text{ lb})\hat{j}$$

4.106

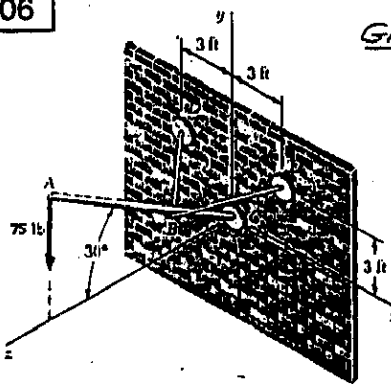

GIVEN: BC = 3 ft
AC = 10 ft
FIND: TENSION IN EACH BRACE AND REACTION AT C.

FREE-BODY DIAGRAM 5 UNKNOWN AND 6 EQS. OF EQUIL. BUT EQUIL IS MAINTAINED ($\Sigma M_x = 0$)

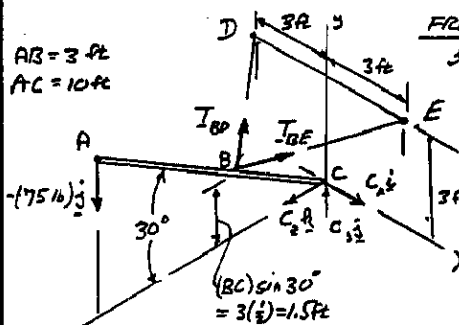

AB = 3 ft
AC = 10 ft

$$\vec{r}_B = (3) \sin 30^\circ \hat{j} + (3) \cos 30^\circ \hat{k} = 1.5\hat{j} + 2.598\hat{k}$$

$$\vec{r}_A = (10) \sin 30^\circ \hat{j} + (10) \cos 30^\circ \hat{k} = 5\hat{j} + 8.66\hat{k}$$

$$\vec{r}_D = -3\hat{i} + 3\hat{j}$$

$$\vec{r}_E = 3\hat{i} + 3\hat{j}$$

$$\vec{BD} = \vec{r}_D - \vec{r}_B = -3\hat{i} + 3\hat{j} - 1.5\hat{j} - 2.598\hat{k}$$

$$\vec{BD} = -3\hat{i} + 1.5\hat{j} - 2.598\hat{k} \quad BD = 4.243 \text{ ft}$$

$$\vec{BE} = 3\hat{i} + 1.5\hat{j} - 2.598\hat{k} \quad BE = 4.243 \text{ ft}$$

$$T_{BD} = T_{BD} \frac{\vec{BD}}{BD} = T_{BD} (-0.707\hat{i} + 0.3535\hat{j} - 0.6123\hat{k})$$

$$T_{BE} = T_{BE} \frac{\vec{BE}}{BE} = T_{BE} (0.707\hat{i} + 0.3535\hat{j} - 0.6123\hat{k})$$

$$\Sigma M_C = 0: \hat{j} \times T_{BD} + \hat{j} \times T_{BE} + (1.5\hat{j} + 8.66\hat{k}) \times (-75\hat{i})\hat{j} = 0$$

$$\begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 0 & 1.5 & 2.598 \\ -0.707 & 0.3535 & -0.6123 \end{vmatrix} T_{BD} + \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 0 & 1.5 & 2.598 \\ 0.707 & 0.3535 & -0.6123 \end{vmatrix} T_{BE} + 649.5\hat{i} = 0$$

EQUATE COEFFICIENTS OF UNIT VECTORS TO ZERO

$$\textcircled{1} -1.837 T_{BD} + 1.837 T_{BE} = 0; \quad T_{BE} = T_{BD}$$

$$\textcircled{2} -1.837 T_{BD} - 1.837 T_{BE} + 649.5 = 0; \quad T_{BD} = 176.8 \text{ lb}$$

$$T_{BE} = 176.8 \text{ lb}$$

$$\Sigma F_x = 0: C_x + (176.8)(-0.707) + (176.8)(0.707) = 0$$

$$C_x = 0$$

$$\Sigma F_y = 0: C_y + (176.8)(0.3535) + (176.8)(0.3535) - 75 \text{ lb} = 0$$


$$C_y = -50$$

$$\Sigma F_z = 0: C_z + (176.8)(-0.6123) + (176.8)(-0.6123) = 0$$


$$C_z = 216 \text{ lb}$$

$$\underline{C} = (-50 \text{ lb})\hat{j} + (216 \text{ lb})\hat{k}$$

4.107

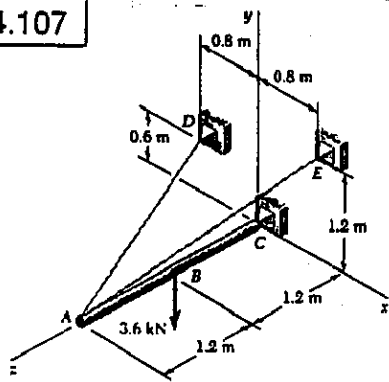

FIND: TENSION IN EACH CABLE AND REACTION AT C.

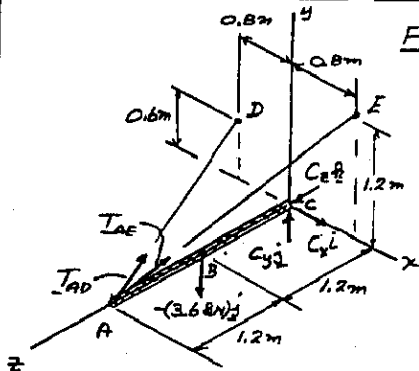

FREE-BODY DIAGRAM

5 UNKNOWNS AND 6 EQS. OF EQUIL. EQUILIBRIUM MAINTAINED ($\sum M_A = 0$)

$r_B = 1.2k$
 $r_A = 2.4i$

$\vec{AD} = -0.8i + 0.6j - 2.4k$ $AD = 2.6m$
 $\vec{AE} = 0.8i + 1.2j - 2.4k$ $AE = 2.8m$

$T_{AD} = \frac{\vec{AD}}{AD} = \frac{T_{AD}}{2.6} (-0.8i + 0.6j - 2.4k)$

$T_{AE} = \frac{\vec{AE}}{AE} = \frac{T_{AE}}{2.8} (0.8i + 1.2j - 2.4k)$

$\sum M_A = 0: r_A \times T_{AD} + r_A \times T_{AE} + r_B \times (-3.6N)j = 0$

$\begin{vmatrix} i & j & k \\ 0 & 0 & 2.4 \\ 0 & 0 & 2.4 \end{vmatrix} \frac{T_{AD}}{2.6} + \begin{vmatrix} i & j & k \\ 0 & 0 & 2.4 \\ 0.8 & 1.2 & -2.4 \end{vmatrix} \frac{T_{AE}}{2.8} + 1.2k \times (-3.6N)j = 0$

EQUATE COEFFICIENTS OF UNIT VECTORS TO ZERO

(1) $-0.55385 T_{AD} - 1.02857 T_{AE} + 4.32 = 0$

(2) $-0.73846 T_{AD} + 0.83671 T_{AE} = 0$
 $T_{AD} = 0.92857 T_{AE}$ (2)

EQ(1): $-0.55385(0.92857) T_{AE} - 1.02857 T_{AE} + 4.32 = 0$
 $1.54296 T_{AE} = 4.32$
 $T_{AE} = 2.800 kN$ $T_{AE} = 2.80 kN$ ◀

EQ(2): $T_{AD} = 0.92857(2.80) = 2.604 kN$ $T_{AD} = 2.60 kN$ ◀


$\sum F_x = 0: C_x - \frac{0.8}{2.6}(2.6 kN) + \frac{0.8}{2.8}(2.8 kN) = 0; C_x = 0$

$\sum F_y = 0: C_y + \frac{0.6}{2.6}(2.6 kN) + \frac{1.2}{2.8}(2.8 kN) - (3.6 kN) = 0$
 $C_y = 1.800 kN$


$\sum F_z = 0: C_z - \frac{2.4}{2.6}(2.6 kN) - \frac{2.4}{2.8}(2.8 kN) = 0$
 $C_z = 4.80 kN$

$\underline{C} = (1.800 kN)j + (4.80 kN)k$ ◀

4.108

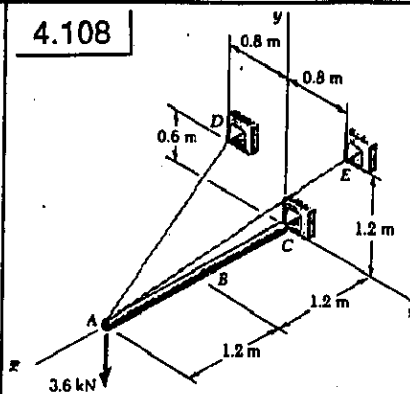

FIND: TENSION IN EACH CABLE AND REACTION AT C.

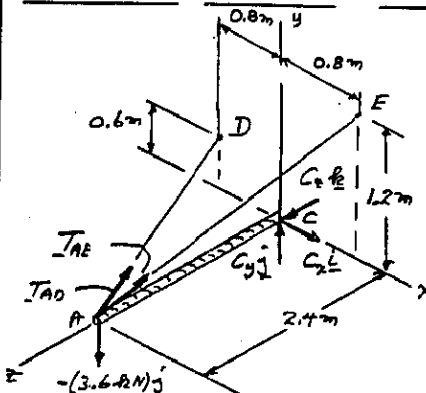

FREE-BODY DIAGRAM

5 UNKNOWNS AND 6 EQS. OF EQUIL. EQUILIBRIUM MAINTAINED ($\sum M_A = 0$)

$\vec{AD} = -0.8i + 0.6j - 2.4k$ $AD = 2.6m$
 $\vec{AE} = 0.8i + 1.2j - 2.4k$ $AE = 2.8m$

$T_{AD} = \frac{\vec{AD}}{AD} = \frac{T_{AD}}{2.6} (-0.8i + 0.6j - 2.4k)$

$T_{AE} = \frac{\vec{AE}}{AE} = \frac{T_{AE}}{2.8} (0.8i + 1.2j - 2.4k)$

$\sum M_A = 0: r_A \times T_{AD} + r_A \times T_{AE} + r_B \times (-3.6 kN)j = 0$

FACTORS r_A : $r_A \times (T_{AD} + T_{AE} - (3.6 kN)j) = 0$

OR: $T_{AD} + T_{AE} - (3.6 kN)j = 0$ (FORCES CONCURRENT AT A)

COEFF. OF i : $-\frac{T_{AD}}{2.6}(0.8) + \frac{T_{AE}}{2.8}(0.8) = 0$

$T_{AD} = \frac{2.6}{2.8} T_{AE}$ (1)

COEFF. OF j : $\frac{T_{AD}}{2.6}(0.6) + \frac{T_{AE}}{2.8}(1.2) - 3.6 kN = 0$

$\frac{2.6}{2.8} T_{AE} \left(\frac{0.6}{2.6}\right) + \frac{1.2}{2.8} T_{AE} - 3.6 kN = 0$

$T_{AE} \left(\frac{0.6 + 1.2}{2.8}\right) = 3.6 kN$

$T_{AE} = 5.600 kN$ $T_{AE} = 5.60 kN$ ◀

EQ(1): $T_{AD} = \frac{2.6}{2.8}(5.6) = 5.200 kN$ $T_{AD} = 5.20 kN$ ◀

$\sum F_x = 0: C_x - \frac{0.8}{2.6}(5.2 kN) + \frac{0.8}{2.8}(5.6 kN) = 0; C_x = 0$


$\sum F_y = 0: C_y + \frac{0.6}{2.6}(5.2 kN) + \frac{1.2}{2.8}(5.6 kN) - 3.6 kN = 0$
 $C_y = 0$

$\sum F_z = 0: C_z - \frac{2.4}{2.6}(5.2 kN) - \frac{2.4}{2.8}(5.6 kN) = 0$
 $C_z = 9.6 kN$

$\underline{C} = (9.6 kN)k$ ◀


NOTE: SINCE FORCES + REACTION ARE CONCURRENT AT A, WE COULD HAVE USED THE METHODS OF CHAPTER 2.

4.109

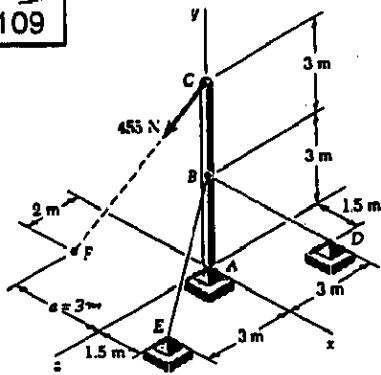

GIVEN: $a = 3\text{ m}$

FIND: TENSION IN EACH CABLE AND REACTION AT A.

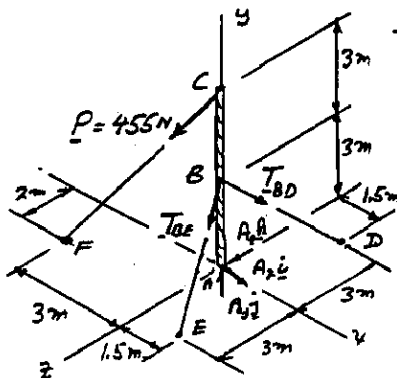

FREE-BODY DIAGRAM
5 UNKNOWNS AND 6 EQS. OF EQUIL.
BUT, EQUILIBRIUM MAINTAINED
($\sum M_A = 0$)

$$r_B = 3\mathbf{j}$$

$$r_C = 6\mathbf{j}$$

$$\overline{CF} = -3\mathbf{i} - 6\mathbf{j} + 2\mathbf{k} \quad CF = 7\text{ m}$$

$$\overline{BD} = 1.5\mathbf{i} - 3\mathbf{j} - 3\mathbf{k} \quad BD = 4.5\text{ m}$$

$$\overline{BE} = 1.5\mathbf{i} - 3\mathbf{j} + 3\mathbf{k} \quad BE = 4.5\text{ m}$$

$$P = P \frac{\overline{CF}}{CF} = \frac{P}{7}(-3\mathbf{i} - 6\mathbf{j} + 2\mathbf{k})$$

$$T_{BD} = T_{BD} \frac{\overline{BD}}{BD} = \frac{T_{BD}}{4.5}(1.5\mathbf{i} - 3\mathbf{j} - 3\mathbf{k}) = \frac{T_{BD}}{3}(\mathbf{i} - 2\mathbf{j} - 2\mathbf{k})$$

$$T_{BE} = T_{BE} \frac{\overline{BE}}{BE} = \frac{T_{BE}}{3}(\mathbf{i} - 2\mathbf{j} + 2\mathbf{k})$$

$$\sum M_A = 0: r_B \times T_{BD} + r_B \times T_{BE} + r_C \times P = 0$$

$$\begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 0 & 3 & 0 \\ 0 & 3 & 0 \end{vmatrix} \frac{T_{BD}}{3} + \begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 0 & 3 & 0 \\ 0 & 3 & 0 \end{vmatrix} \frac{T_{BE}}{3} + \begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 0 & 6 & 0 \\ -3 & -6 & 2 \end{vmatrix} \frac{P}{7} = 0$$

COEFF. OF \mathbf{i} : $-2T_{BD} + 2T_{BE} + \frac{12}{7}P = 0$ (1)

COEFF. OF \mathbf{j} : $-T_{BD} - T_{BE} + \frac{18}{7}P = 0$ (2)

EQ.(1) + 2EQ.(2): $-4T_{BD} + \frac{38}{7}P = 0 \quad T_{BD} = \frac{12}{7}P$

EQ.(2): $-\frac{12}{7}P - T_{BE} + \frac{18}{7}P = 0 \quad T_{BE} = \frac{6}{7}P$

SINCE $P = 455\text{ N}$, $T_{BD} = \frac{12}{7}(455) \quad T_{BD} = 780\text{ N}$

$T_{BE} = \frac{6}{7}(455) \quad T_{BE} = 390\text{ N}$

$$\sum F = 0: T_{BD} + T_{BE} + P + A = 0$$

COEFF. OF \mathbf{i} : $\frac{780}{3} + \frac{390}{3} - \frac{455}{7}(3) + A_x = 0$

$260 + 130 - 195 + A_x = 0; \quad A_x = -195\text{ N}$

COEFF. OF \mathbf{j} : $-\frac{780}{3}(2) - \frac{390}{3}(2) - \frac{455}{7}(6) + A_y = 0$



$-520 - 260 - 390 + A_y = 0; \quad A_y = 1170\text{ N}$

COEFF. OF \mathbf{k} : $-\frac{780}{3}(2) + \frac{390}{3}(2) + \frac{455}{7}(2) + A_z = 0$

$-520 + 260 + 130 + A_z = 0; \quad A_z = +130\text{ N}$

$$A = -(195\text{ N})\mathbf{i} + (1170\text{ N})\mathbf{j} + (130\text{ N})\mathbf{k}$$

4.110

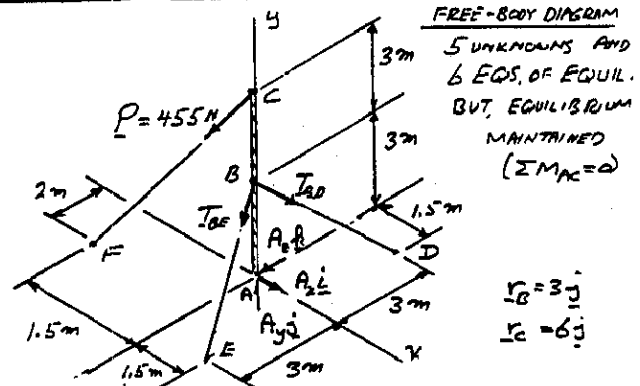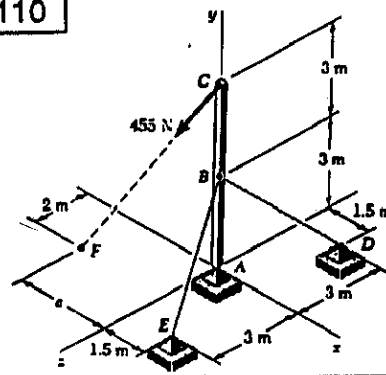

FREE-BODY DIAGRAM
5 UNKNOWNS AND 6 EQS. OF EQUIL.
BUT, EQUILIBRIUM MAINTAINED
($\sum M_A = 0$)

$$r_B = 3\mathbf{j}$$

$$r_C = 6\mathbf{j}$$

$$\overline{CF} = -1.5\mathbf{i} - 6\mathbf{j} + 2\mathbf{k} \quad CF = 6.5\text{ m}$$

$$\overline{BD} = 1.5\mathbf{i} - 3\mathbf{j} - 3\mathbf{k} \quad BD = 4.5\text{ m}$$

$$\overline{BE} = 1.5\mathbf{i} - 3\mathbf{j} + 3\mathbf{k} \quad BE = 4.5\text{ m}$$

$$P = P \frac{\overline{CF}}{CF} = \frac{P}{6.5}(-1.5\mathbf{i} - 6\mathbf{j} + 2\mathbf{k}) = \frac{P}{13}(-3\mathbf{i} - 12\mathbf{j} + 4\mathbf{k})$$

$$T_{BD} = T_{BD} \frac{\overline{BD}}{BD} = \frac{T_{BD}}{4.5}(1.5\mathbf{i} - 3\mathbf{j} - 3\mathbf{k}) = \frac{T_{BD}}{3}(\mathbf{i} - 2\mathbf{j} - 2\mathbf{k})$$

$$T_{BE} = T_{BE} \frac{\overline{BE}}{BE} = \frac{T_{BE}}{3}(\mathbf{i} - 2\mathbf{j} + 2\mathbf{k})$$

$$\sum M_A = 0: r_B \times T_{BD} + r_B \times T_{BE} + r_C \times P = 0$$

$$\begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 0 & 3 & 0 \\ 0 & 3 & 0 \end{vmatrix} \frac{T_{BD}}{3} + \begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 0 & 3 & 0 \\ 0 & 3 & 0 \end{vmatrix} \frac{T_{BE}}{3} + \begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 0 & 6 & 0 \\ -3 & -12 & 4 \end{vmatrix} \frac{P}{13} = 0$$

COEFF. OF \mathbf{i} : $-2T_{BD} + 2T_{BE} + \frac{24}{13}P = 0$ (1)

COEFF. OF \mathbf{j} : $-T_{BD} - T_{BE} + \frac{18}{13}P = 0$ (2)

EQ.(1) + 2EQ.(2): $-4T_{BD} + \frac{60}{13}P = 0 \quad T_{BD} = \frac{15}{13}P$

EQ.(2): $-\frac{15}{13}P - T_{BE} + \frac{18}{13}P = 0 \quad T_{BE} = \frac{3}{13}P$

SINCE $P = 455\text{ N}$, $T_{BD} = \frac{15}{13}(455) \quad T_{BD} = 525\text{ N}$

$T_{BE} = \frac{3}{13}(455) \quad T_{BE} = 105\text{ N}$

$$\sum F = 0: T_{BD} + T_{BE} + P + A = 0$$

COEFF. OF \mathbf{i} : $\frac{525}{3} + \frac{105}{3} - \frac{455}{13}(3) + A_x = 0$

$175 + 35 - 105 + A_x = 0; \quad A_x = -105\text{ N}$

COEFF. OF \mathbf{j} : $-\frac{525}{3}(2) - \frac{105}{3}(2) - \frac{455}{13}(12) + A_y = 0$


$-350 - 70 - 420 + A_y = 0; \quad A_y = 840\text{ N}$

COEFF. OF \mathbf{k} : $-\frac{525}{3}(2) + \frac{105}{3}(2) + \frac{455}{13}(4) + A_z = 0$

$-350 + 70 + 140 + A_z = 0; \quad A_z = 140\text{ N}$


$$A = -(105\text{ N})\mathbf{i} + (840\text{ N})\mathbf{j} + (140\text{ N})\mathbf{k}$$

4.111

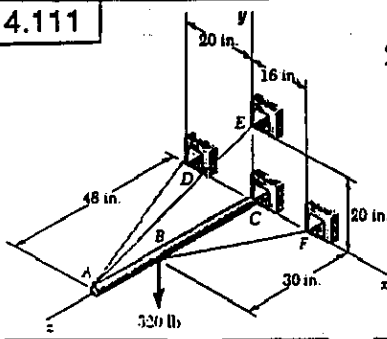

GIVEN: CABLE DAE
PASSES OVER A
PULLEY AT A

FIND: TENSION
IN EACH CABLE
AND REACTION
AT C.

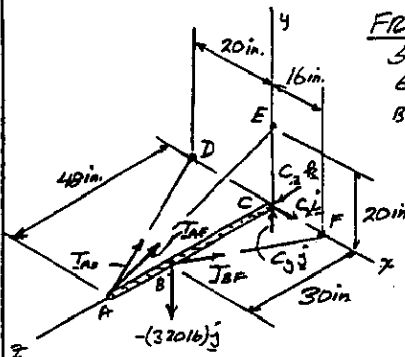

FREE-BODY DIAGRAM

5 UNKNOWN AND
6 EQS. OF EQUIL.
BUT, EQUILIBRIUM
MAINTAINED ($\sum M_A = 0$)

T = TENSION IN
BOTH PARTS OF
CABLE DAE.

$$\begin{aligned} \sqrt{B} &= 30 \text{ ft} \\ \sqrt{A} &= 48 \text{ ft} \end{aligned}$$

$$\begin{aligned} \vec{AD} &= -20\hat{i} - 48\hat{j} & AD &= 52 \text{ in.} \\ \vec{AE} &= 20\hat{j} - 48\hat{j} & AE &= 52 \text{ in.} \\ \vec{BF} &= 16\hat{i} - 30\hat{j} & BF &= 34 \text{ in.} \end{aligned}$$

$$\vec{T}_{AD} = T \frac{\vec{AD}}{AD} = \frac{T}{52} (-20\hat{i} - 48\hat{j}) = \frac{T}{13} (-5\hat{i} - 12\hat{j})$$

$$\vec{T}_{AE} = T \frac{\vec{AE}}{AE} = \frac{T}{52} (20\hat{j} - 48\hat{j}) = \frac{T}{13} (5\hat{j} - 12\hat{j})$$

$$\vec{T}_{BF} = T \frac{\vec{BF}}{BF} = \frac{T}{34} (16\hat{i} - 30\hat{j}) = \frac{T}{17} (8\hat{i} - 15\hat{j})$$

$$\sum M_C = 0: \sqrt{A} \times \vec{T}_{AD} + \sqrt{A} \times \vec{T}_{AE} + \sqrt{B} \times \vec{T}_{BF} + \sqrt{B} \times (-320\hat{j})_j = 0$$

$$\begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 0 & 0 & 48 \\ \frac{T}{13} & -\frac{12T}{13} & 0 \end{vmatrix} + \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 0 & 0 & 48 \\ \frac{T}{13} & -\frac{12T}{13} & 0 \end{vmatrix} + \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 0 & 0 & 30 \\ \frac{8T}{17} & -\frac{15T}{17} & 0 \end{vmatrix} + \frac{T}{17} (30\hat{i}) \times (-320\hat{j}) = 0$$

$$\text{COEFF. OF } \hat{i}: -\frac{240}{13} T + 9600 = 0 \quad T = 520 \text{ lb}$$

$$\text{COEFF. OF } \hat{j}: -\frac{240}{13} T + \frac{240}{17} T_{BD} = 0$$

$$T_{BD} = \frac{17}{13} T = \frac{17}{13} (520); T_{BD} = 680 \text{ lb}$$

$$\sum F = 0: \vec{T}_{AD} + \vec{T}_{AE} + \vec{T}_{BF} - 320\hat{j} + \vec{C} = 0$$

$$\text{COEFF. OF } \hat{i}: -\frac{20}{52} (520) + \frac{8}{17} (680) + C_x = 0$$

$$-200 + 320 + C_x = 0 \quad C_x = -120 \text{ lb}$$

$$\text{COEFF. OF } \hat{j}: \frac{20}{52} (520) - 320 + C_y = 0$$

$$200 - 320 + C_y = 0 \quad C_y = 120 \text{ lb}$$

$$\text{COEFF. OF } \hat{k}: -\frac{48}{52} (520) - \frac{48}{52} (520) - \frac{30}{34} (680) + C_z = 0$$


$$-480 - 480 - 600 + C_z = 0 \quad C_z = 1560 \text{ lb}$$

ANSWERS: $T_{DAE} = T$ $T_{DAE} = 520 \text{ lb}$ \blacktriangleleft

$T_{BD} = 680 \text{ lb}$ \blacktriangleleft


$$\vec{C} = -(120 \text{ lb})\hat{i} + (120 \text{ lb})\hat{j} + (1560 \text{ lb})\hat{k} \quad \blacktriangleleft$$

4.112

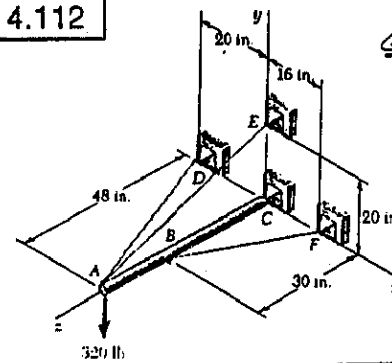

GIVEN: CABLE DAE
PASSES OVER A
PULLEY AT A

FIND: TENSION
IN EACH CABLE
AND REACTION
AT C.

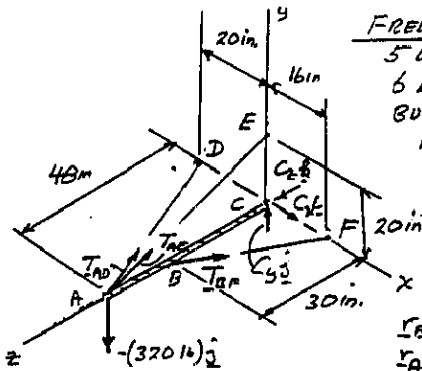

FREE-BODY DIAGRAM

5 UNKNOWN AND
6 EQS. OF EQUIL.
BUT, EQUILIBRIUM
MAINTAINED
($\sum M_A = 0$)

T = TENSION IN
BOTH PARTS OF
CABLE DAE.

$$\begin{aligned} \sqrt{B} &= 30 \text{ ft} \\ \sqrt{A} &= 48 \text{ ft} \end{aligned}$$

$$\begin{aligned} \vec{AD} &= -20\hat{i} - 48\hat{j} & AD &= 52 \text{ in.} \\ \vec{AE} &= 20\hat{j} - 48\hat{j} & AE &= 52 \text{ in.} \\ \vec{BF} &= 16\hat{i} - 30\hat{j} & BF &= 34 \text{ in.} \end{aligned}$$

$$\vec{T}_{AD} = T \frac{\vec{AD}}{AD} = \frac{T}{52} (-20\hat{i} - 48\hat{j}) = \frac{T}{13} (-5\hat{i} - 12\hat{j})$$

$$\vec{T}_{AE} = T \frac{\vec{AE}}{AE} = \frac{T}{52} (20\hat{j} - 48\hat{j}) = \frac{T}{13} (5\hat{j} - 12\hat{j})$$

$$\vec{T}_{BF} = T \frac{\vec{BF}}{BF} = \frac{T}{34} (16\hat{i} - 30\hat{j}) = \frac{T}{17} (8\hat{i} - 15\hat{j})$$

$$\sum M_C = 0: \sqrt{A} \times \vec{T}_{AD} + \sqrt{A} \times \vec{T}_{AE} + \sqrt{B} \times \vec{T}_{BF} + \sqrt{B} \times (-320\hat{j})_j = 0$$

$$\begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 0 & 0 & 48 \\ \frac{T}{13} & -\frac{12T}{13} & 0 \end{vmatrix} + \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 0 & 0 & 48 \\ \frac{T}{13} & -\frac{12T}{13} & 0 \end{vmatrix} + \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 0 & 0 & 30 \\ \frac{8T}{17} & -\frac{15T}{17} & 0 \end{vmatrix} + \frac{T}{17} (30\hat{i}) \times (-320\hat{j}) = 0$$

$$\text{COEFF. OF } \hat{i}: -\frac{240}{13} T + 15360 = 0 \quad T = 832 \text{ lb}$$

$$\text{COEFF. OF } \hat{j}: -\frac{240}{13} T + \frac{240}{17} T_{BD} = 0$$

$$T_{BD} = \frac{17}{13} T = \frac{17}{13} (832) \quad T_{BD} = 1088 \text{ lb}$$

$$\sum F = 0: \vec{T}_{AD} + \vec{T}_{AE} + \vec{T}_{BF} - 320\hat{j} + \vec{C} = 0$$

$$\text{COEFF. OF } \hat{i}: -\frac{20}{52} (832) + \frac{8}{17} (1088) + C_x = 0$$

$$-320 + 512 + C_x = 0 \quad C_x = -192 \text{ lb}$$

$$\text{COEFF. OF } \hat{j}: \frac{20}{52} (832) - 320 + C_y = 0$$

$$320 - 320 + C_y = 0 \quad C_y = 0$$

$$\text{COEFF. OF } \hat{k}: -\frac{48}{52} (832) - \frac{48}{52} (832) - \frac{30}{34} (1088) + C_z = 0$$


$$-768 - 768 - 960 + C_z = 0 \quad C_z = 2496 \text{ lb}$$

ANSWERS: $T_{DAE} = T$ $T_{DAE} = 832 \text{ lb}$ \blacktriangleleft

$T_{BD} = 1088 \text{ lb}$ \blacktriangleleft

$$\vec{C} = -(192 \text{ lb})\hat{i} + (2496 \text{ lb})\hat{k} \quad \blacktriangleleft$$


4.113

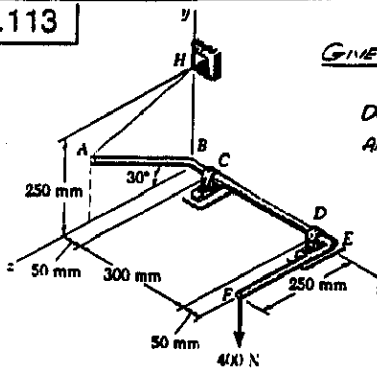

GIVEN: ROD AB = 250 mm
BEARING AT D
DOES NOT EXERT
ANY AXIAL THRUST.

FIND:
(a) TENSION IN
WIRE AH.
(b) REACTIONS
AT C AND D.

DIMENSIONS
IN mm

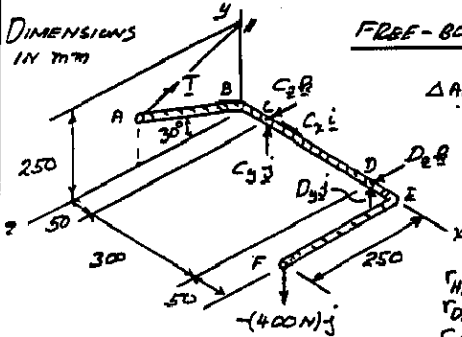

FREE-BODY DIAGRAM

Δ ABH IS EQUILATERAL

$r_{HC} = -50i + 250j$
 $r_{DC} = 300i$
 $r_{FE} = 350i + 250j$

$T = T(\sin 30^\circ)j - T(\cos 30^\circ)i = T(0.5j - 0.866i)$

$\sum M_C = 0: r_{HC} \times T + r_D \times D + r_{FE} \times (-400j) = 0$

i	j	k		i	j	k		i	j	k	
-50	250	0	T	300	0	0	+	350	0	250	-400
0	0.5	-0.866	0	D ₁	D ₂	0		0	-400	0	0


COEFF. OF i: $-26.5T + 100D_1 = 0$
 $T = 461.9N$

COEFF. OF j: $-43.3T - 300D_2 = 0$
 $-43.3(461.9) - 300D_2 = 0; D_2 = -66.67N$

COEFF. OF k: $-25T + 300D_3 - 140000 = 0$
 $-25(461.9) + 300D_3 - 140000 = 0; D_3 = 505.1N$

$\sum F = 0: C + D + T - 400j = 0$
 COEFF. OF i: $C_x = 0$
 COEFF. OF j: $C_y + (461.9)(0.5) + 505.1 - 400 = 0; C_y = -336N$
 COEFF. OF k: $C_z - (461.9)(0.866) - 66.67 = 0; C_z = 467N$


4.114

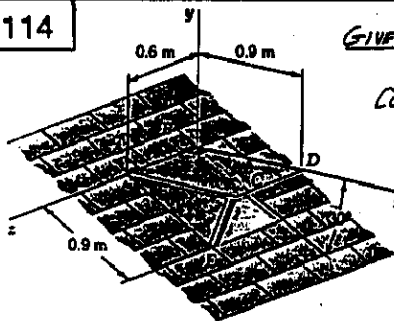

GIVEN: $w_{cover} = 20R_3$
 $A_2 = 0$
COVER IS HORIZONTAL

FIND: (a) FORCE
EXERTED BY CE
(b) REACTIONS
AT A AND B


FORCE EXERTED BY CD



$F = F(\sin 75^\circ)i + F(\cos 75^\circ)j$
 $F = F(0.9659i + 0.2445j)$
 (CONTINUED)

4.114 CONTINUED

$W = mg = 20R_3(9.81/5) = 196.2N$

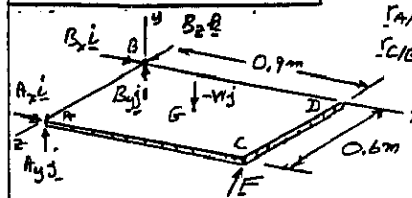

$r_{AB} = 0.6i$
 $r_{CB} = 0.9i + 0.6j$
 $r_{GB} = 0.45i + 0.3j$
 $F = F(0.9659i + 0.2445j)$

$\sum M_B = 0: r_{GB} \times (-196.2j) + r_{CB} \times F + r_{AB} \times A = 0$

i	j	k		i	j	k		i	j	k	
0.45	0	0.13	+	0.9	0	0.6	F	+	0	0	0.6
0	-196.2	0		0.2588	0.19629	0		+	A _x	A _y	0

COEFF. OF i: $+58.86 - 0.5796F - 0.6A_y = 0$

COEFF. OF j: $-0.1553F + 0.6A_x = 0$

COEFF. OF k: $-88.29 + 0.8693F = 0; F = 101.56N$

EQ.(1): $+58.86 - 0.5796(101.56) - 0.6A_y = 0; A_y = 0$

EQ.(2): $-0.1553(101.56) + 0.6A_x = 0; A_x = 26.29$
 $F = 101.6N; A = (26.3N)i$


$\sum F = 0: A + B + F - Wj = 0$

COEFF. OF i: $26.29 + B_x + 0.2588(101.56) = 0; B_x = 0$

COEFF. OF j: $B_y + 0.19629(101.56) - 196.2 = 0; B_y = 98.1N$


COEFF. OF k: $B_z = 0; B = 98.1N$

4.115

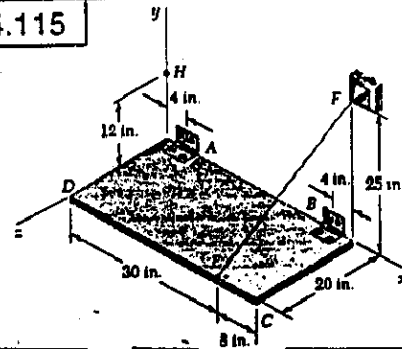

GIVEN: $W = 750$
 $B_2 = 0$

FIND
(a) TENSION
IN CABLE
(b) REACTIONS
AT A AND B

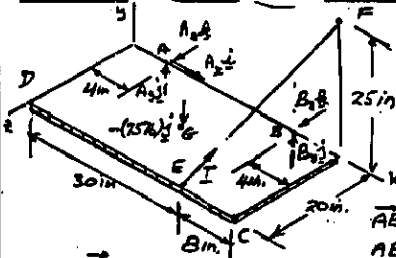

$r_{CA} = (30-4)i + 20j = 26i + 20j$
 $r_{EA} = 30i + 20j$
 $r_{GA} = 30i + 10j$

$AE = B_1i + 25j - 20k$
 $AE = 33i$

$T = T \frac{AE}{AE} = \frac{T}{33}(B_1i + 25j - 20k)$

$\sum M_A = 0: r_{EA} \times T + r_{GA} \times (-750j) + r_{CA} \times B = 0$

i	j	k		i	j	k		i	j	k	
26	0	20	T	30	0	10	+	30	0	0	0
B	25	-20		0	-75	0		0	B ₁	B ₂	

COEFF. OF i: $-(25)(20) \frac{T}{33} + 750 = 0; T = 49.5lb$

COEFF. OF j: $(160 + 520) \frac{49.5}{33} - 30B_2 = 0; B_2 = 34lb$

COEFF. OF k: $(26)(25) \frac{49.5}{33} - 1425 + 30B_1 = 0; B_1 = 15lb$

$B = (15lb)i + (34lb)j$

$\sum F = 0: A + B + T - (750lb)j = 0$


COEFF. OF i: $A_x + 15 + 49.5 = 0; A_x = -12lb$

COEFF. OF j: $A_y + 15 + \frac{25}{33}(49.5) - 750 = 0; A_y = 22.5lb$

COEFF. OF k: $A_z + 34 - \frac{20}{33}(49.5) = 0; A_z = -4lb$


$A = (-12lb)i + (22.5lb)j - (4lb)k$

4.116

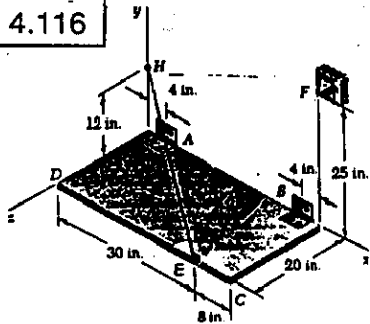

GIVEN: $W = 75 \text{ lb}$
 $B_x = 0$

FIND:
(a) TENSION IN CABLE EH.
(b) REACTIONS AT A AND B.

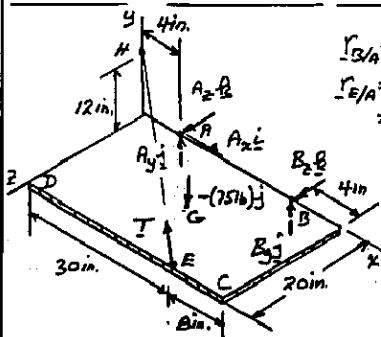

$$r_{B/A} = (30-0)\hat{i} = 30\hat{i}$$

$$r_{E/A} = (30-4)\hat{i} + 20\hat{j} = 26\hat{i} + 20\hat{j}$$

$$r_{G/A} = \frac{30}{2}\hat{i} + 10\hat{j} = 15\hat{i} + 10\hat{j}$$

$$\vec{E}H = -30\hat{i} + 12\hat{j} - 20\hat{k}$$

$$EH = 38 \text{ in.}$$

$$T = T \frac{\vec{E}H}{EH} = \frac{T}{38} (-30\hat{i} + 12\hat{j} - 20\hat{k})$$

$$\sum M_A = 0: r_{E/A} \times T + r_{G/A} \times (-75\hat{j}) + r_{B/A} \times B = 0$$

$$\begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 26 & 20 & 0 \\ -30 & 12 & -20 \end{vmatrix} \frac{T}{38} + \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 15 & 10 & 0 \\ 0 & -75 & 0 \end{vmatrix} + \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 30 & 0 & 0 \\ 0 & B_y & B_z \end{vmatrix} = 0$$

COEFF. OF \hat{i} : $-(12)(20)\frac{T}{38} + 750 = 0; T = 118.75; T = 118.8 \text{ lb}$

COEFF. OF \hat{j} : $(-600 + 520)\frac{118.75}{38} - 30B_z = 0; B_z = -8.33 \text{ lb}$

COEFF. OF \hat{k} : $(26)(12)\frac{118.75}{38} - 1425 + 30B_y = 0; B_y = 15.00 \text{ lb}$

$\sum F = 0: A + B + T - (75\hat{j}) = 0$
 $B = (15.00)\hat{j} - (8.33)\hat{k}$


COEFF. OF \hat{i} : $A_x - \frac{20}{38}(118.75) = 0; A_x = 93.75 \text{ lb}$

COEFF. OF \hat{j} : $A_y + 15 + \frac{12}{38}(118.75) - 75 = 0; A_y = 22.5 \text{ lb}$

COEFF. OF \hat{k} : $A_z - 8.33 - \frac{20}{38}(118.75) = 0; A_z = 70.93 \text{ lb}$

$A = (93.8 \text{ lb})\hat{i} + (22.5 \text{ lb})\hat{j} + (70.9 \text{ lb})\hat{k}$

4.117 and 4.118 CONTINUED

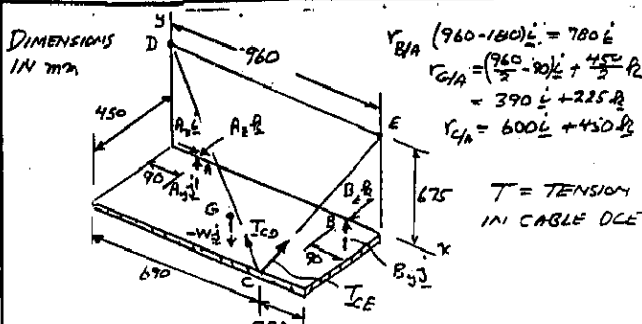

$$\vec{CD} = -670\hat{i} + 675\hat{j} - 450\hat{k} \quad CD = 1065 \text{ mm}$$

$$\vec{CE} = 270\hat{i} + 675\hat{j} - 450\hat{k} \quad CE = 855 \text{ mm}$$

$$T_{CD} = \frac{T}{1065} (-670\hat{i} + 675\hat{j} - 450\hat{k})$$

$$T_{CE} = \frac{T}{855} (270\hat{i} + 675\hat{j} - 450\hat{k})$$

$$W = -mg\hat{j} = -(100 \text{ kg})(9.81 \text{ m/s}^2)\hat{j} = -(981 \text{ N})\hat{j}$$

PROB. 4.117

$$\sum M_A = 0: r_{D/A} \times T_{CD} + r_{E/A} \times T_{CE} + r_{G/A} \times (-W\hat{j}) + r_{B/A} \times B = 0$$

$$\begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 600 & 0 & 450 \\ -670 & 675 & -450 \end{vmatrix} \frac{T}{1065} + \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 600 & 0 & 450 \\ 270 & 675 & -450 \end{vmatrix} \frac{T}{855} + \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 390 & 0 & 225 \\ 0 & -981 & 0 \end{vmatrix} + \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 780 & 0 & 0 \\ 0 & B_y & B_z \end{vmatrix} = 0$$

COEFF. OF \hat{i} : $-(450)(675)\frac{T}{1065} - (450)(675)\frac{T}{855} + 220.725 \times 10^3 = 0$
 $T = 344.6 \text{ N} \quad T = 345 \text{ N}$

COEFF. OF \hat{j} : $(-670)(450) + 600(450)\frac{344.6}{1065} + (270)(450) + 600(450)\frac{344.6}{855} - 780B_z = 0$
 $B_z = 185.49 \text{ N}$

COEFF. OF \hat{k} : $(600)(675)\frac{344.6}{1065} + (600)(675)\frac{344.6}{855} - 382.57 \times 10^3 + 780B_y = 0$
 $B_y = 113.2 \text{ N}$

$\sum F = 0: A + B + T_{CD} + T_{CE} + W = 0$
 $B = (113.2 \text{ N})\hat{j} + (185.5 \text{ N})\hat{k}$

COEFF. OF \hat{i} : $A_x - \frac{670}{1065}(344.6) + \frac{270}{855}(344.6) = 0; A_x = 114.4 \text{ N}$

COEFF. OF \hat{j} : $A_y + 113.2 + \frac{675}{1065}(344.6) + \frac{675}{855}(344.6) - 981 = 0; A_y = 377 \text{ N}$

COEFF. OF \hat{k} : $A_z + 185.5 - \frac{450}{1065}(344.6) - \frac{450}{855}(344.6) = 0; A_z = 141.5 \text{ N}$

PROB. 4.118

$$\sum M_A = 0: r_{D/A} \times T_{CD} + r_{E/A} \times (-W\hat{j}) + r_{B/A} \times B = 0$$

$$\begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 600 & 0 & 450 \\ -670 & 675 & -450 \end{vmatrix} \frac{T}{1065} + \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 600 & 0 & 450 \\ 270 & 675 & -450 \end{vmatrix} \frac{T}{855} + \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 780 & 0 & 0 \\ 0 & B_y & B_z \end{vmatrix} = 0$$

COEFF. OF \hat{i} : $-(450)(675)\frac{T}{855} + 220.725 \times 10^3 = 0$
 $T = 621.3 \text{ N} \quad T = 621 \text{ N}$

COEFF. OF \hat{j} : $(-670)(450) + 600(450)\frac{621.3}{855} - 780B_z = 0; B_z = 364.7 \text{ N}$

COEFF. OF \hat{k} : $(600)(675)\frac{621.3}{855} - 382.57 \times 10^3 + 780B_y = 0; B_y = 113.2 \text{ N}$
 $B = (113.2 \text{ N})\hat{j} + (365 \text{ N})\hat{k}$

$\sum F = 0: A + B + T_{CD} + W = 0$


COEFF. OF \hat{i} : $A_x + \frac{270}{855}(621.3) = 0; A_x = -196.2 \text{ N}$

COEFF. OF \hat{j} : $A_y + 113.2 + \frac{675}{855}(621.3) - 981 = 0; A_y = 377.3 \text{ N}$

COEFF. OF \hat{k} : $A_z + 364.7 - \frac{450}{855}(621.3) = 0; A_z = -377 \text{ N}$

$A = (-196.2 \text{ N})\hat{i} + (377 \text{ N})\hat{j} - (377 \text{ N})\hat{k}$


4.117 and 4.118

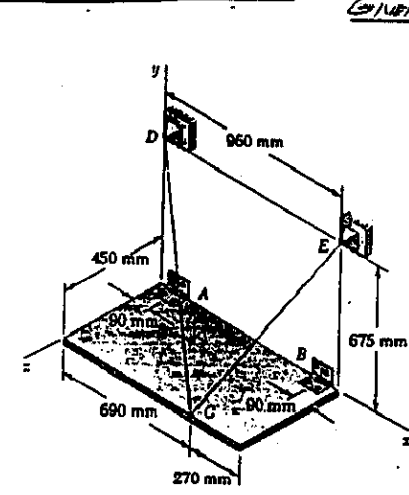

GIVEN: $m_{\text{plate}} = 100 \text{ kg}$
 $B_x = 0$
CABLE DCE PASSES OVER PULLEY AT C.

FIND:
(a) TENSION IN CABLE DCE.
(b) REACTIONS AT A AND B.


4.119

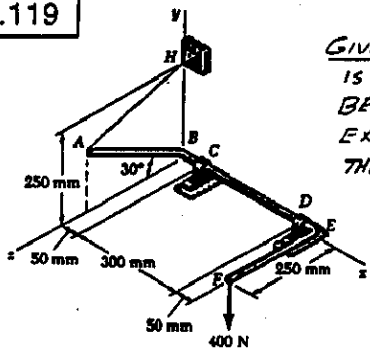


GIVEN: BEARING AT D IS REMOVED AND BEARING AT C CAN EXERT COUPLES ABOUT THE y AND z AXES.

FIND: TENSION IN WIRE AH AND REACTION AT C.

DIMENSIONS IN mm

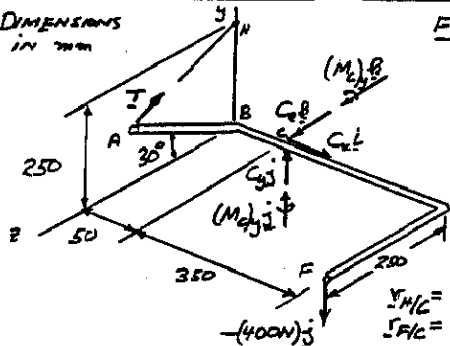

FREE-BODY DIAGRAM
ΔABH IS EQUILATERAL



$$\begin{aligned} \sum M_C = 0: & \quad \sum F_{i/C} \times (-400j) + \sum M_{i/C} \times T + (M_C)_y j + (M_C)_z k = 0 \\ \sum F = 0: & \quad C_x = 0, \quad C_y = 0.5(461.9) = 230.95, \quad C_z = 400 \end{aligned}$$

$$T = T(\sin 30^\circ)j - T(\cos 30^\circ)k = T(0.5j - 0.866k)$$

$$\sum M_C = 0: \quad \sum F_{i/C} \times (-400j) + \sum M_{i/C} \times T + (M_C)_y j + (M_C)_z k = 0$$

$$\begin{vmatrix} i & j & k \\ 350 & 0 & 250 \\ 0 & -400 & 0 \end{vmatrix} + \begin{vmatrix} i & j & k \\ -50 & 250 & 0 \\ 0 & 0.5 & -0.866 \end{vmatrix} T + (M_C)_y j + (M_C)_z k = 0$$

COEFF. OF i: $+100000 - 216.5T = 0; T = 461.9N; T = 462N$

COEFF. OF j: $-43.3(461.9) + (M_C)_y = 0; (M_C)_y = 20 \times 10^3 N \cdot mm; (M_C)_y = 20 N \cdot m$

COEFF. OF k: $-140000 - 216(461.9) + (M_C)_z = 0; (M_C)_z = 157.57 \times 10^3 N \cdot mm; (M_C)_z = 157.57 N \cdot m$

$\sum F = 0: C_x + T = 400j = 0 \Rightarrow M_C = (20 N \cdot m)j + (157.57 N \cdot m)k$


COEFF. OF i: $C_x = 0; C_x = 0$

COEFF. OF j: $C_y + 0.5(461.9) - 400 = 0; C_y = 169.1N$

COEFF. OF k: $C_z - 0.866(461.9) = 0; C_z = 400N$

$C = (169.1N)j + (400N)k$

4.120

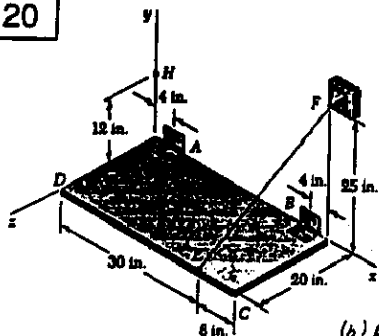

GIVEN: $W = 75 lb$
HINGE AT B IS REMOVED
HINGE AT A CAN EXERT COUPLES PARALLEL TO y AND z AXES


FIND:
(a) TENSION IN CABLE EF
(b) REACTION AT A

$$\sum F_{i/A} = (30-4)i + 20j = 26i + 20j$$

$$\sum F_{i/A} = (0.5 \times 38)i + 10j = 19i + 10j$$

(CONTINUED)

4.120 CONTINUED

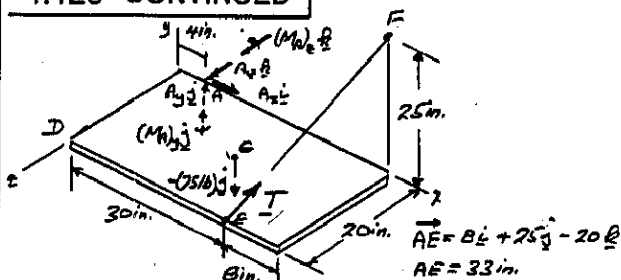

$$T = T \frac{AE}{AE} = \frac{T}{33} (26i + 25j - 20k)$$

$$\sum M_A = 0: \quad \sum F_{i/A} \times T + G_{i/A} \times (-75j) + (M_A)_y j + (M_A)_z k = 0$$

$$\begin{vmatrix} i & j & k \\ 26 & 0 & 20 \\ 8 & 25 & -10 \end{vmatrix} \frac{T}{33} + \begin{vmatrix} i & j & k \\ 19 & 0 & 10 \\ 0 & -75 & 0 \end{vmatrix} + (M_A)_y j + (M_A)_z k = 0$$

COEFF. OF i: $-(20 \times 25) \frac{T}{33} + 750 = 0; T = 49.5 lb$

COEFF. OF j: $(160 + 520) \frac{49.5}{33} + (M_A)_y = 0; (M_A)_y = -1020 lb \cdot in$

COEFF. OF k: $(26 \times 25) \frac{49.5}{33} - 1425 + (M_A)_z = 0; (M_A)_z = 450 lb \cdot in$

$\sum F = 0: A + T - 75j = 0 \Rightarrow M_A = (-1020 lb \cdot in)j + (450 lb \cdot in)k$


COEFF. OF i: $A_x + \frac{26}{33}(49.5) = 0; A_x = -12 lb$

COEFF. OF j: $A_y + \frac{25}{33}(49.5) - 75 = 0; A_y = 37.5 lb$

COEFF. OF k: $A_z - \frac{20}{33}(49.5) = 0; A_z = 30 lb$

$A = -(12 lb)i + (37.5 lb)j + (30 lb)k$

4.121

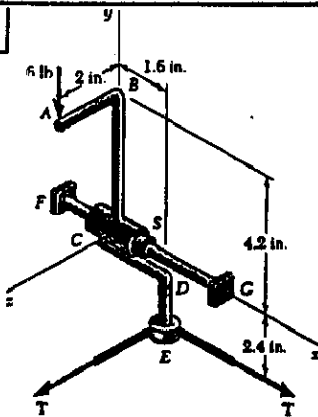

FIND:
(a) TENSION IN TAPE
(b) REACTION AT C

FREE-BODY DIAGRAM

$$\begin{aligned} \sum F_{i/C} &= 4.2j + 2k \\ \sum F_{i/E} &= 1.6i - 2.4j \end{aligned}$$

$$\sum M_C = 0; \quad \sum F_{i/C} \times (-6j) + \sum F_{i/E} \times T(L + k) + (M_C)_y j + (M_C)_z k = 0$$

$$(4.2j + 2k) \times (-6j) + (1.6i - 2.4j) \times T(L + k) + (M_C)_y j + (M_C)_z k = 0$$

COEFF. OF i: $12 - 2.4T = 0; T = 5 lb$

COEFF. OF j: $-1.6(5) + (M_C)_y = 0; (M_C)_y = 8 lb \cdot in$

COEFF. OF k: $2.4(5) + (M_C)_z = 0; (M_C)_z = -12 lb \cdot in$

$M_C = (8 lb \cdot in)j - (12 lb \cdot in)k$


$\sum F = 0: C_x i + C_y j + C_z k - (6 lb)j + (5 lb)i + (5 lb)k = 0$

EQUATE COEFFICIENTS OF UNIT VECTORS TO 2522


$C_x = -5 lb; C_y = 6 lb; C_z = -5 lb$

$C = -(5 lb)i + (6 lb)j - (5 lb)k$

4.122

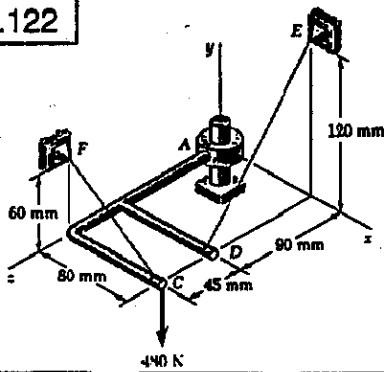

FIND:
TENSION IN
EACH CABLE,
REACTION
AT A.

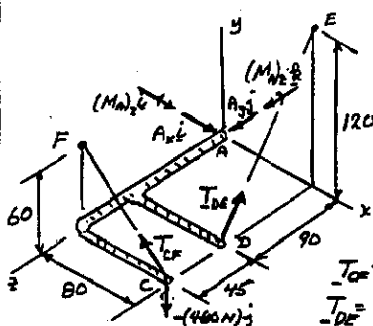

FREE-BODY DIAGRAM

$r_{CA} = 80\mathbf{i} + 135\mathbf{j}$
 $r_{DA} = 80\mathbf{i} + 90\mathbf{j}$
 $r_{CF} = -80\mathbf{i} + 60\mathbf{j}; CF = 100$
 $r_{DE} = 120\mathbf{j} - 90\mathbf{k}; DE = 150$
 $T_{CF} = T \frac{r_{CF}}{CF} = T_F(0.8\mathbf{i} + 0.6\mathbf{j})$
 $T_{DE} = T \frac{r_{DE}}{DE} = T_E(0.8\mathbf{j} - 0.6\mathbf{k})$

$\Sigma M_A = 0: r_{CA} \times T_{CF} + r_{DA} \times T_{DE} + r_{CA} \times (-480\mathbf{j}) + (M_A)_x \mathbf{i} + (M_A)_z \mathbf{k} = 0$

$\begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 80 & 0 & 135 \\ 0.8 & 0.6 & 0 \end{vmatrix} T_{CF}$	$+$	$\begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 80 & 0 & 90 \\ 0 & 0.8 & -0.6 \end{vmatrix} T_{DE}$	$+$	$\begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 80 & 0 & 135 \\ 0 & -480 & 0 \end{vmatrix}$	$+$	$(M_A)_x \mathbf{i} + (M_A)_z \mathbf{k} = 0$
--	-----	--	-----	--	-----	---

COEFF. OF \mathbf{i} : $-81 T_{CF} - 72 T_{DE} + 64.8 \times 10^3 + (M_A)_x = 0$ (1)

COEFF. OF \mathbf{j} : $108 T_{CF} + 72 T_{DE} = 0$; $T_{CF} = -\frac{2}{3} T_{DE}$ (2)

COEFF. OF \mathbf{k} : $48 T_{CF} + 64 T_{DE} - 38.4 \times 10^3 + (M_A)_z = 0$ (3)

$\Sigma F = 0$: $T_{CF} + T_{DE} - 480\mathbf{j} + \mathbf{A} = 0$

COEFF. OF \mathbf{j} : $0.6 T_{CF} + 0.8 T_{DE} - 480 = 0$

USE EQ(2): $0.6(-\frac{2}{3} T_{DE}) + 0.8 T_{DE} = 480$; $T_{DE} = 450\text{N}$

$T_{CF} = -\frac{2}{3} T_{DE} = -\frac{2}{3}(450)$; $T_{CF} = 300\text{N}$

COEFF. OF \mathbf{i} : $A_x - 0.8(200) = 0$; $A_x = 160\text{N}$

COEFF. OF \mathbf{k} : $A_z - 0.6(450) = 0$; $A_z = 270\text{N}$

$\mathbf{A} = (160\text{N})\mathbf{i} + (270\text{N})\mathbf{k}$


EG(1): $-81(200) - 72(450) + 64.8 \times 10^3 + (M_A)_x = 0$

$(M_A)_x = -16.2 \times 10^3 \text{ N}\cdot\text{mm}$; $(M_A)_x = -16.2 \text{ N}\cdot\text{m}$

EG(3): $48(200) + 64(450) - 38.4 \times 10^3 + (M_A)_z = 0$; $(M_A)_z = 0$

$M_A = -(16.2 \text{ N}\cdot\text{m})\mathbf{i}$

4.123 and 4.124 CONTINUED

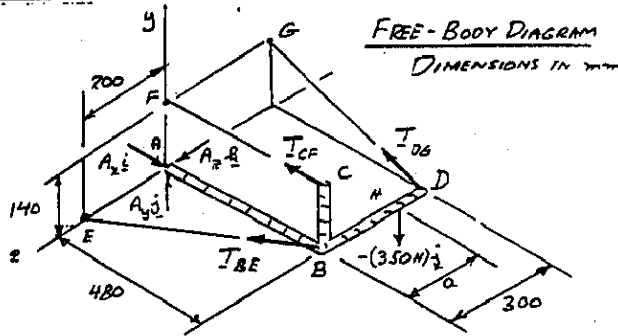

FREE-BODY DIAGRAM
DIMENSIONS IN mm

$r_{BE} = -480\mathbf{i} + 200\mathbf{j}$; $BE = 520\text{mm}$; $\hat{r}_{BE} = \frac{1}{13}(-12\mathbf{i} + 5\mathbf{j})$
 $r_{DE} = -480\mathbf{i} + 140\mathbf{j}$; $DE = 500\text{mm}$; $\hat{r}_{DE} = \frac{1}{25}(-24\mathbf{i} + 7\mathbf{j})$
 $T_{BE} = T_{BE} \hat{r}_{BE} = \frac{T_{BE}}{13}(-12\mathbf{i} + 5\mathbf{j})$; $T_{CF} = -T_{CF} \mathbf{i}$
 $T_{CG} = T_{CG} \hat{r}_{CG} = \frac{T_{CG}}{25}(-24\mathbf{i} + 7\mathbf{j})$
PROB. 4.123 $a = 150\text{mm}$ $r_{HA} = 480\mathbf{i} - 150\mathbf{j}$

$\Sigma M_A = 0: r_{BA} \times T_{BE} + r_{HA} \times T_{CF} + r_{CA} \times T_{CG} + r_{HA} \times (-350\mathbf{j}) = 0$

$\begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 480 & 0 & 0 \\ 0 & 140 & 0 \end{vmatrix} \frac{T_{BE}}{13}$	$+$	$\begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 0 & 140 & 0 \\ -1 & 0 & 0 \end{vmatrix} T_{CF}$	$+$	$\begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 0 & 140 & -300 \\ -24 & 7 & 0 \end{vmatrix} \frac{T_{CG}}{25}$	$+$	$\begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 480 & 0 & -150 \\ 0 & -350 & 0 \end{vmatrix} = 0$
--	-----	--	-----	---	-----	--

COEFF. OF \mathbf{i} : $2100 \frac{T_{BE}}{25} - (150 \times 350) = 0$; $T_{CG} = 625\text{N}$

COEFF. OF \mathbf{j} : $-2400 \frac{T_{BE}}{13} + 7200 \frac{625}{25} = 0$; $T_{BE} = 975\text{N}$

COEFF. OF \mathbf{k} : $140 T_{CF} + (24 \times 140) \frac{625}{25} - 168 \times 10 = 0$; $T_{CF} = 600\text{N}$

$\Sigma F = 0: \mathbf{B} + T_{BE} + T_{CG} + T_{CF} - 350\mathbf{j} = 0$

COEFF. OF \mathbf{i} : $A_x - \frac{12}{13} 975 - \frac{24}{25} 625 - 600 = 0$; $A_x = 2100\text{N}$

COEFF. OF \mathbf{j} : $A_y + \frac{7}{25} 625 - 350 = 0$; $A_y = 175\text{N}$

COEFF. OF \mathbf{k} : $A_z + \frac{1}{13} 975 = 0$; $A_z = -375\text{N}$

$\mathbf{A} = (2100\text{N})\mathbf{i} + (175\text{N})\mathbf{j} - (375\text{N})\mathbf{k}$

PROB. 4.124 $a = 300\text{mm}$
 $r_{HA} = 480\mathbf{i} - 300\mathbf{j}$

$\Sigma M_A = 0: r_{BA} \times T_{BE} + r_{HA} \times T_{CF} + r_{CA} \times T_{CG} + r_{HA} \times (-350\mathbf{j}) = 0$

$\begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 480 & 0 & 0 \\ 0 & 140 & 0 \end{vmatrix} \frac{T_{BE}}{13}$	$+$	$\begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 0 & 140 & 0 \\ -1 & 0 & 0 \end{vmatrix} T_{CF}$	$+$	$\begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 0 & 140 & -300 \\ -24 & 7 & 0 \end{vmatrix} \frac{T_{CG}}{25}$	$+$	$\begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ 480 & 0 & -300 \\ 0 & -350 & 0 \end{vmatrix} = 0$
--	-----	--	-----	---	-----	--

COEFF. OF \mathbf{i} : $2100 \frac{T_{BE}}{25} - (300 \times 350) = 0$; $T_{CG} = 1250\text{N}$

COEFF. OF \mathbf{j} : $-2400 \frac{T_{BE}}{13} + 7200 \frac{1250}{25} = 0$; $T_{BE} = 1950\text{N}$

COEFF. OF \mathbf{k} : $140 T_{CF} + (24 \times 140) \frac{1250}{25} - 168 \times 10 = 0$; $T_{CF} = 0$

$\Sigma F = 0: \mathbf{B} + T_{BE} + T_{CG} + T_{CF} - 350\mathbf{j} = 0$


COEFF. OF \mathbf{i} : $A_x - \frac{12}{13} 1950 - \frac{24}{25} 1250 + 0 = 0$; $A_x = 3000\text{N}$

COEFF. OF \mathbf{j} : $A_y + \frac{7}{25} 1250 - 350 = 0$; $A_y = 0$

COEFF. OF \mathbf{k} : $A_z + \frac{1}{13} 1950 = 0$; $A_z = -750\text{N}$

$\mathbf{A} = (3000\text{N})\mathbf{i} - (750\text{N})\mathbf{k}$

4.123 and 4.124

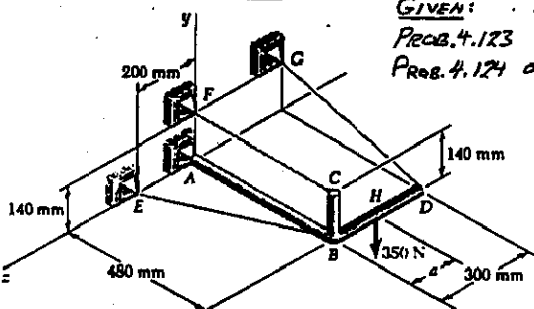


GIVEN:
PROB. 4.123 $a = 150\text{mm}$
PROB. 4.124 $a = 300\text{mm}$

FIND: TENSION IN CABLES,
REACTION AT A.


(CONTINUED)

4.131

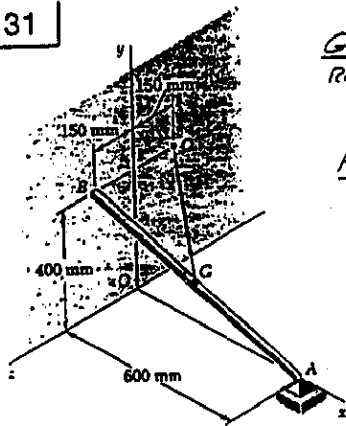

GIVEN: MASS OF ROD AB: $m = 10 \text{ kg}$

FIND: (a) TENSION IN CORD CG,
(b) REACTIONS AT A AND B.

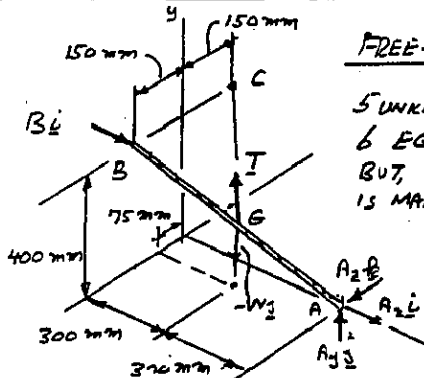

FREE-BODY DIAGRAM

5 UNKNOWN AND 6 EQS. OF EQUIL. BUT, EQUILIBRIUM IS MAINTAINED ($\sum M_A = 0$)

$W = mg = (10 \text{ kg})(9.81 \text{ m/s}^2) = 98.1 \text{ N}$
 $VV = 98.1 \text{ N}$

$\vec{GC} = -300\hat{i} + 200\hat{j} - 225\hat{k}$ $GC = 425 \text{ mm}$

$T = T \frac{\vec{GC}}{GC} = \frac{T}{425} (-300\hat{i} + 200\hat{j} - 225\hat{k})$

$\vec{r}_{B/A} = -600\hat{i} + 400\hat{j} + 150\hat{k}$
 $\vec{r}_{G/A} = -300\hat{i} + 200\hat{j} + 75\hat{k}$

$\sum M_A = 0: \vec{r}_{B/A} \times \vec{B} + \vec{r}_{G/A} \times \vec{T} + \vec{r}_{G/A} \times (-W\hat{j}) = 0$

\hat{i}	\hat{j}	\hat{k}	+	\hat{i}	\hat{j}	\hat{k}	T	+	\hat{i}	\hat{j}	\hat{k}	
-600	400	150		-300	200	75	$\frac{52.12}{425}$	+	-300	200	75	
B	0	0		-300	200	-225			0	-281	0	

COEFF. OF \hat{i} : $(-105.88 - 25.29)T + 7357.5 = 0$
 $T = 52.12 \text{ N}$ $T = 52.1 \text{ N}$

COEFF. OF \hat{j} : $150B - (300)(75) + 300(-225) = 0$
 $B = 73.58 \text{ N}$ $B = (73.6 \text{ N})\hat{i}$

$\sum F = 0: A + B + T - W\hat{j} = 0$

COEFF. OF \hat{i} : $A_x + 73.58 - 52.15 \frac{300}{425} = 0$ $A_x = 37.8 \text{ N}$

COEFF. OF \hat{j} : $A_y + 52.15 \frac{200}{425} - 281 = 0$ $A_y = 73.6 \text{ N}$

COEFF. OF \hat{k} : $A_z - 52.15 \frac{225}{425} = 0$ $A_z = 27.6 \text{ N}$

ALTERNATE COMPUTATION OF B :

$\vec{AC} = -600\hat{i} + 400\hat{j} - 150\hat{k}$; $\hat{r}_{AC} = \frac{\vec{AC}}{AC}$

$\sum M_{AC} = 0: \hat{r}_{AC} \cdot M_A = \hat{r}_{AC} \cdot (\vec{r}_{B/A} \times \vec{B}) + \hat{r}_{AC} \cdot (\vec{r}_{G/A} \times (-W\hat{j})) = 0$


-600	+400	-150		-600	+400	-150	
-600	+400	+150	$\frac{1}{AC}$	-300	+200	+75	$\frac{1}{AC}$
B	0	0				-W	

$B(400 \times 150 + 400 \times 150) - W(300 \times 150 + 600 \times 75) = 0$

$120000B - 90000W = 0$


$B = \frac{3}{4}W = \frac{3}{4}(98.1) = 73.6 \text{ N}$ $B = 73.6 \text{ N}$

4.132

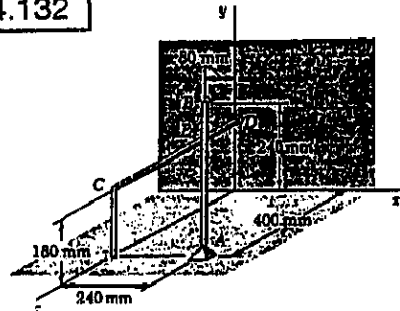

GIVEN: MASS OF ROD AB $m = 5 \text{ kg}$

FIND: (a) FORCE CD EXERTS ON AB
(b) REACTIONS AT A AND B

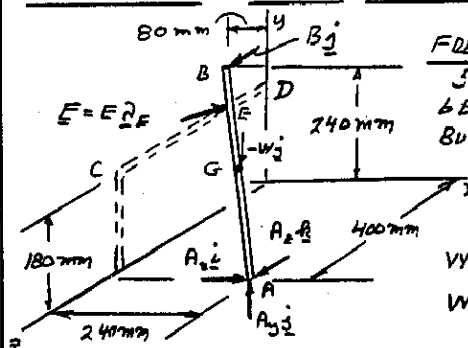

FREE-BODY DIAGRAM

5 UNKNOWN AND 6 EQS. OF EQUIL. BUT, EQUILIBRIUM MAINTAINED ($\sum M_A = 0$)

$VV = mg = (5 \text{ kg})(9.81 \text{ m/s}^2) = 49.05 \text{ N}$
 $W = 49.05 \text{ N}$

$\hat{r}_E =$ UNIT VECTOR \perp TO AB AND CD

$\vec{AB} = -320\hat{i} + 240\hat{j} - 400\hat{k}$

UNIT VECTOR ALONG ROD CD IS \hat{r}_E

$\hat{r}_E = \frac{\vec{AB} \times \vec{r}_E}{|\vec{AB} \times \vec{r}_E|} = \frac{(-320\hat{i} + 240\hat{j} - 400\hat{k}) \times \vec{r}_E}{|\vec{AB} \times \vec{r}_E|}$

$\hat{r}_E = \frac{320\hat{i} + 240\hat{k}}{\sqrt{320^2 + 240^2}} = \frac{320\hat{i} + 240\hat{k}}{400}$ $\hat{r}_E = 0.8\hat{i} + 0.6\hat{k}$

$\vec{F} = F\hat{r}_E$; $\vec{F} = F(0.8\hat{i} + 0.6\hat{k})$ (1)

$\vec{r}_{B/A} = \vec{AB} = -320\hat{i} + 240\hat{j} - 400\hat{k}$

$\vec{r}_{G/A} = \frac{1}{2}\vec{AB} = -160\hat{i} + 120\hat{j} - 200\hat{k}$

$\vec{r}_{E/A} = \frac{180}{240}\vec{AB} = -240\hat{i} + 180\hat{j} - 300\hat{k}$

$\sum M_A = 0: \vec{r}_{B/A} \times \vec{B} + \vec{r}_{G/A} \times (-W\hat{j}) + \vec{r}_{E/A} \times \vec{F} = 0$

\hat{i}	\hat{j}	\hat{k}	+	\hat{i}	\hat{j}	\hat{k}	+	\hat{i}	\hat{j}	\hat{k}	F	
-320	+240	-400		-160	120	-200		-240	180	-300		
0	0	B		0	-W	0		0.6	0.8	0		

EQUATE COEFFICIENTS OF UNIT VECTORS TO ZERO

COEFF. OF \hat{i} : $+160W + (-240)(0.6) - 180(0.8)F = 0$
 $160(49.05) - 300F = 0$ $F = 26.16 \text{ N}$

COEFF. OF \hat{k} : $240B - 200W + 300(0.6)F = 0$
 $240B - 200(49.05) + 240(26.16) = 0$; $B = 14.715 \text{ N}$

THUS: $\vec{F} = F(0.6\hat{i} + 0.8\hat{k}) = 26.16(0.6\hat{i} + 0.8\hat{k})$

$\vec{F} = (15.70\text{N})\hat{i} + (20.9\text{N})\hat{k}$


$\vec{B} = B\hat{i} = (14.72\text{N})\hat{i}$

$\sum \vec{F} = 0: \vec{A} + \vec{B} + \vec{F} - W\hat{j} = 0$

- ① $A_x + 15.70 = 0$ $A_x = -15.70 \text{ N}$
- ② $A_y + 20.9 - 49.05 = 0$ $A_y = 28.1 \text{ N}$
- ③ $A_z + 14.72 = 0$ $A_z = -14.72 \text{ N}$

$\vec{A} = -(15.70\text{N})\hat{i} + (28.1\text{N})\hat{j} - (14.72\text{N})\hat{k}$


4.133

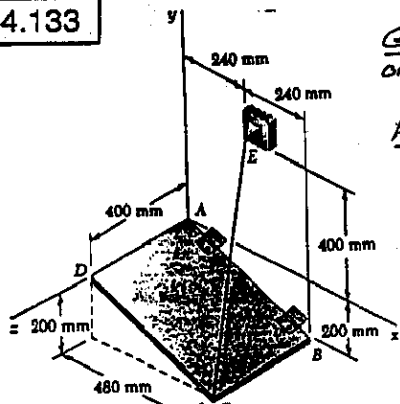

GIVEN: MASS OF PLATE $m = 50 \text{ kg}$

FIND: TENSION IN WIRE CE

DIMENSIONS IN mm

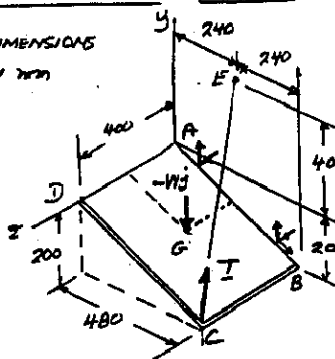

FREE-BODY DIAGRAM

$$W = mg = (50 \text{ kg})(9.81 \text{ m/s}^2) \\ W = 490.5 \text{ N}$$

$$\vec{CE} = 240\hat{i} + 400\hat{j} - 400\hat{k} \\ CE = 760 \text{ mm}$$

$$T = T \frac{\vec{CE}}{CE}$$

$$T = \frac{T}{760} (-240\hat{i} + 400\hat{j} - 400\hat{k})$$

$$\vec{r}_{AB} = \frac{\vec{AB}}{AB} = \frac{480\hat{i} - 200\hat{j}}{570}$$

$$\vec{r}_{AB} = \frac{1}{13} (12\hat{i} - 5\hat{j})$$

$$\sum M_{AB} = 0: \vec{r}_{AB} \cdot (\sum \vec{M}_{AB}) = 0$$


$$\vec{r}_{E1A} = 240\hat{i} + 400\hat{j}; \vec{r}_{E1A} = 240\hat{i} - 100\hat{j} + 200\hat{k}$$

$$\begin{vmatrix} 12 & -5 & 0 \\ 240 & 400 & 0 \\ -240 & 400 & -400 \end{vmatrix} \frac{T}{13 \times 760} + \begin{vmatrix} 12 & -5 & 0 \\ 240 & -100 & 200 \\ 0 & -W & 0 \end{vmatrix} \frac{1}{13} = 0$$

$$(-12 \times 400 \times 400 - 5 \times 240 \times 400) T / 760 + 12 \times 200 \times W = 0$$

$$T = 0.76W = 0.76(490.5 \text{ N}); \quad T = 373 \text{ N}$$


4.134

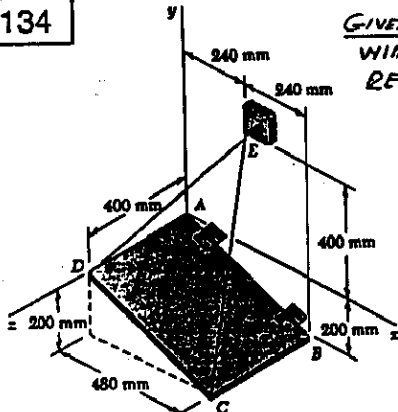

GIVEN: REMOVE WIRE CE AND REPLACE BY WIRE DE. MASS OF PLATE: $m = 50 \text{ kg}$

FIND: TENSION IN WIRE DE

DIMENSIONS IN mm



FREE-BODY DIAGRAM

$$W = mg = (50 \text{ kg})(9.81 \text{ m/s}^2) \\ W = 490.5 \text{ N}$$

$$\vec{DE} = 240\hat{i} + 400\hat{j} - 400\hat{k} \\ DE = 614.5 \text{ mm}$$

$$T = T \frac{\vec{DE}}{DE}$$

$$T = \frac{T}{614.5} (240\hat{i} + 400\hat{j} - 400\hat{k})$$

(CONTINUED)

4.134 CONTINUED

$$\vec{r}_{AB} = \frac{\vec{AB}}{AB} = \frac{480\hat{i} - 200\hat{j}}{570}; \quad \vec{r}_{AB} = \frac{1}{13} (12\hat{i} - 5\hat{j})$$

$$\vec{r}_{E1A} = 240\hat{i} + 400\hat{j}; \quad \vec{r}_{E1A} = 240\hat{i} - 100\hat{j} + 200\hat{k}$$


$$\sum M_{AB} = 0: \vec{r}_{AB} \cdot (\sum \vec{M}_{AB}) = 0$$

$$\begin{vmatrix} 12 & -5 & 0 \\ 240 & 400 & 0 \\ 240 & 400 & -400 \end{vmatrix} \frac{T}{13 \times 614.5} + \begin{vmatrix} 12 & -5 & 0 \\ 240 & -100 & 200 \\ 0 & -W & 0 \end{vmatrix} \frac{1}{13} = 0$$


$$(-12 \times 400 \times 400 - 5 \times 240 \times 400) T / 614.5 + 12 \times 200 \times W = 0$$

$$T = 0.6145W = 0.6145(490.5 \text{ N}); \quad T = 301 \text{ N}$$

4.135

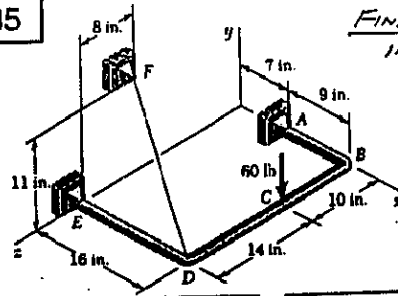

FIND: TENSION IN CABLE DF

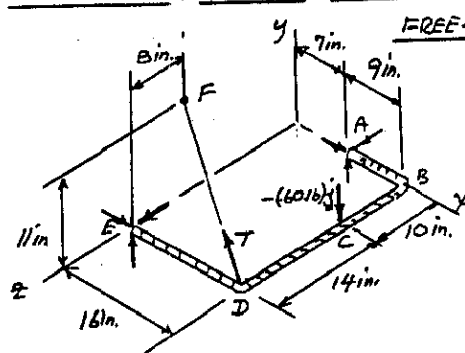

FREE-BODY DIAGRAM

$$\vec{DF} = -16\hat{i} + 11\hat{j} - 8\hat{k} \quad DF = 21 \text{ in.}$$

$$T = T \frac{\vec{DF}}{DF} = \frac{T}{21} (-16\hat{i} + 11\hat{j} - 8\hat{k})$$

$$\vec{r}_{E1E} = 16\hat{i}$$

$$\vec{r}_{E1E} = 16\hat{i} - 14\hat{k}$$

$$\vec{r}_{EA} = \frac{\vec{EA}}{EA} = \frac{7\hat{i} - 24\hat{k}}{25}$$

$$\sum M_{EA} = 0: \vec{r}_{EA} \cdot (\sum \vec{M}_{EA}) = 0$$

$$\begin{vmatrix} 7 & 0 & -24 \\ 16 & 0 & 0 \\ -16 & 11 & -8 \end{vmatrix} \frac{T}{21 \times 25} + \begin{vmatrix} 7 & 0 & -24 \\ 16 & 0 & -14 \\ 0 & -60 & 0 \end{vmatrix} \frac{1}{25} = 0$$


$$- \frac{24 \times 16 \times 11}{21 \times 25} T + \frac{-7 \times 14 \times 60 + 24 \times 16 \times 60}{25} = 0$$

$$201.14T + 17,160 = 0$$


$$T = 85.31 \text{ lb}$$

$$T = 85.3 \text{ lb}$$

4.136

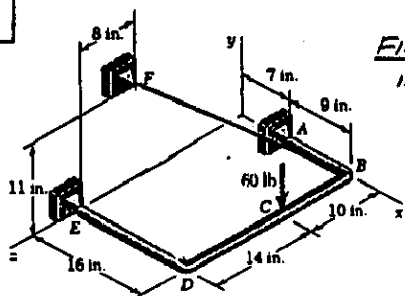

FIND: TENSION IN CABLE BF

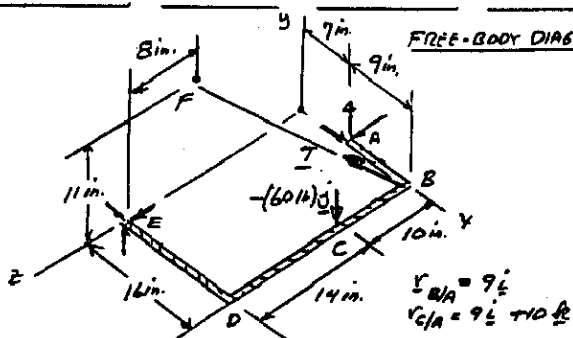

FREE-BODY DIAGRAM

$$\vec{BF} = -16\hat{i} + 11\hat{j} + 16\hat{k} \quad BF = 25.16 \text{ in.}$$

$$T = T \frac{\vec{BF}}{BF} = \frac{T}{25.16} (-16\hat{i} + 11\hat{j} + 16\hat{k})$$

$$\vec{r}_{AE} = \frac{\vec{AE}}{AE} = \frac{7\hat{i} - 24\hat{k}}{25}$$


$$\sum M_{AE} = 0: \vec{r}_{AE} \cdot (\vec{r}_{BA} \times T) + \vec{r}_{AE} \cdot (\vec{r}_{CA} \times (-60\hat{j})) = 0$$

$$\begin{vmatrix} 7 & 0 & -24 \\ 9 & 0 & 0 \\ -16 & 11 & 16 \end{vmatrix} \frac{T}{25 \times 25.16} + \begin{vmatrix} 7 & 0 & -24 \\ 0 & -60 & 0 \\ 0 & -60 & 0 \end{vmatrix} \frac{1}{25} = 0$$


$$-\frac{24 \times 9 \times 11}{38 \times 25.16} T + \frac{24 \times 9 \times 60 + 7 \times 11 \times 60}{38} = 0$$

$$94.4267 - 17.160 = 0 \quad T = 181.716 \text{ lb}$$

4.137

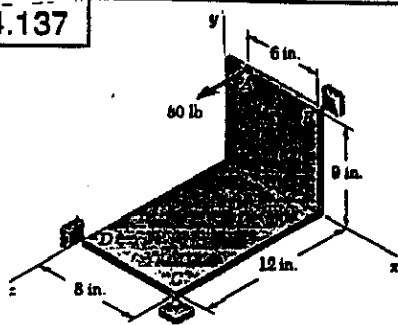

FIND: REACTION AT C.

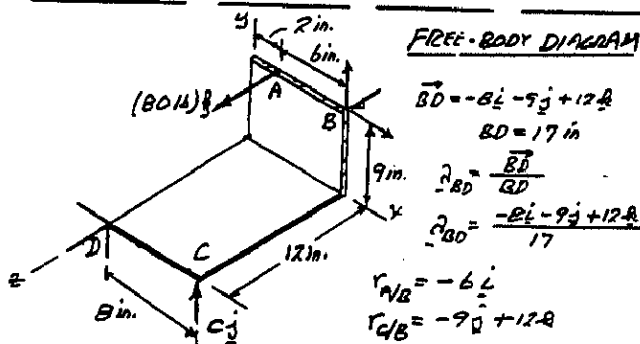

FREE-BODY DIAGRAM

$$\vec{BD} = -8\hat{i} - 9\hat{j} + 12\hat{k} \quad BD = 17 \text{ in}$$

$$\vec{r}_{BD} = \frac{\vec{BD}}{BD}$$

$$\vec{r}_{BD} = \frac{-8\hat{i} - 9\hat{j} + 12\hat{k}}{17}$$

$$r_{NB} = -6\hat{i}$$

$$r_{DB} = -9\hat{j} + 12\hat{k}$$

(CONTINUED)


4.137 CONTINUED

$$\sum M_{BD} = 0: \vec{r}_{BD} \cdot (\vec{r}_{CB} \times \vec{E}) + \vec{r}_{BD} \cdot (\vec{r}_{AB} \times (80\hat{i})\hat{k}) = 0$$


$$\begin{vmatrix} -8 & -9 & 12 \\ 0 & -9 & 12 \\ 0 & 0 & 0 \end{vmatrix} \frac{1}{17} + \begin{vmatrix} -8 & -9 & 12 \\ -6 & 0 & 0 \\ 0 & 0 & 80 \end{vmatrix} \frac{1}{17} = 0$$

$$\frac{B \times 12 \times C}{17} - \frac{9 \times 6 \times 80}{17} = 0; C = 45.16 \quad C = (45.16)\hat{j}$$

4.138

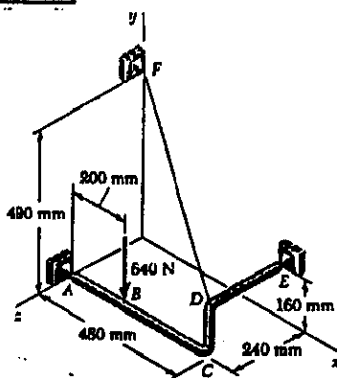

FIND: TENSION IN WIRE DF

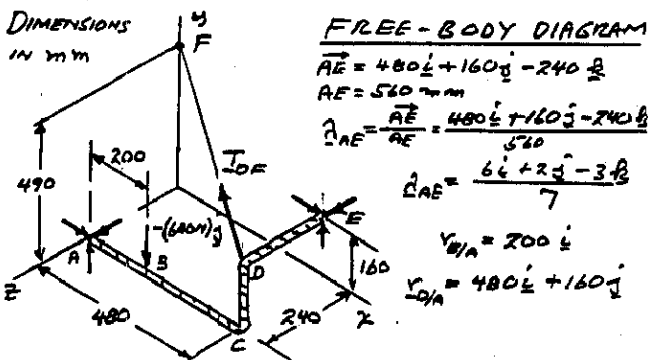

DIMENSIONS IN mm

FREE-BODY DIAGRAM

$$\vec{AE} = 480\hat{i} + 160\hat{j} - 240\hat{k}$$

$$AE = 560 \text{ mm}$$

$$\vec{r}_{AE} = \frac{\vec{AE}}{AE} = \frac{480\hat{i} + 160\hat{j} - 240\hat{k}}{560}$$

$$\vec{r}_{AE} = \frac{6\hat{i} + 2\hat{j} - 3\hat{k}}{7}$$

$$r_{BA} = 200\hat{i}$$

$$r_{DA} = 480\hat{i} + 160\hat{j}$$

$$\vec{DF} = -480\hat{i} + 330\hat{j} - 240\hat{k}; \quad DF = 680 \text{ mm}$$

$$T_{DF} = T \frac{\vec{DF}}{DF} = \frac{T}{680} (-480\hat{i} + 330\hat{j} - 240\hat{k}) = T \frac{-16\hat{i} + 11\hat{j} - 8\hat{k}}{21}$$

$$\sum M_{AE} = \vec{r}_{AE} \cdot (\vec{r}_{BA} \times T_{DF}) + \vec{r}_{AE} \cdot (\vec{r}_{DA} \times (-600\hat{j})) = 0$$

$$\begin{vmatrix} 6 & 2 & -3 \\ 480 & 160 & 0 \\ -16 & 11 & -8 \end{vmatrix} \frac{T_{DF}}{21 \times 7} + \begin{vmatrix} 6 & 2 & -3 \\ 0 & -640 & 0 \\ 0 & -640 & 0 \end{vmatrix} \frac{1}{7} = 0$$


$$-6 \times 160 \times 8 + 2 \times 480 \times 8 - 3 \times 480 \times 11 - 3 \times 160 \times 16 \frac{T_{DF}}{21 \times 7} + \frac{3 \times 200 \times 640}{7} = 0$$

$$-1120 T_{DF} + 384 \times 10^3 = 0$$

$$T_{DF} = 342.9 \text{ N}$$


$$T_{DF} = 343 \text{ N}$$

4.139

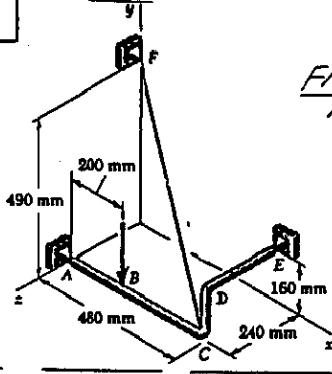

FIND: TENSION IN WIRE CF

DIMENSIONS IN mm

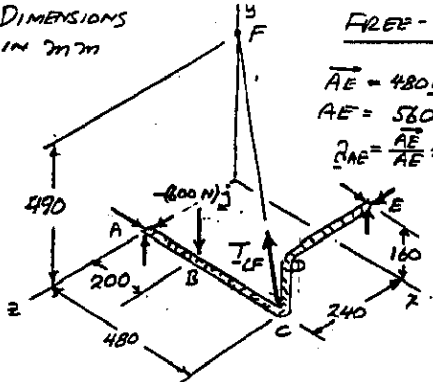

FREE-BODY DIAGRAM

$$\begin{aligned} \vec{AE} &= 480\hat{i} + 160\hat{j} - 240\hat{k} \\ AE &= 560 \text{ mm} \\ \vec{r}_{AE} &= \frac{\vec{AE}}{AE} = \frac{480\hat{i} + 160\hat{j} - 240\hat{k}}{560} \\ \vec{r}_{AE} &= \frac{6\hat{i} + 2\hat{j} - 3\hat{k}}{7} \\ \vec{r}_{B/A} &= 200\hat{i} \\ \vec{r}_{C/A} &= 480\hat{i} \end{aligned}$$

$$\begin{aligned} \vec{CF} &= -480\hat{i} + 490\hat{j} - 240\hat{k} \\ CF &= 726.7 \text{ mm} \\ T_{CF} &= T_{CF} \frac{\vec{CF}}{CF} = \frac{-480\hat{i} + 490\hat{j} - 240\hat{k}}{726.7} \end{aligned}$$

$$\sum M_{AE} = 0: \vec{r}_{AE} \cdot (\vec{r}_{C/A} \times T_{CF}) + \vec{r}_{AE} \cdot (\vec{r}_{B/A} \times (-600\hat{j})) = 0$$

$$\begin{vmatrix} 6 & 2 & -3 \\ 480 & 0 & 0 \\ -480 & 490 & -240 \end{vmatrix} \frac{T_{CF}}{726.7 \times 7} + \begin{vmatrix} 6 & 2 & -3 \\ 200 & 0 & 0 \\ 0 & -640 & 0 \end{vmatrix} \frac{1}{7} = 0$$

$$\frac{2 \times 480 \times 240 - 3 \times 480 \times 490}{726.7 \times 7} T_{CF} + \frac{3 \times 200 \times 640}{7} = 0$$

$$-653.91 T_{CF} + 384 \times 10^3 = 0; \quad T_{CF} = 587 \text{ N} \quad \blacktriangleleft$$

4.140 CONTINUED

$$\vec{AF} = 4\hat{i} - 2\hat{j} - 4\hat{k} \quad AF = 3 \text{ ft}$$


$$\vec{r}_{AF} = \frac{1}{3}(2\hat{i} - \hat{j} - 2\hat{k})$$

$$\vec{r}_{G_1/A} = 2\hat{i} - \hat{j}$$

$$\vec{r}_{G_2/A} = 4\hat{i} - \hat{j} - 2\hat{k}$$

$$\vec{r}_{B/A} = 4\hat{i}$$

FREE-BODY DIAGRAM

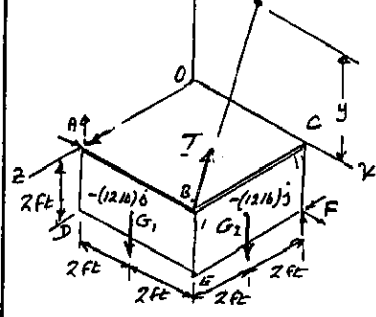

$$\sum M_{AF} = 0: \vec{r}_{AF} \cdot (\vec{r}_{G_1/A} \times (-12\hat{j})) + \vec{r}_{AF} \cdot (\vec{r}_{G_2/A} \times (-12\hat{j})) + \vec{r}_{AF} \cdot (\vec{r}_{B/A} \times T) = 0$$

$$\begin{vmatrix} 2 & -1 & -2 \\ 2 & -1 & 0 \\ 0 & -12 & 0 \end{vmatrix} \frac{1}{3} + \begin{vmatrix} 2 & -1 & -2 \\ 4 & -1 & -2 \\ 0 & -12 & 0 \end{vmatrix} \frac{1}{3} + \vec{r}_{AF} \cdot (\vec{r}_{B/A} \times T) = 0$$

$$(2 \times 2 \times 12) \frac{1}{3} + (2 \times 2 \times 12 + 2 \times 2 \times 12) \frac{1}{3} + \vec{r}_{AF} \cdot (\vec{r}_{B/A} \times T) = 0$$

$$\vec{r}_{AF} \cdot (\vec{r}_{B/A} \times T) = -32 \text{ OR } T \cdot (\vec{r}_{AF} \times \vec{r}_{B/A}) = -32 \quad (1)$$

PROJECTION OF T ON $(\vec{r}_{AF} \times \vec{r}_{B/A})$ IS CONSTANT. THUS, T_{min} IS PARALLEL TO

$$\vec{r}_{AF} \times \vec{r}_{B/A} = \frac{1}{3}(2\hat{i} - \hat{j} - 2\hat{k}) \times 4\hat{i} = \frac{1}{3}(-8\hat{j} + 4\hat{k})$$

CORRESPONDING UNIT VECTOR IS $\frac{1}{\sqrt{5}}(-2\hat{j} + \hat{k})$

$$T_{min} = T(-2\hat{j} + \hat{k}) \frac{1}{\sqrt{5}} \quad (2)$$

$$\text{EQ (1): } \frac{T}{\sqrt{5}}(-2\hat{j} + \hat{k}) \cdot \left[\frac{1}{3}(2\hat{i} - \hat{j} - 2\hat{k}) \times 4\hat{i} \right] = -32$$

$$\frac{T}{\sqrt{5}}(-2\hat{j} + \hat{k}) \cdot \frac{1}{3}(-8\hat{j} + 4\hat{k}) = -32$$

$$\frac{T}{3\sqrt{5}}(16 + 4) = -32; \quad T = -\frac{3\sqrt{5}(32)}{20} = 4.8\sqrt{5}$$

$$T = 10.733 \text{ lb}$$


$$\text{EQ (2): } T_{min} = T(-2\hat{j} + \hat{k}) \frac{1}{\sqrt{5}}$$

$$= 4.8\sqrt{5}(-2\hat{j} + \hat{k}) \frac{1}{\sqrt{5}}$$

$$T_{min} = -(9.616)\hat{j} + (4.816)\hat{k}$$

SINCE T_{min} HAS NO \hat{i} COMPONENT, WIRE BH IS PARALLEL TO THE yz PLANE, AND $x = 4 \text{ ft}$

IS PARALLEL TO THE y & PLANE, AND $x = 4 \text{ ft}$

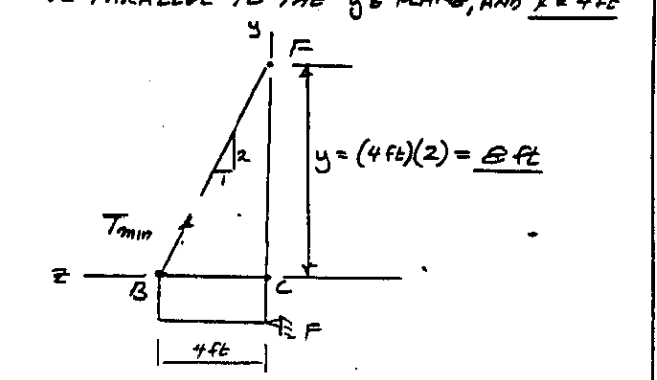


ANSWERS:

$$(a) \quad x = 4 \text{ ft}, \quad y = 8 \text{ ft} \quad \blacktriangleleft$$

$$(b) \quad T_{min} = 10.73 \text{ lb} \quad \blacktriangleleft$$

4.140


FIND: (a) LOCATION OF H IN xy PLANE FOR WHICH TENSION IN WIRE BH IS MINIMUM (b) CORRESPONDING MINIMUM TENSION

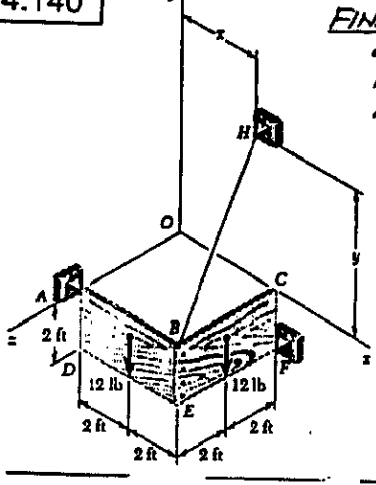

(CONTINUED)

$$\vec{r}_{CF} = \frac{EF}{EA} = \frac{7\hat{k} - 2\hat{j}}{25}$$


4.141

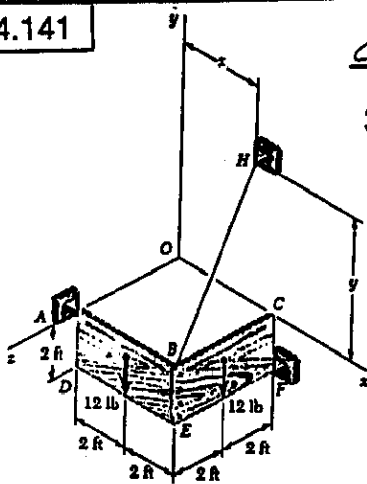

GIVEN: SUPPORT H MUST BE ON y AXIS (i.e., x=0)

FIND:
 (a) DISTANCE y FOR WHICH TENSION IN WIRE BH IS MINIMUM.
 (b) CORRESPONDING MINIMUM TENSION.

FREE-BODY DIAGRAM

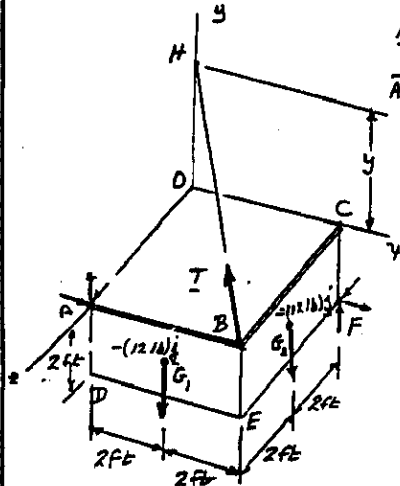

$$\vec{AF} = 4\hat{i} - 2\hat{j} - 4\hat{k}$$

$$\vec{r}_{AF} = \frac{1}{3}(2\hat{i} - \hat{j} - 2\hat{k})$$

$$y_{G_1} = 2\hat{i} - \hat{j}$$

$$y_{G_2} = 4\hat{i} - \hat{j} - 2\hat{k}$$

$$y_{G_3} = 4\hat{i}$$

$$\Sigma M_{AF} = 0: \vec{r}_{AF} \cdot (y_{G_1} \times (-12\hat{j})) + \vec{r}_{AF} \cdot (y_{G_2} \times (-12\hat{j})) + \vec{r}_{AF} \cdot (y_{G_3} \times T) = 0$$

$$\begin{vmatrix} 2 & -1 & 2 \\ 2 & -1 & 0 \\ 0 & -12 & 0 \end{vmatrix} \frac{1}{3} + \begin{vmatrix} 2 & -1 & 2 \\ 4 & -1 & -2 \\ 0 & -12 & 0 \end{vmatrix} \frac{1}{3} + \vec{r}_{AF} \cdot (y_{G_3} \times T) = 0$$

$$(2 \times 2 \times 12) \frac{1}{3} + (-2 \times 2 \times 12 + 2 \times 4 \times 12) \frac{1}{3} + \vec{r}_{AF} \cdot (y_{G_3} \times T) = 0$$

$$\vec{r}_{AF} \cdot (y_{G_3} \times T) = -32 \quad (1)$$

$$\vec{BH} = -4\hat{i} + y\hat{j} - 4\hat{k} \quad BH = (32 + y^2)^{1/2}$$

$$\vec{T} = T \frac{\vec{BH}}{BH} = T \frac{-4\hat{i} + y\hat{j} - 4\hat{k}}{(32 + y^2)^{1/2}}$$

EQ. (1)

$$\vec{r}_{AF} \cdot (y_{G_3} \times T) = \begin{vmatrix} 2 & -1 & 2 \\ 4 & 0 & 0 \\ -4 & y & -4 \end{vmatrix} \frac{T}{3(32 + y^2)^{1/2}} = -32$$

$$(-16 - 8y)T = -3 \times 32(32 + y^2)^{1/2}; \quad T = \frac{96(32 + y^2)^{1/2}}{8y + 16} \quad (2)$$


$$\frac{dT}{dy} = 0: \frac{96(8y + 16) \frac{1}{2}(32 + y^2)^{-1/2} (2y) + (32 + y^2)^{1/2} (96)}{(8y + 16)^2}$$

NUMERATOR = 0: $(8y + 16)y = (32 + y^2)8$

$$8y^2 + 16y = 32 + 8y^2 \quad y = 16 \text{ ft}$$

EQ. (2): $T = \frac{96(32 + 16^2)^{1/2}}{8 \times 16 + 16} = 11.313 \text{ lb} \quad T = 11.31 \text{ lb}$


4.142 and 4.143



PROB. 4.141:
 For $\alpha = 45^\circ$,
 FIND REACTIONS AT B, C, AND D.

PROB. 4.142:
 FIND RANGE OF α FOR EQUILIBRIUM.

FREE-BODY DIAGRAM

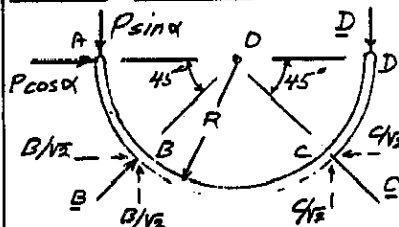

$$+\Sigma M_O = 0: (P \sin \alpha)R - D(R) = 0 \quad D = P \sin \alpha \quad (1)$$

$$+\Sigma F_x = 0: P \cos \alpha + B/\sqrt{2} - C/\sqrt{2} = 0 \quad (2)$$

$$+\Sigma F_y = 0: -P \sin \alpha + B/\sqrt{2} + C/\sqrt{2} - P \sin \alpha = 0$$

$$-2P \sin \alpha + B/\sqrt{2} + C/\sqrt{2} = 0 \quad (3)$$

$$(2) + (3): P(\cos \alpha - 2 \sin \alpha) + 2B/\sqrt{2} = 0$$

$$B = \frac{\sqrt{2}}{2}(2 \sin \alpha - \cos \alpha)P \quad (4)$$

$$(2) - (3): P(\cos \alpha + 2 \sin \alpha) - 2C/\sqrt{2} = 0$$

$$C = \frac{\sqrt{2}}{2}(2 \sin \alpha + \cos \alpha)P \quad (5)$$

PROB. 4.142 FOR $\alpha = 45^\circ$; $\sin \alpha = \cos \alpha = \frac{1}{\sqrt{2}}$

EQ. (4): $B = \frac{\sqrt{2}}{2}(\frac{2}{\sqrt{2}} - \frac{1}{\sqrt{2}})P = P$; $B = P \triangle 45^\circ$

EQ. (5): $C = \frac{\sqrt{2}}{2}(\frac{2}{\sqrt{2}} + \frac{1}{\sqrt{2}})P = \frac{3}{2}P$; $C = \frac{3}{2}P \triangle 45^\circ$

EQ. (1): $D = P/\sqrt{2}$ $D = P/\sqrt{2} \downarrow$


PROB. 4.143 RANGE OF α FOR EQUILIBRIUM

FOR B ≥ 0 :

FROM EQ. (4): $2 \sin \alpha - \cos \alpha \geq 0$

FOR C ≥ 0 :

FROM EQ. (5): $2 \sin \alpha + \cos \alpha \geq 0$

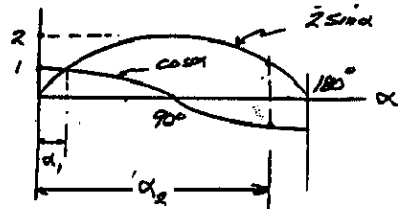

$$2 \sin \alpha_1 \geq \cos \alpha_1$$

$$\tan \alpha_1 \geq 0.5$$

$$\alpha_1 \geq 26.6^\circ$$

$$2 \sin \alpha_2 \geq -\cos \alpha_2$$


$$\tan \alpha_2 \geq -0.5$$

$$\alpha_2 \leq 153.4^\circ$$

$$26.6^\circ \leq \alpha \leq 153.4^\circ$$


FOR THIS RANGE $\sin \alpha \geq 0$, THUS EQ. (1) YIELDS $D \geq 0$, O.K.

4.144

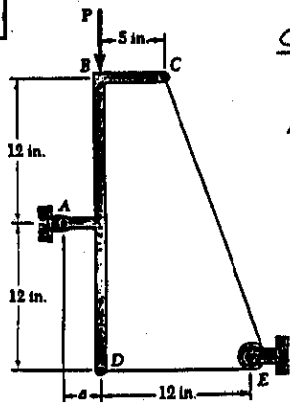

GIVEN: $\theta = 31^\circ$,
 $P = 280 \text{ lb}$.

FIND:
(a) TENSION IN CABLE DEC.
(b) REACTION AT A.

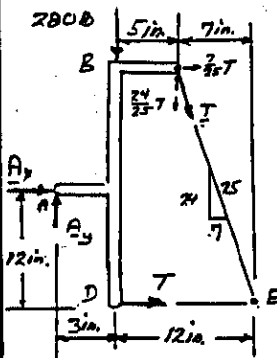

FREE-BODY DIAGRAM

$$+\sum M_A = 0: -(280 \text{ lb})(24 \text{ in.}) - T(12 \text{ in.}) - \frac{24}{25}T(12 \text{ in.}) - \frac{3}{25}T(24 \text{ in.}) = 0$$

$$(12 - 11.04)T = 840$$

$$T = 875 \text{ lb}$$

$$+\sum F_y = 0: \frac{24}{25}(875 \text{ lb}) + 875 \text{ lb} + A_y = 0$$


$$A_y = -1120 \text{ lb} \quad A_y = 1120 \text{ lb} \leftarrow$$

$$+\sum F_x = 0: A_x - 280 \text{ lb} - \frac{24}{25}(875 \text{ lb}) = 0$$

$$A_x = 1120 \text{ lb} \quad A_y = 1120 \text{ lb}$$


$$A = 1584 \text{ lb} \angle 45^\circ$$

4.145



GIVEN: $\theta = 30^\circ$.

FIND: REACTIONS AT C, D, AND E.



$$+\sum F_y = 0: E \cos 30^\circ - 20 - 40 = 0$$

$$E = \frac{60 \text{ lb}}{\cos 30^\circ} = 69.28 \text{ lb}$$

$$E = 69.3 \text{ lb} \angle 60^\circ$$

$$+\sum M_D = 0: (20 \text{ lb})(4 \text{ in.}) - (40 \text{ lb})(4 \text{ in.}) - C(3 \text{ in.}) + E \sin 30^\circ(3 \text{ in.}) = 0$$

$$-80 - 3C + 69.28(0.5)(3) = 0$$


$$C = 7.974 \text{ lb} \quad C = 7.97 \text{ lb} \leftarrow$$

$$+\sum F_x = 0: E \sin 30^\circ + C - D = 0$$


$$(69.28 \text{ lb})(0.5) + 7.974 \text{ lb} - D = 0$$

$$D = 42.61 \text{ lb} \quad D = 42.6 \text{ lb} \leftarrow$$

4.146



FIND:
(a) SMALLEST θ FOR EQUILIBRIUM.
(b) CORRESPONDING REACTIONS AT C, D, AND E



FREE-BODY DIAGRAM

$$+\sum F_y = 0: E \cos \theta - 20 - 40 = 0$$

$$E = \frac{60}{\cos \theta}$$

$$+\sum M_D = 0: (20 \text{ lb})(4 \text{ in.}) - (40 \text{ lb})(4 \text{ in.}) - C(3 \text{ in.}) + \left(\frac{60}{\cos \theta} \sin \theta\right)(3 \text{ in.}) = 0$$

$$C = \frac{1}{3}(180 \tan \theta - 60)$$

(a) For $C = 0$, $180 \tan \theta = 60$
 $\tan \theta = \frac{1}{3}$; $\theta = 23.9^\circ$ $\theta = 24.0^\circ \leftarrow$


EQ. (1) $E = 60 / \cos 23.9^\circ = 65.66 \text{ lb}$

$$+\sum F_x = 0: -D + C + E \sin \theta = 0$$

$$D = (65.66) \sin 23.9^\circ = 26.67 \text{ lb}$$


(b) $C = 0$; $D = 26.7 \text{ lb} \leftarrow$; $E = 65.7 \text{ lb} \angle 24.0^\circ \leftarrow$

4.147

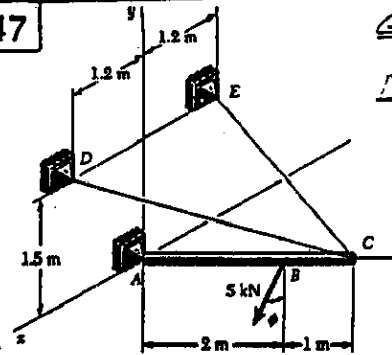

GIVEN: $\theta = 0$

FIND: (a) TENSION IN CD AND CE
(b) REACTIONS AT A.



FREE-BODY DIAGRAM BY SYMMETRY WITH xy PLANE

$$T_{CD} = T_{CE} = T$$

$$\vec{CD} = -3\hat{i} + 1.5\hat{j} + 1.2\hat{k}$$

$$CD = 3.562 \text{ m}$$

$$T = T \frac{\vec{CD}}{CD} = T \frac{-3\hat{i} + 1.5\hat{j} + 1.2\hat{k}}{3.562}$$

$$T_{CE} = T \frac{-3\hat{i} + 1.5\hat{j} - 1.2\hat{k}}{3.562}$$

$$\sum M_A = 0: r_{DA} \times T_{CD} + r_{CA} \times T_{CE} + r_{BA} \times (-5\hat{k}) = 0$$

$$\begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 3 & 0 & 0 \\ 3 & 0 & 0 \end{vmatrix} \frac{T}{3.562} + \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 3 & 0 & 0 \\ 2 & 0 & 0 \end{vmatrix} \frac{T}{3.562} + \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ -3 & 1.5 & 1.2 \\ 0 & -5 & 0 \end{vmatrix} = 0$$

COEFF. OF \hat{k} : $2[3 \times 1.5 \times \frac{T}{3.562}] - 10 = 0$; $T = 3.958 \text{ kN}$


$$\sum F_x = 0: A_x + T_{CD} + T_{CE} - 5 = 0$$

COEFF. OF \hat{i} : $A_x - 2[3.958 \times 3 / 3.562] = 0$; $A_x = 6.67 \text{ kN}$

COEFF. OF \hat{j} : $A_y + 2[3.958 \times 1.5 / 3.562] - 5 = 0$; $A_y = 1.667 \text{ kN}$


(a) $T_{CD} = T_{CE} = 3.96 \text{ kN}$. (b) $A = (6.67 \text{ kN})\hat{i} + (1.667 \text{ kN})\hat{j}$

4.148

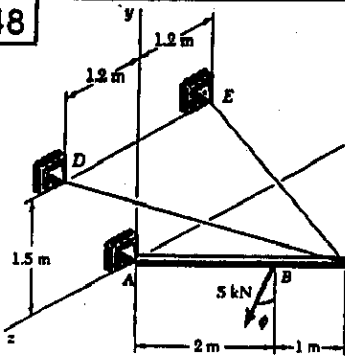

GIVEN: $\phi = 30^\circ$

FIND:
(a) TENSION IN CD AND CE.
(b) REACTION AT A.

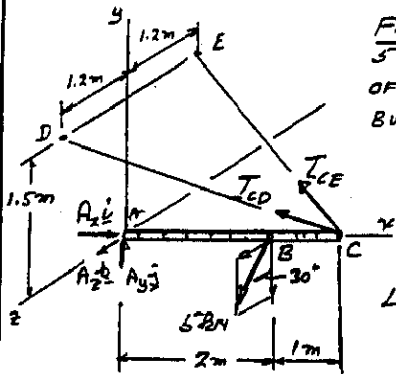

FREE-BODY DIAGRAM
5 UNKNOWN AND 6 EQS. OF EQUILIBRIUM
BUT, EQUIL. MAINTAINED ($\Sigma M_A = 0$)

LOAD AT B,
 $= -(5 \cos 30^\circ)j + (5 \sin 30^\circ)k$
 $= -4.33j + 2.5k$

$\vec{CD} = -3i + 1.5j + 1.2k$ $CD = 3.562m$
 $\frac{T_{CD}}{CD} = \frac{T}{3.562} (-3i + 1.5j + 1.2k)$

SIMILARLY, $T_{CE} = \frac{T}{2.562} (-3i + 1.5j - 1.2k)$

$\Sigma M_A = 0: r_{EA} \times T_{CD} + r_{EA} \times T_{CE} + r_{BA} \times (-4.33j + 2.5k) = 0$

$$\begin{vmatrix} i & j & k \\ 3 & 0 & 0 \\ -3 & 1.5 & 1.2 \end{vmatrix} \frac{T_{CD}}{3.562} + \begin{vmatrix} i & j & k \\ 3 & 0 & 0 \\ -3 & 1.5 & -1.2 \end{vmatrix} \frac{T_{CE}}{3.562} + \begin{vmatrix} i & j & k \\ 2 & 0 & 0 \\ 0 & -4.33 & 2.5 \end{vmatrix} = 0$$

EQUATE COEFFICIENTS OF UNIT VECTORS TO ZERO

(1) $-3.6 \frac{T_{CD}}{3.562} + 3.6 \frac{T_{CE}}{3.562} - 5 = 0$
 $-3.6 T_{CD} + 3.6 T_{CE} - 17.810 = 0$ (1)

(2) $4.5 \frac{T_{CD}}{3.562} + 4.5 \frac{T_{CE}}{3.562} - 8.66 = 0$
 $4.5 T_{CD} + 4.5 T_{CE} = 30.846$ (2)

(2) + 1.25(1): $9 T_{CE} - 53.11 = 0; T_{CE} = 5.901 \text{ kN}$
 EQ (1): $-3.6 T_{CD} + 3.6(5.901) - 17.810 = 0$

$\Sigma F = 0: A_x + T_{CD} + T_{CE} - 4.33j + 2.5k = 0$
 $T_{CD} = 0.954 \text{ kN}$

(3) $A_x + \frac{0.954}{3.562}(-3) + \frac{5.901}{3.562}(-3) = 0; A_x = 5.77 \text{ kN}$

(4) $A_y + \frac{0.954}{3.562}(1.5) + \frac{5.901}{3.562}(1.5) - 4.33 = 0$
 $A_y = 1.443 \text{ kN}$


(5) $A_z + \frac{0.954}{3.562}(1.2) + \frac{5.901}{3.562}(-1.2) + 2.5 = 0$
 $A_z = -0.833 \text{ kN}$

ANSWERS:


(a) $T_{CD} = 0.954 \text{ kN}; T_{CE} = 5.90 \text{ kN}$

(b) $A = (5.77 \text{ kN})i + (1.443 \text{ kN})j - (0.833 \text{ kN})k$

4.149

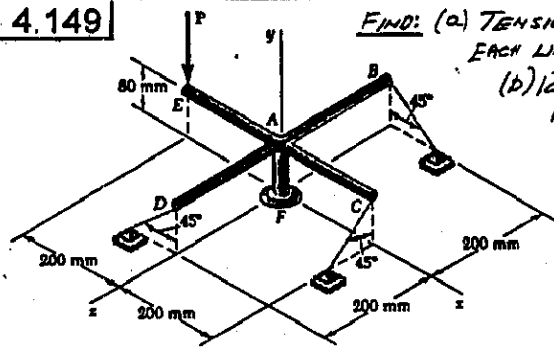

FIND: (a) TENSION IN EACH LINK.
(b) REACTION AT F

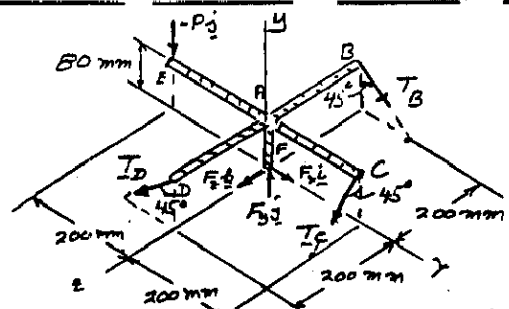

$r_{EF} = -200i + 80j$
 $r_{BF} = 80j - 200k$
 $r_{CF} = 200i + 80j$
 $r_{DF} = 80j + 200k$

$\Sigma M_F = 0: r_{EA} \times T_B + r_{CA} \times T_C + r_{DA} \times T_D + r_{EF} \times (-Pj) = 0$

EQUATE COEFFICIENTS OF UNIT VECTORS TO ZERO AND MULTIPLY EACH EQUATION BY $\sqrt{2}$.

(1) $-200 T_B + 80 T_C + 200 T_D = 0$
 (2) $-200 T_B - 200 T_C - 200 T_D = 0$
 (3) $-80 T_B - 200 T_C + 80 T_D + 200\sqrt{2}P = 0$

(3) - (2): $-160 T_B - 280 T_C + 200\sqrt{2}P = 0$
 (4) $-160 T_B - 280 T_C + 200\sqrt{2}P = 0$
 (5) $-400 T_B - 120 T_C = 0$

(5) - (4): $-240 T_B - 120 T_C = -200\sqrt{2}P$
 $T_B = -\frac{170}{700} T_C = -0.3 T_C$ (6)

(6) - (5): $-160(-0.3 T_C) - 280 T_C + 200\sqrt{2}P = 0$
 $-232 T_C + 200\sqrt{2}P = 0$

$T_C = 1.2191 P$
 $T_B = -0.3(1.2191 P) = -0.36574 P$
 $T_D = -0.8534 P$

(2): $-200(-0.36574 P) - 200(1.2191 P) - 200 T_D = 0$
 $T_D = -0.8534 P$

$\Sigma F = 0: F_x + T_B + T_C + T_D - Pj = 0$


(1) $F_x + (-0.36574 P)/\sqrt{2} - (0.8534 P)/\sqrt{2} = 0$
 $F_x = -0.3448 P$ $F_x = -0.3445 P$

(3) $F_y - (-0.36574 P)/\sqrt{2} - (1.2191 P)/\sqrt{2} - (-0.8534 P)/\sqrt{2} - 200 = 0$
 $F_y = P$ $F_y = P$


(4) $F_z + (1.2191 P)/\sqrt{2} = 0$
 $F_z = -0.8620 P$ $F_z = -0.862 P$

$F = -0.3445 P i + P j - 0.862 P k$

4.150



FIND:
 (a) REACTIONS AT A AND B WHEN $\alpha = 81^\circ$.
 (b) DISTANCE a FOR WHICH REACTION AT A IS HORIZONTAL AND CORRESPONDING REACTIONS AT A AND B.





3-FORCE BODY
 REACTION AT A PASSES THROUGH D WHERE B AND 60-LB LOAD INTERSECT

$AE = \frac{1}{2} EB = \frac{1}{2} (8) = 4 \text{ in.}$
 $EF = BE = 10 - 4 = 6 \text{ in.}$
 $DG = \frac{1}{2} BE = \frac{1}{2} (6) = 3 \text{ in.}$
 $FD = FE - DG = 6 - 3 = 3 \text{ in.}$
 $\tan \gamma = \frac{FD}{AE} = \frac{3}{4}; \gamma = 36.87^\circ$

FORCE TRIANGLE

$A = B = \frac{30 \text{ lb}}{\sin 26.57^\circ} = 67.08 \text{ lb}$
 $A = 67.1 \text{ lb} \angle 26.6^\circ$
 $B = 67.1 \text{ lb} \angle 26.6^\circ$




FOR A HORIZONTAL,
 $\triangle ABF: BF = AF \cos \alpha$
 $\triangle BFG: FG = BF \sin \alpha$
 $a = FG = AF \cos \alpha \sin \alpha$
 $a = (10 \text{ in.}) \cos 26.57^\circ \sin 26.57^\circ; a = 4 \text{ in.}$

FORCE TRIANGLE


$A = 60 / \sin \alpha = 120 \text{ lb}$
 $B = 120 \text{ lb}$
 $B = (60 \text{ lb}) / \sin \alpha = 134.16 \text{ lb} \quad B = 134.16 \text{ lb} \angle 26.6^\circ$

4.151

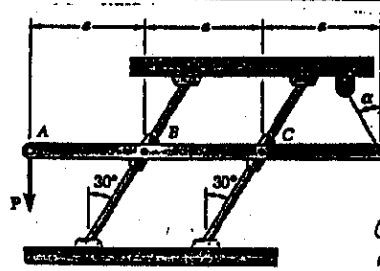

GIVEN:
 $\alpha = 30^\circ$

FIND:
 (a) TENSION IN WIRE.
 (b) REACTIONS AT B AND C.

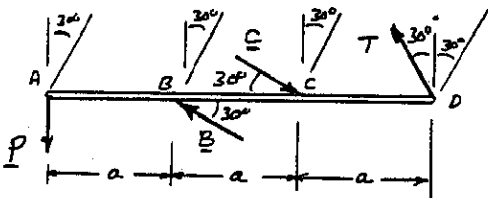


(CONTINUED)

4.151 CONTINUED

$30^\circ \uparrow \Sigma F = 0: -P \cos 30^\circ + T \cos 60^\circ = 0$
 $T = \frac{P \cos 30^\circ}{\cos 60^\circ} = P \frac{\sqrt{3}/2}{1/2} \quad T = \sqrt{3}P$
 $\uparrow \Sigma M_B = 0: Pa - (C \sin 30^\circ)a + T \cos 30^\circ(2a) = 0$
 $Pa - (\frac{1}{2}C)a + \sqrt{3}P(\frac{\sqrt{3}}{2})2a = 0$
 $-\frac{1}{2}C + (1+\sqrt{3})P = 0; C = BP; C = BP \angle 30^\circ$
 $\downarrow \Sigma F = 0: -B \cos 30^\circ + C \cos 30^\circ - T \sin 30^\circ = 0$
 $-B \frac{\sqrt{3}}{2} + BP \frac{\sqrt{3}}{2} - \sqrt{3}P(\frac{1}{2}) = 0; D = 7P; B = 7P \angle 30^\circ$

4.152

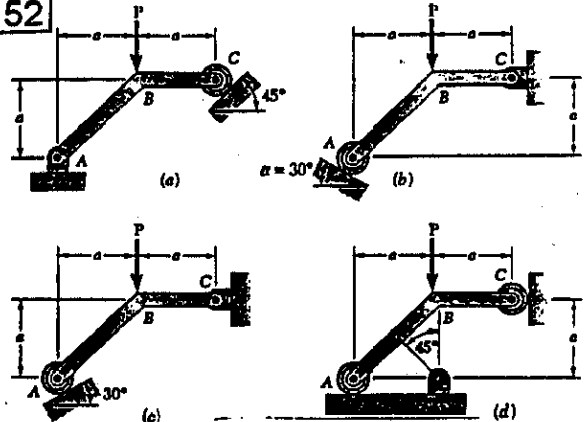

FIND: REACTIONS

(a) $\uparrow \Sigma M = 0: -Pa + (C \sin 45^\circ)2a + (C \cos 45^\circ)a = 0$
 $3 \frac{C}{\sqrt{2}} = P; C = \frac{\sqrt{2}}{3}P$
 $C = 0.471P \angle 45^\circ$
 $\uparrow \Sigma F_x = 0: A_x - (\frac{\sqrt{2}}{3}P) \frac{1}{\sqrt{2}}; A_x = \frac{P}{3}$
 $\uparrow \Sigma F_y = 0: A_y - P + (\frac{\sqrt{2}}{3}P) \frac{1}{\sqrt{2}}; A_y = \frac{2P}{3}$
 $A = 0.745P \angle 63.4^\circ$


(b) $\uparrow \Sigma M_C = 0: Pa - (A \cos 30^\circ)2a + (A \sin 30^\circ)a = 0$
 $A(1.732 - 0.5) = P; A = 1.232P$
 $A = 1.232P \angle 60^\circ$
 $\uparrow \Sigma F_x = 0: (1.232P) \sin 30^\circ + C_x = 0; C_x = 0.616P$
 $\uparrow \Sigma F_y = 0: (1.232P) \cos 30^\circ - P + C_y = 0; C_y = 0.612P$
 $C = 0.627P \angle 61.2^\circ$

(c) $\uparrow \Sigma M_C = 0: Pa - (A \cos 30^\circ)2a + (A \sin 30^\circ)a = 0$
 $A(1.732 + 0.5) = P \quad A = 0.448P$
 $A = 0.448P \angle 60^\circ$
 $\uparrow \Sigma F_x = 0: -(0.448P) \sin 30^\circ + C_x = 0; C_x = 0.224P$
 $\uparrow \Sigma F_y = 0: (0.448P) \cos 30^\circ - P + C_y = 0; C_y = 0.612P$
 $C = 0.652P \angle 69.9^\circ$

(d) **FORCE T EXERTED BY WIRE AND REACTIONS A AND C ALL INTERSECT AT POINT D.**
 $\uparrow \Sigma M_D = 0: Pa = 0$
 EQUILIBRIUM NOT MAINTAINED
 ROD IS IMPROPERLY CONSTRAINED


***4.153**

FOR THE RIGID BODIES OF THE FOLLOWING PROBLEMS, FIND THE VALUE OF a OR α WHICH RESULTS IN IMPROPER CONSTRAINTS.



(a) PROB. 4.77

FREE-BODY DIAGRAM




$$+\uparrow \Sigma M_B = 0:$$

$$P(24-a) - T(24-a) + \frac{7}{25}Ta = 0$$

$$T = \frac{P(24-a)}{24-a - \frac{7}{25}a}$$


T BECOMES ∞ WHEN $24-a - \frac{7}{25}a = 0$

IMPROPER CONSTRAINT: $a = 18.75 \text{ in.}$



(b) PROB. 4.78

FREE-BODY DIAGRAM




$$+\uparrow \Sigma M_B = 0:$$

$$P(160) - T(160) + T(a) = 0$$

$$T = \frac{160P}{160-a}$$

T BECOMES INFINITE WHEN $160-a = 0$

IMPROPER CONSTRAINT: $a = 160 \text{ mm}$

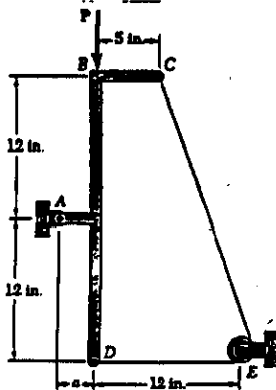


(c) PROB. 4.144

(CONTINUED)

***4.153 CONTINUED**

(c) PROB. 4.144 (CONTINUED)




$$+\uparrow \Sigma M_B = 0:$$

$$-Pa - \frac{7}{25}T(12) - \frac{24}{25}T(a+5) + T(12) = 0$$

$$T = \frac{Pa}{12 - \frac{24}{25}a - \frac{24}{25}a - \frac{120}{25}}$$


$$T = \frac{Pa}{3.84 - \frac{24}{25}a}$$

T BECOMES INFINITE WHEN $3.84 - \frac{24}{25}a = 0$
IMPROPER CONSTRAINT: $a = 4 \text{ in.}$

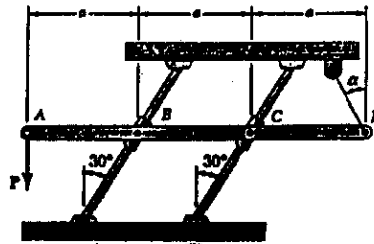

(d) PROB. 4.151

FREE-BODY DIAGRAM




$$+\uparrow \Sigma F = 0: -P \cos 30^\circ + T \cos(\alpha + 30^\circ) = 0$$

$$T = \frac{P \cos 30^\circ}{\cos(\alpha + 30^\circ)}$$


T BECOMES INFINITE WHEN $\cos(\alpha + 30^\circ) = 0$

IMPROPER CONSTRAINT: $\alpha + 30^\circ = 90^\circ$, $\alpha = 60^\circ$



(e) PROB. 4.152

FREE-BODY DIAGRAM




$$+\uparrow \Sigma M_C = 0: Pa + (A \sin \alpha)a - (A \cos \alpha)2a = 0$$

$$A = \frac{Pa}{a(2 \cos \alpha - \sin \alpha)}$$


A BECOMES INFINITE WHEN $2 \cos \alpha - \sin \alpha = 0$
 $\tan \alpha = 2$ $\alpha = 63.43^\circ$

IMPROPER CONSTRAINT: $\alpha = 63.4^\circ$

5.1



GIVEN: PLANE AREA SHOWN
FIND: \bar{X} AND \bar{Y}

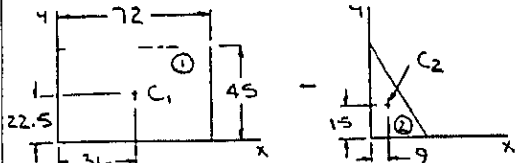

DIMENSIONS IN mm

	A, mm ²	\bar{x} , mm	\bar{y} , mm	$\bar{x}A$, mm ³	$\bar{y}A$, mm ³
1	$72 \times 45 = 3240$	36	22.5	116 640	72 900
2	$-\frac{1}{2} \times 27 \times 45 = -607.5$	9	15	-5467.5	-9112.5
Σ	2632.5			111 172.5	63 787.5

THEN

$$\bar{X} \Sigma A = \Sigma \bar{x}A$$

$$\bar{X}(2632.5) = 111 172.5$$

$$\text{OR } \bar{X} = 42.2 \text{ mm}$$


AND

$$\bar{Y} \Sigma A = \Sigma \bar{y}A$$


$$\bar{Y}(2632.5) = 63 787.5$$

$$\text{OR } \bar{Y} = 24.2 \text{ mm}$$

5.2



GIVEN: PLANE AREA SHOWN
FIND: \bar{X} AND \bar{Y}

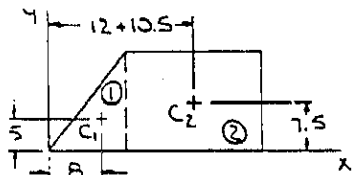

DIMENSIONS IN IN.

	A, in ²	\bar{x} , in.	\bar{y} , in.	$\bar{x}A$, in ³	$\bar{y}A$, in ³
1	$\frac{1}{2} \times 12 \times 15 = 90$	B	5	720	450
2	$21 \times 15 = 315$	22.5	7.5	7087.5	2362.5
Σ	405			7807.5	2812.5

THEN

$$\bar{X} \Sigma A = \Sigma \bar{x}A$$

$$\bar{X}(405) = 7807.5$$

$$\text{OR } \bar{X} = 19.28 \text{ in.}$$


AND

$$\bar{Y} \Sigma A = \Sigma \bar{y}A$$


$$\bar{Y}(405) = 2812.5$$

$$\text{OR } \bar{Y} = 6.94 \text{ in.}$$

5.3



GIVEN: PLANE AREA SHOWN
FIND: \bar{X} AND \bar{Y}

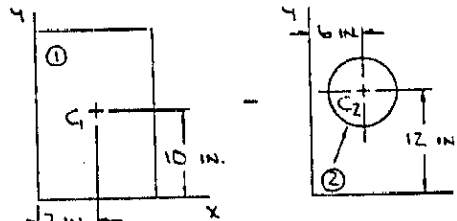

	A, in ²	\bar{x} , in.	\bar{y} , in.	$\bar{x}A$, in ³	$\bar{y}A$, in ³
1	$14 \times 20 = 280$	7	10	1960	2800
2	$-\pi(4)^2 = -16\pi$	6	12	-301.59	-603.19
Σ	229.73			1658.41	2196.8

THEN

$$\bar{X} \Sigma A = \Sigma \bar{x}A$$

$$\bar{X}(229.73) = 1658.41$$

$$\text{OR } \bar{X} = 7.22 \text{ in.}$$


AND

$$\bar{Y} \Sigma A = \Sigma \bar{y}A$$

$$\bar{Y}(229.73) = 2196.8$$


$$\text{OR } \bar{Y} = 9.56 \text{ in.}$$

5.4



GIVEN: PLANE AREA SHOWN
FIND: \bar{X} AND \bar{Y}

FOR THE AREA AS A WHOLE, IT CAN BE CONCLUDED BY OBSERVATION THAT
 $\bar{Y} = \frac{2}{3}(72 \text{ mm})$
OR $\bar{Y} = 48.0 \text{ mm}$



DIMENSIONS IN mm

	A, mm ²	\bar{x} , mm	$\bar{x}A$, mm ³
1	$\frac{1}{2} \times 30 \times 72 = 1080$	20	21600
2	$\frac{1}{2} \times 48 \times 72 = 1728$	46	79 488
Σ	2808		101 088

THEN



$$\bar{X} \Sigma A = \Sigma \bar{x}A$$

$$\bar{X}(2808) = 101 088$$

$$\text{OR } \bar{X} = 36.0 \text{ mm}$$

5.5

GIVEN: PLANE AREA SHOWN
FIND: \bar{X} AND \bar{Y}

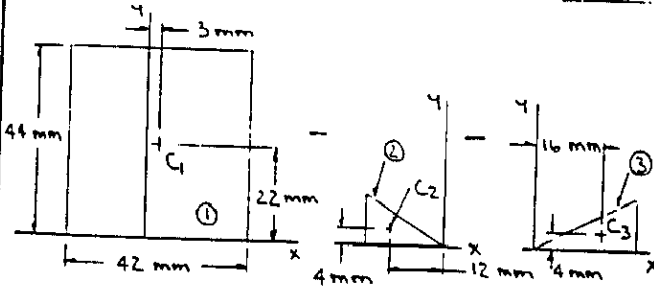



A, mm ²	\bar{x} , mm	\bar{y} , mm	$\bar{x}A$, mm ³	$\bar{y}A$, mm ³
1 $42 \times 44 = 1848$	3	22	5544	40656
2 $-\frac{1}{2} \times 18 \times 12 = -108$	-12	4	1296	-432
3 $-\frac{1}{2} \times 24 \times 12 = -144$	16	4	-2304	-576
Σ 1596			4536	39648

THEN $\bar{X}\Sigma A = \Sigma \bar{x}A$
 $\bar{X}(1596) = 4536$
 OR $\bar{X} = 284$ mm
 AND $\bar{Y}\Sigma A = \Sigma \bar{y}A$
 $\bar{Y}(1596) = 39648$
 OR $\bar{Y} = 248$ mm

5.6

GIVEN: PLANE AREA SHOWN
FIND: \bar{X} AND \bar{Y}

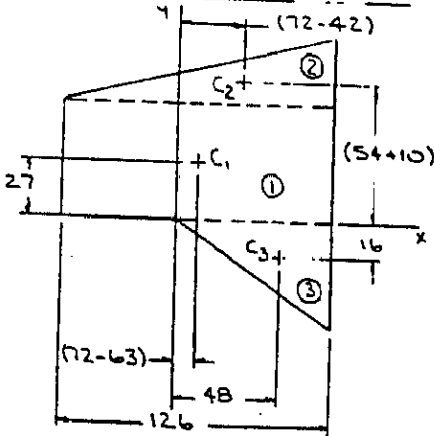

DIMENSIONS IN mm

(CONTINUED)



5.6 CONTINUED

A, mm ²	\bar{x} , mm	\bar{y} , mm	$\bar{x}A$, mm ³	$\bar{y}A$, mm ³
1 $126 \times 54 = 6804$	9	27	61236	183708
2 $\frac{1}{2} \times 126 \times 30 = 1890$	30	64	56700	120960
3 $\frac{1}{2} \times 72 \times 48 = 1728$	48	-16	82944	-27648
Σ 10422			200880	277020

THEN $\bar{X}\Sigma A = \Sigma \bar{x}A$
 $\bar{X}(10422) = 200880$
 OR $\bar{X} = 19.27$ mm
 AND $\bar{Y}\Sigma A = \Sigma \bar{y}A$
 $\bar{Y}(10422) = 277020$
 OR $\bar{Y} = 26.6$ mm

5.7

GIVEN: PLANE AREA SHOWN
FIND: \bar{X} AND \bar{Y}

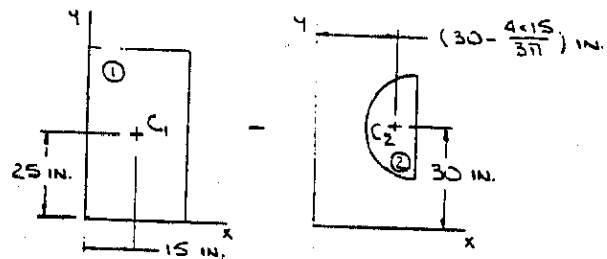



A, in ²	\bar{x} , in.	\bar{y} , in.	$\bar{x}A$, in ³	$\bar{y}A$, in ³
1 $30 \times 50 = 1500$	15	25	22500	37500
2 $-\frac{\pi}{2}(15)^2 = -353.43$	23.634	30	-8353.0	-10602.9
Σ 1146.57			14147.0	26897

THEN $\bar{X}\Sigma A = \Sigma \bar{x}A$
 $\bar{X}(1146.57) = 14147.0$
 OR $\bar{X} = 12.34$ in.
 AND $\bar{Y}\Sigma A = \Sigma \bar{y}A$
 $\bar{Y}(1146.57) = 26897$
 OR $\bar{Y} = 23.5$ in.

5.8


GIVEN: PLANE AREA SHOWN
FIND: \bar{X} AND \bar{Y}

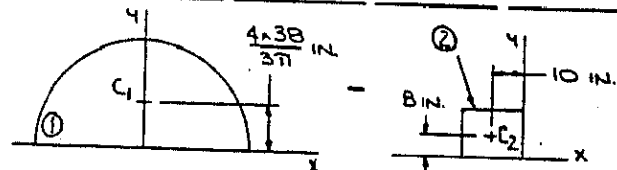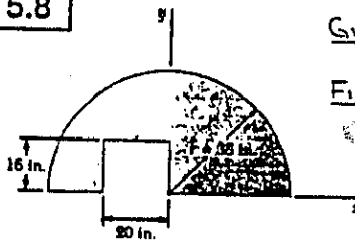

(CONTINUED)

5.8 CONTINUED


	A, IN ²	\bar{x} , IN.	\bar{y} , IN.	$\bar{x}A$, IN ³	$\bar{y}A$, IN ³
1	$\frac{\pi}{2}(38)^2 = 2268.2$	0	16.1277	0	36581
2	$-20 \times 16 = -320$	-10	8	3200	-2560
Σ	1948.23			3200	34021



THEN $\bar{X}\Sigma A = \Sigma \bar{x}A$
 $X(1948.23) = 3200$
 OR $\bar{X} = 1.643$ IN.


AND $\bar{Y}\Sigma A = \Sigma \bar{y}A$
 $Y(1948.23) = 34021$
 OR $Y = 17.46$ IN.

5.9



GIVEN: PLANE AREA SHOWN
 FIND: \bar{X} AND \bar{Y}


FIRST NOTE THAT SYMMETRY IMPLIES $\bar{X} = \bar{Y}$

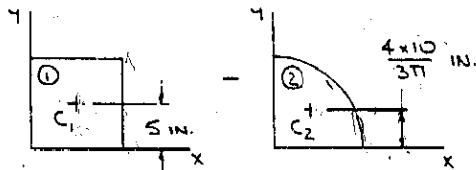

	A, IN ²	\bar{y} , IN.	$\bar{y}A$, IN ³
1	$10 \times 10 = 100$	5	500
2	$-\frac{\pi}{2}(10)^2 = -78.540$	4.2441	-333.33
Σ	21.460		166.67


THEN $\bar{Y}\Sigma A = \Sigma \bar{y}A$
 $Y(21.460) = 166.67$
 OR $\bar{X} = \bar{Y} = 7.77$ IN.

5.10



GIVEN: PLANE AREA SHOWN
 FIND: \bar{X} AND \bar{Y}


FIRST NOTE THAT SYMMETRY IMPLIES $\bar{X} = 0$

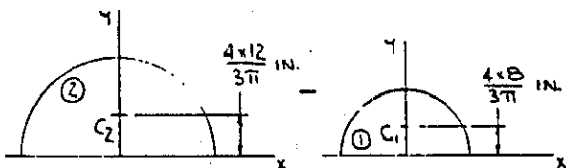

	A, IN ²	\bar{y} , IN.	$\bar{y}A$, IN ³
1	$-\frac{\pi}{2}(8)^2 = -100.531$	3.3953	-341.33
2	$\frac{\pi}{2}(12)^2 = 226.19$	5.0930	1151.99
Σ	125.659		810.66


THEN $\bar{Y}\Sigma A = \Sigma \bar{y}A$
 $Y(125.659) = 810.66$
 OR $\bar{Y} = 6.45$ IN.

5.11



GIVEN: PLANE AREA SHOWN
 FIND: \bar{X} AND \bar{Y}

FIRST NOTE THAT SYMMETRY IMPLIES $\bar{X} = 0$

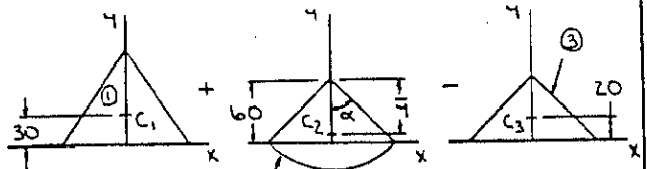


NOTE: $r = 60\sqrt{2}$ mm $\alpha = 45^\circ$
 $\bar{y} = \frac{2r \sin \alpha}{3\alpha} = \frac{2(60\sqrt{2} \text{ mm}) \sin 45^\circ}{3 \times \frac{\pi}{4}}$ (FIG. 5.8A)


	A, mm ²	\bar{y} , mm	$\bar{y}A$, mm ³
1	$\frac{1}{2} \times 120 \times 90 = 5400$	30	162000
2	$\frac{\pi}{2}(60\sqrt{2})^2 = 5654.9$	$60 - 50.930 = 9.07$	51290
3	$-\frac{1}{2} \times 120 \times 60 = -3600$	20	-72000
Σ	7454.9		141290

THEN $\bar{Y}\Sigma A = \Sigma \bar{y}A$
 $Y(7454.9) = 141290$
 OR $\bar{Y} = 18.95$ mm

5.12

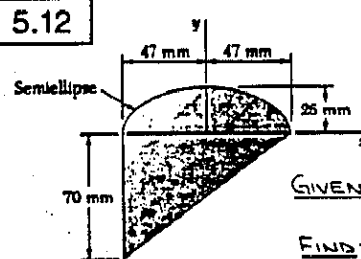

GIVEN: PLANE AREA SHOWN
 FIND: \bar{X} AND \bar{Y}

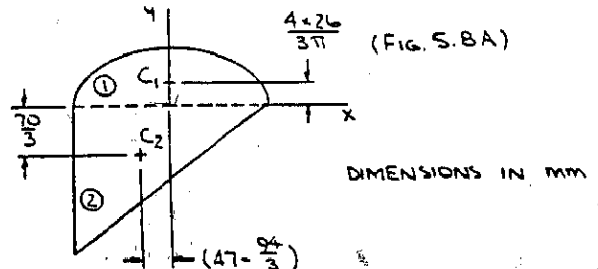

	A, mm ²	\bar{x} , mm	$\bar{x}A$, mm ³	$\bar{y}A$, mm ³
1	$\frac{\pi}{2} \times 47 \times 26 = 1919.51$	0	110347	21181
2	$\frac{1}{2} \times 94 \times 70 = 3290$	-15.6667	-51543	-76766
Σ	5209.5		-51543	-55584

THEN $\bar{X}\Sigma A = \Sigma \bar{x}A$
 $X(5209.5) = -51543$
 OR $\bar{X} = -9.89$ mm

AND $\bar{Y}\Sigma A = \Sigma \bar{y}A$
 $Y(5209.5) = -55584$
 OR $\bar{Y} = -10.67$ mm

5.16 CONTINUED

	A, mm ²	\bar{x} , mm	\bar{y} , mm	$\bar{x}A$, mm ³	$\bar{y}A$, mm ³
1	$\frac{1}{2} \cdot 60 \cdot 150 = 2250$	48	42.857	108 000	94 429
2	$-\frac{1}{2} \cdot 30 \cdot 18.75 = -140.625$	24	5.3571	-3 375	-753.35
Σ	2109.4			104 625	95 675

THEN $\bar{X}\Sigma A = \Sigma \bar{x}A$
 $\bar{X}(2109.4) = 104 625$
 OR $\bar{X} = 49.6 \text{ mm}$ \blacktriangleleft
 AND $\bar{Y}\Sigma A = \Sigma \bar{y}A$
 $\bar{Y}(2109.4) = 95 675$
 OR $\bar{Y} = 45.4 \text{ mm}$ \blacktriangleleft

5.17 and 5.18

5.17

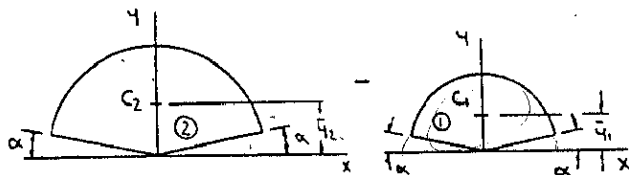
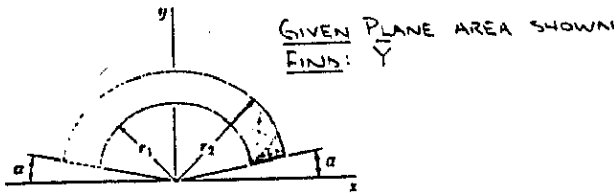


FIG. 5.8A: $\bar{y}_2 = \frac{2}{3} r_2 \frac{\sin(\frac{\pi}{2} - \alpha)}{(\frac{\pi}{2} - \alpha)}$ $A_2 = (\frac{\pi}{2} - \alpha) r_2^2$
 $= \frac{2}{3} r_2 \frac{\cos \alpha}{(\frac{\pi}{2} - \alpha)}$

SIMILARLY... $\bar{y}_1 = \frac{2}{3} r_1 \frac{\cos \alpha}{(\frac{\pi}{2} - \alpha)}$ $A_1 = (\frac{\pi}{2} - \alpha) r_1^2$

THEN.. $\Sigma \bar{y}A = \frac{2}{3} r_2 \frac{\cos \alpha}{(\frac{\pi}{2} - \alpha)} [(\frac{\pi}{2} - \alpha) r_2^2] - \frac{2}{3} r_1 \frac{\cos \alpha}{(\frac{\pi}{2} - \alpha)} [(\frac{\pi}{2} - \alpha) r_1^2]$
 $= \frac{2}{3} (r_2^3 - r_1^3) \cos \alpha$

AND $\Sigma A = (\frac{\pi}{2} - \alpha) r_2^2 - (\frac{\pi}{2} - \alpha) r_1^2$
 $= (\frac{\pi}{2} - \alpha) (r_2^2 - r_1^2)$

NOW $\bar{Y}\Sigma A = \Sigma \bar{y}A$
 $\bar{Y}[(\frac{\pi}{2} - \alpha) (r_2^2 - r_1^2)] = \frac{2}{3} (r_2^3 - r_1^3) \cos \alpha$
 $\bar{Y} = \frac{2}{3} \frac{r_2^3 - r_1^3}{r_2^2 - r_1^2} \frac{\cos \alpha}{\frac{\pi}{2} - \alpha}$ \blacktriangleleft

5.18

GIVEN: PLANE AREA SHOWN
 SHOW: \bar{Y} APPROACHES \bar{Y} OF AN ARC OF RADIUS $\frac{1}{2}(\bar{r}_1 + \bar{r}_2)$ AS $\bar{r}_1 \rightarrow \bar{r}_2$

USING FIG. 5.8B, \bar{Y} OF AN ARC OF RADIUS $\frac{1}{2}(\bar{r}_1 + \bar{r}_2)$ IS.. $\bar{Y} = \frac{1}{2}(\bar{r}_1 + \bar{r}_2) \frac{\sin(\frac{\pi}{2} - \alpha)}{(\frac{\pi}{2} - \alpha)}$
 $= \frac{1}{2}(\bar{r}_1 + \bar{r}_2) \frac{\cos \alpha}{(\frac{\pi}{2} - \alpha)}$ (1)
 (CONTINUED)

5.17 and 5.18 CONTINUED

FROM THE SOLUTION TO PROBLEM 5.17 HAVE
 $\bar{Y} = \frac{2}{3} \frac{r_2^3 - r_1^3}{r_2^2 - r_1^2} \frac{\cos \alpha}{\frac{\pi}{2} - \alpha}$

NOW.. $\frac{r_2^3 - r_1^3}{r_2^2 - r_1^2} = \frac{(r_2 - r_1)(r_2^2 + r_1 r_2 + r_1^2)}{(r_2 - r_1)(r_2 + r_1)}$
 $= \frac{r_2^2 + r_1 r_2 + r_1^2}{r_2 + r_1}$

LET $r_2 = r + \Delta$
 $r_1 = r - \Delta$

THEN $r = \frac{1}{2}(r_1 + r_2)$
 AND $\frac{r_2^3 - r_1^3}{r_2^2 - r_1^2} = \frac{(r + \Delta)^2 + (r + \Delta)(r - \Delta) + (r - \Delta)^2}{(r + \Delta) + (r - \Delta)}$
 $= \frac{3r^2 + \Delta^2}{2r}$

IN THE LIMIT AS $r_1 \rightarrow r_2$, $\Delta \rightarrow 0$. THEN



$\frac{r_2^3 - r_1^3}{r_2^2 - r_1^2} = \frac{3}{2} r$
 $= \frac{3}{2} \times \frac{1}{2} (r_1 + r_2)$

SO THAT $\bar{Y} = \frac{2}{3} \times \frac{3}{4} (r_1 + r_2) \frac{\cos \alpha}{\frac{\pi}{2} - \alpha}$
 OR $\bar{Y} = \frac{1}{2} (r_1 + r_2) \frac{\cos \alpha}{\frac{\pi}{2} - \alpha}$ \blacktriangleleft

WHICH AGREES WITH EQ. (1).

5.19


GIVEN: PLANE AREA SHOWN
 FIND: \bar{Y}

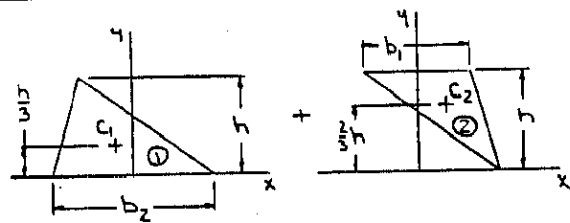


	A	\bar{y}	$\bar{y}A$
1	$\frac{1}{2} b_2 h$	$\frac{1}{3} h$	$\frac{1}{6} b_2 h^2$
2	$\frac{1}{2} b_1 h$	$\frac{1}{2} h$	$\frac{1}{4} b_1 h^2$
Σ	$\frac{1}{2} (b_1 + b_2) h$		$\frac{1}{6} (2b_1 + b_2) h^2$

THEN $\bar{Y}\Sigma A = \Sigma \bar{y}A$
 $\bar{Y}[\frac{1}{2} (b_1 + b_2) h] = \frac{1}{6} (2b_1 + b_2) h^2$
 OR $\bar{Y} = \frac{2b_1 + b_2}{b_1 + b_2} \frac{h}{3}$ \blacktriangleleft

5.20



GIVEN: PLANE AREA SHOWN, $\bar{y} = \frac{3}{4}r$
 FIND: r^2/r

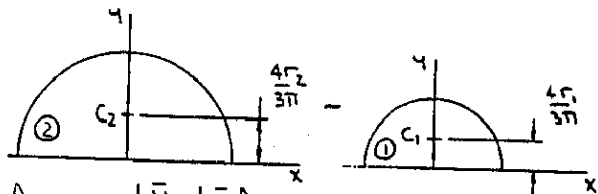

	A	\bar{y}	$\bar{y}A$
1	$\frac{\pi}{2}r_1^2$	$\frac{4r_1}{3\pi}$	$\frac{2}{3}r_1^3$
2	$\frac{\pi}{2}r_2^2$	$\frac{4r_2}{3\pi}$	$\frac{2}{3}r_2^3$
Σ	$\frac{\pi}{2}(r_2^2 - r_1^2)$		$\frac{2}{3}(r_2^3 - r_1^3)$

THEN $\bar{y}\Sigma A = \Sigma \bar{y}A$

OR $\frac{3}{4}r = \frac{\pi}{2}(r_2^2 - r_1^2) = \frac{2}{3}(r_2^3 - r_1^3)$

$\frac{9\pi}{16}[(\frac{r_2}{r})^2 - 1] = (\frac{r_2}{r})^3 - 1$

LET $p = \frac{r_2}{r}$

$\frac{9\pi}{16}[(p+1)(p-1)] = (p-1)(p^2+p+1)$

OR $16p^2 + (16-9\pi)p + (16-9\pi) = 0$

THEN $p = \frac{-(16-9\pi) \pm \sqrt{(16-9\pi)^2 - 4(16)(16-9\pi)}}{2(16)}$


OR TAKING THE POSITIVE ROOT... $p = 1.340$

5.21 CONTINUED

THEN $\bar{x}\Sigma A = \Sigma \bar{x}A$
 $\bar{x}(\frac{\pi}{6}ab) = a^2b/12$
 OR $\bar{x} = \frac{1}{2}a$
 NOW $\bar{x} = \bar{y} \Rightarrow \frac{1}{2}a = \frac{2}{3}b$

$\bar{y}\Sigma A = \Sigma \bar{y}A$
 $\bar{y}(\frac{\pi}{6}ab) = ab^2/15$
 OR $\bar{y} = \frac{2}{3}b$
 OR $\frac{a}{b} = \frac{4}{3}$

5.22

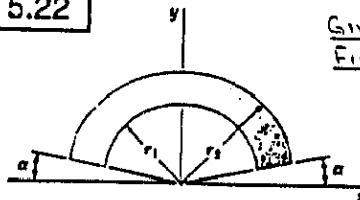

GIVEN: $\alpha = 60^\circ$
 FIND: r^2/r , IF $\bar{y} = r$

FROM THE SOLUTION TO PROBLEM 5.17 HAVE

$\bar{y} = \frac{2}{3} \frac{r^3 - r_1^3}{r^2 - r_1^2} \frac{\cos \alpha}{\frac{\pi}{2} - \alpha}$

WHEN $\bar{y} = r$ AND $\alpha = 60^\circ$
 $r = \frac{2}{3} \frac{r^3 [(\frac{r_1}{r})^3 - 1] \cos \frac{\pi}{6}}{r^2 [(\frac{r_1}{r})^2 - 1] \frac{\pi}{2} - \frac{\pi}{6}}$

$1 = \frac{2}{\pi} \frac{p^3 - 1}{p^2 - 1}$ WHERE $p = \frac{r_1}{r}$


THEN $\frac{\pi}{2} = \frac{(p-1)(p^2+p+1)}{(p+1)(p-1)}$

OR $2p^2 + (2-\pi)p + (2-\pi) = 0$


THEN $p = \frac{-(2-\pi) \pm \sqrt{(2-\pi)^2 - 4(2)(2-\pi)}}{2(2)}$

OR TAKING THE POSITIVE ROOT... $\frac{r_1}{r} = 1.093$

5.21




GIVEN: PLANE AREA SHOWN, $\bar{x} = \bar{y}$
 FIND: a/b

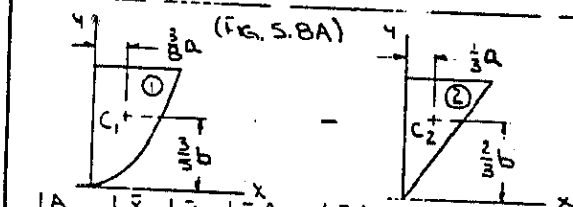


	A	\bar{x}	\bar{y}	$\bar{x}A$	$\bar{y}A$
1	$\frac{2}{3}ab$	$\frac{2}{3}a$	$\frac{2}{3}b$	$\frac{2}{3}ab$	$\frac{2}{3}ab$
2	$\frac{2}{3}ab$	$\frac{1}{3}a$	$\frac{1}{3}b$	$\frac{1}{9}ab$	$\frac{1}{9}ab$
Σ	$\frac{4}{3}ab$			$\frac{2}{3}ab$	$\frac{2}{3}ab$

(CONTINUED)

5.23

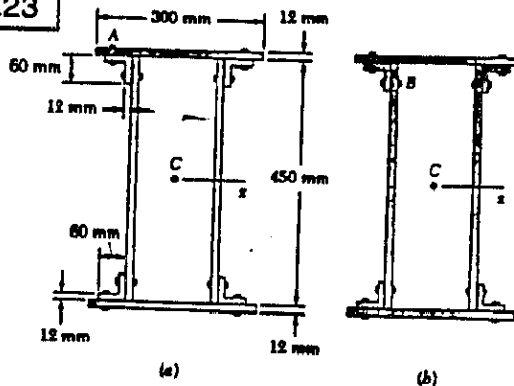

GIVEN: $F_A \propto (Q_x)_A$, $F_B \propto (Q_x)_B$, $F_A = 280$ N
 FIND: F_B

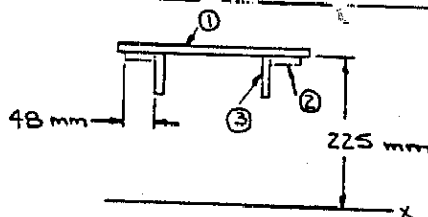

FROM THE PROBLEM STATEMENT, $F \propto Q_x$
 SO THAT $\frac{F_A}{(Q_x)_A} = \frac{F_B}{(Q_x)_B}$ (CONTINUED)

5.23 CONTINUED

OR $F_B = \frac{(Q_x)_B}{(Q_x)_A} F_A$


Now.. $Q_x = \sum \bar{y}A$

THEN $(Q_x)_A = [(225+6)mm](300 \times 12)mm^2 = 831.6 \times 10^3 mm^3$


AND $(Q_x)_B = (Q_x)_A + 2[(225-6)mm](48 \times 12)mm^2 + 2[(225-30)mm](60 \times 12)mm^2 = 1364.688 \times 10^3 mm^3$

FINALLY.. $F_B = \frac{1364.688 \times 10^3 mm^3}{831.6 \times 10^3 mm^3} \times 280 N$
OR $F_B = 459 N$

5.24



GIVEN: PLANE AREA SHOWN
FIND: $(Q_x)_1, (Q_x)_2$
EXPLAIN RESULTS

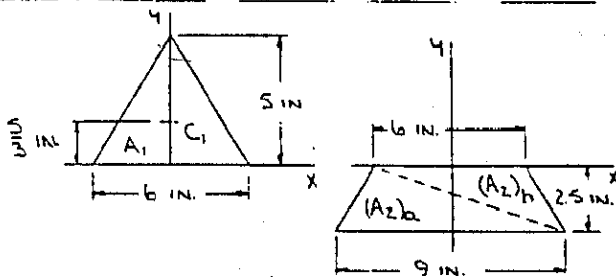


HAVE $Q_x = \sum \bar{y}A$
THEN $(Q_x)_1 = (\frac{5}{3} in)(\frac{1}{2} \times 6 \times 5)in^2$
 $(Q_x)_1 = 25 in^3$

AND $(Q_x)_2 = (-\frac{2}{3} \times 2.5 in)(\frac{1}{2} \times 9 \times 2.5)in^2 + (-\frac{1}{3} \times 2.5 in)(\frac{1}{2} \times 6 \times 2.5)in^2$
 $(Q_x)_2 = -25 in^3$


Now.. $Q_x = (Q_x)_1 + (Q_x)_2 = 0$
THIS RESULT IS EXPECTED SINCE X IS A CENTROIDAL AXIS (THUS $\bar{Y} = 0$)
AND $Q_x = \sum \bar{y}A = \bar{Y} \sum A$ ($\bar{Y} = 0 \Rightarrow Q_x = 0$)

5.25

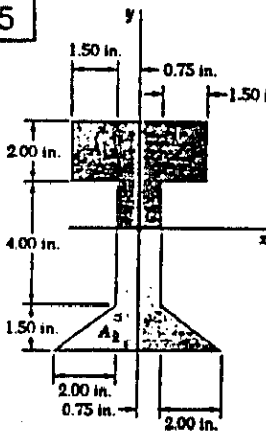

GIVEN: PLANE AREA SHOWN
FIND: $(Q_x)_1, (Q_x)_2$
EXPLAIN RESULTS

5.25 CONTINUED



FIRST DETERMINE THE LOCATION OF THE CENTROID C. HAVE..

	A, IN ²	\bar{y} , IN.	$\bar{y}A$, IN ³
I	$2(\frac{1}{2} \times 2 \times 1.5) = 3$	0.5	1.5
II	$1.5 \times 5.5 = 8.25$	2.75	22.6875
III	$4.5 \times 2 = 9$	6.5	58.5
Σ	20.25		82.6875


THEN $\bar{Y} \Sigma A = \Sigma \bar{y}A$
 $\bar{Y}(20.25) = 82.6875$
OR $\bar{Y} = 4.0833 in.$

Now $Q_x = \sum \bar{y}A$
THEN $(Q_x)_1 = [\frac{1}{2}(5.5 - 4.0833)in.][(1.5)(5.5 - 4.0833)]in^2 + [(6.5 - 4.0833)in.][(4.5)(2)]in^2$
OR $(Q_x)_1 = 23.3 in^3$


AND $(Q_x)_2 = -[\frac{1}{2}(4.0833 in.)][(1.5)(4.0833)]in^2 - [(4.0833 - 0.5)in.][2](\frac{1}{2} \times 2 \times 1.5)in^2$
OR $(Q_x)_2 = -23.3 in^3$

Now.. $Q_x = (Q_x)_1 + (Q_x)_2 = 0$
THIS RESULT IS EXPECTED SINCE X IS A CENTROIDAL AXIS (THUS $\bar{Y} = 0$)
AND $Q_x = \sum \bar{y}A = \bar{Y} \Sigma A$ ($\bar{Y} = 0 \Rightarrow Q_x = 0$)

5.26

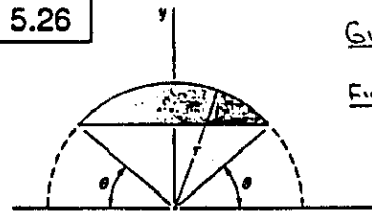

GIVEN: PLANE AREA SHOWN
FIND: (a) Q_x
(b) θ AND Q_x FOR THE MAXIMUM VALUE OF Q_x

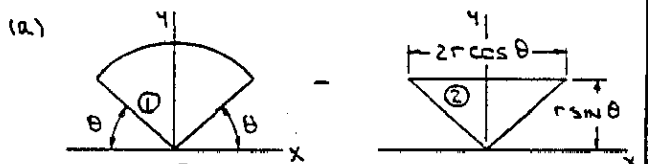


HAVE $Q_x = \sum \bar{y}A$ AND USING FIG 5.8.A ...
 $Q_x = (\frac{2}{3}r \frac{\sin(\pi/2 - \theta)}{\pi/2 - \theta})[(\frac{\pi}{2} - \theta)r^2] - (\frac{2}{3}r \sin \theta)(\frac{1}{2} \times 2r \cos \theta \times r \sin \theta)$
 $= \frac{2}{3}r^3(\cos \theta - \cos \theta \sin^2 \theta)$

OR $Q_x = \frac{2}{3}r^3 \cos^3 \theta$
(b) BY OBSERVATION, Q_x IS MAXIMUM FOR $\theta = 0$
AND THEN $(Q_x)_{max} = \frac{2}{3}r^3$

(CONTINUED)


6	111530	1174.581	0	24.142	0	236.000
Σ	227.38			-370		344.1

5.27



GIVEN: WIRE HAVING THE SHAPE OF THE PERIMETER OF THE PLANE AREA SHOWN
FIND: \bar{X} AND \bar{Y}


FIRST NOTE THAT BECAUSE THE WIRE IS HOMOGENEOUS, ITS CENTER OF GRAVITY WILL COINCIDE WITH THE CENTROID OF THE CORRESPONDING LINE.



	L, mm	\bar{x} , mm	\bar{y} , mm	$\bar{x}L$, mm ²	$\bar{y}L$, mm ²
1	45	49.5	0	2227.5	0
2	45	72	22.5	3240	1012.5
3	72	36	45	2592	3240
4	$\sqrt{27^2 + 45^2} = 52.479$	13.5	22.5	708.47	1180.78
Σ	214.479			8768.0	5433.3


THEN $\bar{X}\Sigma L = \Sigma \bar{x}L$
 $\bar{X}(214.479) = 8768.0$
 OR $\bar{X} = 40.9$ mm \blacktriangleleft
 AND $\bar{Y}\Sigma L = \Sigma \bar{y}L$
 $\bar{Y}(214.479) = 5433.3$
 OR $\bar{Y} = 25.3$ mm \blacktriangleleft

5.29



GIVEN: WIRE HAVING THE SHAPE OF THE PERIMETER OF THE PLANE AREA SHOWN
FIND: \bar{X} AND \bar{Y}


FIRST NOTE THAT BECAUSE THE WIRE IS HOMOGENEOUS, ITS CENTER OF GRAVITY WILL COINCIDE WITH THE CENTROID OF THE CORRESPONDING LINE.



	L, mm	\bar{x} , mm	\bar{y} , mm	$\bar{x}L$, mm ²	$\bar{y}L$, mm ²
1	$\sqrt{30^2 + 72^2} = 78$	15	36	1170	2808
2	$\sqrt{48^2 + 72^2} = 86.533$	54	36	4722.8	3115.2
3	78	39	72	3042	5616
Σ	242.53			8884.8	11539.2


THEN $\bar{X}\Sigma L = \Sigma \bar{x}L$
 $\bar{X}(242.53) = 8884.8$
 OR $\bar{X} = 36.6$ mm \blacktriangleleft
 AND $\bar{Y}\Sigma L = \Sigma \bar{y}L$
 $\bar{Y}(242.53) = 11539.2$
 OR $\bar{Y} = 47.6$ mm \blacktriangleleft

5.28



GIVEN: WIRE HAVING THE SHAPE OF THE PERIMETER OF THE PLANE AREA SHOWN
FIND: \bar{X} AND \bar{Y}


FIRST NOTE THAT BECAUSE THE WIRE IS HOMOGENEOUS, ITS CENTER OF GRAVITY WILL COINCIDE WITH THE CENTROID OF THE CORRESPONDING LINE.

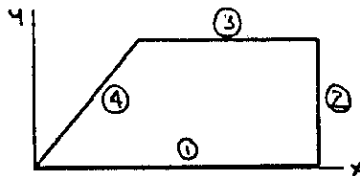

	L, IN.	\bar{x} , IN.	\bar{y} , IN.	$\bar{x}L$, IN ²	$\bar{y}L$, IN ²
1	33	16.5	0	544.5	0
2	15	33	7.5	495	112.5
3	21	22.5	15	472.5	315
4	$\sqrt{12^2 + 15^2} = 19.2093$	6	7.5	115.256	144.070
Σ	88.209			1627.26	571.57


THEN $\bar{X}\Sigma L = \Sigma \bar{x}L$
 $\bar{X}(88.209) = 1627.26$
 OR $\bar{X} = 18.45$ IN. \blacktriangleleft
 AND $\bar{Y}\Sigma L = \Sigma \bar{y}L$
 $\bar{Y}(88.209) = 571.57$
 OR $\bar{Y} = 6.48$ IN. \blacktriangleleft

5.30

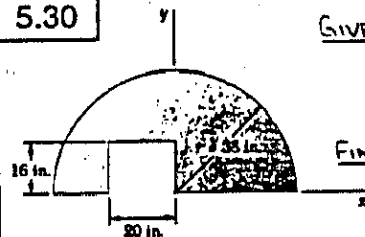

GIVEN: WIRE HAVING THE SHAPE OF THE PERIMETER OF THE PLANE AREA SHOWN
FIND: \bar{X} AND \bar{Y}

FIRST NOTE THAT BECAUSE THE WIRE IS HOMOGENEOUS, ITS CENTER OF GRAVITY WILL COINCIDE WITH THE CENTROID OF THE CORRESPONDING LINE.

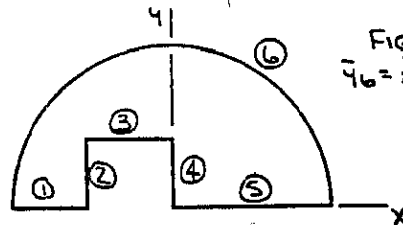


	L, IN.	\bar{x} , IN.	\bar{y} , IN.	$\bar{x}L$, IN ²	$\bar{y}L$, IN ²
1	16	-29	0	-522	0
2	16	-20	8	-320	128
3	20	-10	16	-200	320
4	16	0	8	0	128
5	38	19	0	722	0
6	$\pi(38) = 119.381$	0	24.192	0	2888.1
Σ	227.38			-320	3464.1

FIG. 5.8A
 $\bar{y}_6 = \frac{2}{\pi}(38 \text{ IN.})$

5.30 CONTINUED


THEN $\bar{X}\Sigma L = \Sigma \bar{x}L$
 $\bar{X}(227.38) = -320$
 OR $\bar{X} = -1.407 \text{ IN.}$
 AND $\bar{Y}\Sigma L = \Sigma \bar{y}L$
 $\bar{Y}(227.38) = 3464.1$
 OR $\bar{Y} = 15.23 \text{ IN.}$

5.31



GIVEN: MASS/LENGTH $m' = 4.73 \text{ kg/m}$
 FIND: (a) T_{BA}
 (b) REACTION C AT PIN C


FIRST NOTE THAT BECAUSE THE FRAME IS FABRICATED FROM UNIFORM BAR STOCK, ITS CENTER OF GRAVITY WILL COINCIDE WITH THE CENTROIDS OF THE CORRESPONDING LINE.

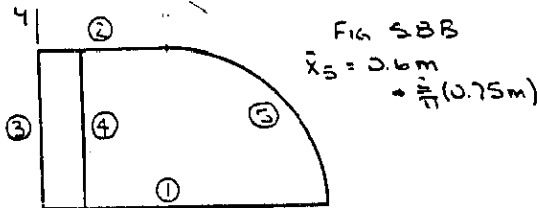

	L, m	\bar{x} , m	$\bar{x}L$, m ³
1	1.35	0.675	0.91125
2	0.6	0.3	0.18
3	0.75	0	0
4	0.75	0.2	0.15
5	$\frac{2}{\pi}(0.75) = 1.17810$	1.07746	1.26936
Σ	4.62810		2.5106

THEN $\bar{X}\Sigma L = \Sigma \bar{x}L$
 $\bar{X}(4.62810) = 2.5106$
 OR $\bar{X} = 0.54247 \text{ m}$

THE FREE-BODY DIAGRAM OF THE FRAME IS THEN...



WHERE $W = (m'\Sigma L)g$
 $= 4.73 \text{ kg/m} \times 4.62810 \text{ m} \times 9.81 \frac{\text{m}}{\text{s}^2}$
 $= 214.75 \text{ N}$


EQUILIBRIUM THEN REQUIRES... (CONTINUED)

5.31 CONTINUED

(a) $\Sigma M_C = 0: (1.55 \text{ m})(\frac{2}{3}T_{BA}) - (0.54247 \text{ m})(214.75 \text{ N}) = 0$
 OR $T_{BA} = 125.264 \text{ N}$
 OR $T_{BA} = 125.3 \text{ N}$


(b) $\Sigma F_x = 0: C_x - \frac{2}{3}(125.264 \text{ N}) = 0$
 OR $C_x = 75.158 \text{ N}$
 $\Sigma F_y = 0: C_y + \frac{4}{3}(125.264 \text{ N}) - (214.75 \text{ N}) = 0$
 OR $C_y = 114.539 \text{ N}$
 THEN... $C = 137.0 \text{ N} \angle 56.7^\circ$

5.32




GIVEN: HOMOGENEOUS WIRE
 FIND: θ FOR EQUILIBRIUM

FIRST NOTE THAT FOR EQUILIBRIUM, THE CENTER OF GRAVITY OF THE WIRE MUST LIE ON A VERTICAL LINE THROUGH A. FURTHER, BECAUSE THE WIRE IS HOMOGENEOUS, ITS CENTER OF GRAVITY WILL COINCIDE WITH THE CENTROIDS OF THE CORRESPONDING LINE. THUS,

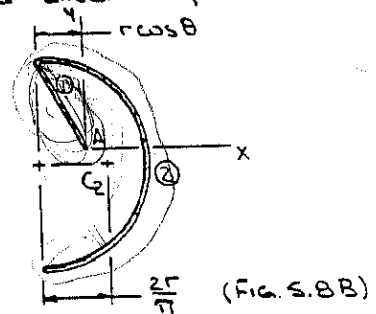


$\bar{X} = 0$
 SO THAT $\Sigma \bar{x}L = 0$
 THEN... $(-\frac{1}{2}r \cos \theta)(\pi r) + (\frac{2r}{\pi} - r \cos \theta)(\pi r) = 0$
 OR $\cos \theta = \frac{4}{1+2\pi}$
 $= 0.54921$
 OR $\theta = 56.7^\circ$

5.33




GIVEN: UNIFORM TUBING, $t = 2$ m, BCD IS HORIZONTAL
FIND: d

FIRST NOTE THAT FOR EQUILIBRIUM, THE CENTER OF GRAVITY OF THE COMPONENT MUST LIE ON A VERTICAL LINE THROUGH C. FURTHER, BECAUSE THE TUBING IS UNIFORM, THE CENTER OF GRAVITY OF THE COMPONENT WILL COINCIDE WITH THE CENTROID OF THE CORRESPONDING LINE. THUS,



SO THAT $\sum \bar{x}L = 0$
 THEN $-(d - \frac{0.75}{2} \cos 55^\circ)m = (0.75m) + (0.75 - d)m + (1.5m) + [(1.5 - d)m - (\frac{1}{2} + 2m \cos 55^\circ)](2m) = 0$
 OR $(0.75 + 1.5 + 2)d = [\frac{1}{2}(0.75)^2 - 2] \cos 55^\circ + (0.75)(1.5) + 3$
 OR $d = 0.739$ m

5.34




GIVEN: UNIFORM TUBING, $d = 0.5$ m, DE IS HORIZONTAL
FIND: l

FIRST NOTE THAT FOR EQUILIBRIUM, THE CENTER OF GRAVITY OF THE COMPONENT MUST LIE ON A VERTICAL LINE THROUGH C. FURTHER, BECAUSE THE TUBING IS UNIFORM, THE CENTER OF GRAVITY OF THE COMPONENT WILL COINCIDE WITH THE CENTROID OF THE CORRESPONDING LINE. THUS,

(CONTINUED)

5.34 CONTINUED





SO THAT $\sum \bar{x}L = 0$
 OR $-(\frac{0.75}{2} \sin 20^\circ + 0.5 \sin 35^\circ)m = (0.75m) + (0.25m \sin 35^\circ) + (1.5m) + (1.0 \sin 35^\circ - \frac{1}{2})m = 0$
 OR $-(\bar{x}L)_{AB} - (\bar{x}L)_{BC} - (\bar{x}L)_{DE} = 0$

THIS EQUATION IMPLIES THAT THE CENTER OF GRAVITY OF DE MUST BE TO THE RIGHT OF C. THEN..

$l^2 - 1.14715l + 0.192386 = 0$
 OR $l = \frac{1.14715 \pm \sqrt{(-1.14715)^2 - 4(0.192386)}}{2}$
 OR $l = 0.204$ m AND $l = 0.943$ m
 NOTE THAT $\sin 35^\circ - \frac{1}{2} > 0$ FOR BOTH VALUES OF l SO BOTH VALUES ARE ACCEPTABLE.

5.35 and 5.36

GIVEN: PLANE AREA SHOWN

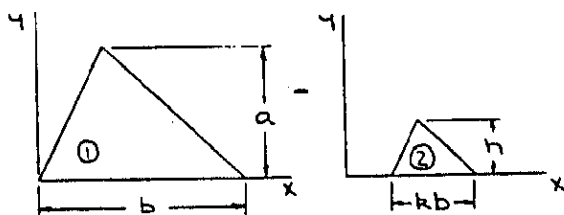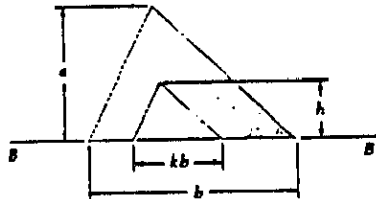

	A	\bar{y}	$\bar{y}A$
1	$\frac{1}{2}ba$	$\frac{3}{4}a$	$\frac{3}{4}a^2b$
2	$-\frac{1}{2}(kb)h$	$\frac{3}{4}h$	$-\frac{3}{4}krbh$
Σ	$\frac{1}{2}(a - kh)$		$\frac{3}{4}(a^2 - kh^2)$

THEN $\sum A = \sum \bar{y}A$
 $\bar{y}[\frac{1}{2}(a - kh)] = \frac{3}{4}(a^2 - kh^2)$
 OR $\bar{y} = \frac{a^2 - kh^2}{3(a - kh)}$ (1)

AND $\frac{d\bar{y}}{dh} = \frac{1}{3} \frac{-2kh(a - kh) - (a^2 - kh^2)(-k)}{(a - kh)^2} = 0$
 OR $2h(a - kh) - a^2 + kh^2 = 0$ (2)

5.35 FIND: h SO THAT \bar{y} IS MAXIMUM
 (a) $k = 0.10$
 (b) $k = 0.80$

(CONTINUED)

5.35 and 5.36 CONTINUED

SIMPLIFYING EQ. (2) YIELDS...

$$kh^2 - 2ah + a^2 = 0$$

THEN
$$h = \frac{2a \pm \sqrt{(-2a)^2 - 4(k)(a^2)}}{2k}$$

$$= \frac{a}{k} [1 \pm \sqrt{1-k}]$$

NOTE THAT ONLY THE NEGATIVE ROOT IS ACCEPTABLE SINCE $h < a$. THEN...

(a) $k = 0.10$

$$h = \frac{a}{0.10} [1 - \sqrt{1-0.10}]$$

OR $h = 0.513a$ ◀

(b) $k = 0.80$

$$h = \frac{a}{0.80} [1 - \sqrt{1-0.80}]$$

OR $h = 0.691a$ ◀

5.36 SHOW: $\bar{Y} = \frac{2}{3}h$ FOR THE VALUE OF h WHICH MAXIMIZES \bar{Y}

REARRANGING EQ. (2) (WHICH DERIVES THE VALUE OF h WHICH MAXIMIZES \bar{Y}) YIELDS


$$a^2 - kh^2 = 2h(a - kh)$$

THEN SUBSTITUTING INTO EQ. (1) (WHICH DERIVES \bar{Y})...

$$\bar{Y} = \frac{1}{3(a - kh)} \cdot 2h(a - kh)$$

OR $\bar{Y} = \frac{2}{3}h$ ◀


5.37 and 5.38



GIVEN: PLANE AREA

SHOWN
FIND \bar{X} (5.37) AND \bar{Y} (5.38) USING APPROXIMATE MEANS

THE AREA IS FIRST DIVIDED INTO TWELVE VERTICAL STRIPS, EACH 10 MM WIDE, AND THEN THE AREA AND THE LOCATION OF THE CENTROID ARE APPROXIMATED FOR EACH STRIP. A 10x10-MM GRID IS USED TO FACILITATE APPROXIMATING THE VALUES.



(CONTINUED)

5.37 and 5.38 CONTINUED

STRIP	A, mm ²	\bar{x} , mm	\bar{y} , mm	$\bar{x}A$, mm ³	$\bar{y}A$, mm ³
1	15	7	1	105	15
2	65	16	3	1040	195
3	150	26	7	3900	1050
4	250	36	14	9000	3500
5	400	47	21	18800	8400
6	650	57	33	37050	21450
7	700	63	36	44100	25200
8	520	74	27	38480	14040
9	390	83	18	32370	7020
10	295	94	15	27750	4425
11	240	104	12	24960	2880
12	210	113	11	23730	2310
Σ	3885			261265	90485

5.37

HAVE...

$$\bar{X}\Sigma A = \Sigma \bar{x}A$$

$$\bar{X}(3885) = 261265$$

OR $\bar{X} = 67.2$ mm ◀

5.38


HAVE...

$$\bar{Y}\Sigma A = \Sigma \bar{y}A$$

$$\bar{Y}(3885) = 90485$$

OR $\bar{Y} = 23.3$ mm ◀

5.39



GIVEN: PLANE AREA

SHOWN,
 $\bar{x} = 5a/\ln 6$

FIND: \bar{x} USING APPROXIMATE MEANS BASED ON RECTANGLES bcc'b'

HAVE $y = \frac{h}{a}x^2$
THEN AT $x=a$, $y=h$: $h = \frac{ka}{a}$ OR $k = ah$
SO THAT $y = \frac{ah}{a}x^2$


RECTANGLE	x_c	y_c	A	\bar{x}	$\bar{x}A$
1	2a	h/2	ah/2	1.5a	0.75a ² h
2	3a	h/3	ah/3	2.5a	0.833a ² h
3	4a	h/4	ah/4	3.5a	0.875a ² h
4	5a	h/5	ah/5	4.5a	0.9a ² h
5	6a	h/6	ah/6	5.5a	0.917a ² h
Σ			1.45ah		4.275a ² h

THEN $\bar{X}\Sigma A = \Sigma \bar{x}A$
 $\bar{X}(1.45ah) = 4.275a^2h$
 OR $\bar{X} = 2.9483a$
 OR $\bar{X} = 2.95a$ ◀

$$\% \text{ ERROR} = \frac{\left| \frac{5a}{\ln 6} - 2.9483a \right|}{\frac{5a}{\ln 6}} = 100\%$$

OR $\% \text{ ERROR} = 5.65\%$ ◀

5.40



GIVEN: PLANE AREA

SHOWN,
 $\bar{x} = 5a/\ln 6$ FIND: \bar{x} USING
APPROXIMATE
MEANS BASED
ON RECTANGLES
Ddd'b'

HAVE $y = \frac{h}{x}$
THEN AT $x=a$, $y=h$: $h = \frac{h}{a}$
SO THAT $y = \frac{ah}{x}$

RECTANGLE	x_{AV}	y_{AV}	A	\bar{x}	$\bar{x}A$
1	1.5a	h/1.5	ah/1.5	1.5a	a ² h
2	2.5a	h/2.5	ah/2.5	2.5a	a ² h
3	3.5a	h/3.5	ah/3.5	3.5a	a ² h
4	4.5a	h/4.5	ah/4.5	4.5a	a ² h
5	5.5a	h/5.5	ah/5.5	5.5a	a ² h
Σ			1.75642ah		5a ² h

THEN: $\bar{x}\Sigma A = \Sigma \bar{x}A$
 $\bar{x}(1.75642ah) = 5a^2h$
OR $\bar{x} = 2.8467a$
OR $\bar{x} = 2.85a$


% ERROR = $\frac{5a - 2.8467a}{5a} \times 100\%$
OR % ERROR = 2.01%

5.41 CONTINUED

$$\bar{y}A = \int \bar{y}_{EL} dA: \bar{y}(\frac{1}{2}ah) = \frac{1}{3}ah^2$$


$$\bar{y} = \frac{2}{3}h$$

5.42



GIVEN: PLANE AREA

SHOWN

FIND: \bar{x} AND \bar{y}
USING DIRECT
INTEGRATION

AT $x=a$, $y=h$: $h = ka^2$
OR $k = \frac{h}{a^2}$


THEN $x = \sqrt[2]{\frac{h}{k}} y^{1/2}$
NOW.. $dA = x dy$
 $= \frac{h^{1/2}}{k^{1/2}} y^{1/2} dy$
 $\bar{x}_{EL} = \frac{2}{3}x = \frac{1}{3} \frac{h^{1/2}}{k^{1/2}} y^{1/2}$

THEN.. $A = \int dA = \int_0^h \frac{h^{1/2}}{k^{1/2}} y^{1/2} dy = \frac{2}{3} \frac{h^{1/2}}{k^{1/2}} [y^{3/2}]_0^h = \frac{2}{3} ah$
AND.. $\int \bar{x}_{EL} dA = \int_0^h \frac{1}{3} \frac{h^{1/2}}{k^{1/2}} y^{1/2} \left[\frac{h^{1/2}}{k^{1/2}} y^{1/2} dy \right] = \frac{1}{3} \frac{h}{k} \int_0^h y dy = \frac{1}{6} ah^2$
 $\bar{x}A = \int \bar{x}_{EL} dA: \bar{x}(\frac{2}{3}ah) = \frac{1}{6} ah^2$
 $\bar{y}A = \int \bar{y}_{EL} dA: \bar{y}(\frac{2}{3}ah) = \frac{1}{3} ah^2$

$$\bar{x} = \frac{1}{4}a$$


$$\bar{y} = \frac{2}{3}h$$

5.41



GIVEN: PLANE AREA

SHOWN

FIND: \bar{x} AND \bar{y}
USING DIRECT
INTEGRATION


HAVE.. $y = \frac{h}{a}x$
AND $dA = (h-y)dx$
 $= h(1 - \frac{x}{a})dx$
 $\bar{x}_{EL} = x$
 $\bar{y}_{EL} = \frac{1}{2}(h+y)$
 $= \frac{1}{2}(h + \frac{h}{a}x)$

THEN.. $A = \int dA = \int_0^a h(1 - \frac{x}{a})dx = h[x - \frac{x^2}{2a}]_0^a$
 $= \frac{1}{2}ah$

AND.. $\int \bar{x}_{EL} dA = \int_0^a x[h(1 - \frac{x}{a})dx] = h[\frac{x^2}{2} - \frac{x^3}{3a}]_0^a$
 $= \frac{1}{6}a^2h$
 $\int \bar{y}_{EL} dA = \int_0^a \frac{1}{2}(h + \frac{h}{a}x)[h(1 - \frac{x}{a})dx]$
 $= \frac{1}{2} \int_0^a (h - \frac{hx}{a})dx = \frac{1}{2}[hx - \frac{hx^2}{2a}]_0^a$
 $= \frac{1}{3}ah^2$


$\bar{x}A = \int \bar{x}_{EL} dA: \bar{x}(\frac{1}{2}ah) = \frac{1}{6}a^2h$ $\bar{x} = \frac{1}{3}a$
(CONTINUED)

5.43



GIVEN: PLANE AREA

SHOWN

FIND: \bar{x} AND \bar{y}
USING DIRECT
INTEGRATION

BY OBSERVATION..

$$y_1 = -\frac{h}{a}x + h$$

$$= h(1 - \frac{x}{a})$$

FOR y_2 ..

AT $x=0$, $y=h$: $h = k(1-0)$
OR $k = h$

AT $x=a$, $y=0$: $0 = h(1 - \frac{a}{a})^2$
OR $C = \frac{h}{a^2}$

THEN.. $y_2 = h(1 - \frac{x^2}{a^2})$

NOW.. $dA = (y_2 - y_1)dx = h[(1 - \frac{x^2}{a^2}) - (1 - \frac{x}{a})]dx$
 $= h(\frac{x}{a} - \frac{x^2}{a^2})dx$
 $\bar{x}_{EL} = x$
 $\bar{y}_{EL} = \frac{1}{2}(y_1 + y_2) = \frac{1}{2}[(1 - \frac{x}{a}) + (1 - \frac{x^2}{a^2})]$

THEN.. $A = \int dA = \int_0^a h(\frac{x}{a} - \frac{x^2}{a^2})dx = h[\frac{x^2}{2a} - \frac{x^3}{3a^2}]_0^a$
 $= \frac{1}{6}ah$
(CONTINUED)

5.43 CONTINUED

$$\text{AND.. } \bar{x}_{EL} dA = \int_0^a x \left(h \left(\frac{x}{a} - \frac{x^2}{a^2} \right) \right) dx = h \left[\frac{x^2}{2a} - \frac{x^3}{3a^2} \right]_0^a$$

$$= \frac{1}{12} a^2 h$$

$$\int \bar{x}_{EL} dA = \int_0^a \frac{1}{2} \left(2 - \frac{x}{a} - \frac{x^2}{a^2} \right) \left(h \left(\frac{x}{a} - \frac{x^2}{a^2} \right) \right) dx$$


$$= \frac{1}{2} \int_0^a \left(2 \frac{x}{a} - 3 \frac{x^2}{a^2} - \frac{x^3}{a^3} \right) dx$$

$$= \frac{1}{2} \int_0^a \left[\frac{x^2}{a} - \frac{x^3}{a^2} + \frac{x^4}{5a^3} \right]_0^a = \frac{1}{10} a^2 h$$


$$\bar{x} A = \int \bar{x}_{EL} dA: \bar{x} \left(\frac{1}{6} a^2 h \right) = \frac{1}{10} a^2 h \quad \bar{x} = \frac{2}{5} a$$

$$\bar{y} A = \int \bar{y}_{EL} dA: \bar{y} \left(\frac{1}{6} a^2 h \right) = \frac{1}{10} a^2 h \quad \bar{y} = \frac{2}{5} h$$

5.44



GIVEN: PLANE AREA SHOWN
FIND: \bar{x} AND \bar{y} USING DIRECT INTEGRATION



HAVE.. $y = \frac{b}{a} \sqrt{a^2 - x^2}$
AND
 $dA = (b - y) dx$
 $= \frac{b}{a} (a - \sqrt{a^2 - x^2}) dx$

$$\bar{x}_{EL} = x$$

$$\bar{y}_{EL} = \frac{1}{2} (y + b)$$

$$= \frac{b}{2a} (a + \sqrt{a^2 - x^2})$$

$$\text{THEN.. } A = \int dA = \int_0^a \frac{b}{a} (a - \sqrt{a^2 - x^2}) dx$$

LET $x = a \sin \theta: \sqrt{a^2 - x^2} = a \cos \theta$
 $dx = a \cos \theta d\theta$

$$\text{THEN.. } A = \int_0^{\pi/2} \frac{b}{a} (a - a \cos \theta) (a \cos \theta d\theta)$$

$$= \frac{b}{a} \int_0^{\pi/2} [a^2 \sin \theta - a^2 \left(\frac{\theta}{2} + \frac{\sin 2\theta}{4} \right)] d\theta$$

$$= ab \left(1 - \frac{\pi}{4} \right)$$

$$\text{AND.. } \int \bar{x}_{EL} dA = \int_0^a x \left[\frac{b}{a} (a - \sqrt{a^2 - x^2}) \right] dx$$

$$= \frac{b}{a} \int_0^a \left[\frac{x^2}{2} + \frac{1}{3} (a^2 - x^2)^{3/2} \right]_0^a = \frac{1}{6} a^2 b$$

$$\int \bar{y}_{EL} dA = \int_0^a \frac{b}{2a} (a + \sqrt{a^2 - x^2}) \left[\frac{b}{a} (a - \sqrt{a^2 - x^2}) \right] dx$$


$$= \frac{b^2}{2a^2} \int_0^a (x^2) dx = \frac{b^2}{2a^2} \left[\frac{1}{3} x^3 \right]_0^a$$

$$= \frac{1}{6} a b^2$$

$$\bar{x} A = \int \bar{x}_{EL} dA: \bar{x} [ab(1 - \frac{\pi}{4})] = \frac{1}{6} a^2 b \quad \bar{x} = \frac{2a}{3(4 - \pi)}$$

$$\bar{y} A = \int \bar{y}_{EL} dA: \bar{y} [ab(1 - \frac{\pi}{4})] = \frac{1}{6} a b^2 \quad \bar{y} = \frac{2b}{3(4 - \pi)}$$

5.45




GIVEN: PLANE AREA SHOWN
FIND: \bar{x} AND \bar{y} USING DIRECT INTEGRATION

(CONTINUED)

5.45 CONTINUED

FIRST NOTE THAT SYMMETRY IMPLIES $\bar{y} = 0$

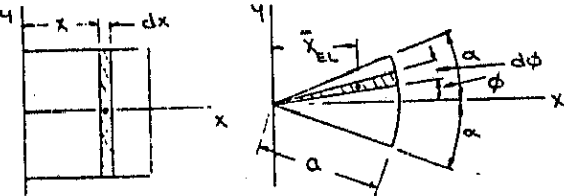

$$dA = a dx$$

$$\bar{x}_{EL} = x$$

$$dA = \frac{1}{2} a (a d\phi)$$

$$\bar{x}_{EL} = \frac{2}{3} a \cos \phi$$

$$\text{THEN.. } A = \int dA = \int_0^a a dx = \int_0^{\pi/2} \frac{1}{2} a^2 d\phi$$

$$= a \left[x \right]_0^a - \frac{a^2}{2} \left[\phi \right]_0^{\pi/2} = a^2 (1 - \alpha)$$

$$\text{AND.. } \int \bar{x}_{EL} dA = \int_0^a x (a dx) - \int_0^{\pi/2} \frac{1}{3} a \cos \phi \left(\frac{1}{2} a^2 d\phi \right)$$


$$= a \left[\frac{x^2}{2} \right]_0^a - \frac{1}{6} a^3 \left[\sin \phi \right]_0^{\pi/2}$$

$$= a^3 \left(\frac{1}{2} - \frac{2}{3} \sin \alpha \right)$$

$$\bar{x} A = \int \bar{x}_{EL} dA: \bar{x} [a^2 (1 - \alpha)] = a^3 \left(\frac{1}{2} - \frac{2}{3} \sin \alpha \right)$$


$$\text{OR } \bar{x} = \frac{3 - 4 \sin \alpha}{6(1 - \alpha)} a$$

5.46



GIVEN: PLANE AREA SHOWN
FIND: \bar{x} AND \bar{y} USING DIRECT INTEGRATION

FIRST NOTE THAT SYMMETRY IMPLIES $\bar{x} = 0$



HAVE.. $dA = \pi r dr$
AND $\bar{y}_{EL} = \frac{2}{\pi} r$
(FIG. 5.8B)

$$\text{THEN.. } A = \int dA = \int_{r_1}^{r_2} \pi r dr = \frac{\pi}{2} [r^2]_{r_1}^{r_2} = \frac{\pi}{2} (r_2^2 - r_1^2)$$


$$\text{AND.. } \int \bar{y}_{EL} dA = \int_{r_1}^{r_2} \frac{2r}{\pi} (\pi r dr) = 2 \left[\frac{1}{3} r^3 \right]_{r_1}^{r_2}$$

$$= \frac{2}{3} (r_2^3 - r_1^3)$$

$$\bar{y} A = \int \bar{y}_{EL} dA: \bar{y} \left[\frac{\pi}{2} (r_2^2 - r_1^2) \right] = \frac{2}{3} (r_2^3 - r_1^3)$$

$$\text{OR } \bar{y} = \frac{4}{3\pi} \frac{r_2^3 - r_1^3}{r_2^2 - r_1^2}$$


5.47



GIVEN: PLANE AREA SHOWN
FIND: \bar{x} AND \bar{y} USING DIRECT INTEGRATION

FIRST NOTE THAT SYMMETRY IMPLIES $\bar{y} = b$
(CONTINUED)

5.47 CONTINUED



At $x=a, y=b$
 $y_1: b = ka^2$ OR $k = \frac{b}{a^2}$
 THEN $y_1 = \frac{b}{a^2} x^2$
 $y_2: b = 2b - ca^2$
 OR $c = \frac{b}{a^2}$
 THEN $y_2 = b(2 - \frac{x^2}{a^2})$


Now.. $dA = (y_2 - y_1) dx = [b(2 - \frac{x^2}{a^2}) - \frac{b}{a^2} x^2] dx$
 $= 2b(1 - \frac{x^2}{a^2}) dx$

AND $\bar{x}_{EL} = x$
 THEN.. $A = \int dA = \int_0^a 2b(1 - \frac{x^2}{a^2}) dx = 2b[x - \frac{x^3}{3a^2}]_0^a$
 $= \frac{4}{3} ab$

AND $\int \bar{x}_{EL} dA = \int_0^a x(2b(1 - \frac{x^2}{a^2})) dx = 2b[\frac{x^2}{2} - \frac{x^4}{4a^2}]_0^a$
 $= \frac{1}{2} a^2 b$

$\bar{x} A = \int \bar{x}_{EL} dA: \bar{x}(\frac{4}{3} ab) = \frac{1}{2} a^2 b \quad \bar{x} = \frac{3}{8} a$

5.49 CONTINUED



FOR y_2 AT $x=0, y=b$
 $a = kb^2$ OR $k = \frac{a}{b^2}$
 THEN $y_2 = b \frac{x^2}{a}$

Now.. $\bar{x}_{EL} = x$
 AND FOR $0 \leq x \leq \frac{a}{2}$:
 $\bar{x}_{EL} = \frac{1}{2} y_2 \quad dA = y_2 dx$
 $= \frac{1}{2} b \frac{x^2}{a} \quad = b \frac{x^2}{2a}$

FOR $\frac{a}{2} \leq x \leq a: \bar{x}_{EL} = \frac{1}{2}(y_1 + y_2) = \frac{1}{2}(\frac{b}{a}(\frac{x^2}{a} - \frac{x^2}{a}) + \frac{b}{a} \frac{x^2}{a})$
 $dA = (y_2 - y_1) dx = b(\frac{x^2}{a} - \frac{x^2}{a} - \frac{1}{2}) dx$

THEN.. $A = \int dA = \int_0^{\frac{a}{2}} b \frac{x^2}{2a} dx + \int_{\frac{a}{2}}^a b(\frac{x^2}{a} - \frac{x^2}{a} - \frac{1}{2}) dx$
 $= \frac{b}{2a} [\frac{1}{3} x^3]_0^{\frac{a}{2}} - b[\frac{1}{3} \frac{x^3}{a} - \frac{x^2}{2a} - \frac{1}{2} x]_{\frac{a}{2}}^a$
 $= \frac{b}{2a} [\frac{1}{24} (\frac{a^3}{2}) - (a) \frac{1}{24} - \frac{1}{2} (\frac{a}{2})]$
 $= b[\frac{1}{24} (a^2) - (\frac{a}{2})^2] = \frac{1}{24} (a^2) - \frac{1}{2} (\frac{a}{2})$


AND.. $\int \bar{x}_{EL} dA = \int_0^{\frac{a}{2}} \frac{13}{24} \frac{ab}{a} x^2 dx + \int_{\frac{a}{2}}^a x[b(\frac{x^2}{a} - \frac{x^2}{a} - \frac{1}{2})] dx$
 $= \frac{13}{24} \frac{ab}{a} [\frac{1}{3} x^3]_0^{\frac{a}{2}} + b[\frac{1}{4} \frac{x^4}{a} - \frac{x^3}{3a} - \frac{1}{4} x^2]_{\frac{a}{2}}^a$
 $= \frac{13}{24} \frac{ab}{a} [\frac{1}{24} (\frac{a^3}{2}) - (a) \frac{1}{24}] + b[\frac{1}{4} (a^2) - (\frac{a}{2})^2] - \frac{1}{4} [(a)^2 - (\frac{a}{2})^2]$

$\int \bar{x}_{EL} dA = \int_0^{\frac{a}{2}} \frac{13}{24} \frac{ab}{a} x^2 dx + \int_{\frac{a}{2}}^a x[b(\frac{x^2}{a} - \frac{x^2}{a} - \frac{1}{2})] dx$
 $= \frac{13}{24} \frac{ab}{a} [\frac{1}{3} x^3]_0^{\frac{a}{2}} + b[\frac{1}{4} \frac{x^4}{a} - \frac{x^3}{3a} - \frac{1}{4} x^2]_{\frac{a}{2}}^a$
 $= \frac{13}{24} \frac{ab}{a} [\frac{1}{24} (\frac{a^3}{2}) - (a) \frac{1}{24}] + b[\frac{1}{4} (a^2) - (\frac{a}{2})^2] - \frac{1}{4} [(a)^2 - (\frac{a}{2})^2]$
 $= \frac{13}{24} ab^2$


$\bar{x} A = \int \bar{x}_{EL} dA: \bar{x}(\frac{13}{24} ab) = \frac{11}{240} a^2 b \quad \bar{x} = \frac{11}{130} a$

$\bar{y} A = \int \bar{y}_{EL} dA: \bar{y}(\frac{13}{24} ab) = \frac{11}{48} ab^2 \quad \bar{y} = \frac{11}{26} b$

5.48



(GIVEN: PLANE AREA SHOWN)
 FIND: \bar{x} AND \bar{y}
 USING DIRECT INTEGRATION



At $x=0, y=b$
 $b = k(0-a)^2$ OR $k = \frac{b}{a^2}$
 THEN $y = \frac{b}{a^2} (x-a)^2$
 NOW.. $\bar{x}_{EL} = x$
 $\bar{y}_{EL} = \frac{1}{2} y = \frac{b}{2a^2} (x-a)^2$

THEN.. $A = \int dA = \int_0^a \frac{b}{a^2} (x-a)^2 dx = \frac{b}{3a^2} [(x-a)^3]_0^a$
 $= \frac{1}{3} ab$


AND.. $\int \bar{x}_{EL} dA = \int_0^a x[\frac{b}{a^2} (x-a)^2] dx = \frac{b}{a^2} \int_0^a (x^3 - 2ax^2 + a^2x) dx$
 $= \frac{b}{a^2} [\frac{1}{4} x^4 - \frac{2}{3} ax^3 + \frac{1}{2} a^2 x^2]_0^a = \frac{1}{12} a^2 b$

$\int \bar{y}_{EL} dA = \int_0^a \frac{b}{2a^2} (x-a)^2 [\frac{b}{a^2} (x-a)^2] dx$
 $= \frac{b^2}{2a^4} [\frac{1}{5} (x-a)^5]_0^a = \frac{1}{10} ab^2$

$\bar{x} A = \int \bar{x}_{EL} dA: \bar{x}(\frac{1}{3} ab) = \frac{1}{12} a^2 b \quad \bar{x} = \frac{1}{4} a$

$\bar{y} A = \int \bar{y}_{EL} dA: \bar{y}(\frac{1}{3} ab) = \frac{1}{10} ab^2 \quad \bar{y} = \frac{2}{10} b$


5.49




(GIVEN: PLANE AREA SHOWN)
 FIND: \bar{x} AND \bar{y}
 USING DIRECT INTEGRATION

BY OBSERVATION.. $y_1 = \frac{b}{a^2} x - \frac{b}{2} = b(\frac{x}{a^2} - \frac{1}{2})$
 (CONTINUED)

5.50



(GIVEN: PLANE AREA SHOWN)
 FIND: \bar{x} AND \bar{y}
 USING DIRECT INTEGRATION

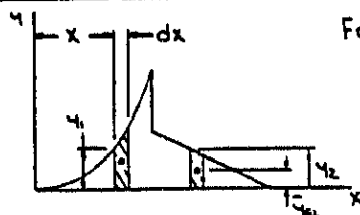

FOR y_1 AT $x=a, y=2b$
 $2b = ka^2$ OR $k = \frac{2b}{a^2}$
 THEN.. $y_1 = \frac{2b}{a^2} x^2$
 BY OBSERVATION
 $y_2 = -\frac{b}{a^2} x + 2b = b(2 - \frac{x}{a})$

(CONTINUED)

5.50 CONTINUED

Now $\bar{x}_{EL} = x$
 AND FOR $0 \leq x \leq a$: $\bar{y}_{EL} = \frac{1}{2}y = \frac{b}{2a^2}x^2$
 $dA = y_1 dx = \frac{2b}{a^2}x^2 dx$


FOR $a \leq x \leq 2a$: $\bar{y}_{EL} = \frac{1}{2}y_2 = \frac{b}{2}(2 - \frac{x}{a})$
 $dA = y_2 dx = b(2 - \frac{x}{a}) dx$

THEN... $A = \int dA = \int_0^a \frac{2b}{a^2}x^2 dx + \int_a^{2a} b(2 - \frac{x}{a}) dx$
 $= \frac{2b}{a^2} [\frac{1}{3}x^3]_0^a + b [-\frac{a}{2}(2 - \frac{x}{a})^2]_a^{2a}$
 $= \frac{2}{3}ab + b [-\frac{a}{2}(2 - \frac{2a}{a})^2 - (-\frac{a}{2}(2 - \frac{a}{a})^2)]$
 $= \frac{2}{3}ab + b [-\frac{a}{2}(0)^2 - (-\frac{a}{2}(1)^2)]$
 $= \frac{2}{3}ab + \frac{1}{2}ab = \frac{7}{6}ab$

AND... $\int \bar{x}_{EL} dA = \int_0^a x (\frac{2b}{a^2}x^2 dx) + \int_a^{2a} x [b(2 - \frac{x}{a}) dx]$
 $= \frac{2b}{a^2} [\frac{1}{4}x^4]_0^a + b [x^2 - \frac{x^3}{3a}]_a^{2a}$
 $= \frac{2}{4}a^2b + b [(2a)^2 - \frac{(2a)^3}{3a} - (a^2 - \frac{a^3}{3a})]$
 $= \frac{1}{2}a^2b + b [(2a)^2 - \frac{2a^2}{3} - (a^2 - \frac{a^2}{3})]$
 $= \frac{1}{2}a^2b + b [\frac{4a^2}{3} - \frac{2a^2}{3} - \frac{2a^2}{3} + \frac{a^2}{3}]$
 $= \frac{1}{2}a^2b + b [\frac{4a^2 - 2a^2 - 2a^2 + a^2}{3}]$
 $= \frac{1}{2}a^2b + b [\frac{-a^2}{3}] = \frac{1}{2}a^2b - \frac{1}{3}a^2b = \frac{1}{6}a^2b$

$\bar{x}A = \int \bar{x}_{EL} dA$: $\bar{x}(\frac{7}{6}ab) = \frac{1}{6}a^2b$ $\bar{x} = \frac{a}{7}$
 $\bar{y}A = \int \bar{y}_{EL} dA$: $\bar{y}(\frac{7}{6}ab) = \frac{17}{30}ab^2$ $\bar{y} = \frac{17}{35}b$

5.51

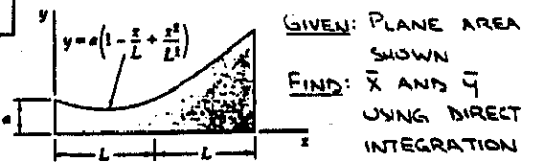

GIVEN: PLANE AREA SHOWN
 FIND: \bar{x} AND \bar{y} USING DIRECT INTEGRATION

HAVE... $\bar{x}_{EL} = x$
 $\bar{y}_{EL} = \frac{1}{2}y = \frac{a}{2}(1 - \frac{x}{L} + \frac{x^2}{L^2})$
 $dA = y dx = a(1 - \frac{x}{L} + \frac{x^2}{L^2}) dx$


THEN... $A = \int dA = \int_0^L a(1 - \frac{x}{L} + \frac{x^2}{L^2}) dx$
 $= a [x - \frac{x^2}{2L} + \frac{x^3}{3L^2}]_0^L = \frac{10}{3}aL$

AND... $\int \bar{x}_{EL} dA = \int_0^L x [a(1 - \frac{x}{L} + \frac{x^2}{L^2}) dx]$
 $= a [\frac{x^2}{2} - \frac{x^3}{3L} + \frac{x^4}{4L^2}]_0^L = \frac{10}{3}aL^2$


$\int \bar{y}_{EL} dA = \int_0^L \frac{a}{2}(1 - \frac{x}{L} + \frac{x^2}{L^2}) [a(1 - \frac{x}{L} + \frac{x^2}{L^2}) dx]$
 $= \frac{a^2}{2} \int_0^L (1 - 2\frac{x}{L} + 3\frac{x^2}{L^2} - 2\frac{x^3}{L^3} + \frac{x^4}{L^4}) dx$
 $= \frac{a^2}{2} [x - \frac{x^2}{L} + \frac{x^3}{L^2} - \frac{x^4}{2L^3} + \frac{x^5}{5L^4}]_0^L$
 $= \frac{11}{5}a^2L$

$\bar{x}A = \int \bar{x}_{EL} dA$: $\bar{x}(\frac{10}{3}aL) = \frac{10}{3}aL^2$ $\bar{x} = \frac{3}{2}L$
 $\bar{y}A = \int \bar{y}_{EL} dA$: $\bar{y}(\frac{10}{3}aL) = \frac{11}{5}a^2L$ $\bar{y} = \frac{33}{40}a$

5.52



GIVEN: HOMOGENEOUS WIRE SHOWN
 FIND: \bar{x} USING DIRECT INTEGRATION




FIRST NOTE THAT BECAUSE THE WIRE IS HOMOGENEOUS, ITS CENTER OF GRAVITY WILL COINCIDE WITH THE CENTROID OF THE CORRESPONDING LINE.
 NOW... $\bar{x}_{EL} = r \cos \theta$
 AND $dL = r d\theta$
 THEN... $L = \int dL = \int_0^{\pi/4} r d\theta = r[\theta]_0^{\pi/4} = \frac{\pi}{4}r$


AND... $\int \bar{x}_{EL} dL = \int_0^{\pi/4} r \cos \theta (r d\theta) = r^2 [\sin \theta]_0^{\pi/4} = r^2 (\frac{\sqrt{2}}{2} - 0) = \frac{\sqrt{2}}{2}r^2$

$\bar{x}L = \int \bar{x}_{EL} dL$: $\bar{x}(\frac{\pi}{4}r) = \frac{\sqrt{2}}{2}r^2$ $\bar{x} = \frac{\sqrt{2}}{2\pi}r$

5.53



GIVEN: HOMOGENEOUS WIRE SHOWN
 FIND: \bar{x} USING DIRECT INTEGRATION



FIRST NOTE THAT BECAUSE THE WIRE IS HOMOGENEOUS, ITS CENTER OF GRAVITY WILL COINCIDE WITH THE CENTROID OF THE CORRESPONDING LINE.
 NOW... $\bar{x}_{EL} = a \cos^3 \theta$

AND $dL = \sqrt{dx^2 + dy^2}$
 WHERE... $x = a \cos^3 \theta$: $dx = -3a \cos^2 \theta \sin \theta d\theta$
 $y = a \sin^3 \theta$: $dy = 3a \sin^2 \theta \cos \theta d\theta$
 THEN... $dL = \sqrt{(-3a \cos^2 \theta \sin \theta d\theta)^2 + (3a \sin^2 \theta \cos \theta d\theta)^2}$
 $= 3a \cos \theta \sin \theta \sqrt{\cos^4 \theta + \sin^4 \theta} d\theta$
 $= 3a \cos \theta \sin \theta d\theta$

$\therefore L = \int dL = \int_0^{\pi/2} 3a \cos \theta \sin \theta d\theta = 3a [\frac{1}{2} \sin^2 \theta]_0^{\pi/2} = \frac{3}{2}a$

AND... $\int \bar{x}_{EL} dL = \int_0^{\pi/2} a \cos^3 \theta (3a \cos \theta \sin \theta d\theta)$
 $= 3a^2 [-\frac{1}{5} \cos^5 \theta]_0^{\pi/2} = \frac{3}{5}a^2$

$\bar{x}L = \int \bar{x}_{EL} dL$: $\bar{x}(\frac{3}{2}a) = \frac{3}{5}a^2$ $\bar{x} = \frac{2}{5}a$

ALTERNATIVE SOLUTION


$x = a \cos^3 \theta \Rightarrow \cos^3 \theta = (\frac{x}{a})^{2/3}$
 $y = a \sin^3 \theta \Rightarrow \sin^3 \theta = (\frac{y}{a})^{2/3}$
 $\therefore (\frac{x}{a})^{2/3} + (\frac{y}{a})^{2/3} = 1$ OR $y = (a^{2/3} - x^{2/3})^{3/2}$
 THEN $\frac{dy}{dx} = (a^{2/3} - x^{2/3})^{-1/2} (-\frac{2}{3}x^{-1/3})$

(CONTINUED)


5.53 CONTINUED

Now.. $\bar{x}_{EL} = x$
 AND $dL = \sqrt{1 + \left(\frac{dy}{dx}\right)^2} dx = \left\{1 + \left(a^{1/3} - x^{2/3}\right)^2 \left(-x^{-1/3}\right)^2\right\}^{1/2} dx$
 $= \frac{a^{1/3}}{x^{1/3}} dx$
 THEN.. $L = \int dL = \int_0^a \frac{a^{1/3}}{x^{1/3}} dx = a^{1/3} \left[\frac{3}{2} x^{2/3}\right]_0^a = \frac{3}{2} a$
 AND.. $\int \bar{x}_{EL} dL = \int_0^a x \left(\frac{a^{1/3}}{x^{1/3}} dx\right) = a^{1/3} \left[\frac{3}{5} x^{5/3}\right]_0^a = \frac{3}{5} a^2$
 $\bar{x}L = \int \bar{x}_{EL} dL \quad \bar{x} \left(\frac{3}{2} a\right) = \frac{3}{5} a^2 \quad \bar{x} = \frac{2}{5} a$

* 5.54



GIVEN: HOMOGENEOUS WIRE SHOWN
 FIND: \bar{x} USING DIRECT INTEGRATION




FIRST NOTE THAT BECAUSE THE WIRE IS HOMOGENEOUS, ITS CENTER OF GRAVITY WILL COINCIDE WITH THE CENTROID OF THE CORRESPONDING LINE.


HAVE AT $x = a, y = a$
 $a = ka^{3/2}$ OR $k = \frac{a}{a^{3/2}}$
 THEN $y = \frac{1}{\sqrt{a}} x^{3/2}$
 AND $\frac{dy}{dx} = \frac{3}{2\sqrt{a}} x^{1/2}$

Now.. $\bar{x}_{EL} = x$
 AND $dL = \sqrt{1 + \left(\frac{dy}{dx}\right)^2} dx = \left[1 + \left(\frac{3}{2\sqrt{a}} x^{1/2}\right)^2\right]^{1/2} dx$
 $= \frac{1}{2\sqrt{a}} \sqrt{4a + 9x} dx$
 THEN.. $L = \int dL = \int_0^a \frac{1}{2\sqrt{a}} \sqrt{4a + 9x} dx$
 $= \frac{1}{2\sqrt{a}} \left[\frac{2}{3} \cdot \frac{2}{9} (4a + 9x)^{3/2}\right]_0^a = \frac{a}{27} \left[(13)^{3/2} - 8\right]$
 $= 1.43971a$
 AND.. $\int \bar{x}_{EL} dL = \int_0^a x \left[\frac{1}{2\sqrt{a}} \sqrt{4a + 9x} dx\right]$
 USE INTEGRATION BY PARTS WITH
 $u = x \quad dv = \sqrt{4a + 9x} dx$
 $du = dx \quad v = \frac{2}{27} (4a + 9x)^{3/2}$
 THEN.. $\int \bar{x}_{EL} dL = \frac{1}{2\sqrt{a}} \left\{ x \cdot \frac{2}{27} (4a + 9x)^{3/2} \Big|_0^a - \int_0^a \frac{2}{27} (4a + 9x)^{3/2} dx \right\}$
 $= \frac{(13)^{3/2}}{27} a^2 - \frac{1}{27\sqrt{a}} \left[\frac{2}{45} (4a + 9x)^{5/2} \right]_0^a$
 $= \frac{a^2}{27} \left\{ (13)^{3/2} - \frac{2}{45} [(13)^{5/2} - 32] \right\}$
 $= 0.78566a^2$
 $\bar{x}L = \int \bar{x}_{EL} dL \quad \bar{x} (1.43971a) = 0.78566a^2$
 OR $\bar{x} = 0.546a$

* 5.55




GIVEN: PLANE AREA SHOWN
 FIND: \bar{x} AND \bar{y} USING DIRECT INTEGRATION




HAVE.. $\bar{x}_{EL} = \frac{2}{3} r \cos \theta$
 $dA = \frac{1}{2} r^2 d\theta$
 $\bar{y}_{EL} = \frac{2}{3} r \sin \theta$
 AND $dA = \frac{1}{2} r^2 d\theta$

THEN.. $A = \int dA = \int_0^{\pi/2} \frac{1}{2} a^2 d\theta = \frac{1}{2} a^2 \left[\theta\right]_0^{\pi/2} = \frac{1}{2} a^2 \left(\frac{\pi}{2} - 0\right) = \frac{\pi}{4} a^2 = 133.623 a^2$
 AND $\int \bar{x}_{EL} dA = \int_0^{\pi/2} \frac{2}{3} a \cos \theta \left(\frac{1}{2} a^2 d\theta\right)$
 $= \frac{1}{3} a^3 \int_0^{\pi/2} \cos \theta d\theta$
 USE INTEGRATION BY PARTS WITH
 $u = a \cos \theta \quad dv = \cos \theta d\theta$
 $du = -3a \sin \theta d\theta \quad v = \sin \theta$
 THEN.. $\int a \cos \theta d\theta = a \sin \theta - \int \sin \theta (3a \cos \theta d\theta)$
 NOW LET $u = a \cos \theta \quad dv = \sin \theta d\theta$
 $du = -3a \sin \theta d\theta \quad v = -\cos \theta$
 THEN.. $\int a \cos \theta d\theta = a \sin \theta - 3 \int \cos \theta d\theta = a \sin \theta - 3 \cos \theta$
 SO THAT $\int a \cos \theta d\theta = \frac{a}{10} (\sin \theta + 3 \cos \theta)$
 $\therefore \int \bar{x}_{EL} dA = \frac{1}{3} a^3 \left[\frac{a}{10} (\sin \theta + 3 \cos \theta) \right]_0^{\pi/2}$
 $= \frac{a^4}{30} (-3e^{3\pi} - 3) = -1239.26 a^3$
 ALSO.. $\int \bar{y}_{EL} dA = \int_0^{\pi/2} \frac{2}{3} a \sin \theta \left(\frac{1}{2} a^2 d\theta\right)$
 $= \frac{1}{3} a^3 \int_0^{\pi/2} \sin \theta d\theta$
 USE INTEGRATION BY PARTS WITH
 $u = a \sin \theta \quad dv = \sin \theta d\theta$
 $du = 3a \cos \theta d\theta \quad v = -\cos \theta$
 THEN.. $\int a \sin \theta d\theta = -a \cos \theta - \int \cos \theta (3a \sin \theta d\theta)$
 NOW LET $u = a \sin \theta \quad dv = \cos \theta d\theta$
 $du = 3a \cos \theta d\theta \quad v = \sin \theta$
 THEN.. $\int a \sin \theta d\theta = -a \cos \theta + 3 \int \sin \theta d\theta = -a \cos \theta + 3(-\sin \theta)$
 SO THAT $\int a \sin \theta d\theta = \frac{a}{10} (-\cos \theta + 3 \sin \theta)$
 $\therefore \int \bar{y}_{EL} dA = \frac{1}{3} a^3 \left[\frac{a}{10} (-\cos \theta + 3 \sin \theta) \right]_0^{\pi/2}$
 $= \frac{a^4}{30} (e^{3\pi} + 1) = 413.09 a^3$
 $\bar{x}A = \int \bar{x}_{EL} dA \quad \bar{x} (133.623 a^2) = -1239.26 a^3$
 OR $\bar{x} = -9.27a$
 $\bar{y}A = \int \bar{y}_{EL} dA \quad \bar{y} (133.623 a^2) = 413.09 a^3$
 OR $\bar{y} = 3.09a$

5.56



GIVEN: PLANE AREA SHOWN
 FIND: \bar{x} AND \bar{y}
 USING DIRECT INTEGRATION




HAVE -- $\bar{x}_{EL} = x$
 $\bar{y}_{EL} = \frac{1}{2}y = \frac{a}{2} \cos \frac{\pi x}{2L}$
 AND -- $dA = y dx = a \cos \frac{\pi x}{2L} dx$
 THEN -- $A = \int dA = \int_0^{L/2} a \cos \frac{\pi x}{2L} dx$
 $= a \left[\frac{2L}{\pi} \sin \frac{\pi x}{2L} \right]_0^{L/2}$
 $= \frac{\sqrt{2}}{\pi} aL$

AND $\int \bar{x}_{EL} dA = \int x (a \cos \frac{\pi x}{2L} dx)$
 USE INTEGRATION BY PARTS WITH
 $u = x$ $dv = \cos \frac{\pi x}{2L} dx$
 $du = dx$ $v = \frac{2L}{\pi} \sin \frac{\pi x}{2L}$
 THEN -- $\int x \cos \frac{\pi x}{2L} dx = \frac{2L}{\pi} x \sin \frac{\pi x}{2L} - \int \frac{2L}{\pi} \sin \frac{\pi x}{2L} dx$
 $= \frac{2L}{\pi} \left(x \sin \frac{\pi x}{2L} + \frac{2L}{\pi} \cos \frac{\pi x}{2L} \right)$
 $\therefore \int \bar{x}_{EL} dA = a \frac{2L}{\pi} \left[x \sin \frac{\pi x}{2L} + \frac{2L}{\pi} \cos \frac{\pi x}{2L} \right]_0^{L/2}$
 $= a \frac{2L}{\pi} \left[\left(\frac{L}{\sqrt{2}} + \frac{\sqrt{2}}{\pi} L \right) - \frac{2L}{\pi} \right]$
 $= 0.106374 aL^2$


ALSO -- $\int \bar{y}_{EL} dA = \int_0^{L/2} \frac{a}{2} \cos \frac{\pi x}{2L} (a \cos \frac{\pi x}{2L} dx)$
 $= \frac{a^2}{2} \left[\frac{x}{2} + \frac{\sin \frac{\pi x}{L}}{2L} \right]_0^{L/2} = \frac{a^2}{2} \left(\frac{L}{4} + \frac{1}{2\pi} \right)$
 $= 0.20458 a^2 L$

$\bar{x}A = \int \bar{x}_{EL} dA$: $\bar{x} \left(\frac{\sqrt{2}}{\pi} aL \right) = 0.106374 aL^2$
 OR $\bar{x} = 0.236L$
 $\bar{y}A = \int \bar{y}_{EL} dA$: $\bar{y} \left(\frac{\sqrt{2}}{\pi} aL \right) = 0.20458 a^2 L$
 OR $\bar{y} = 0.454a$

5.57 and 5.58



GIVEN: PLANE AREA SHOWN
 FIND: \bar{x} AND \bar{y}



HAVE -- $\bar{x}_{EL} = x$
 $\bar{y}_{EL} = \frac{1}{2}y = \frac{1}{2} \left(1 - \frac{x}{2} \right)$
 AND $dA = y dx = \left(1 - \frac{x}{2} \right) dx$
 (CONTINUED)

5.57 and 5.58 CONTINUED

THEN -- $A = \int dA = \int_0^a \left(1 - \frac{x}{2} \right) dx = \left[x - \frac{1}{4}x^2 \right]_0^a$
 $= (a - \frac{1}{4}a^2 - 1) \text{ IN}^2$
 AND $\int \bar{x}_{EL} dA = \int_0^a x \left(1 - \frac{x}{2} \right) dx = \left[\frac{x^2}{2} - \frac{x^3}{6} \right]_0^a$
 $= \left(\frac{a^2}{2} - a + \frac{1}{6} \right) \text{ IN}^3$
 $\int \bar{y}_{EL} dA = \int_0^a \frac{1}{2} \left(1 - \frac{x}{2} \right) \left(1 - \frac{x}{2} \right) dx = \frac{1}{2} \int_0^a \left(1 - \frac{x}{2} + \frac{x^2}{4} \right) dx$
 $= \frac{1}{2} \left[x - \frac{1}{4}x^2 + \frac{1}{12}x^3 \right]_0^a = \frac{1}{2} (a - \frac{1}{4}a^2 + \frac{1}{12}a^3) \text{ IN}^3$
 $\bar{x}A = \int \bar{x}_{EL} dA$: $\bar{x} = \frac{\frac{a^2}{2} - a + \frac{1}{6}}{a - \frac{1}{4}a^2 - 1} \text{ IN.}$
 $\bar{y}A = \int \bar{y}_{EL} dA$: $\bar{y} = \frac{a - \frac{1}{4}a^2 + \frac{1}{12}}{2(a - \frac{1}{4}a^2 - 1)} \text{ IN.}$


5.57 FIND: \bar{x} AND \bar{y} WHEN $a = 2 \text{ IN.}$

HAVE -- $\bar{x} = \frac{\frac{1}{2}(2)^2 - 2 + \frac{1}{6}}{2 - \ln 2 - 1}$ OR $\bar{x} = 1.629 \text{ IN}$
 AND $\bar{y} = \frac{2 - \frac{1}{4}(2)^2 + \frac{1}{12}}{2(2 - \ln 2 - 1)}$ OR $\bar{y} = 0.1853 \text{ IN}$

5.58 FIND: a SO THAT $\frac{\bar{x}}{\bar{y}} = 9$


HAVE -- $\frac{\bar{x}}{\bar{y}} = \frac{\bar{x}A}{\bar{y}A} = \frac{\int \bar{x}_{EL} dA}{\int \bar{y}_{EL} dA}$
 THEN -- $\frac{\frac{1}{2}a^2 - a + \frac{1}{6}}{\frac{1}{2}(a - \frac{1}{4}a^2 + \frac{1}{12})} = 9$
 OR $a^3 - 11a^2 + a + 18 \ln a + 9 = 0$
 USING TRIAL AND ERROR OR NUMERICAL METHODS AND IGNORING THE TRIVIAL SOLUTION $a = 1 \text{ IN.}$, FIND --
 $a = 1.901 \text{ IN. AND } a = 3.74 \text{ IN.}$

5.59



GIVEN: PLANE AREA SHOWN
 FIND: VOLUME AND SURFACE AREA OF SOLID OBTAINED BY ROTATING THE AREA ABOUT
 (a) THE X AXIS
 (b) THE LINE $x = 72 \text{ mm}$

FROM THE SOLUTION TO PROBLEM 5.1 HAVE
 $A = 2632.5 \text{ mm}^2$ $\sum \bar{x}A = 111172.5 \text{ mm}^3$
 $\sum \bar{y}A = 63787.5 \text{ mm}^3$

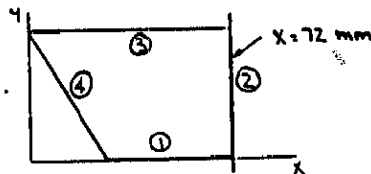

APPLYING THE THEOREMS OF PAPPUS-GULBINUS HAVE --
 (a) ROTATION ABOUT THE X AXIS:
 VOLUME = $2\pi \bar{y} A = 2\pi (\sum \bar{y}A) = 2\pi (63787.5 \text{ mm}^3)$
 OR VOLUME = 401910 mm^3
 AREA = $2\pi \bar{y}_{LINE} L = 2\pi (\bar{y}_{LINE}) L$
 (CONTINUED)

5.59 CONTINUED

$$\begin{aligned} \text{AREA} &= 2\pi(\bar{q}_2 L_2 + \bar{q}_3 L_3 + \bar{q}_4 L_4) \\ &= 2\pi[(22.5)(45) + (45)(72) + (22.5)(\sqrt{27^2 + 45^2})] \\ &\text{OR AREA} = 34.1 \times 10^3 \text{ mm}^2 \end{aligned}$$

(b) ROTATION ABOUT THE LINE $x = 72$ mm:

$$\begin{aligned} \text{VOLUME} &= 2\pi(72 - \bar{x}_{\text{AREA}})A = 2\pi(72A - \sum \bar{x}A) \\ &= 2\pi[(72 \text{ mm})(2632.5 \text{ mm}^2) - (111)(172.5 \text{ mm}^3)] \\ &\text{OR VOLUME} = 492 \times 10^3 \text{ mm}^3 \end{aligned}$$

$$\begin{aligned} \text{AREA} &= 2\pi \bar{x}_{\text{LINE}} L = 2\pi(\sum \bar{x}_{\text{LINE}})L \\ &= 2\pi(\bar{x}_1 L_1 + \bar{x}_3 L_3 + \bar{x}_4 L_4) \end{aligned}$$

WHERE \bar{x}_1 , \bar{x}_3 , AND \bar{x}_4 ARE MEASURED WITH RESPECT TO THE LINE $x = 72$ mm. THEN

$$\begin{aligned} \text{AREA} &= 2\pi[(22.5)(45) + (36)(72) \\ &\quad + \left(\frac{45+72}{2}\right)(\sqrt{27^2 + 45^2})] \end{aligned}$$


$$\text{OR AREA} = 41.9 \times 10^3 \text{ mm}^2$$

5.60 CONTINUED

TO THE LINE $x = 24$ mm. THEN..

$$\begin{aligned} \text{AREA} &= 2\pi[(12)(\sqrt{24^2 + 12^2}) + (21)(42) + (42)(32) \\ &\quad + (133)(\sqrt{18^2 + 12^2})] \\ &\text{OR AREA} = 20.5 \times 10^3 \text{ mm}^2 \end{aligned}$$

5.61




GIVEN: PLANE AREA SHOWN

FIND: VOLUME AND SURFACE AREA OF SOLID OBTAINED BY ROTATING THE AREA ABOUT

- (a) THE x AXIS
(b) THE y AXIS

5.60




GIVEN: PLANE AREA SHOWN

FIND: VOLUME AND SURFACE AREA OF SOLID OBTAINED BY ROTATING THE AREA ABOUT

- (a) THE LINE $y = 44$ mm
(b) THE LINE $x = 24$ mm

FROM THE SOLUTION TO PROBLEM 5.5 HAVE

$$\begin{aligned} A &= 1596 \text{ mm}^2 \\ \sum \bar{x}A &= 4536 \text{ mm}^3 \\ \sum \bar{y}A &= 39648 \text{ mm}^3 \end{aligned}$$

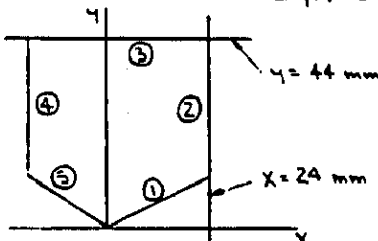

APPLYING THE THEOREMS OF PAPPUS-GULBINUS HAVE..

(a) ROTATION ABOUT THE LINE $y = 44$ mm:

$$\begin{aligned} \text{VOLUME} &= 2\pi(44 - \bar{y}_{\text{AREA}})A = 2\pi(44A - \sum \bar{y}A) \\ &= 2\pi[(44 \text{ mm})(1596 \text{ mm}^2) - (39648 \text{ mm}^3)] \\ &\text{OR VOLUME} = 192.1 \times 10^3 \text{ mm}^3 \end{aligned}$$

$$\begin{aligned} \text{AREA} &= 2\pi \bar{y}_{\text{LINE}} L = 2\pi(\sum \bar{y}_{\text{LINE}})L \\ &= 2\pi(\bar{y}_1 L_1 + \bar{y}_2 L_2 + \bar{y}_4 L_4 + \bar{y}_5 L_5) \end{aligned}$$

WHERE $\bar{y}_1, \dots, \bar{y}_5$ ARE MEASURED WITH RESPECT TO THE LINE $y = 44$ mm. THEN..

$$\begin{aligned} \text{AREA} &= 2\pi[(38)(\sqrt{24^2 + 12^2}) + (16)(32) + (16)(32) \\ &\quad + (38)(\sqrt{18^2 + 12^2})] \\ &\text{OR AREA} = 18.01 \times 10^3 \text{ mm}^2 \end{aligned}$$

(b) ROTATION ABOUT THE LINE $x = 24$ mm:


$$\begin{aligned} \text{VOLUME} &= 2\pi(24 - \bar{x}_{\text{AREA}})A = 2\pi(24A - \sum \bar{x}A) \\ &= 2\pi[(24 \text{ mm})(1596 \text{ mm}^2) - (4536 \text{ mm}^3)] \\ &\text{OR VOLUME} = 212 \times 10^3 \text{ mm}^3 \end{aligned}$$

$$\begin{aligned} \text{AREA} &= 2\pi \bar{x}_{\text{LINE}} L = 2\pi(\sum \bar{x}_{\text{LINE}})L \\ &= 2\pi(\bar{x}_1 L_1 + \bar{x}_3 L_3 + \bar{x}_4 L_4 + \bar{x}_5 L_5) \end{aligned}$$

WHERE $\bar{x}_1, \dots, \bar{x}_5$ ARE MEASURED WITH RESPECT (CONTINUED)

FROM THE SOLUTION TO PROBLEM 5.7 HAVE

$$\begin{aligned} A &= 1146.57 \text{ in}^2 \\ \sum \bar{x}A &= 14147.0 \text{ in}^3 \\ \sum \bar{y}A &= 26897 \text{ in}^3 \end{aligned}$$



APPLYING THE THEOREMS OF PAPPUS-GULBINUS HAVE..

(a) ROTATION ABOUT THE x AXIS:

$$\begin{aligned} \text{VOLUME} &= 2\pi \bar{y}_{\text{AREA}} A = 2\pi \sum \bar{y}A = 2\pi(26897 \text{ in}^3) \\ &\text{OR VOLUME} = 169.0 \times 10^3 \text{ in}^3 \end{aligned}$$


$$\begin{aligned} \text{AREA} &= 2\pi \bar{y}_{\text{LINE}} A = 2\pi(\sum \bar{y}_{\text{LINE}})A \\ &= 2\pi(\bar{y}_2 L_2 + \bar{y}_3 L_3 + \bar{y}_4 L_4 + \bar{y}_5 L_5 + \bar{y}_6 L_6) \\ &= 2\pi[(7.5)(15) + (30)(\pi(15)) + (47.5)(5) \\ &\quad + (50)(30) + (25)(50)] \\ &\text{OR AREA} = 22.4 \times 10^3 \text{ in}^2 \end{aligned}$$

(b) ROTATION ABOUT THE y AXIS:

$$\begin{aligned} \text{VOLUME} &= 2\pi \bar{x}_{\text{AREA}} A = 2\pi \sum \bar{x}A = 2\pi(14147.0 \text{ in}^3) \\ &\text{OR VOLUME} = 88.9 \times 10^3 \text{ in}^3 \end{aligned}$$

$$\begin{aligned} \text{AREA} &= 2\pi \bar{x}_{\text{LINE}} L = 2\pi(\sum \bar{x}_{\text{LINE}})L \\ &= 2\pi(\bar{x}_1 L_1 + \bar{x}_2 L_2 + \bar{x}_3 L_3 + \bar{x}_4 L_4 + \bar{x}_5 L_5) \\ &= 2\pi[(15)(30) + (30)(15) + (30 - \frac{2(15)^2}{\pi})(\pi(15)) \\ &\quad + (30)(5) + (15)(30)] \\ &\text{OR AREA} = 15.48 \times 10^3 \text{ in}^2 \end{aligned}$$

5.62



GIVEN: PLANE PARABOLIC AREA SHOWN

FIND: VOLUME OF SOLID OBTAINED BY ROTATING THE AREA ABOUT

- (a) THE x AXIS
(b) THE LINE AA'

FIRST, FROM FIG. 5.8A HAVE.. $A = \frac{4}{3}ah$
 $\bar{y} = \frac{5}{8}h$

APPLYING THE SECOND THEOREM OF PAPPUS-GULBINUS HAVE..

(a) ROTATION ABOUT THE x AXIS:


(CONTINUED)

5.62 CONTINUED

VOLUME = $2\pi \bar{y}A = 2\pi(\frac{2}{3}h)(\frac{4}{3}ah)$
 OR VOLUME = $\frac{16}{15}\pi ah^2$

(b) ROTATION ABOUT THE LINE AA':
 VOLUME = $2\pi(2a)A = 2\pi(2a)(\frac{4}{3}ah)$
 OR VOLUME = $\frac{16}{3}\pi a^2h$

5.63



(GIVEN: $d = 6 \text{ mm}$,
 $R = 10 \text{ mm}$, $L = 30 \text{ mm}$)
 FIND: VOLUME V AND
 SURFACE AREA A_s
 OF THE LINK

FIRST NOTE THAT THE AREA A AND THE CIRCUMFERENCE C OF THE CROSS SECTION OF THE BAR ARE

$A = \frac{\pi}{4}d^2$ $C = \pi d$

OBSERVING THAT THE SEMICIRCULAR ENDS OF THE LINK CAN BE OBTAINED BY ROTATING THE CROSS SECTION THROUGH A HORIZONTAL SEMICIRCULAR ARC OF RADIUS R . THEN, APPLYING THE THEOREMS OF PAPPUS-GULBINUS HAVE..

VOLUME: $V = 2(V_{\text{SIDE}}) + 2(V_{\text{END}})$
 $= 2(AL) + 2(\pi RA) = 2(L + \pi R)A$
 $= 2[(30 \text{ mm}) + \pi(10 \text{ mm})][\frac{\pi}{4}(6 \text{ mm})^2]$
 OR $V = 3470 \text{ mm}^3$

AREA: $A_s = 2(A_{\text{SIDE}}) + 2(A_{\text{END}})$
 $= 2(CL) + 2(\pi RC) = 2(L + \pi R)C$
 $= 2[(30 \text{ mm}) + \pi(10 \text{ mm})][\pi(6 \text{ mm})]$
 OR $A_s = 2320 \text{ mm}^2$

5.64

(GIVEN: FIRST FOUR SHAPES OF FIG. 5.21)
 FIND: VOLUME OF EACH SHAPE

FOLLOWING THE SECOND THEOREM OF PAPPUS-GULBINUS, IN EACH CASE A SPECIFIC GENERATING AREA A WILL BE ROTATED ABOUT THE x AXIS TO PRODUCE THE GIVEN SHAPE. VALUES OF \bar{y} ARE FROM FIG. 5.8.A.

(1) HEMISPHERE: THE GENERATING AREA IS A QUARTER CIRCLE

$\bar{y} = \frac{4a}{3\pi}$ HAVE.. $V = 2\pi \bar{y}A = 2\pi(\frac{4a}{3\pi})(\frac{1}{4}\pi a^2)$
 OR $V = \frac{2}{3}\pi a^3$

(2) SEMIELLIPSOID OF REVOLUTION: THE GENERATING AREA IS A QUARTER ELLIPSE

$\bar{y} = \frac{4a}{3\pi}$ HAVE.. $V = 2\pi \bar{y}A$
 $= 2\pi(\frac{4a}{3\pi})(\frac{1}{4}\pi ha)$
 OR $V = \frac{2}{3}\pi a^2h$
 (CONTINUED)

5.64 CONTINUED


(3) PARABOLOID OF REVOLUTION: THE GENERATING AREA IS A QUARTER PARABOLA

$\bar{y} = \frac{3}{8}a$ HAVE.. $V = 2\pi \bar{y}A$
 $= 2\pi(\frac{3}{8}a)(\frac{2}{3}ah)$
 OR $V = \frac{1}{2}\pi a^2h$

(4) CONE: THE GENERATING AREA IS A TRIANGLE

$\bar{y} = \frac{3}{8}a$ HAVE.. $V = 2\pi \bar{y}A$
 $= 2\pi(\frac{3}{8}a)(\frac{1}{2}ha)$
 OR $V = \frac{3}{8}\pi a^2h$

5.65




(GIVEN: COUNTERSUNK HOLE SHOWN)
 FIND: VOLUME OF STEEL REMOVED DURING COUNTERSINKING PROCESS

THE REQUIRED VOLUME CAN BE GENERATED BY ROTATING THE AREA SHOWN ABOUT THE y AXIS. APPLYING THE SECOND THEOREM OF PAPPUS-GULBINUS HAVE..

$V = 2\pi \bar{x}A$
 $= 2\pi[\frac{3}{8} + \frac{1}{2}(\frac{1}{4})] \text{ in.} \cdot [\frac{1}{2} \cdot \frac{1}{4} \text{ in.} \cdot \frac{1}{4} \text{ in.}]$
 OR $V = 0.0900 \text{ in}^3$

ALL DIMENSIONS ARE IN INCHES

5.66

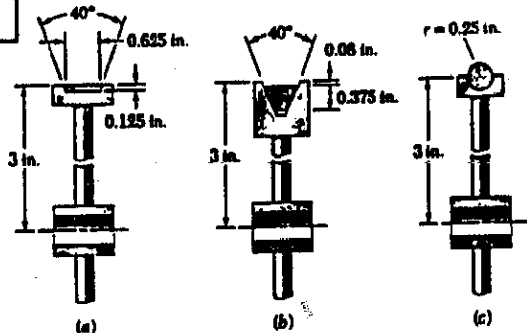


(GIVEN: THREE DRIVE BELT PROFILES, EACH BELT CONTACTS ONE-HALF OF THE CIRCUMFERENCE OF ITS PULLEY)
 FIND: CONTACT AREA BETWEEN EACH BELT AND ITS PULLEY

APPLYING THE FIRST THEOREM OF PAPPUS-GULBINUS, THE CONTACT AREA A_c OF A BELT (CONTINUED)


5.66 CONTINUED

IS GIVEN BY
 $A_c = \pi \bar{Y} L = \pi \sum q L$


WHERE THE INDIVIDUAL LENGTHS ARE THE LENGTHS OF THE BELT CROSS SECTION WHICH ARE IN CONTACT WITH THE PULLEY.

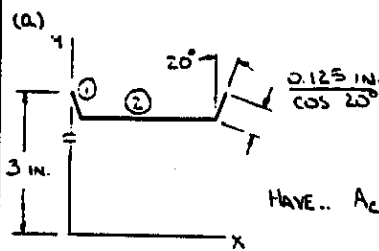

HAVE.. $A_c = \pi [2(\bar{y}_1 L_1) + \bar{y}_2 L_2]$
 $= \pi [2(3 - \frac{0.125}{2})(\frac{0.125}{\cos 20^\circ}) + (3 - 0.125)(0.625)]$
 OR $A_c = 8.10 \text{ IN}^2$



HAVE.. $A_c = \pi [2(\bar{y}_1 L_1)]$
 $= 2\pi (3 - 0.08 - \frac{0.375}{2})(\frac{0.375}{\cos 20^\circ})$
 OR $A_c = 6.85 \text{ IN}^2$

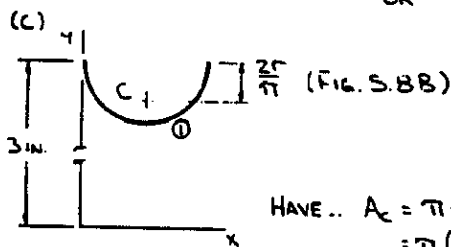


HAVE.. $A_c = \pi (\bar{y}_1 L_1)$
 $= \pi (3 - \frac{0.25}{2})(\frac{0.25}{\cos 20^\circ})$
 OR $A_c = 7.01 \text{ IN}^2$

5.67



GIVEN: BOWL SHOWN, $R = 250 \text{ mm}$
 FIND: VOLUME V IN LITERS

THE VOLUME CAN BE GENERATED BY ROTATING THE TRIANGLE AND CIRCULAR SECTOR SHOWN ABOUT THE y AXIS. APPLYING THE SECOND THEOREM OF PAPPUS-GULBINUS AND USING FIG. 5.8A, HAVE..



(CONTINUED)

5.67 CONTINUED

$$V = 2\pi \bar{X} A = 2\pi \sum \bar{x} A = 2\pi (\bar{x}_1 A_1 + \bar{x}_2 A_2)$$


$$= 2\pi [(\frac{1}{3} \times \frac{1}{2} R)(\frac{1}{2} \times \frac{1}{2} R \times \frac{\sqrt{3}}{2} R) + (\frac{2R \sin 30^\circ}{3} \times \frac{1}{2} R \cos 30^\circ)(\frac{\pi}{6} R^2)]$$

$$= 2\pi (\frac{R^3}{16\sqrt{3}} + \frac{R^3}{2\sqrt{3}}) = \frac{3\sqrt{3}}{8} \pi R^3$$

$$= \frac{3\sqrt{3}}{8} \pi (0.25 \text{ m})^3 = 0.031883 \text{ m}^3 = \frac{10^3}{1 \text{ m}^3}$$


OR $V = 31.9 \text{ l}$

5.68

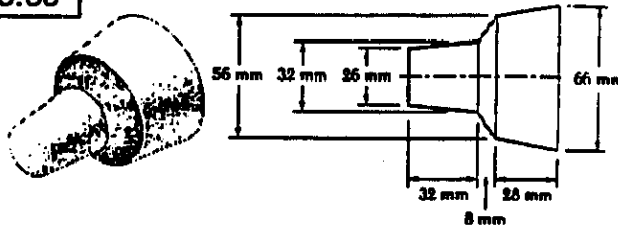

GIVEN: LAMP SHADE SHOWN, DENSITY $\rho = 2800 \frac{\text{kg}}{\text{m}^3}$,
 THICKNESS $t = 1 \text{ mm}$
 FIND: MASS m

THE MASS OF THE SHADE IS GIVEN BY
 $m = \rho V = \rho A t$
 WHERE A IS THE SURFACE AREA OF THE SHADE. THIS AREA CAN BE GENERATED BY ROTATING THE LINE SHOWN ABOUT THE x AXIS. APPLYING THE FIRST THEOREM OF PAPPUS-GULBINUS HAVE..

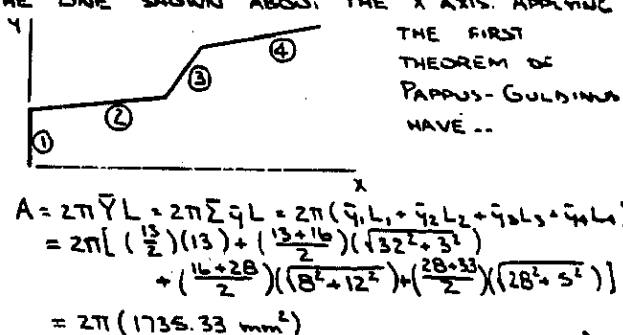

$$A = 2\pi \bar{Y} L = 2\pi \sum q L = 2\pi (\bar{y}_1 L_1 + \bar{y}_2 L_2 + \bar{y}_3 L_3 + \bar{y}_4 L_4)$$


$$= 2\pi [(\frac{13}{2})(13) + (\frac{13+16}{2})(\sqrt{32^2+3^2}) + (\frac{16+28}{2})(18^2+12^2) + (\frac{28+33}{2})(28^2+5^2)]$$

$$= 2\pi (1735.33 \text{ mm}^2)$$

THEN.. $m = 2800 \frac{\text{kg}}{\text{m}^3} \times [2\pi (1735.33 \text{ mm}^2)] \times 1 \text{ mm} = \frac{1 \text{ m}^3}{10^3 \text{ mm}^3}$

OR $m = 0.0305 \text{ kg}$

5.69

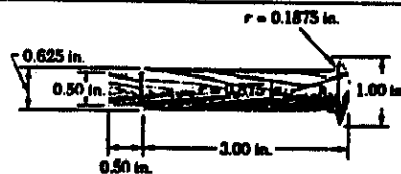


GIVEN: 20,000 PEGS HAVING SHAPE SHOWN, 2 COATS OF PAINT, 1 GALLON PAINT / 100 ft^2
 FIND: NUMBER OF GALLONS NEEDED

THE NUMBER OF GALLONS OF PAINT NEEDED IS GIVEN BY
 NUMBER OF GALLONS = (NUMBER OF PEGS) (SURFACE AREA OF 1 PEG) ($\frac{1 \text{ GALLON}}{100 \text{ ft}^2}$) (2 COATS)
 (CONTINUED)

5.69 CONTINUED

OR NUMBER OF GALLONS = 400 A_5 ($A_5 = ft^2$)
 WHERE A_5 IS THE SURFACE AREA OF ONE PEG.
 A_5 CAN BE GENERATED BY ROTATING THE LINE
 SHOWN ABOUT THE X AXIS. USING THE FIRST
 THEOREM OF PAPPUS-GULDINUS AND FIG. 5.8B,
 HAVE..

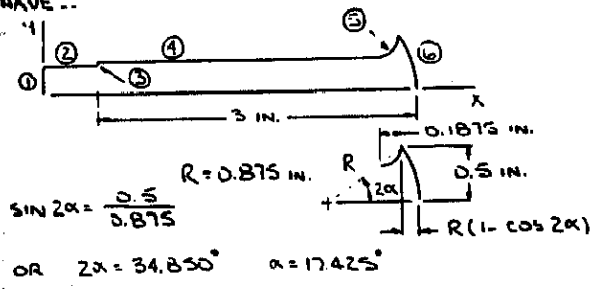


$A_5 = 2\pi \bar{Y}L = 2\pi \sum \bar{q}L$

L, IN	\bar{q} , IN	$\bar{q}L$, IN ²
1 0.25	0.125	0.03125
2 0.5	0.25	0.125
3 0.0625	$0.25 + 0.3125 = 0.28125$	0.0175781
4 $2 \cdot 0.875(1 - \cos 34.850^\circ) - 0.1275 = 2.6556$	0.3125	0.82988
5 $\frac{1}{2} \cdot 0.1875 = 0.29452$	$0.5 - \frac{2 \cdot 0.1875}{\pi} = 0.38063$	0.112103
6 $2\alpha(0.875)$	$\frac{0.875 \sin 17.425^\circ}{\alpha} = \sin 17.425^\circ$	0.137314

$\sum \bar{q}L = 1.25312 \text{ IN}^2$
 THEN.. $A_5 = 2\pi(1.25312 \text{ IN}^2) \cdot \frac{144 \text{ IN}^2}{144 \text{ IN}^2} = 0.054678 \text{ IN}^2$
 FINALLY.. NUMBER OF GALLONS = 400 \times 0.054678
 = 21.87 GALLONS
 \therefore ORDER 22 GALLONS

5.70 CONTINUED

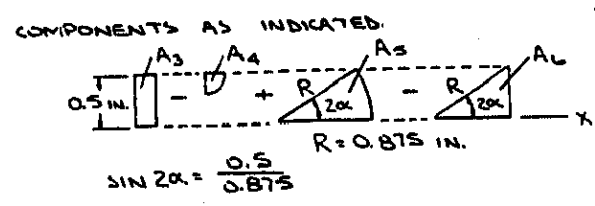


OR $2\alpha = 34.850^\circ$ $\alpha = 17.425^\circ$
 APPLYING THE SECOND THEOREM OF PAPPUS-GULDINUS AND THEN USING FIG. 5.8A, HAVE..

$V_{PEG} = 2\pi \bar{Y}A = 2\pi \sum \bar{q}A$

A, IN ²	\bar{q} , IN	$\bar{q}A$, IN ³
1 $0.5 \times 0.25 = 0.125$	0.125	0.054675
2 $[3 - 0.875(1 - \cos 34.850^\circ) - 0.1875] \times (0.3125) = 0.82987$	0.15625	0.129667
3 $0.1875 \times 0.5 = 0.09375$	0.25	0.023438
4 $\frac{1}{2}(0.1875)^2 = -0.027612$	$0.5 - \frac{2 \times 0.1875}{\pi} = 0.42042$	-0.011609
5 $\alpha(0.875)^2$	$\frac{2 \times 0.875 \sin 17.425^\circ}{3\alpha} = \sin 17.425^\circ$	0.00005
6 $\frac{1}{2}(0.875 \cos 34.850^\circ)(0.5) = -0.179517$	$\frac{3}{2}(0.5) = 0.166667$	-0.029920


$\sum \bar{q}L = 0.167252 \text{ IN}^3$
 THEN.. $V_{PEG} = 2\pi(0.167252 \text{ IN}^3) = 1.05088 \text{ IN}^3$
 NOW.. $V_{DOWEL} = \frac{\pi}{4}(\text{DIAMETER})^2(\text{LENGTH}) = \frac{\pi}{4}(1 \text{ IN.})^2(4 \text{ IN.}) = 3.14159 \text{ IN}^3$
 THEN.. % WASTE = $\frac{V_{WASTE}}{V_{DOWEL}} \times 100\%$
 = $\frac{V_{DOWEL} - V_{PEG}}{V_{DOWEL}} \times 100\%$
 = $(1 - \frac{1.05088}{3.14159}) \times 100\%$
 OR % WASTE = 66.5%

5.70

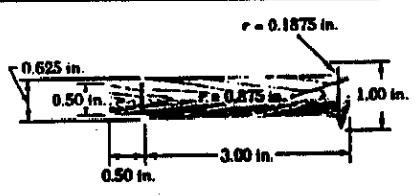


GIVEN: PEG HAVING THE SHAPE SHOWN, INITIAL SIZE OF DOWEL.. 1 IN. DIA. \times 4 IN. LONG.
 FIND: PERCENT (VOLUME) OF DOWEL THAT BECOMES WASTE

TO OBTAIN THE SOLUTION IT IS FIRST NECESSARY TO DETERMINE THE VOLUME OF THE PEG. THAT VOLUME CAN BE GENERATED BY ROTATING THE AREA SHOWN ABOUT THE X AXIS.

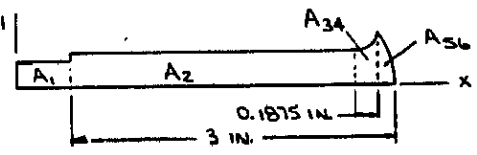


THE GENERATING AREA IS NEXT DIVIDED INTO SIX (CONTINUED)

5.71

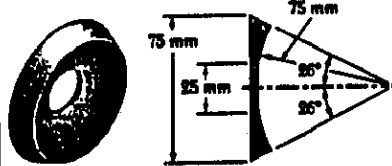

GIVEN: BRASS PLATE, DENSITY $\rho = 8470 \text{ kg/m}^3$
 FIND: MASS m

THE MASS OF THE ESCUTCHEON IS GIVEN BY $m = \rho V$
 WHERE V IS THE VOLUME OF THE PLATE. V CAN BE GENERATED BY ROTATING THE AREA A ABOUT THE X AXIS.

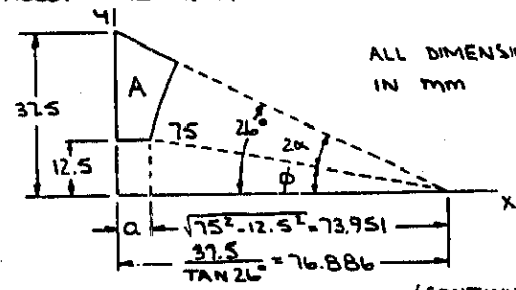

ALL DIMENSIONS IN MM


(CONTINUED)

5.71 CONTINUED

HAVE... $a = 76.886 - 73.951 = 2.935 \text{ mm}$
 AND... $\sin \phi = \frac{12.5}{75} \Rightarrow \phi = 9.5941^\circ$

THEN $2\alpha = 26^\circ - 9.5941^\circ = 16.4059^\circ$
 AND $\alpha = 8.2030^\circ$

THE AREA A CAN BE OBTAINED BY COMBINING THE FOLLOWING FOUR AREAS AS INDICATED.



APPLYING THE SECOND THEOREM OF PAPPUS-GULDINUS AND THEN USING FIG. 5.8A, HAVE...

$$V = 2\pi \bar{y}A = 2\pi \sum \bar{y}A$$


A, mm ²	\bar{y} , mm	$\bar{y}A$, mm ³
1 $\frac{1}{2} \times 76.886 \times 37.5 = 1441.61$	$\frac{1}{3}(37.5) = 12.5$	18 020.13
2 $-\alpha(75)^2$	$\frac{2(75)\sin 8.203^\circ}{3\alpha} = \frac{2(75)\sin(8.203^\circ + 9.5941^\circ)}{3\alpha}$	-12 265.30
3 $-\frac{1}{2} \times 73.951 \times 12.5 = -462.19$	$\frac{1}{3}(12.5) = 4.1667$	-1925.81
4 $-2.935 \times 12.5 = -36.688$	$\frac{1}{2}(12.5) = 6.25$	-229.30

$$\sum \bar{y}A = 3599.72 \text{ mm}^3$$

THEN $V = 2\pi(3599.72 \text{ mm}^3) = 22 617.7 \text{ mm}^3$

SO THAT $m = 8470 \frac{\text{kg}}{\text{m}^3} = 22 617.7 \times 10^{-9} \text{ m}^3$
 $= 0.1916 \text{ kg}$ OR $m = 191.6 \text{ g}$


5.72



GIVEN: SHADE SHOWN
 FIND: OUTER SURFACE AREA

FIRST NOTE THAT THE REQUIRED SURFACE AREA A CAN BE GENERATED BY ROTATING THE PARABOLIC CROSS SECTION THROUGH π RADIANS ABOUT THE Y AXIS. APPLYING THE FIRST THEOREM OF PAPPUS-GULDINUS HAVE

$$A = \pi \bar{x}L$$



NOW... AT $x = 100 \text{ mm}$, $y = 250 \text{ mm}$
 $250 = k(100)^2$

OR $k = 0.025 \text{ mm}^{-1}$

AND $\bar{x}_{EL} = x$
 $dL = \sqrt{1 + \left(\frac{dy}{dx}\right)^2} dx$

WHERE $\frac{dy}{dx} = 2kx$

THEN... $dL = \sqrt{1 + 4k^2x^2} dx$
 HAVE... $\bar{x}L = \int \bar{x}_{EL} dL = \int_0^{100} x \sqrt{1 + 4k^2x^2} dx$
 (CONTINUED)

5.72 CONTINUED


$$\bar{x}L = \left[\frac{1}{3} \frac{1}{4k^2} (1 + 4k^2x^2)^{3/2} \right]_0^{100}$$

$$= \frac{1}{12} \frac{1}{(0.025)^2} \left\{ [1 + 4(0.025)^2(100)^2]^{3/2} - (1)^{3/2} \right\}$$

$$= 17 543.3 \text{ mm}^2$$

FINALLY... $A = \pi(17 543.3 \text{ mm}^2)$
 OR $A = 55.1 \times 10^3 \text{ mm}^2$

5.73



GIVEN: BOTTLE OF CROSS SECTION SHOWN,
 $W = 0.131 \text{ lb}$,
 SPECIFIC WEIGHT $\gamma = 59.0 \text{ lb/ft}^3$
 FIND: AVERAGE WALL THICKNESS t

THE WEIGHT OF THE BOTTLE IS GIVEN BY $W = \gamma V = \gamma A_s t$
 WHERE A_s IS THE SURFACE AREA OF THE BOTTLE. A_s CAN BE GENERATED BY ROTATING THE CURVE BOUNDING THE CROSS SECTION ABOUT THE VERTICAL AXIS OF SYMMETRY. APPROXIMATING THE PORTION OF THIS CURVE TO THE RIGHT OF THE VERTICAL AXIS WITH A SERIES OF SHORT, STRAIGHT LINE SEGMENTS AND THEN APPROXIMATING THE LENGTH AND THE VALUE OF \bar{x} FOR EACH SEGMENT USING THE GIVEN GRID, A_s IS THEN DETERMINED USING THE FIRST THEOREM OF PAPPUS-GULDINUS.

$$A_s = 2\pi \bar{x}L = 2\pi \sum \bar{x}L$$


WITH THE ELEVEN SEGMENTS NUMBERED STARTING AT THE TOP, HAVE...

	L, IN.	\bar{x} , IN.	$\bar{x}L$, IN ²
1	0.76	0.38	0.2888
2	0.48	0.76	0.3648
3	0.88	0.98	0.8624
4	1.06	1.20	1.272
5	0.36	1.08	0.3888
6	1.12	0.98	1.0976
7	1.78	1.32	2.3496
8	2.50	1.66	4.15
9	1.12	1.74	1.9488
10	0.48	1.68	0.8064
11	1.56	0.78	1.2168
Σ			14.7460

THEN... $A_s = 2\pi(14.7460 \text{ in}^2) = 92.652 \text{ in}^2$

FINALLY... $0.131 \text{ lb} = 59.0 \frac{\text{lb}}{\text{ft}^3} = 92.652 \text{ in}^2 \times \left(\frac{1 \text{ ft}}{12 \text{ in}}\right)^3 t$
 OR $t = 0.0414 \text{ in.}$

5.74



GIVEN: PAWN OF CROSS SECTION SHOWN, DENSITY $\rho = 7310 \text{ kg/m}^3$
 FIND: MASS m


THE MASS OF THE PAWN m , GIVEN BY
 $m = \rho V$
 WHERE V IS THE VOLUME OF THE PEWTER. V CAN BE GENERATED BY ROTATING THE CROSS-SECTIONAL AREA OF THE PEWTER ABOUT THE VERTICAL AXIS OF SYMMETRY. APPROXIMATING THIS AREA WITH A TRIANGLE AND A SERIES OF RECTANGLES AND TRAPEZOIDS AND APPROXIMATING THE DIMENSIONS OF THESE ELEMENTS USING THE GIVEN GRID, V IS THEN DETERMINED USING THE SECOND THEOREM OF PAPPUS-GULBINUS.
 $V = 2\pi \bar{x}A = 2\pi \sum \bar{x}A$

WITH THE AREAS TAKEN STARTING AT THE TOP, HAVE..

	A, mm ²	\bar{x} , mm	$\bar{x}A$, mm ³
1	$\frac{1}{2} \cdot 3 \cdot 15 = 2.25$	10	2.25
2	$\frac{1}{2} \cdot 3 \cdot (3+3.9) = 3.62$	1.75	6.34
3	$\frac{1}{2} \cdot 3 \cdot (3.9+3.6) = 6.75$	3.4	22.95
4	$3.6 \cdot 2 = 7.32$	3.3	24.26
5	$\frac{1}{2} \cdot 3 \cdot (3.6-2.25) = 4.83$	3.0	14.49
6	$\frac{1}{2} \cdot 3 \cdot (2.25+5.15) = 11.44$	3.5	29.54
7	$5.25 \cdot 1.2 = 6.3$	4.1	25.83
8	$\frac{1}{2} \cdot 3 \cdot (1.35+2.55) = 19.31$	2.5	48.28
9	$3.15 \cdot 0.9 = 2.84$	3.1	8.80
10	$\frac{1}{2} \cdot 3 \cdot (3.15+5.85) = 14.18$	3.8	53.88
11	$\frac{1}{2} \cdot 3 \cdot (1.65+2.25) = 4.6$	6.7	9.78
12	$2.25 \cdot 2.85 = 6.41$	6.8	43.59
13	$\frac{1}{2} \cdot 3 \cdot (2.25+1.65) = 2.05$	6.7	13.74
14	$3 \cdot 1.5 = 4.5$	7.2	32.40
15	$\frac{1}{2} \cdot 3 \cdot (3+1.95) = 3.34$	6.95	23.21
16	$\frac{1}{2} \cdot 3 \cdot (1.95+4.35) = 8.51$	7.35	62.55
17	$4.35 \cdot 1.20 = 5.22$	7.9	41.24
Σ	104.33		453.12

THEN.. $V = 2\pi (453.12 \text{ mm}^3) = 2847.0 \text{ mm}^3$
 FINALLY.. $m = 7310 \frac{\text{kg}}{\text{m}^3} = 2847.0 \cdot 10^{-9} \text{ m}^3$
 OR $m = 0.0208 \text{ kg}$


5.75



GIVEN: BEAM AND LOADING SHOWN
 FIND: (a) RESULTANT R
 (b) REACTIONS AT A

(CONTINUED)

5.75 CONTINUED




(a) HAVE.. $R_1 = \frac{1}{2}(6\text{m})(400 \frac{\text{N}}{\text{m}}) = 1200 \text{ N}$
 $R_2 = \frac{1}{2}(6\text{m})(1600 \frac{\text{N}}{\text{m}}) = 4800 \text{ N}$
 THEN.. $\Sigma F_y = 0: -R = -R_1 - R_2$
 OR $R = 1200 + 4800 = 6000 \text{ N}$
 AND $\Sigma M_A = 0: -\bar{x}(6000) = -2(1200) - 4(4800)$
 OR $\bar{x} = 3.6 \text{ m}$
 $\therefore R = 6000 \text{ N}, \bar{x} = 3.6 \text{ m}$


(b) REACTIONS

$\Sigma F_x = 0: A_x = 0$
 $\uparrow \Sigma F_y = 0: A_y - 6000 \text{ N} = 0 \quad A_y = 6000 \text{ N}$
 $\therefore A = 6000 \text{ N}$
 $\Sigma M_A = 0: M_A - (3.6 \text{ m})(6000 \text{ N}) = 0$
 OR $M_A = 21.6 \text{ kN}\cdot\text{m}$

5.76



GIVEN: BEAM AND LOADING SHOWN
 FIND: (a) RESULTANT R
 (b) REACTIONS AT SUPPORTS

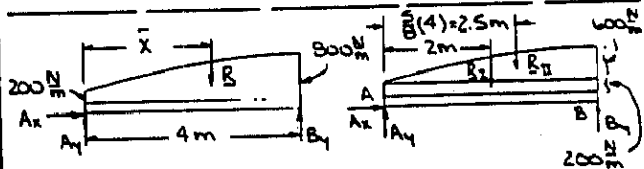


(a) HAVE.. $R_1 = (4\text{m})(200 \frac{\text{N}}{\text{m}}) = 800 \text{ N}$
 $R_2 = \frac{2}{3}(4\text{m})(600 \frac{\text{N}}{\text{m}}) = 1600 \text{ N}$
 THEN.. $\Sigma F_y = 0: -R = -R_1 - R_2$
 OR $R = 800 + 1600 = 2400 \text{ N}$
 AND $\Sigma M_A = 0: -\bar{x}(2400) = -2(800) - 2.5(1600)$
 OR $\bar{x} = \frac{7}{3} \text{ m}$
 $\therefore R = 2400 \text{ N}, \bar{x} = 2.33 \text{ m}$


(b) REACTIONS

$\Sigma F_x = 0: A_x = 0$
 $\Sigma M_A = 0: (4\text{m})B_y - (\frac{7}{3}\text{m})(2400 \text{ N}) = 0$
 OR $B_y = 1400 \text{ N}$
 $\uparrow \Sigma F_y = 0: A_y + 1400 \text{ N} - 2400 \text{ N} = 0$
 OR $A_y = 1000 \text{ N}$
 $\therefore A = 1000 \text{ N}, B = 1400 \text{ N}$

5.77



GIVEN: BEAM AND LOADING SHOWN
 FIND: REACTIONS AT A

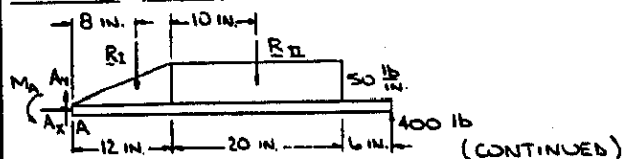


(CONTINUED)

5.77 CONTINUED


HAVE.. $R_I = \frac{1}{2}(12 \text{ in.})(50 \frac{\text{lb}}{\text{in.}}) = 300 \text{ lb}$
 $R_{II} = (20 \text{ in.})(50 \frac{\text{lb}}{\text{in.}}) = 1000 \text{ lb}$

THEN.. $\sum F_x = 0: A_x = 0$
 $\uparrow \sum F_y = 0: A_y - 300 \text{ lb} - 1000 \text{ lb} + 400 \text{ lb} = 0$
 OR $A_y = 900 \text{ lb}$ $A = 900 \text{ lb} \blacktriangleleft$
 $\rightarrow \sum M_A = 0: M_A - (8 \text{ in.})(300 \text{ lb}) - (22 \text{ in.})(1000 \text{ lb}) + (38 \text{ in.})(400 \text{ lb}) = 0$
 OR $M_A = 9200 \text{ lb}\cdot\text{in.}$
 $M_A = 9200 \text{ lb}\cdot\text{in.} \blacktriangleleft$

5.78

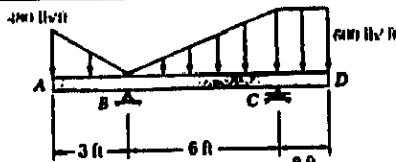


GIVEN: BEAM AND LOADING SHOWN
 FIND: REACTIONS AT SUPPORTS

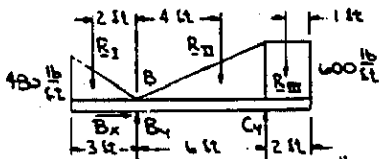


HAVE.. $R_I = \frac{1}{2}(3 \text{ ft})(400 \frac{\text{lb}}{\text{ft}}) = 600 \text{ lb}$
 $R_{II} = \frac{1}{2}(6 \text{ ft})(400 \frac{\text{lb}}{\text{ft}}) = 1200 \text{ lb}$
 $R_{III} = \frac{1}{2}(9 \text{ ft})(400 \frac{\text{lb}}{\text{ft}}) = 1800 \text{ lb}$

THEN.. $\sum F_x = 0: B_x = 0$
 $\rightarrow \sum M_B = 0: (2 \text{ ft})(600 \text{ lb}) - (4 \text{ ft})(1200 \text{ lb}) + (6 \text{ ft})(C_y) - (7 \text{ ft})(1800 \text{ lb}) = 0$
 OR $C_y = 2360 \text{ lb}$ $C = 2360 \text{ lb} \blacktriangleleft$
 $\uparrow \sum F_y = 0: -600 \text{ lb} + B_y - 1200 \text{ lb} + 2360 \text{ lb} - 1800 \text{ lb} = 0$
 OR $B_y = 1360 \text{ lb}$ $B = 1360 \text{ lb} \blacktriangleleft$

5.79




GIVEN: BEAM AND LOADING SHOWN
 FIND: REACTIONS AT SUPPORTS




$R_I = (3 \text{ m})(900 \frac{\text{N}}{\text{m}}) = 2700 \text{ N}$
 $R_{II} = \frac{1}{2}(1 \text{ m})(900 \frac{\text{N}}{\text{m}}) = 450 \text{ N}$

NOW.. $\sum F_x = 0: A_x = 0$
 $\rightarrow \sum M_B = 0: -(3 \text{ m})A_y + (1.5 \text{ m})(2700 \text{ N}) - (\frac{1}{3} \text{ m})(450 \text{ N}) = 0$
 OR $A_y = 1300 \text{ N}$ $A = 1300 \text{ N} \blacktriangleleft$
 $\uparrow \sum F_y = 0: 1300 \text{ N} - 2700 \text{ N} + B_y - 450 \text{ N} = 0$
 OR $B_y = 1850 \text{ N}$ $B = 1850 \text{ N} \blacktriangleleft$

5.80

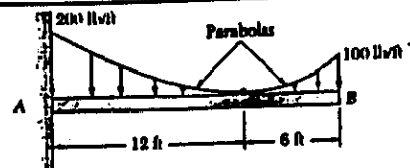


GIVEN: BEAM AND LOADING SHOWN
 FIND: REACTIONS AT A

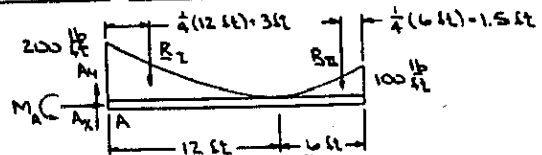

HAVE.. $R_I = \frac{1}{3}(12 \text{ ft})(200 \frac{\text{lb}}{\text{ft}}) = 800 \text{ lb}$
 $R_{II} = \frac{1}{3}(6 \text{ ft})(100 \frac{\text{lb}}{\text{ft}}) = 200 \text{ lb}$


THEN.. $\sum F_x = 0: A_x = 0$
 $\uparrow \sum F_y = 0: A_y - 800 \text{ lb} - 200 \text{ lb} = 0$
 OR $A_y = 1000 \text{ lb}$ $A = 1000 \text{ lb} \blacktriangleleft$
 $\rightarrow \sum M_A = 0: M_A - (3 \text{ ft})(800 \text{ lb}) - (16.5 \text{ ft})(200 \text{ lb}) = 0$
 OR $M_A = 5700 \text{ lb}\cdot\text{ft}$ $M_A = 5700 \text{ lb}\cdot\text{ft} \blacktriangleleft$

5.81



GIVEN: BEAM AND LOADING SHOWN
 FIND: REACTIONS AT SUPPORTS

FIRST REPLACE THE GIVEN LOADING WITH THE LOADING SHOWN BELOW. THE TWO LOADINGS ARE EQUIVALENT BECAUSE BOTH ARE DEFINED BY A LINEAR RELATION BETWEEN LOAD AND DISTANCE AND THE VALUES AT THE END POINTS ARE THE SAME.

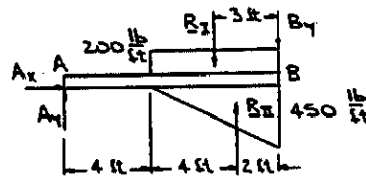


HAVE.. $R_I = (4 \text{ ft})(200 \frac{\text{lb}}{\text{ft}}) = 800 \text{ lb}$
 $R_{II} = \frac{1}{2}(4 \text{ ft})(400 \frac{\text{lb}}{\text{ft}}) = 800 \text{ lb}$

THEN.. $\sum F_x = 0: A_x = 0$
 $\rightarrow \sum M_B = 0: -(10 \text{ ft})A_y + (3 \text{ ft})(1200 \text{ lb}) - (2 \text{ ft})(800 \text{ lb}) = 0$
 OR $A_y = 90 \text{ lb}$ $A = 90 \text{ lb} \blacktriangleleft$
 $\uparrow \sum F_y = 0: 90 \text{ lb} - 800 \text{ lb} + 800 \text{ lb} - B_y = 0$
 OR $B_y = 90 \text{ lb}$ $B = 90 \text{ lb} \blacktriangleleft$

5.86




GIVEN: BEAM AND LOADING SHOWN
 FIND: (a) a SO THAT B_y IS MINIMUM
 (b) REACTIONS AT SUPPORTS

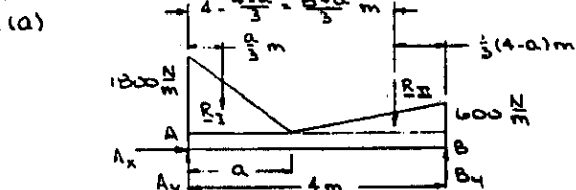


HAVE.. $R_I = \frac{1}{2}(a\text{ m})(1800 \frac{\text{N}}{\text{m}}) = 900a \text{ N}$
 $R_{II} = \frac{1}{2}[(4-a)\text{ m}](600 \frac{\text{N}}{\text{m}}) = 300(4-a) \text{ N}$
 THEN.. $\sum M_A = 0: -(\frac{a}{3}\text{ m})(900a \text{ N}) - (\frac{4-a}{3}\text{ m})(300(4-a)\text{ N}) + (4\text{ m})B_y = 0$
 OR $B_y = 50a^2 - 100a + 800$ (1)

THEN.. $\frac{dB_y}{da} = 100a - 100 = 0$ OR $a = 1.00\text{ m}$
 (b) Eq. (1).. $B_y = 50(1)^2 - 100(1) + 800 = 750 \text{ N}$
 AND.. $\sum F_x = 0: A_x = 0$
 $\sum F_y = 0: A_y - 900(1) - 300(4-1) + 750 = 0$
 OR $A_y = 1050 \text{ N}$ $A = 1050 \text{ N}$

5.87

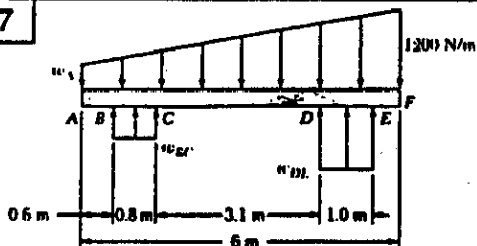


GIVEN: BEAM AND LOADING SHOWN, $W_A = 600 \frac{\text{N}}{\text{m}}$
 FIND: W_{BC} AND W_{DE}

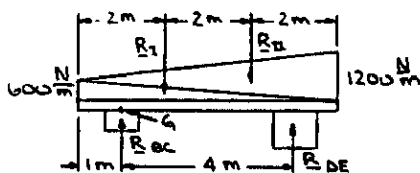


HAVE.. $R_I = \frac{1}{2}(6\text{ m})(600 \frac{\text{N}}{\text{m}}) = 1800 \text{ N}$
 $R_{II} = \frac{1}{2}(6\text{ m})(1200 \frac{\text{N}}{\text{m}}) = 3600 \text{ N}$
 $R_{BC} = (0.8\text{ m})(W_{bc} \frac{\text{N}}{\text{m}}) = (0.8 W_{bc}) \text{ N}$
 $R_{DE} = (1.0\text{ m})(W_{de} \frac{\text{N}}{\text{m}}) = (W_{de}) \text{ N}$
 THEN.. $\sum M_G = 0: -(1\text{ m})(1800 \text{ N}) - (3\text{ m})(3600 \text{ N}) + (4\text{ m})(W_{de} \text{ N}) = 0$
 OR $W_{de} = 3150 \frac{\text{N}}{\text{m}}$
 AND.. $\sum F_y = 0: (0.8 W_{bc}) \text{ N} - 1800 \text{ N} - 3600 \text{ N} + 3150 \text{ N} = 0$
 OR $W_{bc} = 2812.5 \frac{\text{N}}{\text{m}}$
 $W_{bc} = 2810 \frac{\text{N}}{\text{m}}$

5.88

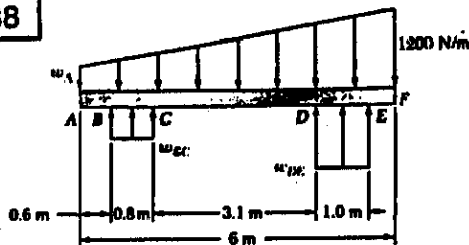


GIVEN: BEAM AND LOADING SHOWN
 FIND: (a) W_A SO THAT $W_{BC} = W_{DE}$
 (b) W_{BC} AND W_{DE}

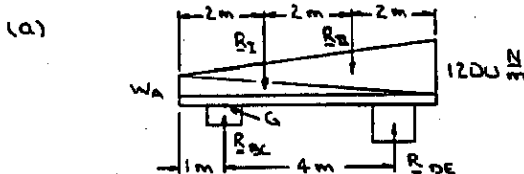


HAVE.. $R_I = \frac{1}{2}(6\text{ m})(W_A \frac{\text{N}}{\text{m}}) = (3 W_A) \text{ N}$
 $R_{II} = \frac{1}{2}(6\text{ m})(1200 \frac{\text{N}}{\text{m}}) = 3600 \text{ N}$
 $R_{BC} = (0.8\text{ m})(W_{bc} \frac{\text{N}}{\text{m}}) = (0.8 W_{bc}) \text{ N}$
 $R_{DE} = (1\text{ m})(W_{de} \frac{\text{N}}{\text{m}}) = (W_{de}) \text{ N}$
 THEN.. $\sum F_y = 0: (0.8 W_{bc}) \text{ N} - (3 W_A) \text{ N} - 3600 \text{ N} + (W_{de}) \text{ N} = 0$
 OR $0.8 W_{bc} + W_{de} = 3600 + 3 W_A$
 NOW.. $W_{bc} = W_{de} \Rightarrow W_{bc} = W_{de} = 2000 + \frac{3}{2} W_A$ (1)
 ALSO.. $\sum M_G = 0: -(1\text{ m})(3 W_A \text{ N}) - (3\text{ m})(3600 \text{ N}) + (4\text{ m})(W_{de} \text{ N}) = 0$
 OR $W_{de} = 2700 + \frac{3}{2} W_A$ (2)

EQUATING EQS. (1) AND (2)..
 $2000 + \frac{3}{2} W_A = 2700 + \frac{3}{2} W_A$
 OR $W_A = \frac{700 \text{ N}}{\text{m}}$
 (b) Eq. (1) $\Rightarrow W_{bc} = W_{de} = 2000 + \frac{3}{2}(\frac{700}{1})$
 OR $W_{bc} = W_{de} = 3270 \frac{\text{N}}{\text{m}}$

5.89




GIVEN: DAM CROSS SECTION SHOWN, WIDTH = 1 ft
 FIND: (a) REACTION FORCES EXERTED ON BASE OF DAM
 (b) POINT OF APPLICATION OF REACTION FORCES
 (c) RESULTANT FORCE ON FACE OF DAM




THE FREE BODY SHOWN CONSISTS OF A 1-ft THICK SECTION OF THE DAM AND THE TRIANGULAR SECTION BCD OF WATER ABOVE THE DAM.
 NOTE: $\bar{x}_1 = 6 \text{ ft}$
 $\bar{x}_2 = (9+3)\text{ ft} = 12 \text{ ft}$
 $\bar{x}_3 = (15+2)\text{ ft} = 17 \text{ ft}$
 $\bar{x}_4 = (15+4)\text{ ft} = 19 \text{ ft}$
 (CONTINUED)

5.82

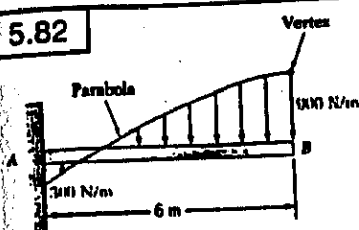

GIVEN: BEAM AND LOADING SHOWN
FIND: REACTIONS AT A

FIRST REPLACE THE GIVEN LOADING WITH THE LOADING SHOWN BELOW. THE TWO LOADINGS ARE EQUIVALENT BECAUSE BOTH ARE DEFINED BY A PARABOLIC RELATION BETWEEN LOAD AND DISTANCE AND THE VALUES AT THE END POINTS ARE THE SAME.

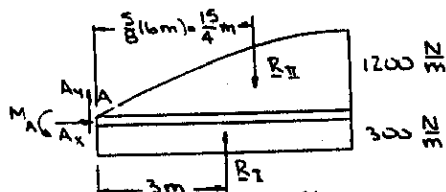


HAVE .. $R_I = (6\text{ m})(300 \frac{\text{N}}{\text{m}}) = 1800 \text{ N}$
 $R_{II} = \frac{2}{3}(6\text{ m})(1200 \frac{\text{N}}{\text{m}}) = 4800 \text{ N}$


THEN .. $\sum F_x = 0: A_x = 0$
 $+ \sum F_y = 0: A_y + 1800\text{ N} - 4800\text{ N} = 0$
 OR $A_y = 3000 \text{ N}$ $A = 3000 \text{ N}$

$\sum M_A = 0: M_A + (3\text{ m})(1800\text{ N}) - (\frac{15}{4}\text{ m})(4800\text{ N}) = 0$
 OR $M_A = 12.6 \text{ kN}\cdot\text{m}$
 $M_A = 12.6 \text{ kN}\cdot\text{m}$

5.83

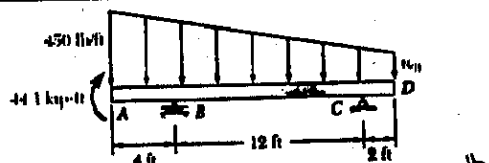

GIVEN: BEAM AND LOADING SHOWN, $w_0 = 150 \frac{\text{lb}}{\text{ft}}$
FIND: REACTIONS AT SUPPORTS

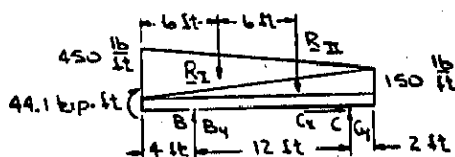


HAVE .. $R_I = \frac{1}{2}(18\text{ ft})(450 \frac{\text{lb}}{\text{ft}}) = 4050 \text{ lb}$
 $R_{II} = \frac{1}{2}(18\text{ ft})(150 \frac{\text{lb}}{\text{ft}}) = 1350 \text{ lb}$


THEN .. $\sum F_x = 0: C_x = 0$
 $\sum M_B = 0: -(44,100 \text{ kip}\cdot\text{ft}) - (21\text{ ft})(4050\text{ lb}) - (8\text{ ft})(1350\text{ lb}) + (12\text{ ft})C_y = 0$
 OR $C_y = 5250 \text{ lb}$ $C = 5250 \text{ lb}$

$+ \sum F_y = 0: B_y - 4050\text{ lb} - 1350\text{ lb} + 5250\text{ lb} = 0$
 OR $B_y = 150 \text{ lb}$ $B = 150 \text{ lb}$

5.84

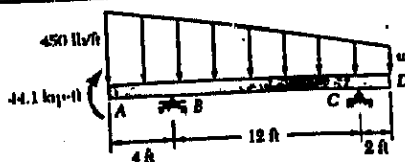

GIVEN: BEAM AND LOADING SHOWN
FIND: (a) w_0 SO THAT $B_y = 0$
(b) REACTION AT C




HAVE .. $R_I = \frac{1}{2}(18\text{ ft})(450 \frac{\text{lb}}{\text{ft}}) = 4050 \text{ lb}$
 $R_{II} = \frac{1}{2}(18\text{ ft})(w_0 \frac{\text{lb}}{\text{ft}}) = 9w_0 \text{ lb}$


THEN .. $\sum M_C = 0: -(44,100 \text{ lb}\cdot\text{ft}) + (10\text{ ft})(4050\text{ lb}) + (4\text{ ft})(9w_0\text{ lb}) = 0$
 OR $w_0 = 100 \frac{\text{lb}}{\text{ft}}$

(b) $\sum F_x = 0: C_x = 0$
 $+ \sum F_y = 0: -4050\text{ lb} - (9 \times 100)\text{ lb} + C_y = 0$
 OR $C_y = 4950 \text{ lb}$ $C = 4950 \text{ lb}$

5.85

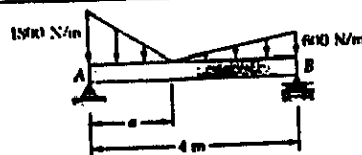

GIVEN: BEAM AND LOADING SHOWN
FIND: (a) a SO THAT $A_y = B_y$
(b) REACTIONS AT SUPPORTS

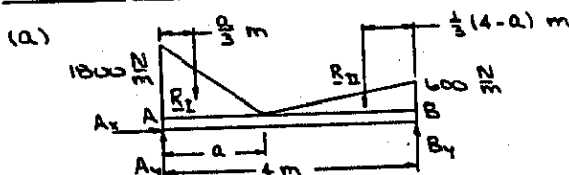

HAVE .. $R_I = \frac{1}{2}(a\text{ m})(1800 \frac{\text{N}}{\text{m}}) = 900a \text{ N}$
 $R_{II} = \frac{1}{2}[(4-a)\text{ m}](600 \frac{\text{N}}{\text{m}}) = 300(4-a) \text{ N}$

THEN .. $+ \sum F_y = 0: A_y - 900a - 300(4-a) + B_y = 0$
 OR $A_y + B_y = 1200 + 600a$

NOW $A_y = B_y \Rightarrow A_y = B_y = 600 + 300a \text{ (N)}$ (1)

ALSO .. $\sum M_B = 0: -(4\text{ m})A_y + [(4-\frac{a}{3})\text{ m}][900a\text{ N}] + [\frac{1}{3}(4-a)\text{ m}][300(4-a)\text{ N}] = 0$
 OR $A_y = 400 + 700a - 50a^2$ (2)

EQUATING Eqs. (1) AND (2)

$$600 + 300a = 400 + 700a - 50a^2$$

$$\text{OR } a^2 - 8a + 4 = 0$$

THEN .. $a = \frac{8 \pm \sqrt{64 - 4(1)(4)}}{2}$

$$\text{OR } a = 0.53590\text{ m} \quad a = 7.4641\text{ m}$$

NOW $a \leq 4\text{ m} \Rightarrow a = 0.536\text{ m}$

(b) HAVE .. $\sum F_x = 0: A_x = 0$
 Eq. (1) .. $A_y = B_y = 600 + 300(0.53590)$
 $= 761 \text{ N}$

$$\therefore A = B = 761 \text{ N}$$

5.89 CONTINUED

(a) Now... $W = \gamma V$ SO THAT

$$W_1 = (150 \frac{\text{lb}}{\text{ft}^3}) \left[\frac{1}{2} (9 \text{ ft})(15 \text{ ft})(1 \text{ ft}) \right] = 10,125 \text{ lb}$$

$$W_2 = (150 \frac{\text{lb}}{\text{ft}^3}) \left[(6 \text{ ft})(18 \text{ ft})(1 \text{ ft}) \right] = 16,200 \text{ lb}$$

$$W_3 = (150 \frac{\text{lb}}{\text{ft}^3}) \left[\frac{1}{2} (6 \text{ ft})(18 \text{ ft})(1 \text{ ft}) \right] = 8100 \text{ lb}$$

$$W_4 = (62.4 \frac{\text{lb}}{\text{ft}^3}) \left[\frac{1}{2} (6 \text{ ft})(18 \text{ ft})(1 \text{ ft}) \right] = 5369.6 \text{ lb}$$

Also... $P = \frac{1}{2} A p = \frac{1}{2} (18 \text{ ft})(1 \text{ ft}) (62.4 \frac{\text{lb}}{\text{ft}^3})(18 \text{ ft})$
 $= 10,108.8 \text{ lb}$

THEN... $\sum F_x = 0: H - 10,108.8 \text{ lb} = 0$
 OR $H = 10.11 \text{ kips}$


$$\sum F_y = 0: V - 10,125 \text{ lb} - 16,200 \text{ lb} - 8100 \text{ lb} - 5369.6 \text{ lb} = 0$$

OR $V = 37,794.6 \text{ lb}$ $V = 37.8 \text{ kips}$


(b) HAVE... $\sum M_A = 0: x(37,794.6 \text{ lb}) - (6 \text{ ft})(10,125 \text{ lb}) - (12 \text{ ft})(16,200 \text{ lb}) - (17 \text{ ft})(8100 \text{ lb}) - (19 \text{ ft})(5369.6 \text{ lb}) + (6 \text{ ft})(10,108.8 \text{ lb}) = 0$

OR... $37,794.6x - 60,750 - 194,400 - 137,700 - 64,022.4 + 60,652.8 = 0$
 OR $x = 10.48 \text{ ft}$


(c) CONSIDER WATER SECTION BCD AS THE FREE BODY

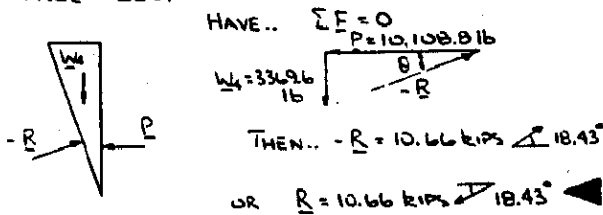

ALTERNATIVE SOLUTION

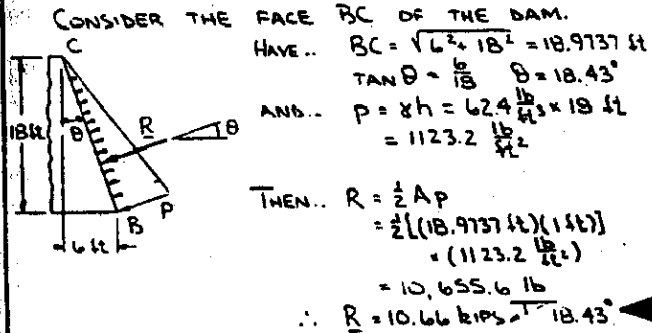

5.90

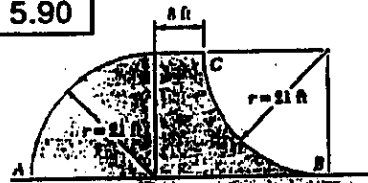


GIVEN: DAM CROSS SECTION SHOWN, WIDTH = 1 ft
 FIND: (a) REACTION FORCES EXERTED ON BASE OF DAM

- (b) POINT OF APPLICATION OF REACTION FORCES
 (c) RESULTANT FORCE ON FACE OF DAM


THE FREE BODY SHOWN (TOP OF NEXT COLUMN) CONSISTS OF A 1-ft THICK SECTION OF THE DAM AND THE QUARTER CIRCULAR SECTION OF WATER ABOVE THE DAM. (CONTINUES)

5.90 CONTINUED

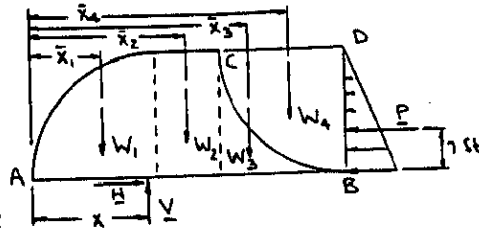

NOTE: $\bar{x}_1 = (21 - \frac{4+21}{3\pi}) \text{ ft} = 12.0873 \text{ ft}$
 $\bar{x}_2 = (21 - 4) \text{ ft} = 25 \text{ ft}$
 $\bar{x}_4 = (50 - \frac{4+21}{3\pi}) \text{ ft} = 41.087 \text{ ft}$

FOR AREA 3 FIRST NOTE...

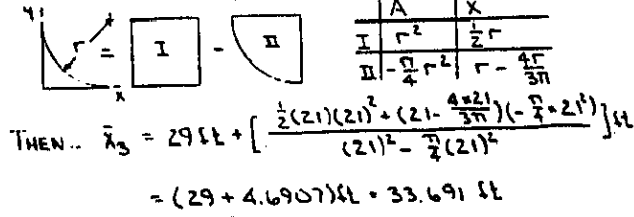

(a) NOW... $W = \gamma V$ SO THAT

$$W_1 = (150 \frac{\text{lb}}{\text{ft}^3}) \left[\frac{\pi}{4} (21 \text{ ft})^2 (1 \text{ ft}) \right] = 51,954 \text{ lb}$$

$$W_2 = (150 \frac{\text{lb}}{\text{ft}^3}) \left[(18 \text{ ft})(21 \text{ ft})(1 \text{ ft}) \right] = 25,200 \text{ lb}$$

$$W_3 = (150 \frac{\text{lb}}{\text{ft}^3}) \left[(21^2 - \frac{\pi}{4} 21^2) \text{ ft}^2 (1 \text{ ft}) \right] = 14,196 \text{ lb}$$

$$W_4 = (62.4 \frac{\text{lb}}{\text{ft}^3}) \left[\frac{\pi}{4} (21 \text{ ft})^2 (1 \text{ ft}) \right] = 21,613 \text{ lb}$$

ALSO $P = \frac{1}{2} A p = \frac{1}{2} [(21 \text{ ft})(1 \text{ ft})] (62.4 \frac{\text{lb}}{\text{ft}^3})(21 \text{ ft}) = 13,759 \text{ lb}$

THEN... $\sum F_x = 0: H - 13,759 \text{ lb} = 0$
 OR $H = 13.76 \text{ kips}$


$$\sum F_y = 0: V - 51,954 \text{ lb} - 25,200 \text{ lb} - 14,196 \text{ lb} - 21,613 \text{ lb} = 0$$

OR $V = 112,963 \text{ lb}$ $V = 113.0 \text{ kips}$


(b) HAVE... $\sum M_A = 0: x(112,963 \text{ lb}) - (12.0873 \text{ ft})(51,954 \text{ lb}) - (25 \text{ ft})(25,200 \text{ lb}) - (33.691 \text{ ft})(14,196 \text{ lb}) - (41.087 \text{ ft})(21,613 \text{ lb}) + (7 \text{ ft})(13,759 \text{ lb}) = 0$

OR $112,963x - 627,980 - 630,000 - 478,280 - 888,010 + 96,313 = 0$
 OR $x = 22.4 \text{ ft}$

(c) CONSIDER WATER SECTION BCD AS THE FREE BODY

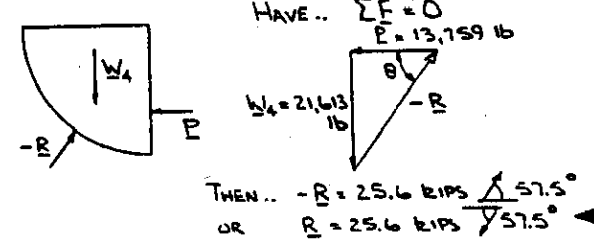


5.91



GIVEN: 6-ft GATE, $W = 1000 \text{ lb}$
 FRICTION FORCE $F = 0.1$
 = RESULTANT PRESSURE
 FORCE P , $x = 6 + \frac{15}{3}$
 FIND: T

CONSIDER THE FREE-BODY DIAGRAM OF THE GATE. NOW..



$$P_1 = \frac{1}{2} A p_1 = \frac{1}{2} [(6 \text{ ft})^2] \left[(2.4 \frac{\text{lb}}{\text{ft}^3}) (9 \text{ ft}) \right]$$

$$= 10,108.8 \text{ lb}$$

$$P_2 = \frac{1}{2} A p_2 = \frac{1}{2} [(6 \text{ ft})^2] \left[(2.4 \frac{\text{lb}}{\text{ft}^3}) (15 \text{ ft}) \right]$$

$$= 16,848 \text{ lb}$$

THEN.. $F = 0.1 P = 0.1 (P_1 + P_2)$

$$= 0.1 (10,108.8 + 16,848) \text{ lb}$$


$$= 2695.7 \text{ lb}$$

FINALLY..

$$+\sum F_y = 0: T - 2695.7 \text{ lb} - 1000 \text{ lb} = 0$$


OR $T = 3700 \text{ lb}$ ◀

5.92



GIVEN: 3-4-m SIDE,
 $T_{\text{max}} = 0.2 (200 \text{ kN})$
 $p = 10^3 \frac{\text{kg}}{\text{m}^3}$
 FIND: d_{max}

CONSIDER THE FREE-BODY DIAGRAM OF THE SIDE.



HAVE.. $P = \frac{1}{2} A p = \frac{1}{2} A (p g d)$

NOW.. $\sum M_A = 0: h T - \frac{d}{3} P = 0$

WHERE $h = 3 \text{ m}$

THEN FOR d_{max}

$$(3 \text{ m}) (0.2 \cdot 200 \cdot 10^3 \text{ N})$$


$$- \frac{d_{\text{max}}}{3} \left[\frac{1}{2} (4 \text{ m}) d_{\text{max}} \right] \cdot (10^3 \frac{\text{kg}}{\text{m}^3}) \cdot 9.81 \frac{\text{m}}{\text{s}^2}$$

$$= 0$$

OR $120 \text{ N} \cdot \text{m} - 6.54 d_{\text{max}}^2 \frac{\text{N}}{\text{m}} = 0$


OR $d_{\text{max}} = 2.64 \text{ m}$ ◀

5.93



GIVEN 3-4-m SIDE,
 $p = 1263 \frac{\text{kg}}{\text{m}^3}$,
 $d = 2.9 \text{ m}$
 FIND: T , REACTION AT A

CONSIDER THE FREE-BODY DIAGRAM OF THE SIDE.



HAVE.. $P = \frac{1}{2} A p = \frac{1}{2} A (p g d)$

$$= \frac{1}{2} [(2.9 \text{ m}) (4 \text{ m})]$$

$$\cdot (1263 \frac{\text{kg}}{\text{m}^3}) \cdot 9.81 \frac{\text{m}}{\text{s}^2} (2.9 \text{ m})$$

$$= 208.40 \text{ kN}$$

THEN.. $+\sum F_y = 0: A_y = 0$


$$\sum M_A = 0: (3 \text{ m}) T - (\frac{2.9}{3} \text{ m}) (208.40 \text{ kN}) = 0$$

OR $T = 67.151 \text{ kN}$ $I = 67.2 \text{ kN}$ ◀

$$+\sum F_x = 0: A_x + 208.40 \text{ kN} - 67.151 \text{ kN} = 0$$


OR $A_x = -141.249 \text{ kN}$ $A = 141.2 \text{ kN}$ ◀

5.94



GIVEN: $P_2 = 1.76 \times 10^3 \frac{\text{kg}}{\text{m}^3}$,
 WIDTH = 1 m,
 $d_s = 2 \text{ m}$
 FIND: PERCENTAGE
 INCREASE OF FORCE
 ON DAM FACE
 BECAUSE OF SILT

FIRST DETERMINE THE FORCE ON THE DAM FACE WITHOUT THE SILT. HAVE..




$$P_w = \frac{1}{2} A p_w = \frac{1}{2} A (p g h)$$

$$= \frac{1}{2} [(6.6 \text{ m}) (1 \text{ m})]$$

$$\cdot [(10^3 \frac{\text{kg}}{\text{m}^3}) (9.81 \frac{\text{m}}{\text{s}^2}) (6.6 \text{ m})]$$

$$= 213.66 \text{ kN}$$

NEXT DETERMINE THE FORCE ON THE DAM FACE WITH THE SILT. HAVE..



$$P'_w = \frac{1}{2} [(4.6 \text{ m}) (1 \text{ m})]$$

$$\cdot [(10^3 \frac{\text{kg}}{\text{m}^3}) (9.81 \frac{\text{m}}{\text{s}^2}) (4.6 \text{ m})]$$

$$= 103.79 \text{ kN}$$

$$(P_2)_1 = \frac{1}{2} [(2 \text{ m}) (1 \text{ m})] [(1.76 \times 10^3 \frac{\text{kg}}{\text{m}^3})$$

$$\cdot (9.81 \frac{\text{m}}{\text{s}^2}) (4.6 \text{ m})]$$

$$= 79.42 \text{ kN}$$

$$(P_2)_2 = \frac{1}{2} [(2 \text{ m}) (1 \text{ m})] [(1.76 \times 10^3 \frac{\text{kg}}{\text{m}^3})$$

$$\cdot (9.81 \frac{\text{m}}{\text{s}^2}) (6.6 \text{ m})]$$

$$= 113.95 \text{ kN}$$


THEN.. $P' = P'_w + (P_2)_1 + (P_2)_2 = 297.16 \text{ kN}$

THE PERCENTAGE INCREASE % INC. IS THEN

GIVEN BY.. $\% \text{ INC.} = \frac{P' - P_w}{P_w} \cdot 100\% = \frac{(297.16 - 213.66)}{213.66} \cdot 100\%$

OR $\% \text{ INC.} = 39.14\%$ ◀


5.95



GIVEN: $(F_{\text{BASE}})_{\text{MAX}} = 1.2 \times$
 FORCE OF WATER,
 $P_2 = 1.76 \times 10^3 \frac{\text{kg}}{\text{m}^3}$,
 WIDTH = 1 m,
 RATE r_s AT WHICH
 SILT IS DEPOSITED
 = 12 mm/YEAR

FIND: NUMBER OF YEARS N UNTIL DAM
 BECOMES UNSAFE

FIRST DETERMINE THE FORCE ON THE DAM FACE BEFORE ANY SILT IS DEPOSITED. HAVE..



$$P_w = \frac{1}{2} A p_w = \frac{1}{2} A (p g h)$$

$$= \frac{1}{2} [(6.6 \text{ m}) (1 \text{ m})]$$

$$\cdot [(10^3 \frac{\text{kg}}{\text{m}^3}) (9.81 \frac{\text{m}}{\text{s}^2}) (6.6 \text{ m})]$$

$$= 213.66 \text{ kN}$$


THE MAXIMUM ALLOWED FORCE P_{ALLOW} ON THE DAM IS THEN..

$P_{\text{ALLOW}} = 1.2 P_w = 1.2 (213.66 \text{ kN}) = 256.39 \text{ kN}$

NEXT DETERMINE THE FORCE P' ON THE DAM FACE AFTER A DEPTH d OF SILT HAS SETTLED.

(CONTINUED)

5.95 CONTINUED



HAVE..

$$P_w = \frac{1}{2} [(b.6-d)m \cdot (1m)] \cdot \left[(10 \frac{kg}{m^3}) (9.81 \frac{m}{s^2}) (b.6-d)m \right]$$

$$= 4.905 (b.6-d)^2 \text{ kN}$$

$$(P_s)_I = \frac{1}{2} [(d)m \cdot (1m)] \cdot \left[(1.764 \frac{kg}{m^3}) (9.81 \frac{m}{s^2}) \cdot (b.6-d)m \right]$$

$$= 8.6328 (b.6-d)^2 \text{ kN}$$

$$(P_s)_II = \frac{1}{2} [(d)m \cdot (1m)] \cdot \left[(1.764 \frac{kg}{m^3}) (9.81 \frac{m}{s^2}) \cdot (b.6m) \right]$$

$$= 56.976 d \text{ kN}$$

THEN $P' = P_w + (P_s)_I + (P_s)_II$

$$= [4.905 (b.6-d)^2 + 8.6328 (b.6-d)^2 + 56.976 d] \text{ kN}$$

$$= (213.66 + 49.206d - 3.7278d^2) \text{ kN}$$

NOW REQUIRE THAT $P' = P_{allow}$ TO DETERMINE THE MAXIMUM VALUE OF d .

$$\therefore (213.66 + 49.206d - 3.7278d^2) \text{ kN} = 256.39 \text{ kN}$$

OR $3.7278d^2 - 49.206d + 42.73 = 0$

THEN..

$$d = \frac{49.206 \pm \sqrt{(-49.206)^2 - 4(3.7278)(42.73)}}{2(3.7278)}$$


OR $d = 0.93456 \text{ m}$ AND $d = 12.2652 \text{ m}$

NOW, $d \leq 6.6 \text{ m}$ AND $d = r_s N$

THEN $0.93456 \text{ m} = 12 \times 10^3 \frac{\text{m}}{\text{YEAR}} \cdot N$

OR $N = 77.9 \text{ YEARS}$

5.96




GIVEN: 1-m GATE, $M_R = 490 \text{ N}\cdot\text{m}$, $r_w = 0.1 \frac{\text{m}}{\text{MIN}}$

$r_{MA} = 0.2 \frac{\text{m}}{\text{MIN}}$

$P_{MA} = 789 \text{ kg/m}^3$

FIND: TIME t_R WHEN GATE ROTATES, DIRECTION OF ROTATION

CONSIDER THE FREE-BODY DIAGRAM OF THE GATE.



FIRST NOTE.. $V = A_{BASE} d$ AND $V = r t$

THEN..

$$d_w = \frac{0.1 \frac{\text{m}}{\text{MIN}} \cdot t (\text{MIN})}{(0.4 \text{ m})(1 \text{ m})}$$

$$= 0.25 t \text{ (m)}$$

$$d_{MA} = \frac{0.2 \frac{\text{m}}{\text{MIN}} \cdot t (\text{MIN})}{(0.2 \text{ m})(1 \text{ m})}$$

$$= t \text{ (m)}$$

NOW.. $P = \frac{1}{2} A \cdot p = \frac{1}{2} A (pgh)$ SO THAT

$$P_w = \frac{1}{2} [(0.25t)m \cdot (1m)] \left[(10 \frac{kg}{m^3}) (9.81 \frac{m}{s^2}) (0.25t)m \right]$$

$$= 306.56 t^2 \text{ N}$$

$$P_{MA} = \frac{1}{2} (t)m \cdot (1m) \left[(789 \frac{kg}{m^3}) (9.81 \frac{m}{s^2}) (t)m \right]$$

$$= 3870 t^2 \text{ N}$$

NOW ASSUME THAT THE GATE WILL ROTATE CLOCKWISE AND WHEN $d_{MA} \leq 0.6 \text{ m}$. WHEN (CONTINUED)

5.96 CONTINUED

ROTATION OF THE GATE IS IMPENDING, REQUIRE

$$\sum M_A: M_R = (0.6m - \frac{1}{3} d_{MA}) P_{MA} - (0.6m - \frac{1}{3} d_w) P_w$$

SUBSTITUTING..

$$490 \text{ N}\cdot\text{m} = (0.6 - \frac{1}{3} t)m \cdot (3870 t^2) \text{ N}$$

$$- (0.6 - \frac{1}{3} \cdot 0.25t)m \cdot (306.56 t^2) \text{ N}$$

SIMPLIFYING.. $1264.45 t^3 - 2138.1 t^2 + 490 = 0$

SOLVING (POSITIVE ROOTS ONLY)..

$$t = 0.59451 \text{ MIN AND } t = 1.52411 \text{ MIN}$$


NOW CHECK ASSUMPTION USING THE SMALLER ROOT. HAVE..

$$d_{MA} = (t)m = 0.59451 \text{ m} < 0.6 \text{ m}$$

$$\therefore t = 0.59451 \text{ MIN} = 35.7 \text{ S}$$

AND THE GATE ROTATES COUNTERCLOCKWISE


5.97 and 5.98



GIVEN: $0.5 \times 0.8 \text{ m}$

GATE, WATER FRICTIONLESS STOP AT B

FIRST CONSIDER THE FORCE OF THE WATER ON THE GATE. HAVE $P = \frac{1}{2} A p = \frac{1}{2} A (pgh)$ SO THAT..




$$P_1 = \frac{1}{2} [(0.5 \text{ m})(0.8 \text{ m})] \cdot \left[(10 \frac{kg}{m^3}) (9.81 \frac{m}{s^2}) (0.45 \text{ m}) \right]$$

$$= 882.9 \text{ N}$$

$$P_2 = \frac{1}{2} [(0.5 \text{ m})(0.8 \text{ m})] \cdot \left[(10 \frac{kg}{m^3}) (9.81 \frac{m}{s^2}) (0.93 \text{ m}) \right]$$

$$= 1824.66 \text{ N}$$

5.97 FIND: REACTIONS AT A AND B WHEN $T = 0$



HAVE..

$$\sum M_A = 0: \frac{1}{3} (0.8 \text{ m})(882.9 \text{ N}) + \frac{1}{3} (0.8 \text{ m})(1824.66 \text{ N}) - (0.8 \text{ m}) B = 0$$


$$\text{OR } B = 1510.74 \text{ N}$$

$$\text{OR } B = 1511 \text{ N } \Delta 53.1^\circ$$

$$\sum F = 0: A + 1510.74 \text{ N} - 882.9 \text{ N} - 1824.66 \text{ N} = 0$$

$$\text{OR } A = 1197 \text{ N } \Delta 53.1^\circ$$

5.98 FIND: T TO OPEN GATE




FIRST NOTE THAT WHEN THE GATE BEGINS TO OPEN, THE REACTION AT B = 0. THEN..

$$\sum M_A = 0: \frac{1}{3} (0.8 \text{ m})(882.9 \text{ N}) + \frac{1}{3} (0.8 \text{ m})(1824.66 \text{ N}) - (0.45 + 0.27)m \cdot (\frac{4}{3} T) = 0$$

$$\text{OR } 235.44 + 973.152 - 0.33882 T = 0$$


$$\text{OR } T = 3570 \text{ N}$$

5.99 and 5.100




GIVEN: 4=2-ft GATE, $k=828 \frac{lb}{ft}$,
SPRING IS UNDEFORMED
WHEN GATE IS VERTICAL
WATER

FIRST DETERMINE THE FORCES EXERTED ON THE GATE BY THE SPRING AND THE WATER WHEN B IS AT THE END OF THE CYLINDRICAL PORTION OF THE FLOOR.



HAVE... $\sin \theta = \frac{2}{4} \quad \theta = 30^\circ$
THEN $X_{sp} = (3 ft) \tan 30^\circ$
AND $F_{sp} = k X_{sp}$
 $= 828 \frac{lb}{ft} \cdot 3 ft \cdot \tan 30^\circ$
 $= 1434.14 lb$

ASSUME $d \geq 4 ft$



HAVE... $P = \frac{1}{2} A \cdot p = \frac{1}{2} A (\gamma h)$
THEN... $P_I = \frac{1}{2} [(4 ft)(2 ft)] \cdot [(62.4 \frac{lb}{ft^3})(d-4) ft]$
 $= 249.6(d-4) lb$
 $P_{II} = \frac{1}{2} [(4 ft)(2 ft)] \cdot [(62.4 \frac{lb}{ft^3})(d-4 + 4 \cos 30^\circ)]$
 $= 249.6(d-0.53590) lb$

5.99 FIND: $d, W=0$

USING THE ABOVE FREE-BODY DIAGRAMS OF THE GATE, HAVE...

$\sum M_A = 0: (\frac{4}{3} ft)[249.6(d-4) lb] + (\frac{8}{3} ft)[249.6(d-0.53590) lb] - (3 ft)(1434.14 lb) = 0$
OR $(332.8 d - 1331.2) + (665.6 d - 356.70) - 4302.4 = 0$
OR $d = 6.00 ft$

$d \geq 4 ft \Rightarrow$ ASSUMPTION CORRECT $\therefore d = 6.00 ft$


5.100 FIND: $d, W=1000 lb$

USING THE ABOVE FREE-BODY DIAGRAMS OF THE GATE, HAVE...

$\sum M_A = 0: (\frac{4}{3} ft)[249.6(d-4) lb] + (\frac{8}{3} ft)[249.6(d-0.53590) lb] - (3 ft)(1434.14 lb) - (1 ft)(1000 lb) = 0$
OR $(332.8 d - 1331.2) + (665.6 d - 356.70) - 4302.4 - 1000 = 0$
OR $d = 7.00 ft$


$d \geq 4 ft \Rightarrow$ ASSUMPTION CORRECT $\therefore d = 7.00 ft$

5.101 and 5.102



GIVEN: PRISMATICALLY SHAPED GATE, WATER

FIRST NOTE THAT WHEN THE GATE IS ABOUT TO OPEN (CLOCKWISE ROTATION IS IMPENDING), $B_y \rightarrow 0$ AND THE LINE OF ACTION OF THE RESULTANT P OF THE PRESSURE FORCES PASSES THROUGH THE PIN AT A. IN ADDITION, IF IT IS ASSUMED THAT




HOMOGENEOUS, THEN ITS CENTER OF GRAVITY C COINCIDES WITH THE CENTROID OF THE TRIANGULAR AREA. THEN...

$a = \frac{d}{3} - (0.25 - h)$
AND $b = \frac{2}{3}(0.4) - \frac{8}{15}(\frac{d}{3})$

NOW $\frac{a}{b} = \frac{8}{15}$
SO THAT


$\frac{\frac{d}{3} - (0.25 - h)}{\frac{2}{3}(0.4) - \frac{8}{15}(\frac{d}{3})} = \frac{8}{15}$

SIMPLIFYING YIELDS...
 $\frac{289}{45}d + 15h = \frac{70.6}{12} \quad (1)$



ALTERNATIVE SOLUTION

CONSIDER A FREE BODY CONSISTING OF A 1-m THICK SECTION OF THE GATE AND THE TRIANGULAR SECTION BDE OF WATER ABOVE THE GATE.

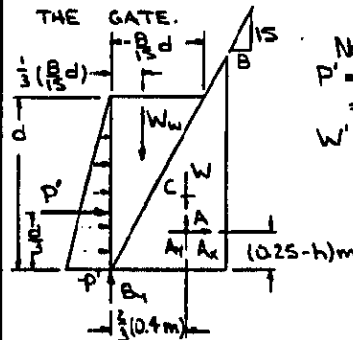

NOW...
 $P' = \frac{1}{2} A \cdot p' = \frac{1}{2} (d+1m)(\rho g d)$
 $= \frac{1}{2} \rho g d^2 \quad (N)$
 $W' = \rho g V = \rho g (\frac{1}{2} \cdot \frac{8}{15} d \cdot d \cdot 1m)$
 $= \frac{4}{15} \rho g d^2 \quad (N)$

THEN WITH $B_y = 0$ (AS EXPLAINED ABOVE), HAVE...

$\sum M_A = 0: [\frac{1}{3}(0.4) - \frac{1}{3}(\frac{8}{15}d)](\frac{4}{15} \rho g d^2) - [\frac{d}{3} - (0.25 - h)](\frac{1}{2} \rho g d^2) = 0$

SIMPLIFYING YIELDS...
 $\frac{289}{45}d + 15h = \frac{70.6}{12}$
AS ABOVE.

(CONTINUED)

5.101 and 5.102 CONTINUED

5.101 FIND: $d, h = 0.10 \text{ m}$

SUBSTITUTING INTO EQ. (1)...

$$\frac{289}{45}d + 15(0.10) = \frac{70.6}{12}$$

OR $d = 0.683 \text{ m}$

5.102 FIND: $h, d = 0.75 \text{ m}$

SUBSTITUTING INTO EQ. (1)...

$$\frac{289}{45}(0.75) + 15h = \frac{70.6}{12}$$

OR $h = 0.0711 \text{ m}$


5.103

GIVEN: WIDTH = 30 IN., WATER

FIND: RESULTANT R OF PRESSURE FORCES ACTING ON DRUM



CONSIDER THE ELEMENTS OF WATER SHOWN. THE RESULTANT OF THE WEIGHTS OF WATER ABOVE EACH SECTION OF THE DRUM AND THE RESULTANTS OF THE PRESSURE FORCES ACTING ON THE VERTICAL SURFACES OF THE ELEMENTS IS EQUAL TO THE RESULTANT HYDROSTATIC FORCE ACTING ON THE DRUM.



THEN..

$$P_1 = \frac{1}{2}A_1p_1 = \frac{1}{2}A_1(\gamma h)$$

$$= \frac{1}{2}[(\frac{30}{12})H - (\frac{23}{12})ft] \cdot [(62.4 \frac{lb}{ft^3}) \cdot (\frac{23}{12}ft)]$$

$$= 286.542 \text{ lb}$$

$$P_2 = \frac{1}{2}A_2p_2 = \frac{1}{2}A_2(\gamma h)$$

$$= \frac{1}{2}[(\frac{30}{12})H - (\frac{11.5}{12})ft] \cdot [(62.4 \frac{lb}{ft^3}) \cdot (\frac{11.5}{12}ft)]$$

$$= 71.635 \text{ lb}$$

$$W_1 = \gamma V_1 = (62.4 \frac{lb}{ft^3}) \cdot [(\frac{11.5}{12})^2 ft^2 - \frac{\pi}{4}(\frac{11.5}{12})^2 ft^2] \cdot (\frac{30}{12}ft)$$

$$= 30.746 \text{ lb}$$

$$W_2 = \gamma V_2 = (62.4 \frac{lb}{ft^3}) \cdot [(\frac{11.5}{12})^2 ft^2 + \frac{\pi}{4}(\frac{11.5}{12})^2 ft^2] \cdot (\frac{30}{12}ft)$$

$$= 255.80 \text{ lb}$$

$$W_3 = \gamma V_3 = (62.4 \frac{lb}{ft^3}) \cdot [\frac{\pi}{4}(\frac{11.5}{12})^2 ft^2] \cdot (\frac{30}{12}ft)$$

$$= 112.525 \text{ lb}$$

THEN.. $\sum F_x: R_x = (286.542 - 71.635) \text{ lb} = 214.91 \text{ lb}$

$\sum F_y: R_y = (-30.746 + 255.80 + 112.525) \text{ lb}$



$= 337.58 \text{ lb}$

FINALLY.. $R = \sqrt{R_x^2 + R_y^2}$ $\text{TAN } \theta = \frac{R_y}{R_x}$

$= 400.18 \text{ lb}$ $\theta = 57.5^\circ$

$\therefore R = 400 \text{ lb} \angle 57.5^\circ$

5.104

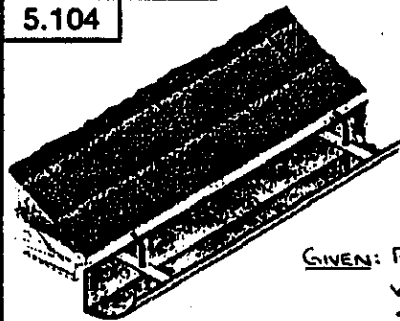


GIVEN: PARABOLIC GUTTER, WATER, HANGERS SPACED 2 ft APART

FIND: (a) THE RESULTANT R OF THE PRESSURE FORCES EXERTED ON A 2-ft SECTION OF GUTTER

(b) THE FORCE-COUPLE SYSTEM EXERTED ON A HANGER AT THE GUTTER

(a) CONSIDER A 2-ft-LONG PARABOLIC SECTION OF WATER. THEN..



$$P = \frac{1}{2}A_1p = \frac{1}{2}A_1(\gamma h)$$

$$= \frac{1}{2}[(\frac{3}{12}ft)(2ft) \cdot [(62.4 \frac{lb}{ft^3}) \cdot (\frac{4}{12}ft)]]$$

$$= 6.9333 \text{ lb}$$

$$W_w = \gamma V$$

$$= (62.4 \frac{lb}{ft^3}) \cdot [\frac{2}{3}(\frac{1}{12}ft)(\frac{4}{12}ft)(2ft)]$$

$$= 13.8667 \text{ lb}$$

NOW.. $\sum F = 0: (-R) - P + W = 0$

SO THAT

$$R = \sqrt{P^2 + W^2}$$


$$\text{TAN } \theta = \frac{W}{P}$$

$$= 15.5034 \text{ lb}$$

$$\theta = 63.4^\circ$$

$\therefore R = 15.50 \text{ lb} \angle 63.4^\circ$

(b) CONSIDER THE FREE-BODY DIAGRAM OF A 2-ft-LONG SECTION OF WATER AND GUTTER.



THEN..

$$\sum F_x = 0: B_x = 0$$

$$+\sum F_y = 0: B_y - 13.8667 \text{ lb} = 0$$

OR $B_y = 13.8667 \text{ lb}$

$$\sum M_B = 0: M_B + (3 - 2.4) \text{ in.} \cdot (13.8667 \text{ lb}) = 0$$

OR $M_B = -8.320 \text{ lb}\cdot\text{in.}$

THE FORCE-COUPLE SYSTEM EXERTED ON THE HANGER IS THEN..


$13.87 \text{ lb} \uparrow, 8.32 \text{ lb}\cdot\text{in.}$

5.105

GIVEN: COMPOSITE BODY SHOWN

FIND: (a) $\bar{x}, h = \frac{1}{2}L$

(b) $\frac{h}{L}, \bar{x} = L$

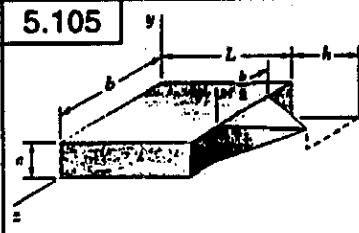

	V	\bar{x}	$\bar{x}V$
RECTANGULAR PRISM	Lab	$\frac{1}{2}L$	$\frac{1}{2}L^2ab$
PYRAMID	$\frac{1}{3}a(\frac{1}{2})h$	$L + \frac{1}{3}h$	$\frac{1}{6}abh(L + \frac{1}{3}h)$

THEN.. $\sum V = ab(L + \frac{1}{6}h)$ $\sum \bar{x}V = \frac{1}{6}ab[3L^2 + h(L + \frac{1}{3}h)]$

(CONTINUED)


5.105 CONTINUED

Now.. $\bar{X} \Sigma V = \Sigma \bar{x} V$ SO THAT
 $\bar{X} [ab(L + \frac{1}{6}h)] = \frac{1}{6}ab(3L^2 + hL + \frac{1}{4}h^2)$
 OR $\bar{X}(1 + \frac{1}{6}\frac{h}{L}) = \frac{1}{6}L(3 + \frac{h}{L} + \frac{1}{4}\frac{h^2}{L^2})$ (1)

(a) $\bar{X} = ?$ WHEN $h = \frac{1}{2}L$
 SUBSTITUTING $\frac{h}{L} = \frac{1}{2}$ INTO EQ. (1)..
 $\bar{X}(1 + \frac{1}{6}(\frac{1}{2})) = \frac{1}{6}L[3 + (\frac{1}{2}) + \frac{1}{4}(\frac{1}{2})^2]$
 OR $\bar{X} = \frac{57}{104}L$ $\bar{X} = 0.548L$

(b) $\frac{h}{L} = ?$ WHEN $\bar{X} = L$
 SUBSTITUTING INTO EQ. (1)..
 $L(1 + \frac{1}{6}\frac{h}{L}) = \frac{1}{6}L(3 + \frac{h}{L} + \frac{1}{4}\frac{h^2}{L^2})$
 OR.. $1 + \frac{1}{6}\frac{h}{L} = \frac{1}{2} + \frac{1}{6}\frac{h}{L} + \frac{1}{24}\frac{h^2}{L^2}$
 OR $\frac{h^2}{L^2} = 12$ $\therefore \frac{h}{L} = 2\sqrt{3}$

5.106

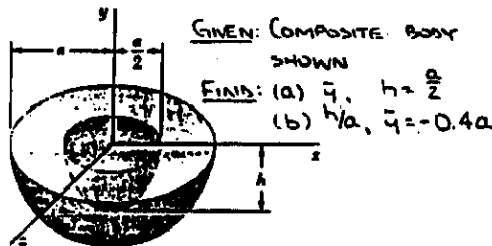

	V	\bar{y}	$\bar{y}V$
HEMISPHERE	$\frac{2}{3}\pi a^3$	$-\frac{3}{8}a$	$-\frac{1}{4}\pi a^4$
SEMIELLIPTOID	$-\frac{2}{3}\pi(\frac{a}{2})^2 h = -\frac{1}{3}\pi a^2 h$	$-\frac{1}{2}h$	$+\frac{1}{6}\pi a^2 h^2$

THEN.. $\Sigma V = \frac{2}{3}\pi a^2(4a-h)$ $\Sigma \bar{y}V = -\frac{\pi}{16}a^2(4a^2-h^2)$


Now.. $\bar{Y} \Sigma V = \Sigma \bar{y}V$ SO THAT
 $\bar{Y}[\frac{2}{3}\pi a^2(4a-h)] = -\frac{\pi}{16}a^2(4a^2-h^2)$
 OR $\bar{Y}(4 - \frac{h}{2a}) = -\frac{1}{8}a[4 - (\frac{h}{2a})^2]$ (1)

(a) $\bar{Y} = ?$ WHEN $h = \frac{a}{2}$
 SUBSTITUTING $\frac{h}{a} = \frac{1}{2}$ INTO EQ. (1)..
 $\bar{Y}(4 - \frac{1}{2}) = -\frac{1}{8}a[4 - (\frac{1}{2})^2]$
 OR $\bar{Y} = -\frac{43}{112}a$ $\bar{Y} = -0.402a$


(b) $\frac{h}{a} = ?$ WHEN $\bar{Y} = -0.4a$
 SUBSTITUTING INTO EQ. (1)..
 $(-0.4a)(4 - \frac{h}{2a}) = -\frac{1}{8}a[4 - (\frac{h}{2a})^2]$
 OR $3(\frac{h}{2a})^2 - 3.2(\frac{h}{2a}) + 0.8 = 0$
 THEN.. $\frac{h}{2a} = \frac{3.2 \pm \sqrt{(3.2)^2 - 4(3)(0.8)}}{2(3)}$
 $= \frac{3.2 \pm 0.8}{6}$

OR $\frac{h}{2a} = \frac{4}{6}$ AND $\frac{h}{2a} = \frac{2}{6}$

5.107

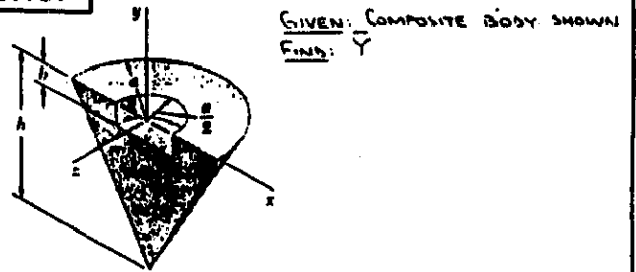


FIRST NOTE THAT THE VALUES OF \bar{Y} WILL BE THE SAME FOR THE GIVEN BODY AND THE BODY SHOWN BELOW. THEN..

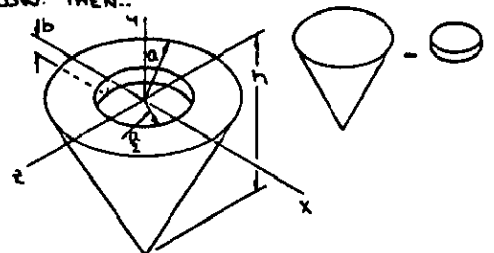

	V	\bar{y}	$\bar{y}V$
CONE	$\frac{1}{3}\pi a^2 h$	$-\frac{2}{3}h$	$-\frac{1}{12}\pi a^2 h^2$
CYLINDER	$-\pi(\frac{a}{2})^2 b = -\frac{1}{4}\pi a^2 b$	$-\frac{1}{2}b$	$+\frac{1}{8}\pi a^2 b^2$
Σ	$\frac{\pi}{12}a^2(4h-3b)$		$-\frac{\pi}{24}a^2(2h^2-3b^2)$

HAVE.. $\bar{Y} \Sigma V = \Sigma \bar{y}V$
 THEN.. $\bar{Y}[\frac{\pi}{12}a^2(4h-3b)] = -\frac{\pi}{24}a^2(2h^2-3b^2)$
 OR $\bar{Y} = -\frac{2h^2-3b^2}{2(4h-3b)}$

5.108

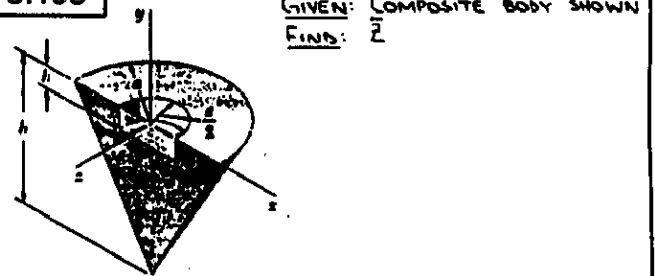


FIRST NOTE THAT THE BODY CAN BE FORMED BY REMOVING A 'HALF-CYLINDER' FROM A 'HALF-CONE.'



	V	\bar{z}	$\bar{z}V$
HALF-CONE	$\frac{1}{6}\pi a^2 h$	$-\frac{3}{8}h$	$-\frac{1}{16}\pi a^2 h^2$
HALF-CYLINDER	$-\frac{1}{2}(\frac{a}{2})^2 b = -\frac{1}{8}a^2 b$	$-\frac{1}{2}h$	$+\frac{1}{16}\pi a^2 b^2$
Σ	$\frac{\pi}{24}a^2(4h-3b)$		$-\frac{1}{16}\pi a^2(2h-b)$

*FROM SAMPLE PROBLEM 5.13
 HAVE.. $\bar{z} \Sigma V = \Sigma \bar{z}V$
 THEN.. $\bar{z}[\frac{\pi}{24}a^2(4h-3b)] = -\frac{1}{16}\pi a^2(2h-b)$
 OR $\bar{z} = -\frac{2a}{\pi} \frac{2h-b}{4h-3b}$


5.109

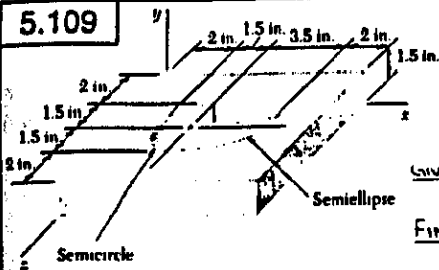

GIVEN: SAND MOLD SHOWN
FIND: LOCATION OF CENTER OF GRAVITY

FIRST ASSUME THAT THE MOLD IS HOMOGENEOUS SO THAT ITS CENTER OF GRAVITY WILL COINCIDE WITH THE CENTROID OF THE CORRESPONDING VOLUME. SYMMETRY THEN IMPLIES $\bar{z} = 3.5$ IN.

Now...




$\bar{x}_I = 3.5 - \frac{4.15}{3\pi} = 2.8634$ IN.
 $\bar{x}_{III} = 3.5 - \frac{4.15}{3\pi} = 4.9854$ IN.

V, IN ³	\bar{x} , IN	\bar{y} , IN	$\bar{x}V$, IN ⁴	$\bar{y}V$, IN ⁴
I (9)(1.5)(7) = 94.5	4.5	0.75	425.25	70.875
II $-\frac{\pi}{2}(1.5)^2(0.75) = -2.6507$	2.8634	1.125	-7.5900	-2.9820
III $-\frac{\pi}{2}(3.5)(1.5)(0.75) = -6.1850$	4.9854	1.125	-30.835	-6.9581
Σ 85.664			386.83	60.935


HAVE... $\bar{x}\Sigma V = \Sigma \bar{x}V$: $\bar{x}(85.664 \text{ IN}^3) = 386.83 \text{ IN}^4$
OR $\bar{x} = 4.52$ IN.
AND $\bar{y}\Sigma V = \Sigma \bar{y}V$: $\bar{y}(85.664 \text{ IN}^3) = 60.935 \text{ IN}^4$
OR $\bar{y} = 0.711$ IN.

5.110 and 5.111



GIVEN: STOP BRACKET SHOWN
FIND: \bar{x} (5.110)
 \bar{z} (5.111)

FIRST ASSUME THAT THE BRACKET IS HOMOGENEOUS SO THAT ITS CENTER OF GRAVITY WILL COINCIDE WITH THE CENTROID OF THE CORRESPONDING VOLUME.



$\bar{x}_{III} = 34 + \frac{2}{3}(10) = 39$ mm
 $\bar{z}_{III} = 12 + \frac{2}{3}(88) = 56$ mm
 $\bar{x}_{IV} = 34 + \frac{2}{3}(66) = 78$ mm
 $\bar{z}_{IV} = 55 + \frac{2}{3}(45) = 85$ mm

(CONTINUED)


5.110 and 5.111 CONTINUED

	V, mm ³	\bar{x} , mm	\bar{z} , mm	$\bar{x}V$, mm ⁴	$\bar{z}V$, mm ⁴
I	(100)(88)(12) = 105 600	50	6	5 280 000	6 33 600
II	(100)(12)(88) = 105 600	50	56	5 280 000	5 913 600
III	$\frac{\pi}{2}(10)(12)(51) = 15 810$	39	29	616 590	4 58 490
IV	$-\frac{\pi}{2}(66)(12)(45) = -17 820$	78	85	-1 389 960	-1 514 700
Σ	209 190			9 786 630	5 490 990

5.110 HAVE... $\bar{x}\Sigma V = \Sigma \bar{x}V$
 $\bar{x}(209 190 \text{ mm}^3) = 9 786 630 \text{ mm}^4$
OR $\bar{x} = 46.8$ mm


5.111 HAVE... $\bar{z}\Sigma V = \Sigma \bar{z}V$
 $\bar{z}(209 190 \text{ mm}^3) = 5 490 990 \text{ mm}^4$
OR $\bar{z} = 26.2$ mm

5.112 and 5.115

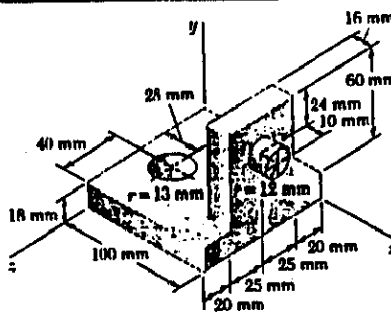

GIVEN: MACHINE ELEMENT SHOWN
FIND: \bar{x} (5.112)
 \bar{y} (5.115)

FIRST ASSUME THAT THE MACHINE ELEMENT IS HOMOGENEOUS SO THAT ITS CENTER OF GRAVITY WILL COINCIDE WITH THE CENTROID OF THE CORRESPONDING VOLUME.




	V, mm ³	\bar{x} , mm	\bar{y} , mm	$\bar{x}V$, mm ⁴	$\bar{y}V$, mm ⁴
I	(100)(18)(90) = 162 000	50	9	8 100 000	1 458 000
II	(16)(60)(50) = 48 000	92	48	4 416 000	2 304 000
III	$\pi(12)^2(10) = 4 523.9$	105	54	475 010	244 290
IV	$-\pi(13)^2(18) = -9 556.7$	28	9	-267 590	-86 010
Σ	204 967.2			12 723 420	3 920 280

5.112 HAVE... $\bar{x}\Sigma V = \Sigma \bar{x}V$
 $\bar{x}(204 967.2 \text{ mm}^3) = 12 723 420 \text{ mm}^4$
OR $\bar{x} = 62.1$ mm


5.115 HAVE... $\bar{y}\Sigma V = \Sigma \bar{y}V$
 $\bar{y}(204 967.2 \text{ mm}^3) = 3 920 280 \text{ mm}^4$
OR $\bar{y} = 19.13$ mm

5.113 and 5.114

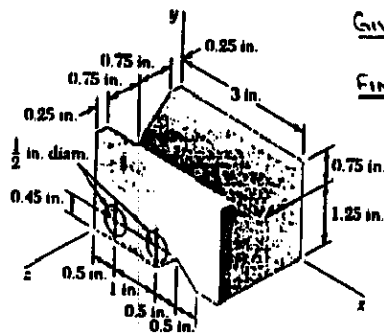

GIVEN: MACHINE ELEMENT SHOWN
 FIND: \bar{X} (5.113)
 \bar{Y} (5.114)

FIRST ASSUME THAT THE MACHINE ELEMENT IS HOMOGENEOUS SO THAT ITS CENTER OF GRAVITY WILL COINCIDE WITH THE CENTROIDS OF THE CORRESPONDING VOLUME. ALSO NOTE THAT THE TWO HOLES AND THE V-NOTCH EXTEND THROUGH THE BODY.

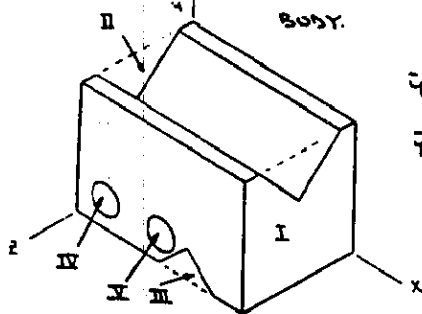

$\bar{y}_{II} = 1.25 + \frac{1}{2}(0.75) = 1.75 \text{ in.}$
 $\bar{y}_{III} = \frac{1}{2}(0.45) = 0.15 \text{ in.}$


V, in ³	\bar{x} , in.	\bar{y} , in.	$\bar{x}V$, in ⁴	$\bar{y}V$, in ⁴
I (3)(2)(2) = 12	1.5	1	18	12
II $-\frac{1}{2}(1.5)(0.75)(3) = -1.6875$	1.5	1.75	-2.53125	-2.9531
III $-\frac{1}{2}(1)(0.45)(2) = -0.45$	2	0.15	-0.90	-0.0675
IV $-\pi(\frac{1}{2})^2(2) = -0.39270$	0.5	0.45	-0.19635	-0.17672
V $-\pi(\frac{1}{2})^2(2) = -0.39270$	1.5	0.45	-0.58905	-0.17672
Σ			13.7834	8.6260

5.113 HAVE.. $\bar{X}\Sigma V = \Sigma \bar{x}V$
 $\bar{X}(9.0771 \text{ in}^3) = 13.7834 \text{ in}^4$
 OR $\bar{X} = 1.518 \text{ in.}$

5.114 HAVE.. $\bar{Y}\Sigma V = \Sigma \bar{y}V$
 $\bar{Y}(9.0771 \text{ in}^3) = 8.6260 \text{ in}^4$
 OR $\bar{Y} = 0.950 \text{ in.}$

5.115 SEE SOLUTION TO PROBLEM 5.112

5.116

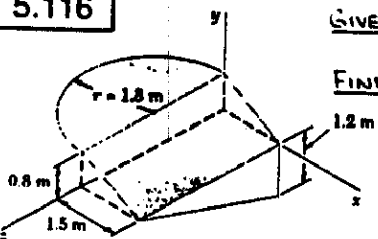


GIVEN: SHEET-METAL FORM SHOWN
 FIND: LOCATION OF CENTER OF GRAVITY

FIRST ASSUME THAT THE SHEET METAL IS (CONTINUED)

5.116 CONTINUED

HOMOGENEOUS SO THAT THE CENTER OF GRAVITY OF THE FORM WILL COINCIDE WITH THE CENTROIDS OF THE CORRESPONDING AREA.




$\bar{y}_I = -\frac{1}{2}(1.2) = -0.4 \text{ m}$
 $\bar{z}_I = \frac{1}{2}(3.6) = 1.2 \text{ m}$
 $\bar{x}_{III} = -\frac{4(1.8)}{3\pi} = -\frac{2.4}{\pi} \text{ m}$

A, m ²	\bar{x} , m	\bar{y} , m	\bar{z} , m	$\bar{x}A$, m ³	$\bar{y}A$, m ³	$\bar{z}A$, m ³
I $\frac{1}{2}(3.6)(1.2) = 2.16$	1.5	-0.4	1.2	3.24	-0.864	2.592
II (3.6)(1.1) = 3.96	0.75	0.4	1.8	2.97	1.584	7.128
III $\frac{\pi}{2}(1.8)^2 = 5.0894$	$-\frac{2.4}{\pi}$	0.8	1.8	-3.888	4.0715	9.1609
Σ				3.942	5.6555	22.769


HAVE.. $\bar{X}\Sigma V = \Sigma \bar{x}V$: $\bar{X}(13.3694 \text{ m}^2) = 3.942 \text{ m}^3$
 OR $\bar{X} = 0.295 \text{ m}$
 $\bar{Y}\Sigma V = \Sigma \bar{y}V$: $\bar{Y}(13.3694 \text{ m}^2) = 5.6555 \text{ m}^3$
 OR $\bar{Y} = 0.423 \text{ m}$
 $\bar{Z}\Sigma V = \Sigma \bar{z}V$: $\bar{Z}(13.3694 \text{ m}^2) = 22.769 \text{ m}^3$
 OR $\bar{Z} = 1.703 \text{ m}$

5.117

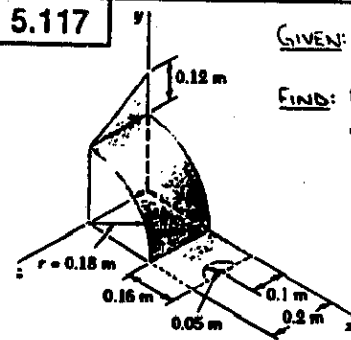

GIVEN: SHEET-METAL FORM SHOWN
 FIND: LOCATION OF CENTER OF GRAVITY

FIRST ASSUME THAT THE SHEET METAL IS HOMOGENEOUS SO THAT THE CENTER OF GRAVITY OF THE FORM WILL COINCIDE WITH THE CENTROIDS OF THE CORRESPONDING AREA.




$\bar{y}_I = 0.18 + \frac{1}{2}(0.12) = 0.22 \text{ m}$
 $\bar{z}_I = \frac{1}{2}(0.2 \text{ m})$
 $\bar{x}_{II} = \bar{y}_{II} = \frac{2(0.18)}{\pi} = \frac{0.36}{\pi} \text{ m}$
 $\bar{x}_{IV} = 0.34 - \frac{4(0.05)}{3\pi} = 0.31878 \text{ m}$

A, m ²	\bar{x} , m	\bar{y} , m	\bar{z} , m	$\bar{x}A$, m ³	$\bar{y}A$, m ³	$\bar{z}A$, m ³
I $\frac{1}{2}(0.2)(0.12) = 0.012$	0	0.22	0.1	0	0.00264	0.0008
II $\frac{\pi}{2}(0.18)(0.2) = 0.018\pi$	$\frac{0.36}{\pi}$	$\frac{0.36}{\pi}$	0.1	0.00648	0.00648	0.005655
III (0.16)(0.2) = 0.032	0.26	0	0.1	0.00832	0	0.0032
IV $-\frac{\pi}{2}(0.05)^2 = -0.00125\pi$	0.31878	0	0.1	-0.001258	0	-0.000393
Σ				0.013548	0.00912	0.009262


HAVE.. $\bar{X}\Sigma V = \Sigma \bar{x}V$: $\bar{X}(0.09622 \text{ m}^2) = 0.013548 \text{ m}^3$
 OR $\bar{X} = 0.1402 \text{ m}$
 $\bar{Y}\Sigma V = \Sigma \bar{y}V$: $\bar{Y}(0.09622 \text{ m}^2) = 0.00912 \text{ m}^3$
 OR $\bar{Y} = 0.0944 \text{ m}$
 $\bar{Z}\Sigma V = \Sigma \bar{z}V$: $\bar{Z}(0.09622 \text{ m}^2) = 0.009262 \text{ m}^3$
 OR $\bar{Z} = 0.0959 \text{ m}$

5.118

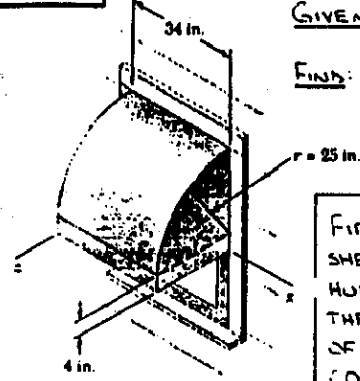

GIVEN: SHEET-METAL AWNING SHOWN
FIND: LOCATION OF CENTER OF GRAVITY

FIRST ASSUME THAT THE SHEET METAL IS HOMOGENEOUS SO THAT THE CENTER OF GRAVITY OF THE AWNING WILL COINCIDE WITH THE CENTROIDS OF THE CORRESPONDING AREA.



$$\bar{y}_I = \bar{y}_{II} = 4 + \frac{4 \cdot 25}{3\pi} = 14.6103 \text{ IN.}$$

$$\bar{z}_I = \bar{z}_{II} = \frac{4 \cdot 25}{3\pi} = \frac{100}{3\pi} \text{ IN.}$$

$$\bar{y}_{III} = 4 + \frac{2 \cdot 25}{\pi} = 19.9155 \text{ IN.}$$

$$\bar{z}_{III} = \frac{2 \cdot 25}{\pi} = \frac{50}{\pi} \text{ IN.}$$


$$A_{II} = A_{III} = \frac{\pi}{4} (25)^2 = 156.25\pi \text{ IN}^2$$

$$A_{IV} = \frac{\pi}{2} (25)(34) = 425\pi \text{ IN}^2$$

I	II	III	IV	V
A, IN ²	\bar{y} , IN.	\bar{z} , IN.	$\bar{y}A$, IN ³	$\bar{z}A$, IN ³
(4)(25) = 100	2	12.5	200	1250
156.25π = 490.87	14.6103	$\frac{100}{3\pi}$	7171.8	5208.3
(4)(34) = 136	2	25	272	3400
425π = 1335.18	19.9155	$\frac{50}{\pi}$	26,591	21,250
(4)(25) = 100	2	12.5	200	1250
156.25π = 490.87	14.6103	$\frac{100}{3\pi}$	7171.8	5208.3
Σ	2652.9		41,606.6	37,566.6

Now... SYMMETRY IMPLIES $\bar{x} = 17.00 \text{ IN.}$
 AND $\bar{y}\Sigma A = \Sigma \bar{y}A$: $\bar{y}(2652.9 \text{ IN}^2) = 41,606.6 \text{ IN}^3$
 OR $\bar{y} = 15.68 \text{ IN.}$
 $\bar{z}\Sigma A = \Sigma \bar{z}A$: $\bar{z}(2652.9 \text{ IN}^2) = 37,566.6 \text{ IN}^3$
 OR $\bar{z} = 14.16 \text{ IN.}$

5.119

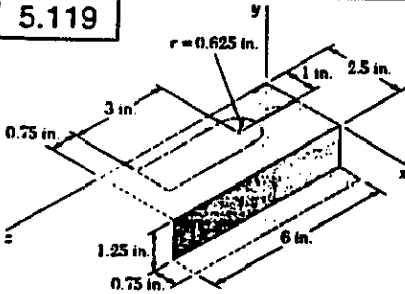


GIVEN: SHEET-METAL BRACKET SHOWN
FIND: LOCATION OF CENTER OF GRAVITY

FIRST ASSUME THAT THE SHEET METAL IS HOMOGENEOUS SO THAT THE CENTER OF GRAVITY OF THE BRACKET WILL COINCIDE WITH THE CENTROIDS OF THE CORRESPONDING AREA. THEN (SEE DIAGRAM AT THE TOP OF NEXT COLUMN)

$$\bar{y}_I = 2.25 - \frac{4 \cdot 0.625}{3\pi} = 1.98474 \text{ IN.}$$

$$A_{II} = \frac{\pi}{2} (0.625)^2 = -0.61359 \text{ IN}^2$$


5.119 CONTINUED

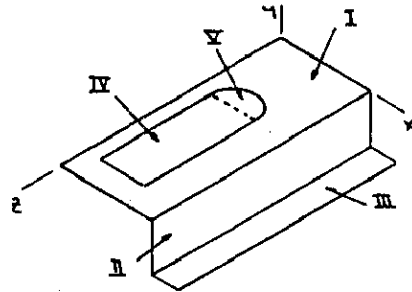

I	II	III	IV	V		
A, IN ²	\bar{x} , IN.	\bar{y} , IN.	\bar{z} , IN.	$\bar{x}A$, IN ³	$\bar{y}A$, IN ³	$\bar{z}A$, IN ³
(12.5)(6) = 75	1.25	0	3	18.75	0	45
(11.25)(6) = 67.5	2.5	-0.625	3	18.75	-4.6875	22.5
(0.75)(6) = 4.5	2.875	-1.25	3	12.9375	-5.425	13.5
(2)(5) = 10	1	0	3.75	-3.75	0	-14.0625
(4)(5) = 20	1	0	1.9375	-0.61359	0	-1.21782
Σ	22.6364			46.0739	-10.3125	65.7197

HAVE... $\bar{x}\Sigma A = \Sigma \bar{x}A$: $\bar{x}(22.6364 \text{ IN}^2) = 46.0739 \text{ IN}^3$
 OR $\bar{x} = 2.04 \text{ IN.}$
 $\bar{y}\Sigma A = \Sigma \bar{y}A$: $\bar{y}(22.6364 \text{ IN}^2) = -10.3125 \text{ IN}^3$
 OR $\bar{y} = -0.456 \text{ IN.}$
 $\bar{z}\Sigma A = \Sigma \bar{z}A$: $\bar{z}(22.6364 \text{ IN}^2) = 65.7197 \text{ IN}^3$
 OR $\bar{z} = 2.90 \text{ IN.}$


5.120

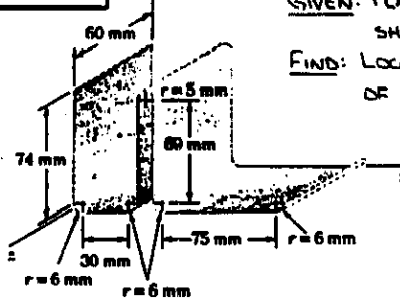

GIVEN: PLASTIC ORGANIZER SHOWN
FIND: LOCATION OF CENTER OF GRAVITY

FIRST ASSUME THAT THE PLASTIC IS HOMOGENEOUS SO THAT THE CENTER OF GRAVITY OF THE ORGANIZER WILL COINCIDE WITH THE CENTROIDS OF THE CORRESPONDING AREA. NOW NOTE THAT SYMMETRY IMPLIES

$\bar{z} = 30 \text{ mm}$

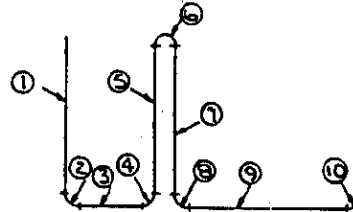

$$\bar{x}_2 = 6 - \frac{2 \cdot 6}{\pi} = 2.1803 \text{ mm}$$

$$\bar{x}_4 = 36 + \frac{2 \cdot 6}{\pi} = 39.820 \text{ mm}$$

$$\bar{x}_8 = 58 - \frac{2 \cdot 6}{\pi} = 54.180 \text{ mm}$$

$$\bar{x}_{10} = 133 + \frac{2 \cdot 6}{\pi} = 136.820 \text{ mm}$$

$$\bar{y}_2 = \bar{y}_4 = \bar{y}_8 = \bar{y}_{10} = 6 - \frac{2 \cdot 6}{\pi} = 2.1803 \text{ mm}$$

$$\bar{y}_6 = 75 + \frac{2 \cdot 6}{\pi} = 78.183 \text{ mm}$$

(CONTINUED)

5.120 CONTINUED

$$A_2 = A_4 = A_8 = A_{10} = \frac{\pi}{2} \cdot 6 \cdot 60 = 565.49 \text{ mm}^2$$


$$A_6 = \pi \cdot 5 \cdot 60 = 942.48 \text{ mm}^2$$

	A, mm ²	\bar{x} , mm	\bar{y} , mm	$\bar{x}A$, mm ³	$\bar{y}A$, mm ³
1	(74)(60) = 4440	0	43	0	190 920
2	565.49	2.1803	2.1803	1233	1 233
3	(30)(60) = 1800	21	0	37 800	0
4	565.49	39.820	2.1803	22 518	1233
5	(69)(60) = 4140	42	40.5	173 880	167 670
6	942.48	47	78.183	44 297	73 686
7	(69)(60) = 4140	52	40.5	215 280	167 670
8	565.49	54.180	2.1803	30 638	1233
9	(75)(60) = 4500	95.5	0	429 750	0
10	565.49	136.820	2.1803	77 370	1233
Σ	22 224.44			1 032 766	604 878


HAVE... $\bar{X}\Sigma A = \Sigma \bar{x}A$: $\bar{X}(22 224.44 \text{ mm}^2) = 1 032 766 \text{ mm}^3$
 OR $\bar{X} = 46.5 \text{ mm}$ \blacktriangleleft

$\bar{Y}\Sigma A = \Sigma \bar{y}A$: $\bar{Y}(22 224.44 \text{ mm}^2) = 604 878 \text{ mm}^3$
 OR $\bar{Y} = 27.2 \text{ mm}$ \blacktriangleleft

5.121

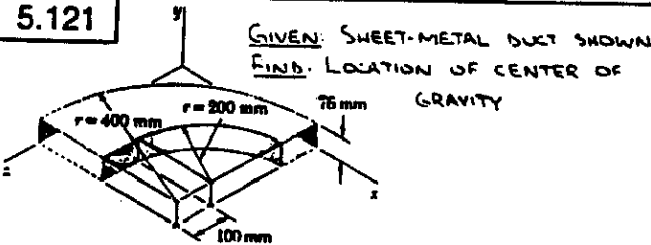

FIRST ASSUME THAT THE SHEET METAL IS HOMOGENEOUS SO THAT THE CENTER OF GRAVITY OF THE DUCT WILL COINCIDE WITH THE CENTROID OF THE CORRESPONDING AREA. NOW NOTE THAT SYMMETRY IMPLIES

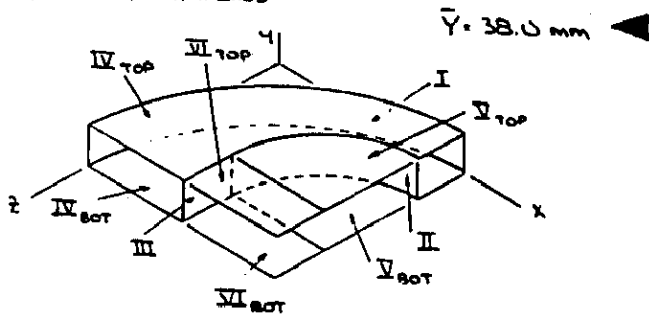

$$\bar{x}_I = \bar{z}_I = 400 - \frac{2 \cdot 400}{\pi} = 145.352 \text{ mm}$$

$$\bar{x}_{II} = 400 - \frac{2 \cdot 200}{\pi} = 272.68 \text{ mm} \quad \bar{z}_{II} = 300 - \frac{2 \cdot 200}{\pi} = 172.676 \text{ mm}$$

$$\bar{x}_{IV} = \bar{z}_{IV} = 400 - \frac{4 \cdot 400}{3\pi} = 230.23 \text{ mm}$$

$$\bar{x}_V = 400 - \frac{4 \cdot 200}{3\pi} = 315.12 \text{ mm} \quad \bar{z}_V = 300 - \frac{4 \cdot 200}{3\pi} = 215.12 \text{ mm}$$

ALSO NOTE THAT THE CORRESPONDING TOP AND BOTTOM AREAS WILL CONTRIBUTE EQUALLY WHEN DETERMINING \bar{X} AND \bar{Z} . THUS...

(CONTINUED)


5.121 CONTINUED

	A, mm ²	\bar{x} , mm	\bar{z} , mm	$\bar{x}A$, mm ³	$\bar{z}A$, mm ³
I	$\frac{\pi}{2}(400)(76) = 47 752$	145.352	145.352	6 940 850	6 940 850
II	$\frac{\pi}{2}(200)(76) = 23 876$	272.68	172.676	6 510 510	4 122 810
III	(100)(76) = 7600	200	350	1 520 000	2 660 000
IV	$2 \cdot \frac{\pi}{2}(400)^2 = 251 321$	230.23	230.23	57 863 020	57 863 020
V	$-2 \cdot \frac{\pi}{2}(200)^2 = -62 832$	315.12	215.12	-19 799 620	-13 516 420
VI	$-2(100 \cdot 200) = -40 000$	300	350	-12 000 000	-14 000 000
Σ	227 723			41 034 760	44 070 260


HAVE... $\bar{X}\Sigma A = \Sigma \bar{x}A$: $\bar{X}(227 723 \text{ mm}^2) = 41 034 760 \text{ mm}^3$
 OR $\bar{X} = 180.2 \text{ mm}$ \blacktriangleleft

$\bar{Z}\Sigma A = \Sigma \bar{z}A$: $\bar{Z}(227 723 \text{ mm}^2) = 44 070 260 \text{ mm}^3$
 OR $\bar{Z} = 193.5 \text{ mm}$ \blacktriangleleft

5.122

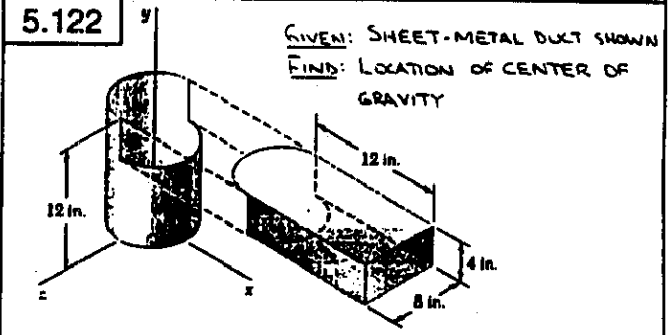

FIRST ASSUME THAT THE SHEET METAL IS HOMOGENEOUS SO THAT THE CENTER OF GRAVITY OF THE DUCT ASSEMBLY WILL COINCIDE WITH THE CENTROID OF THE CORRESPONDING AREA. NOW NOTE THAT SYMMETRY IMPLIES

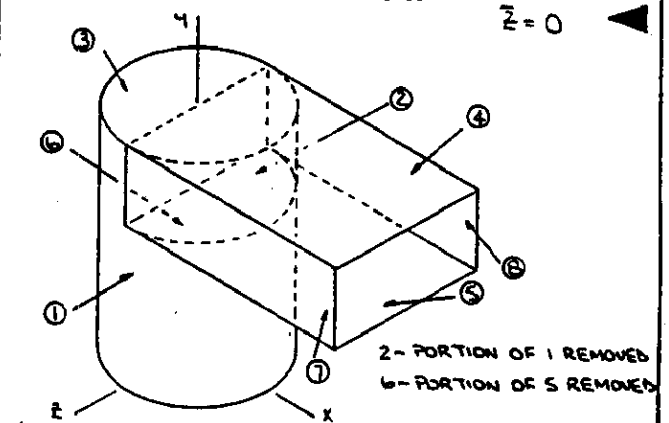


	A, IN ²	\bar{x} , IN	\bar{y} , IN	$\bar{x}A$, IN ³	$\bar{y}A$, IN ³
1	$\pi(8)(12) = 301.59$	0	6	0	1809.54
2	$-\frac{\pi}{2}(8)(4) = -50.27$	$\frac{8^2}{3} = 2.5465$	10	-128	-502.7
3	$\frac{\pi}{2}(4)^2 = 25.13$	$-\frac{4^2}{3\pi} = -1.69765$	12	-42.667	301.56
4	(12)(8) = 96	6	12	576	1152
5	(12)(8) = 96	6	8	576	768
6	$-\frac{\pi}{2}(4)^2 = -25.13$	$\frac{4^2}{3\pi} = 1.69765$	8	-42.667	-201.04
7	(12)(4) = 48	6	10	288	480
8	(12)(4) = 48	6	10	288	480
Σ	539.32			1514.666	4287.36

HAVE... $\bar{X}\Sigma A = \Sigma \bar{x}A$: $\bar{X}(539.32 \text{ IN}^2) = 1514.666 \text{ IN}^3$
 OR $\bar{X} = 2.81 \text{ IN.}$ \blacktriangleleft

$\bar{Y}\Sigma A = \Sigma \bar{y}A$: $\bar{Y}(539.32 \text{ IN}^2) = 4287.36 \text{ IN}^3$
 OR $\bar{Y} = 7.95 \text{ IN.}$ \blacktriangleleft

5.123

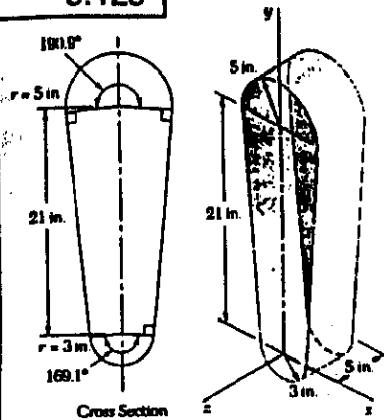

GIVEN: SHEET-METAL COVER SHOWN
 FIND: LOCATION OF CENTER OF GRAVITY

5.123 CONTINUED

$$\bar{y}_5 = \frac{1}{2}(21 - 2\sin 5.45^\circ) - 3\sin 5.45^\circ = 10.120 \text{ IN}$$

$$\bar{y}_6 = \bar{y}_7 = \frac{1}{3}(21 - 2\sin 5.45^\circ) - 3\sin 5.45^\circ = 6.652 \text{ IN}$$

$$\bar{y}_8 = -\frac{3\sin(\frac{169.1^\circ}{2})}{(\frac{169.1^\circ}{2} - \frac{\pi}{180^\circ})} = -2.024 \text{ IN}$$

$$\bar{y}_9 = 21 + \frac{5\sin(\frac{190.9^\circ}{2})}{(\frac{190.9^\circ}{2} - \frac{\pi}{180^\circ})} = 23.99 \text{ IN}$$

$$\bar{y}_{10} = \bar{y}_{11} = \bar{y}_5 = 10.120 \text{ IN}$$

$$A_5 = (21 - 2\sin 5.45^\circ) \cdot 2(5\cos 5.45^\circ) = 207.2 \text{ IN}^2$$

$$A_6 = A_7 = -\frac{1}{2}(2\cos 5.45^\circ) \cdot (21 - 2\sin 5.45^\circ) = -20.72 \text{ IN}^2$$

$$A_8 = [(169.1^\circ - \frac{\pi}{180^\circ}) \cdot (3)](5) = 44.27 \text{ IN}^2$$


$$A_9 = [(190.9^\circ - \frac{\pi}{180^\circ}) \cdot (5)](5) = 83.30 \text{ IN}^2$$

$$A_{10} = A_{11} = (\sqrt{21^2 - 2^2})(5) = 104.52 \text{ IN}^2$$

FIRST ASSUME THAT THE SHEET METAL IS HOMOGENEOUS SO THAT THE CENTER OF GRAVITY OF THE COVER WILL COINCIDE WITH THE CENTROID OF THE CORRESPONDING AREA. NOW NOTE THAT SYMMETRY IMPLIES

$$\bar{x} = 0$$

ALL DIMENSIONS IN IN.

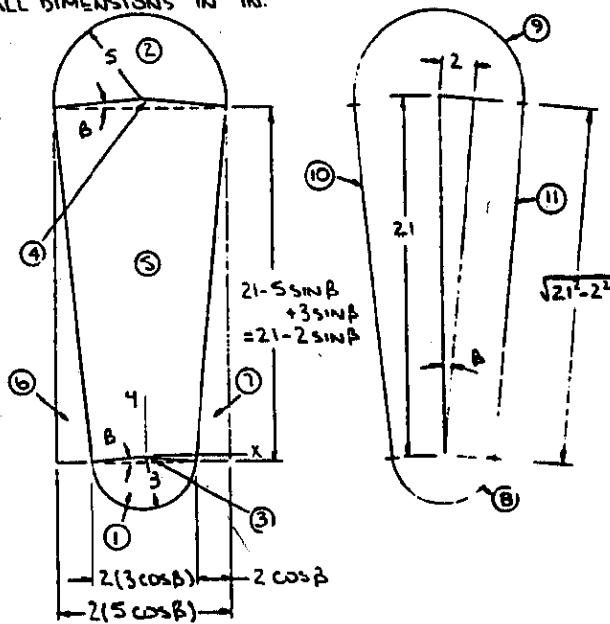


	A, IN ²	\bar{y} , IN	\bar{z} , IN	$\bar{y}A$, IN ³	$\bar{z}A$, IN ³
1	13.281	-1.3492	-5	-17.919	-66.41
2	41.65	22.99	-5	957.5	-208.3
3	-0.8509	-0.18995	-5	0.16162	4.255
4	2.364	20.68	-5	48.89	-11.820
5	207.2	10.120	-5	2097	-1036.0
6	-20.72	6.652	-5	-137.83	103.60
7	-20.72	6.652	-5	-137.83	103.60
8	44.27	-2.024	-2.5	-89.60	-110.68
9	83.30	23.99	-2.5	1998.4	-208.3
10	104.52	10.120	-2.5	1057.7	-261.3
11	104.52	10.120	-2.5	1057.7	-261.3
Σ	558.8			6834	-1952.7

HAVE... $\bar{y}\Sigma A = \Sigma \bar{y}A$: $\bar{y}(558.8 \text{ IN}^2) = 6834 \text{ IN}^3$
 OR $\bar{y} = 12.23 \text{ IN}$

$\bar{z}\Sigma A = \Sigma \bar{z}A$: $\bar{z}(558.8 \text{ IN}^2) = -1952.7 \text{ IN}^3$
 OR $\bar{z} = -3.49 \text{ IN}$


5.124



GIVEN: UNIFORM WIRE BENT INTO THE SHAPE SHOWN
 FIND: LOCATION OF CENTER OF GRAVITY

FIRST ASSUME THAT THE WIRE IS HOMOGENEOUS SO THAT ITS CENTER OF GRAVITY WILL COINCIDE WITH THE CENTROID OF THE CORRESPONDING LINE.

$$\bar{x}_2 = \bar{z}_2 = \frac{2 \cdot 2.4}{\pi} = \frac{4.8}{\pi} \text{ m}$$



(CONTINUED)

FIRST NOTE... $\beta = 90^\circ - \frac{169.1^\circ}{2} = 5.45^\circ$

$$\bar{y}_1 = -\frac{2(3)\sin(\frac{169.1^\circ}{2})}{3(\frac{169.1^\circ}{2} - \frac{\pi}{180^\circ})} = -1.3492 \text{ IN}$$

$$A_1 = (\frac{169.1^\circ}{2} - \frac{\pi}{180^\circ})(3)^2 = 13.281 \text{ IN}^2$$

$$\bar{y}_2 = 21 + \frac{2(5)\sin(\frac{190.9^\circ}{2})}{3(\frac{190.9^\circ}{2} - \frac{\pi}{180^\circ})} = 22.99 \text{ IN}$$

$$A_2 = (\frac{190.9^\circ}{2} - \frac{\pi}{180^\circ})(5)^2 = 41.65 \text{ IN}^2$$

$$\bar{y}_3 = -\frac{1}{3}(3\sin 5.45^\circ) = -0.18995 \text{ IN}$$

$$A_3 = -\frac{1}{2}[2(3\cos 5.45^\circ)] \cdot (3\sin 5.45^\circ) = -0.8509 \text{ IN}^2$$

$$\bar{y}_4 = 21 - \frac{2}{3}(5\sin 5.45^\circ) = 20.68 \text{ IN}$$

$$A_4 = \frac{1}{2}[2(5\cos 5.45^\circ)] \cdot (5\sin 5.45^\circ) = 2.364 \text{ IN}^2$$


(CONTINUED)

5.124 CONTINUED

L, m	\bar{x} , m	\bar{y} , m	\bar{z} , m	$\bar{x}L, m^2$	$\bar{y}L, m^2$	$\bar{z}L, m^2$
1	2.6	1.2	0.5	3.12	1.3	0
2	$\frac{7}{2} = 24 \cdot 12R$	$\frac{4.8}{\pi}$	0	5.76	0	5.76
3	2.4	0	1.2	0	0	2.88
4	1.0	0	0.5	0	0.5	0
Σ	9.7699			8.88	1.8	8.64


HAVE.. $\bar{X}\Sigma L = \Sigma \bar{x}L$: $\bar{X}(9.7699 \text{ m}) = 8.88 \text{ m}^2$
 OR $\bar{X} = 0.909 \text{ m}$
 $\bar{Y}\Sigma L = \Sigma \bar{y}L$: $\bar{Y}(9.7699 \text{ m}) = 1.8 \text{ m}^2$
 OR $\bar{Y} = 0.1842 \text{ m}$
 $\bar{Z}\Sigma L = \Sigma \bar{z}L$: $\bar{Z}(9.7699 \text{ m}) = 8.64 \text{ m}^2$
 OR $\bar{Z} = 0.884 \text{ m}$

5.125

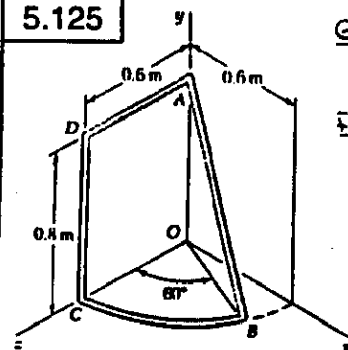

GIVEN: UNIFORM WIRE BENT INTO THE SHAPE SHOWN
 FIND: LOCATION OF CENTER OF GRAVITY

FIRST ASSUME THAT THE WIRE IS HOMOGENEOUS SO THAT ITS CENTER OF GRAVITY WILL COINCIDE WITH THE CENTROID OF THE CORRESPONDING LINE.




$\bar{x}_1 = 0.3 \sin 60^\circ = 0.15\sqrt{3} \text{ m}$
 $\bar{z}_1 = 0.3 \cos 60^\circ = 0.15 \text{ m}$
 $\bar{x}_2 = \left(\frac{0.6 \sin 30^\circ}{\frac{\pi}{16}}\right) \sin 30^\circ = \frac{0.9}{\pi} \text{ m}$
 $\bar{z}_2 = \left(\frac{0.6 \sin 30^\circ}{\frac{\pi}{16}}\right) \cos 30^\circ = \frac{0.9}{\pi} \sqrt{3} \text{ m}$
 $L_2 = \left(\frac{\pi}{3}\right)(0.6) = 0.2\pi \text{ m}$

L, m	\bar{x} , m	\bar{y} , m	\bar{z} , m	$\bar{x}L, m^2$	$\bar{y}L, m^2$	$\bar{z}L, m^2$
1	1.0	$0.15\sqrt{3}$	0.4	0.25981	0.4	0.15
2	0.27	$\frac{0.9}{\pi}$	0	0.18	0	0.31177
3	0.8	0	0.6	0	0.32	0.48
4	0.6	0	0.3	0	0.48	0.18
Σ	3.0283			0.43981	1.20	1.12177


HAVE.. $\bar{X}\Sigma L = \Sigma \bar{x}L$: $\bar{X}(3.0283 \text{ m}) = 0.43981 \text{ m}^2$
 OR $\bar{X} = 0.1452 \text{ m}$
 $\bar{Y}\Sigma L = \Sigma \bar{y}L$: $\bar{Y}(3.0283 \text{ m}) = 1.20 \text{ m}^2$
 OR $\bar{Y} = 0.396 \text{ m}$
 $\bar{Z}\Sigma L = \Sigma \bar{z}L$: $\bar{Z}(3.0283 \text{ m}) = 1.12177 \text{ m}^2$
 OR $\bar{Z} = 0.370 \text{ m}$

5.126

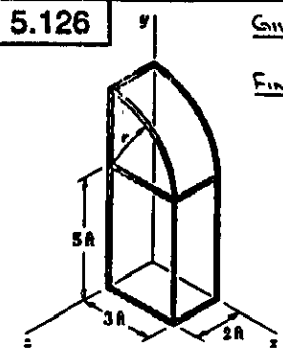

GIVEN: PORTION OF GREENHOUSE FRAME SHOWN
 FIND: LOCATION OF CENTER OF GRAVITY

FIRST ASSUME THAT THE CHANNELS ARE HOMOGENEOUS SO THAT THE CENTER OF GRAVITY OF THE FRAME WILL COINCIDE WITH THE CENTROID OF THE CORRESPONDING LINE.




$\bar{x}_B = \bar{x}_G = \frac{2 \times 3}{\pi} = \frac{6}{\pi} \text{ ft}$
 $\bar{y}_B = \bar{y}_G = 5 + \frac{2 \times 3}{\pi} = 6.9099 \text{ ft}$

L, ft	\bar{x} , ft	\bar{y} , ft	\bar{z} , ft	$\bar{x}L, ft^2$	$\bar{y}L, ft^2$	$\bar{z}L, ft^2$
1	2	3	0	6	0	2
2	3	1.5	0	4.5	0	6
3	5	3	2.5	15	12.5	0
4	5	3	2.5	15	12.5	10
5	8	0	4	20	32	16
6	2	3	5	6	10	2
7	3	1.5	5	4.5	15	6
8	$\frac{7}{2} = 3 = 4.7124$	$\frac{6}{\pi}$	6.9099	0	9	32.562
9	$\frac{7}{2} = 3 = 4.7124$	$\frac{6}{\pi}$	6.9099	2	9	32.562
10	2	0	8	1	0	16
Σ	39.4248			69	163.124	53.4248

HAVE.. $\bar{X}\Sigma L = \Sigma \bar{x}L$: $\bar{X}(39.4248 \text{ ft}) = 69 \text{ ft}^2$
 OR $\bar{X} = 1.750 \text{ ft}$
 $\bar{Y}\Sigma L = \Sigma \bar{y}L$: $\bar{Y}(39.4248 \text{ ft}) = 163.124 \text{ ft}^2$
 OR $\bar{Y} = 4.14 \text{ ft}$
 $\bar{Z}\Sigma L = \Sigma \bar{z}L$: $\bar{Z}(39.4248 \text{ ft}) = 53.4248 \text{ ft}^2$
 OR $\bar{Z} = 1.355 \text{ ft}$

* 5.127

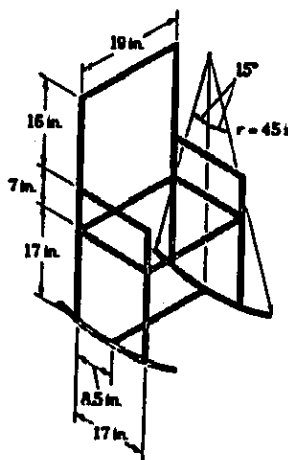



GIVEN: ROCKING CHAIR FRAME SHOWN
 FIND: ANGLE BETWEEN CHAIR BACK AND VERTICAL

FIRST ASSUME THAT THE TUBING IS HOMOGENEOUS SO THAT THE CENTER OF GRAVITY OF THE FRAME WILL COINCIDE WITH THE CENTROID OF THE CORRESPONDING LINE. ALSO, NOTE THAT THE CENTER OF GRAVITY MUST LIE ON A VERTICAL LINE THAT PASSES THROUGH THE POINT OF CONTACT OF A

ROCKER AND THE GROUND.

(CONTINUED)

5.127 CONTINUED

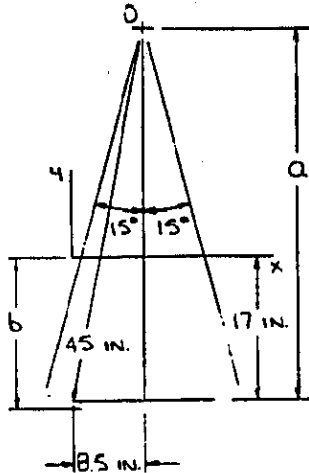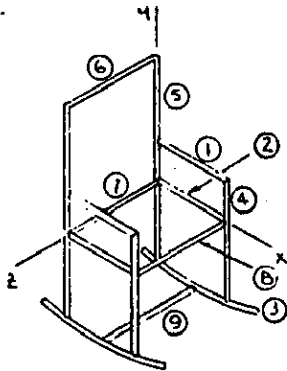

$$a = \sqrt{45^2 - 8.5^2} \text{ in.}$$

$$b = 45 - (a - 17)$$

$$= 17.8101 \text{ in.}$$


$$\bar{y}_3 = -[17 - (\frac{45 \sin 15^\circ}{\pi/12} - a)] \quad L_3 = \frac{\pi}{6} (45)$$

$$= -17.2978 \text{ in.} \quad = 23.562 \text{ in.}$$

NOTE: TO ACCOUNT FOR THE TWO SIDES OF THE CHAIR, THE LENGTHS OF MEMBERS 1-5 WILL BE COUNTED TWICE

L, IN.	\bar{x} , IN.	\bar{y} , IN.	$\bar{x}L$, IN. ²	$\bar{y}L$, IN. ²
1 2(17)	8.5	7	289	238
2 2(17)	8.5	0	289	0
3 2(23.562)	8.5	-17.2978	400.55	-815.14
4 2(24)	17	-5	816	-240
5 2(40)	0	3	0	240
6 19	0	23	0	437
7 19	0	0	0	0
8 19	17	0	323	0
9 19	8.5	-17.8101	161.5	-338.39
Σ 319.124			2279.1	-478.53

HAVE... $\bar{x}\Sigma L = \Sigma \bar{x}L: \bar{x}(319.124 \text{ in.}) = 2279.1 \text{ in.}^2$
 OR $\bar{x} = 7.1417 \text{ in.}$
 $\bar{y}\Sigma L = \Sigma \bar{y}L: \bar{y}(319.124 \text{ in.}) = -478.53 \text{ in.}^2$
 OR $\bar{y} = -1.49951 \text{ in.}$

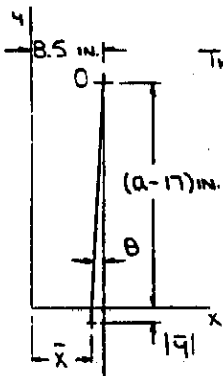



THEN.. $\tan \theta = \frac{8.5 - 7.1417}{(45^2 - 8.5^2 - 17)^{.5} \cdot 1.49951}$
 $= 0.047345$
 OR $\theta = 2.7106^\circ$

∴ THE ANGLE FORMED BY THE BACK OF THE CHAIR AND THE VERTICAL IS 2.71°

5.128

GIVEN: BRONZE BUSHING AND STEEL SLEEVE SHOWN
 $\gamma_{BR} = 0.318 \text{ lb/in}^3$
 $\gamma_{ST} = 0.284 \text{ lb/in}^3$

FIND: LOCATION OF CENTER OF GRAVITY



FIRST NOTE THAT SYMMETRY IMPLIES $\bar{x} = \bar{z} = 0$


Now.. $W = \gamma V$

$\bar{y}_I = 0.20 \text{ in.} \quad W_I = 0.284 \frac{\text{lb}}{\text{in}^3} \cdot \frac{\pi}{4} (1.0^2 - 0.75^2) \text{ in}^2 \cdot 0.4 \text{ in.}$
 $= 0.23889 \text{ lb}$
 $\bar{y}_{II} = 0.90 \text{ in.} \quad W_{II} = 0.284 \frac{\text{lb}}{\text{in}^3} \cdot \frac{\pi}{4} (1.125^2 - 0.75^2) \text{ in}^2 \cdot 1 \text{ in.}$
 $= 0.156834 \text{ lb}$
 $\bar{y}_{III} = 0.70 \text{ in.} \quad W_{III} = 0.318 \frac{\text{lb}}{\text{in}^3} \cdot \frac{\pi}{4} (0.75^2 - 0.5^2) \text{ in}^2 \cdot 1.4 \text{ in.}$
 $= 0.109269 \text{ lb}$


	W, lb	\bar{y} , in.	$\bar{y}W$, in.-lb
I	0.23889	0.20	0.047778
II	0.156834	0.90	0.141151
III	0.109269	0.70	0.076488
Σ	0.50499		0.26542

HAVE... $\bar{y}\Sigma W = \Sigma \bar{y}W: \bar{y}(0.50499 \text{ lb}) = 0.26542 \text{ in.-lb}$
 $= 0.26542 \text{ in.-lb}$
 OR $\bar{y} = 0.526 \text{ in. (ABOVE BASE)}$

5.129

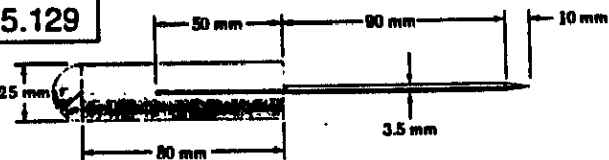

GIVEN: AWL HAVING PLASTIC HANDLE AND STEEL BLADE, $\rho_P = 1030 \text{ kg/m}^3$, $\rho_{ST} = 7860 \text{ kg/m}^3$
 FIND: LOCATION OF CENTER OF GRAVITY



FIRST NOTE THAT SYMMETRY IMPLIES $\bar{y} = \bar{z} = 0$

$\bar{x}_I = \frac{\pi}{8} (12.5) = 7.8125 \text{ mm}$
 $\bar{x}_{II} = 52.5 \text{ mm}$
 $\bar{x}_{III} = 92.5 - 25 = 67.5 \text{ mm}$
 $m_I = \rho_P V_I = 1030 \frac{\text{kg}}{\text{m}^3} \cdot \frac{\pi}{4} (0.025 \text{ m})^2 \cdot 0.08 \text{ m}$
 $= 4.2133 \times 10^{-3} \text{ kg}$
 $m_{II} = \rho_{ST} V_{II} = 7860 \frac{\text{kg}}{\text{m}^3} \cdot \frac{\pi}{4} (0.025 \text{ m})^2 \cdot (0.08 \text{ m})$
 $= 40.448 \times 10^{-3} \text{ kg}$
 $m_{III} = -\rho_{ST} V_{III} = -7860 \frac{\text{kg}}{\text{m}^3} \cdot \frac{\pi}{4} (0.0035 \text{ m})^2 \cdot (0.05 \text{ m})$
 $= -0.49549 \times 10^{-3} \text{ kg}$

(CONTINUED)

5.129 CONTINUED

$$\bar{x}_{II} = 182.5 - 70 = 112.5 \text{ mm}$$

$$m_{II} = \rho_{st} V_{II} = 7860 \frac{\text{kg}}{\text{m}^3} \cdot \frac{\pi}{4} (0.0035 \text{ m})^2 (0.14 \text{ m}) = 10.5871 \cdot 10^{-3} \text{ kg}$$

$$\bar{x}_{III} = 182.5 + \frac{1}{4}(10) = 185 \text{ mm}$$


$$m_{III} = \rho_{st} V_{III} = 7860 \frac{\text{kg}}{\text{m}^3} \cdot \frac{\pi}{4} (0.0035 \text{ m})^2 (0.01 \text{ m}) = 0.25207 \cdot 10^{-3} \text{ kg}$$

	m, kg	\bar{x} , mm	$\bar{x}m$, kg·mm
I	$4.2133 \cdot 10^{-3}$	7.8125	$32.916 \cdot 10^{-3}$
II	$40.448 \cdot 10^{-3}$	52.5	$2123.5 \cdot 10^{-3}$
III	$-0.49549 \cdot 10^{-3}$	67.5	$-33.447 \cdot 10^{-3}$
IV	$10.5871 \cdot 10^{-3}$	112.5	$1191.05 \cdot 10^{-3}$
V	$0.25207 \cdot 10^{-3}$	185	$46.633 \cdot 10^{-3}$
Σ	$55.005 \cdot 10^{-3}$		$3360.7 \cdot 10^{-3}$

HAVE... $\bar{X} \Sigma m = \Sigma \bar{x}m$: $\bar{X} (55.005 \cdot 10^{-3} \text{ kg}) = 3360.7 \cdot 10^{-3} \text{ kg} \cdot \text{mm}$
 OR $\bar{X} = 61.098 \text{ mm}$


∴ THE CENTER OF GRAVITY IS 61.1 mm FROM THE END OF THE HANDLE.

5.130



GIVEN: TABLE WITH GLASS TOP ($\rho_L = 2190 \text{ kg/m}^3$) AND STEEL TUBING LEGS ($\rho_{st} = 7860 \text{ kg/m}^3$),
 $d_{top} = 600 \text{ mm}$,
 $t_{top} = 10 \text{ mm}$,
 $A_{tubing} = 150 \text{ mm}^2$
 $(d_o)_{tubing} = 24 \text{ mm}$

FINIS: LOCATION OF CENTER OF GRAVITY



FIRST NOTE THAT SYMMETRY IMPLIES $\bar{x} = \bar{z} = 0$

ALSO, TO ACCOUNT FOR THE THREE LEGS, THE MASSES OF COMPONENTS I AND II WILL EACH BE MULTIPLIED BY THREE.

$$\bar{y}_I = 12 + 180 - \frac{2 \cdot 180}{\pi} = 77.408 \text{ mm}$$

$$m_I = \rho_{st} V_I = 7860 \frac{\text{kg}}{\text{m}^3} \cdot (150 \cdot 10^{-6} \text{ m}^2) \cdot \frac{\pi}{2} (0.180 \text{ m}) = 0.33335 \text{ kg}$$

$$\bar{y}_{II} = 12 + 180 + \frac{2 \cdot 280}{\pi} = 370.25 \text{ mm}$$

$$m_{II} = \rho_{st} V_{II} = 7860 \frac{\text{kg}}{\text{m}^3} \cdot (150 \cdot 10^{-6} \text{ m}^2) \cdot \frac{\pi}{2} (0.280 \text{ m}) = 0.51855 \text{ kg}$$

$$\bar{y}_{III} = 24 + 180 + 280 + 5 = 489 \text{ mm}$$


$$m_{III} = \rho_L V_{III} = 2190 \frac{\text{kg}}{\text{m}^3} \cdot \frac{\pi}{4} (0.6 \text{ m})^2 \cdot 5 = 6.1921 \text{ kg}$$

	m, kg	\bar{y} , mm	$\bar{y}m$, kg·mm
I	$3(0.33335)$	77.408	77.412
II	$3(0.51855)$	370.25	575.98
III	6.1921	489	3027.9
Σ	8.7478		3681.3


HAVE... $\bar{Y} \Sigma m = \Sigma \bar{y}m$: $\bar{Y} (8.7478 \text{ kg}) = 3681.3 \text{ kg} \cdot \text{mm}$
 OR $\bar{Y} = 420.8 \text{ mm}$

∴ THE CENTER OF GRAVITY IS 421 mm ABOVE THE FLOOR.

5.131

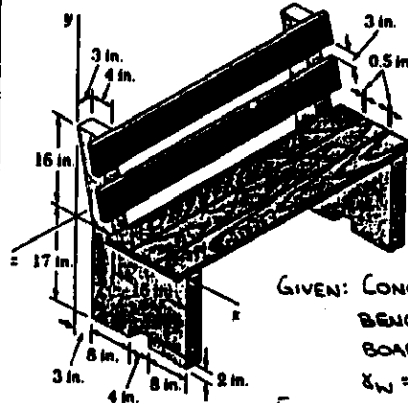

GIVEN: CONCRETE AND WOOD BENCH, $1\frac{1}{2} \times 5 \times 48$ -IN. BOARDS, $\gamma_c = 0.084 \text{ lb/in}^3$, $\gamma_w = 0.017 \text{ lb/in}^3$
 FIND: X AND Y COORDINATES OF CENTER OF GRAVITY

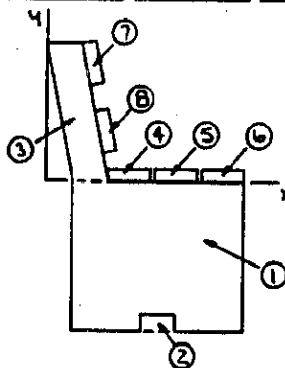


FIRST NOTE TO ACCOUNT FOR THE TWO CONCRETE ENDS, THE WEIGHTS OF COMPONENTS 1-3 WILL BE COUNTED TWICE.

$$W_1 = \gamma_c V_1 = 0.084 \frac{\text{lb}}{\text{in}^3} \cdot (20 \cdot 17 \cdot 3) \text{ in}^3 = 85.68 \text{ lb}$$


$$W_2 = -\gamma_c V_2 = -0.084 \frac{\text{lb}}{\text{in}^3} \cdot (4 \cdot 2 \cdot 3) \text{ in}^3 = -2.016 \text{ lb}$$

$$W_3 = \gamma_c V_3 = 0.084 \frac{\text{lb}}{\text{in}^3} \cdot (4 \cdot 16 \cdot 3) \text{ in}^3 = 16.128 \text{ lb}$$

$$W_4 = W_5 = W_6 = W_7 = W_8 = \gamma_w V_{boards} = 0.017 \frac{\text{lb}}{\text{in}^3} \cdot (5 \cdot 1\frac{1}{2} \cdot 48) \text{ in}^3 = 6.12 \text{ lb}$$

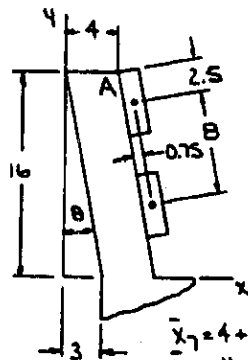

ALL DIMENSIONS IN IN.



$$\tan \theta = \frac{3}{16}$$

$$\theta = 10.619 \text{ deg}$$

$$\bar{x}_7 = 4 + 2.5 \sin \theta + 0.75 \cos \theta = 5.1979 \text{ in.}$$

$$\bar{y}_7 = 16 - 2.5 \cos \theta + 0.75 \sin \theta = 13.6810 \text{ in.}$$

$$\bar{x}_8 = \bar{x}_7 + 8 \sin \theta = 6.6722 \text{ in.}$$

$$\bar{y}_8 = \bar{y}_7 - 8 \cos \theta = 5.8180 \text{ in.}$$

	W, lb	\bar{x} , in.	\bar{y} , in.	$\bar{x}W$, in·lb	$\bar{y}W$, in·lb
1	2(85.68)	13	-8.5	2227.7	-1456.56
2	2(-2.016)	13	-16	-52.416	64.512
3	2(16.128)	3.5	8	112.896	258.05
4	6.12	9.5	0.75	58.14	4.59
5	6.12	15	0.75	91.8	4.59
6	6.12	20.5	0.75	125.46	4.59
7	6.12	5.1979	13.6810	31.811	83.728
8	6.12	6.6722	5.8180	40.834	35.606

(CONTINUED)

5.131 CONTINUED

THEN.. $\Sigma W = 230.18 \text{ lb}$

$\Sigma \bar{r}W = 2636.2 \text{ in}\cdot\text{lb}$ $\Sigma \bar{q}W = -1000.89 \text{ in}\cdot\text{lb}$


NOW.. $\bar{X}\Sigma W = \Sigma \bar{r}W$: $\bar{X}(230.18 \text{ lb}) = 2636.2 \text{ in}\cdot\text{lb}$

OR $\bar{X} = 11.45 \text{ in.}$ \blacktriangleleft

$\bar{Y}\Sigma W = \Sigma \bar{q}W$: $\bar{Y}(230.18 \text{ lb}) = -1000.89 \text{ in}\cdot\text{lb}$


OR $\bar{Y} = -4.35 \text{ in.}$ \blacktriangleleft

5.132



GIVEN: A HEMISPHERE WHICH IS CUT INTO TWO COMPONENTS OF EQUAL WIDTH AS SHOWN

FIND: \bar{x} OF EACH COMPONENT




CHOOSE AS THE ELEMENT OF VOLUME A DISK OF RADIUS r AND THICKNESS dx . THEN

$dV = \pi r^2 dx$, $\bar{x}_{EL} = x$

THE EQUATION OF THE GENERATING CURVE IS $x^2 + y^2 = a^2$ SO THAT $r^2 = a^2 - x^2$ AND THEN

$dV = \pi(a^2 - x^2) dx$



COMPONENT 1

$V_1 = \int_0^{a/2} \pi(a^2 - x^2) dx = \pi[a^2x - \frac{x^3}{3}]_0^{a/2}$

$= \frac{11}{24} \pi a^3$

AND.. $\int \bar{x}_{EL} dV = \int_0^{a/2} x[\pi(a^2 - x^2) dx]$

$= \pi[a^2 \frac{x^2}{2} - \frac{x^4}{4}]_0^{a/2}$

$= \frac{7}{64} \pi a^4$

NOW.. $\bar{x}_1 V_1 = \int \bar{x}_{EL} dV$: $\bar{x}_1 (\frac{11}{24} \pi a^3) = \frac{7}{64} \pi a^4$

OR $\bar{x}_1 = \frac{21}{88} a$ \blacktriangleleft

COMPONENT 2

$V_2 = \int_{a/2}^a \pi(a^2 - x^2) dx = \pi[a^2x - \frac{x^3}{3}]_{a/2}^a$

$= \frac{5}{24} \pi a^3$

AND $\int \bar{x}_{EL} dV = \int_{a/2}^a x[\pi(a^2 - x^2) dx] = \pi[a^2 \frac{x^2}{2} - \frac{x^4}{4}]_{a/2}^a$


$= \pi[a^2(\frac{a^2}{2} - \frac{(\frac{a}{2})^2}{2}) - (\frac{a^4}{4} - \frac{(\frac{a}{2})^4}{4})]$

$= \frac{9}{64} \pi a^4$

NOW.. $\bar{x}_2 V_2 = \int \bar{x}_{EL} dV$: $\bar{x}_2 (\frac{5}{24} \pi a^3) = \frac{9}{64} \pi a^4$


OR $\bar{x}_2 = \frac{27}{40} a$ \blacktriangleleft

5.133



GIVEN: A SEMIELLIPOID OF REVOLUTION WHICH IS CUT INTO TWO COMPONENTS OF EQUAL WIDTH AS SHOWN

FIND: \bar{x} OF EACH COMPONENT



CHOOSE AS THE ELEMENT OF VOLUME A DISK OF RADIUS r AND THICKNESS dx . THEN


$dV = \pi r^2 dx$, $\bar{x}_{EL} = x$

THE EQUATION OF THE GENERATING CURVE IS

$\frac{x^2}{h^2} + \frac{y^2}{a^2} = 1$ SO THAT

$r^2 = \frac{a^2}{h^2}(h^2 - x^2)$ AND THEN

$dV = \pi \frac{a^2}{h^2}(h^2 - x^2) dx$



COMPONENT 1

$V_1 = \int_0^{h/2} \pi \frac{a^2}{h^2}(h^2 - x^2) dx$

$= \pi \frac{a^2}{h^2} [h^2x - \frac{x^3}{3}]_0^{h/2}$

$= \frac{11}{24} \pi a^2 h$

AND $\int \bar{x}_{EL} dV = \int_0^{h/2} x[\pi \frac{a^2}{h^2}(h^2 - x^2) dx]$

$= \pi \frac{a^2}{h^2} [h^2 \frac{x^2}{2} - \frac{x^4}{4}]_0^{h/2}$

$= \frac{7}{64} \pi a^2 h^2$

NOW.. $\bar{x}_1 V_1 = \int \bar{x}_{EL} dV$: $\bar{x}_1 (\frac{11}{24} \pi a^2 h) = \frac{7}{64} \pi a^2 h^2$

OR $\bar{x}_1 = \frac{21}{88} h$ \blacktriangleleft

COMPONENT 2

$V_2 = \int_{h/2}^h \pi \frac{a^2}{h^2}(h^2 - x^2) dx = \pi \frac{a^2}{h^2} [h^2x - \frac{x^3}{3}]_{h/2}^h$

$= \pi \frac{a^2}{h^2} \{ [h^2(h) - \frac{(h)^3}{3}] - [h^2(\frac{h}{2}) - \frac{(\frac{h}{2})^3}{3}] \}$

$= \frac{5}{24} \pi a^2 h$

AND $\int \bar{x}_{EL} dV = \int_{h/2}^h x[\pi \frac{a^2}{h^2}(h^2 - x^2) dx]$

$= \pi \frac{a^2}{h^2} [h^2 \frac{x^2}{2} - \frac{x^4}{4}]_{h/2}^h$


$= \pi \frac{a^2}{h^2} \{ [h^2(\frac{h^2}{2}) - \frac{(h)^4}{4}] - [h^2(\frac{h^2}{2}) - \frac{(\frac{h}{2})^4}{4}] \}$

$= \frac{9}{64} \pi a^2 h^2$


NOW.. $\bar{x}_2 V_2 = \int \bar{x}_{EL} dV$: $\bar{x}_2 (\frac{5}{24} \pi a^2 h) = \frac{9}{64} \pi a^2 h^2$

OR $\bar{x}_2 = \frac{27}{40} h$ \blacktriangleleft


5.134



GIVEN: A PARABOLOID OF REVOLUTION WHICH IS CUT INTO TWO COMPONENTS OF EQUAL WIDTH AS SHOWN
FIND: \bar{x} OF EACH COMPONENT



CHOOSE AS THE ELEMENT OF VOLUME A DISK OF RADIUS r AND THICKNESS dx . THEN
 $dV = \pi r^2 dx$, $\bar{x}_{EL} = x$
THE EQUATION OF THE GENERATING CURVE IS $x = h - \frac{h}{a^2} z^2$ SO THAT
 $r^2 = \frac{a^2}{h^2} (h-x)$ AND THEN
 $dV = \pi \frac{a^2}{h} (h-x) dx$



COMPONENT 1
 $V_1 = \int_0^{h/2} \pi \frac{a^2}{h} (h-x) dx$
 $= \pi \frac{a^2}{h} [hx - \frac{x^2}{2}]_0^{h/2}$
 $= \frac{3}{8} \pi a^2 h$

AND... $\int \bar{x}_{EL} dV = \int_0^{h/2} x [\pi \frac{a^2}{h} (h-x)] dx = \pi \frac{a^2}{h} [h \frac{x^2}{2} - \frac{x^3}{3}]_0^{h/2}$
 $= \frac{1}{12} \pi a^2 h^2$

Now... $\bar{x}_1 V_1 = \int \bar{x}_{EL} dV$: $\bar{x}_1 (\frac{3}{8} \pi a^2 h) = \frac{1}{12} \pi a^2 h^2$
OR $\bar{x}_1 = \frac{2}{9} h$


COMPONENT 2

$V_2 = \int_{h/2}^h \pi \frac{a^2}{h} (h-x) dx = \pi \frac{a^2}{h} [hx - \frac{x^2}{2}]_{h/2}^h$
 $= \pi \frac{a^2}{h} [h(h) - \frac{(h)^2}{2}] - [h(\frac{h}{2}) - \frac{(h/2)^2}{2}]$
 $= \frac{5}{8} \pi a^2 h$

AND... $\int \bar{x}_{EL} dV = \int_{h/2}^h x [\pi \frac{a^2}{h} (h-x)] dx = \pi \frac{a^2}{h} [h \frac{x^2}{2} - \frac{x^3}{3}]_{h/2}^h$
 $= \pi \frac{a^2}{h} [h(\frac{h^2}{2}) - \frac{(h)^3}{3}] - [h(\frac{(h/2)^2}{2}) - \frac{(h/2)^3}{3}]$
 $= \frac{1}{12} \pi a^2 h^2$

Now... $\bar{x}_2 V_2 = \int \bar{x}_{EL} dV$: $\bar{x}_2 (\frac{5}{8} \pi a^2 h) = \frac{1}{12} \pi a^2 h^2$
OR $\bar{x}_2 = \frac{2}{5} h$

5.135




GIVEN: VOLUME GENERATED BY ROTATING THE AREA SHOWN ABOUT THE X AXIS

FIND: LOCATION OF THE CENTROID OF THE VOLUME

FIRST NOTE THAT SYMMETRY IMPLIES (CONTINUES)

5.135 CONTINUED



$\bar{y} = 0$
 $\bar{z} = 0$

At $x=0, y=a: a = k(-h)^2$
OR $k = \frac{a}{h^2}$
CHOOSE AS THE ELEMENT OF VOLUME A DISK OF RADIUS r AND THICKNESS dx . THEN
 $dV = \pi r^2 dx$, $\bar{x}_{EL} = x$

Now $r = \frac{a}{h^2} (x-h)^2$ SO THAT
 $dV = \pi \frac{a^2}{h^4} (x-h)^4 dx$


THEN... $V = \int_0^h \pi \frac{a^2}{h^4} (x-h)^4 dx = \frac{\pi}{5} \frac{a^2}{h^4} [x-h]^5_0^h$
 $= \frac{1}{5} \pi a^2 h$

AND $\int \bar{x}_{EL} dV = \int_0^h x [\pi \frac{a^2}{h^4} (x-h)^4] dx$
 $= \pi \frac{a^2}{h^4} \int_0^h (x^5 - 4hx^4 + 6h^2x^3 - 4h^3x^2 + h^4x) dx$
 $= \pi \frac{a^2}{h^4} [\frac{1}{6}x^6 - \frac{4}{5}hx^5 + \frac{3}{2}h^2x^4 - \frac{4}{3}h^3x^3 + \frac{1}{2}h^4x^2]_0^h$
 $= \frac{1}{30} \pi a^2 h^2$


Now... $\bar{x} V = \int \bar{x}_{EL} dV$: $\bar{x} (\frac{1}{5} \pi a^2 h) = \frac{1}{30} \pi a^2 h^2$
OR $\bar{x} = \frac{1}{6} h$

5.136

GIVEN: VOLUME GENERATED BY ROTATING THE AREA SHOWN ABOUT THE X AXIS
FIND: LOCATION OF THE CENTROID OF THE VOLUME



FIRST NOTE THAT SYMMETRY IMPLIES $\bar{y} = 0$
 $\bar{z} = 0$



CHOOSE AS THE ELEMENT OF VOLUME A DISK OF RADIUS r AND THICKNESS dx . THEN
 $dV = \pi r^2 dx$, $\bar{x}_{EL} = x$

Now $r = 1 - \frac{x}{2}$ SO THAT
 $dV = \pi (1 - \frac{x}{2})^2 dx$
 $= \pi (1 - \frac{x}{2} + \frac{x^2}{4}) dx$

THEN... $V = \int_0^3 \pi (1 - \frac{x}{2} + \frac{x^2}{4}) dx = \pi [x - \frac{1}{4}x^2 + \frac{1}{12}x^3]_0^3$
 $= \pi [(3 - \frac{9}{4} + \frac{27}{12}) - (0)]$
 $= 0.46944\pi \text{ m}^3$


AND $\int \bar{x}_{EL} dV = \int_0^3 x [\pi (1 - \frac{x}{2} + \frac{x^2}{4})] dx = \pi [\frac{x^2}{2} - \frac{1}{4}x^3 + \frac{1}{12}x^4]_0^3$
 $= \pi [\frac{9}{2} - 2(3) + \frac{81}{12}] - [0]$
 $= 1.09861\pi \text{ m}^4$

Now... $\bar{x} V = \int \bar{x}_{EL} dV$: $\bar{x} (0.46944\pi \text{ m}^3) = 1.09861\pi \text{ m}^4$
OR $\bar{x} = 2.34 \text{ m}$


5.137

GIVEN: VOLUME GENERATED BY ROTATING THE AREA SHOWN ABOUT THE LINE $x=h$

FIND: LOCATION OF THE CENTROIDS OF THE VOLUME



FIRST NOTE THAT SYMMETRY IMPLIES $\bar{x}=h$
 $\bar{z}=0$



CHOOSE AS THE ELEMENT OF VOLUME A DISK OF RADIUS r AND THICKNESS dy . THEN $dV = \pi r^2 dy$. $\bar{y}_{EL} = y$

NOW $x^2 = \frac{h^2}{a^2}(a^2 - y^2)$

SO THAT $r = h - \frac{h}{a} \sqrt{a^2 - y^2}$

THEN $dV = \pi \frac{h^2}{a^2} (a - \sqrt{a^2 - y^2})^2 dy$

AND $V = \int_0^a \pi \frac{h^2}{a^2} (a - \sqrt{a^2 - y^2})^2 dy$

LET $y = a \sin \theta \Rightarrow dy = a \cos \theta d\theta$

THEN $V = \pi \frac{h^2}{a^2} \int_0^{\pi/2} (a - \sqrt{a^2 - a^2 \sin^2 \theta})^2 a \cos \theta d\theta$

$$= \pi \frac{h^2}{a^2} \int_0^{\pi/2} (a^2 - 2a(a \cos \theta) + (a^2 - a^2 \sin^2 \theta)) a \cos \theta d\theta$$

$$= \pi a h^2 \int_0^{\pi/2} (2 \cos \theta - 2 \cos^2 \theta - \sin^2 \theta \cos \theta) d\theta$$

$$= \pi a h^2 [2 \sin \theta - 2(\frac{\theta}{2} + \frac{\sin 2\theta}{4}) - \frac{1}{3} \sin^3 \theta]_0^{\pi/2}$$

$$= \pi a h^2 [2 - 2(\frac{\pi/2}{2}) - \frac{1}{3}]$$

$$= 0.095870 \pi a h^2$$

AND $\int \bar{y}_{EL} dV = \int_0^a y (\pi \frac{h^2}{a^2} (a - \sqrt{a^2 - y^2})^2 dy)$

$$= \pi \frac{h^2}{a^2} \int_0^a (2a^2 y - 2ay \sqrt{a^2 - y^2} - y^3) dy$$

$$= \pi \frac{h^2}{a^2} [a^2 y^2 + \frac{2}{3} a (a^2 - y^2)^{3/2} - \frac{1}{4} y^4]_0^a$$

$$= \pi \frac{h^2}{a^2} [a^2(a^2) - \frac{2}{3} a^3 - \frac{1}{4} a^4]$$

$$= \frac{1}{12} \pi a^2 h^2$$


NOW $\bar{y} V = \int \bar{y}_{EL} dV: y(0.095870 \pi a h^2) = \frac{1}{12} \pi a^2 h^2$

OR $\bar{y} = 0.0869a$

* 5.138

GIVEN: VOLUME GENERATED BY ROTATING THE AREA SHOWN ABOUT THE X AXIS


FIND: LOCATION OF THE CENTROIDS OF THE VOLUME



FIRST NOTE THAT SYMMETRY IMPLIES $\bar{y}=0$
 $\bar{z}=0$

CHOOSE AS THE ELEMENT OF VOLUME A DISK OF RADIUS r AND THICKNESS dx . THEN (CONTINUED)

5.138 CONTINUED



AND $\int \bar{x} dV = \int_a^{2a} x (\pi b^2 \sin^2 \frac{\pi x}{2a} dx)$

USE INTEGRATION BY PARTS WITH $u = x$ $dv = \sin^2 \frac{\pi x}{2a}$

$du = dx$ $v = \frac{x}{2} - \frac{\sin \frac{\pi x}{a}}{2\pi/a}$

THEN $\int \bar{x} dV = \pi b^2 \left\{ \left[x \left(\frac{x}{2} - \frac{\sin \pi x/a}{2\pi/a} \right) \right]_a^{2a} - \int_a^{2a} \left(\frac{x}{2} - \frac{\sin \pi x/a}{2\pi/a} \right) dx \right\}$

$$= \pi b^2 \left\{ \left[2a \left(\frac{2a}{2} \right) - a \left(\frac{a}{2} \right) \right] - \left[\frac{1}{4} x^2 + \frac{a^2}{2\pi^2} \cos \frac{\pi x}{a} \right]_a^{2a} \right\}$$

$$= \pi a^2 b^2 \left(\frac{3}{4} - \frac{\pi^2}{2} \right)$$

$$= 0.64868 \pi a^2 b^2$$


NOW $\bar{x} V = \int \bar{x}_{EL} dV: \bar{x} (\frac{1}{2} \pi a b^2) = 0.64868 \pi a^2 b^2$

OR $\bar{x} = 1.297a$


* 5.139

GIVEN: VOLUME GENERATED BY ROTATING THE AREA SHOWN ABOUT THE Y AXIS

FIND: LOCATION OF THE CENTROIDS OF THE VOLUME



FIRST NOTE THAT SYMMETRY IMPLIES $\bar{x}=0$
 $\bar{z}=0$



CHOOSE AS THE ELEMENT OF VOLUME A CYLINDRICAL SHELL OF RADIUS r , THICKNESS dr , AND HEIGHT y . THEN $dV = (2\pi r)(y)dr$, $\bar{y}_{EL} = \frac{1}{2}y$

NOW $y = b \sin \frac{\pi r}{2a}$ SO THAT $dV = 2\pi b r \sin \frac{\pi r}{2a} dr$

THEN $V = \int_a^{2a} 2\pi b r \sin \frac{\pi r}{2a} dr$

USE INTEGRATION BY PARTS WITH $u = r$ $dv = \sin \frac{\pi r}{2a} dr$

$du = dr$ $v = -\frac{2a}{\pi} \cos \frac{\pi r}{2a}$

THEN $V = 2\pi b \left[\left(r X - \frac{2a}{\pi} \cos \frac{\pi r}{2a} \right) \right]_a^{2a}$

$$= 2\pi b \left[-\frac{2a}{\pi} \left[(2a)(-1) \right] + \left[\frac{4a^2}{\pi} \sin \frac{\pi r}{2a} \right]_a^{2a} \right]$$

(CONTINUED)

5.139 CONTINUED

$$V = 2\pi b \left(\frac{4a^2}{\pi} - \frac{4a^2}{\pi} \right)$$

$$= 8a^2 b \left(1 - \frac{\pi}{\pi} \right)$$

$$= 5.4535 a^2 b$$

ALSO $\int_{\text{REL}} dV = \int_a^{2a} \left(\frac{1}{2} b \sin \frac{\pi r}{2a} \right) (2\pi b r \sin \frac{\pi r}{2a} dr)$

$$= \pi b^2 \int_a^{2a} r \sin^2 \frac{\pi r}{2a} dr$$

USE INTEGRATION BY PARTS WITH
 $u = r$ $dv = \sin^2 \frac{\pi r}{2a} dr$
 $du = dr$ $v = \frac{r}{2} - \frac{\sin \frac{\pi r}{a}}{2\pi/a}$

THEN... $\int_{\text{REL}} dV = \pi b^2 \left\{ (r) \left(\frac{r}{2} - \frac{\sin \frac{\pi r}{a}}{2\pi/a} \right) \Big|_a^{2a} - \int_a^{2a} \left(\frac{r}{2} - \frac{\sin \frac{\pi r}{a}}{2\pi/a} \right) dr \right\}$

$$= \pi b^2 \left\{ \left[(2a) \left(\frac{2a}{2} \right) - (a) \left(\frac{a}{2} \right) \right] - \left[\frac{r^2}{4} + \frac{a^2}{2\pi^2} \cos \frac{\pi r}{a} \right] \Big|_a^{2a} \right\}$$

$$= \pi b^2 \left\{ \frac{3}{2} a^2 - \left[\frac{(2a)^2}{4} + \frac{a^2}{2\pi^2} - \left(\frac{a^2}{4} + \frac{a^2}{2\pi^2} \right) \right] \right\}$$


$$= \pi a^2 b^2 \left(\frac{3}{2} - \frac{\pi^2}{4} \right)$$

$$= 2.0379 a^2 b^2$$

Now... $\bar{y}V = \int_{\text{REL}} dV$: $\bar{y}(5.4535 a^2 b) = 2.0379 a^2 b^2$
 OR $\bar{y} = 0.374b$

5.140

GIVEN: A REGULAR PYRAMID OF HEIGHT h AND N SIDES
 SHOW: $\bar{y} = \frac{h}{4}$ ABOVE THE BASE



CHOOSE AS THE ELEMENT OF VOLUME A HORIZONTAL SLICE OF THICKNESS dy . FOR ANY NUMBER N OF SIDES, THE AREA OF THE BASE OF THE

PYRAMID IS GIVEN BY
 $A_{\text{BASE}} = kb^2$

WHERE $k = k(N)$; SEE NOTE BELOW. USING SIMILAR TRIANGLES HAVE

$$\frac{s}{b} = \frac{h-y}{h}$$

$$\text{OR } s = \frac{b}{h}(h-y)$$

THEN... $dV = A_{\text{SLICE}} dy = ks^2 dy = k \frac{b^2}{h^2} (h-y)^2 dy$

AND $V = \int_0^h k \frac{b^2}{h^2} (h-y)^2 dy = k \frac{b^2}{h^2} \left[-\frac{1}{3}(h-y)^3 \right]_0^h$


$$= \frac{1}{3} kb^2 h$$

ALSO... $\bar{y}_{\text{EL}} = \frac{h}{2}$ SO THEN $\int_{\text{REL}} dV = \int_0^h \left(k \frac{b^2}{h^2} (h-y)^2 \right) \left(\frac{h}{2} \right) dy$

$$= k \frac{b^2}{h^2} \int_0^h \frac{1}{2} (h^2 - 2hy + y^2) dy = \frac{1}{12} kb^2 h^2$$

Now... $\bar{y}V = \int_{\text{REL}} dV$: $\bar{y} \left(\frac{1}{3} kb^2 h \right) = \frac{1}{12} kb^2 h^2$
 OR $\bar{y} = \frac{h}{4}$ Q.E.D.

NOTE: CENTER OF BASE



$$A_{\text{BASE}} = N \left(\frac{1}{2} b \cdot \frac{b/2 \tan(\pi/N)}{\tan(\pi/N)} \right)$$


$$= \frac{N}{4 \tan(\pi/N)} b^2$$

$$= k(N) b^2$$


5.141

GIVEN: ONE-HALF OF A THIN, UNIFORM HEMISPHERICAL SHELL

FIND: LOCATION OF CENTROID USING DIRECT INTEGRATION



FIRST NOTE THAT SYMMETRY IMPLIES $\bar{x} = 0$



THE ELEMENT OF AREA dA OF THE SHELL SHOWN IS OBTAINED BY CUTTING THE SHELL WITH TWO PLANES PARALLEL TO THE xy PLANE. NOW $dA = (\pi r)(R d\theta)$

$$\bar{y}_{\text{EL}} = -\frac{2r}{\pi}$$

WHERE $r = R \sin \theta$

SO THAT $dA = \pi R^2 \sin \theta d\theta$, $\bar{y}_{\text{EL}} = -\frac{2R}{\pi} \sin \theta$

THEN $A = \int_0^{\pi/2} \pi R^2 \sin \theta d\theta = \pi R^2 [-\cos \theta]_0^{\pi/2}$

$$= \pi R^2$$

AND $\int_{\text{REL}} dA = \int_0^{\pi/2} \left(-\frac{2R}{\pi} \sin \theta \right) (\pi R^2 \sin \theta d\theta)$


$$= -2R^3 \left[\frac{\theta}{2} - \frac{\sin 2\theta}{4} \right]_0^{\pi/2}$$

$$= -\frac{\pi}{2} R^3$$

Now... $\bar{y}A = \int_{\text{REL}} dA$: $\bar{y}(\pi R^2) = -\frac{\pi}{2} R^3$
 OR $\bar{y} = -\frac{1}{2} R$

SYMMETRY IMPLIES $\bar{z} = \bar{y} \therefore \bar{z} = -\frac{1}{2} R$

5.142




GIVEN: PUNCH BOWL OF UNIFORM WALL THICKNESS t , $R = 250$ mm, $t \ll R$

FIND: LOCATION OF THE CENTER OF GRAVITY OF
 (a) THE BOWL
 (b) THE PUNCH

(a) BOWL

FIRST NOTE THAT SYMMETRY IMPLIES $\bar{x} = 0$
 $\bar{z} = 0$

FOR THE COORDINATE AXES SHOWN BELOW. NOW ASSUME THAT THE BOWL MAY BE TREATED AS A SHELL; THE CENTER OF GRAVITY OF THE BOWL WILL COINCIDE WITH THE CENTROIDS OF THE SHELL.



FOR THE WALLS OF THE BOWL, AN ELEMENT OF AREA IS OBTAINED BY ROTATING THE ARC ds ABOUT THE y AXIS. THEN $dA_{\text{WALL}} = (2\pi R \sin \theta)(R d\theta)$

(CONTINUES)

5.142 CONTINUED

AND $(\bar{y}_{el})_{wall} = -R \cos \theta$
 THEN $A_{wall} = \int_{\pi/6}^{\pi/2} 2\pi R^2 \sin \theta d\theta = 2\pi R^2 [-\cos \theta]_{\pi/6}^{\pi/2}$
 $= \pi \sqrt{3} R^2$

AND $\bar{y}_{wall} A_{wall} = \int_{\pi/6}^{\pi/2} (\bar{y}_{el})_{wall} dA$
 $= \int_{\pi/6}^{\pi/2} (-R \cos \theta)(2\pi R^2 \sin \theta d\theta)$
 $= \pi R^3 [\cos^2 \theta]_{\pi/6}^{\pi/2}$
 $= -\frac{3}{4} \pi R^3$


BY OBSERVATION... $A_{base} = \frac{\pi}{4} R^2$, $\bar{y}_{base} = -\frac{\sqrt{3}}{2} R$

Now.. $\bar{y} \Sigma A = \Sigma \bar{y} A$
 OR.. $\bar{y} (\pi \sqrt{3} R^2 + \frac{\pi}{4} R^2) = -\frac{3}{4} \pi R^3 + \frac{\pi}{4} R^2 (-\frac{\sqrt{3}}{2} R)$
 OR $\bar{y} = -0.48763R$ $R = 250 \text{ mm}$
 $\therefore \bar{y} = -121.9 \text{ mm}$

(b) PUNCH

FIRST NOTE THAT SYMMETRY IMPLIES $\bar{y} = 0$
 $\bar{z} = 0$

AND THAT BECAUSE THE PUNCH IS HOMOGENEOUS,
 ITS CENTER OF GRAVITY WILL COINCIDE WITH
 THE CENTROIDS OF THE CORRESPONDING VOLUME.




CHOOSE AS THE
 ELEMENT OF VOLUME
 A DISK OF RADIUS
 X AND THICKNESS
 dy. THEN
 $dV = \pi x^2 dy$, $\bar{y}_{el} = y$
 Now.. $x^2 + y^2 = R^2$

SO THAT $dV = \pi(R^2 - y^2) dy$
 THEN $V = \int_{-\frac{\sqrt{3}}{2}R}^0 \pi(R^2 - y^2) dy = \pi [R^2 y - \frac{1}{3} y^3]_{-\frac{\sqrt{3}}{2}R}^0$
 $= -\pi [R^2 (-\frac{\sqrt{3}}{2}R) - \frac{1}{3} (-\frac{\sqrt{3}}{2}R)^3] = \frac{3}{8} \pi \sqrt{3} R^3$

AND $(\bar{y}_{el} dV) = \int_{-\frac{\sqrt{3}}{2}R}^0 (y) (\pi(R^2 - y^2) dy) = \pi [\frac{1}{2} R^2 y^2 - \frac{1}{4} y^4]_{-\frac{\sqrt{3}}{2}R}^0$
 $= -\pi [\frac{1}{2} R^2 (-\frac{\sqrt{3}}{2}R)^2 - \frac{1}{4} (-\frac{\sqrt{3}}{2}R)^4] = -\frac{15}{64} \pi R^4$

Now.. $\bar{y} V = (\bar{y}_{el} dV)$: $\bar{y} (\frac{3}{8} \pi \sqrt{3} R^3) = -\frac{15}{64} \pi R^4$
 OR $\bar{y} = -\frac{5}{8\sqrt{3}} R$ $R = 250 \text{ mm}$
 $\therefore \bar{y} = -92.2 \text{ mm}$

5.143

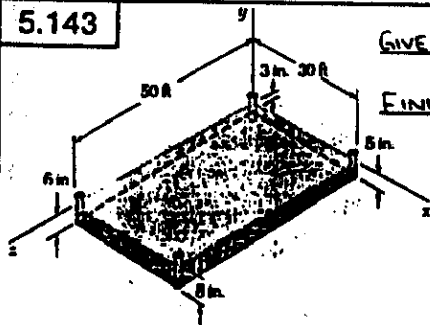


GIVEN: GRAVEL BASE,
 $y = a + bx + cz$
 FIND: VOLUME OF
 GRAVEL, \bar{x}

FIRST DETERMINE THE CONSTANTS a, b, AND c
 AT $x=0, z=0$: $y = 3 \text{ ft}$: $-\frac{3}{12} \text{ ft} = a$ $a = -\frac{3}{4} \text{ ft}$
 $x=30 \text{ ft}, z=0$: $y = 3 \text{ ft}$: $-\frac{3}{12} \text{ ft} = -\frac{3}{4} \text{ ft} + b(30 \text{ ft})$
 $b = \frac{13}{10}$
 $x=0, z=50 \text{ ft}$: $y = 6 \text{ ft}$: $-\frac{6}{12} \text{ ft} = -\frac{3}{4} \text{ ft} + c(50 \text{ ft})$
 (CONTINUED)

5.143 CONTINUED

OR $C = -\frac{1}{200}$
 $\therefore y = -\frac{3}{4} - \frac{1}{180}x - \frac{1}{200}z$
 $= -\frac{3}{4} (1 + \frac{1}{45}x + \frac{5}{20}z)$ WHERE ALL
 DIMENSIONS ARE IN FEET

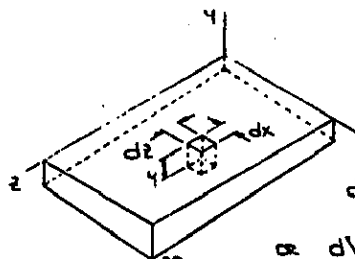


CHOOSE AS THE
 ELEMENT OF VOLUME
 A FILAMENT OF BASE
 $dx \cdot dz$ AND HEIGHT
 y. THEN
 $dV = y dx dz$, $\bar{x}_{el} = x$

OR $dV = \frac{3}{4} (1 + \frac{1}{45}x + \frac{5}{20}z) dx dz$
 THEN $V = \int_0^{50} \int_0^{30} \frac{3}{4} (1 + \frac{1}{45}x + \frac{5}{20}z) dx dz$
 $= \frac{3}{4} \int_0^{50} [x + \frac{1}{90}x^2 + \frac{5}{20}xz]_0^{30} dz$
 $= \frac{3}{4} \int_0^{50} [30 + \frac{(30)^2}{90} + \frac{5}{20}(30)z] dz$
 $= \frac{3}{4} [40z + \frac{3}{10}z^2]_0^{50} = \frac{3}{4} [40(50) + \frac{3}{10}(50)^2]$


$= 687.5 \text{ ft}^3$ $V = 688 \text{ ft}^3$
 AND $(\bar{x}_{el} dV) = \int_0^{50} \int_0^{30} x (\frac{3}{4} (1 + \frac{1}{45}x + \frac{5}{20}z)) dx dz$
 $= \frac{3}{4} \int_0^{50} [\frac{x^2}{2} + \frac{1}{135}x^3 + \frac{5}{100}x^2 z]_0^{30} dz$
 $= \frac{3}{4} \int_0^{50} [\frac{(30)^2}{2} + \frac{(30)^3}{135} + \frac{5}{100}(30)^2 z] dz$
 $= \frac{3}{4} [(450 + 200)z + \frac{5}{2}z^2]_0^{50}$
 $= \frac{3}{4} [650(50) + \frac{5}{2}(50)^2]$
 $= 10,937.5 \text{ ft}^4$
 Now.. $\bar{x} V = (\bar{x}_{el} dV)$: $\bar{x} (687.5 \text{ ft}^3) = 10,937.5 \text{ ft}^4$
 OR $\bar{x} = 15.91 \text{ ft}$

5.144

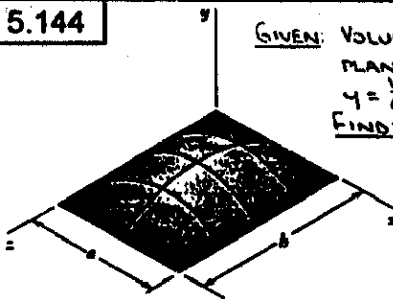

GIVEN: VOLUME BETWEEN THE xz
 PLANE AND THE SURFACE
 $y = \frac{16h}{a^2b} (ax-x^2)(bz-z^2)$
 FIND: LOCATION OF THE
 CENTROID USING
 DIRECT INTEGRATION

FIRST NOTE THAT SYMMETRY IMPLIES $\bar{x} = \frac{a}{2}$
 $\bar{z} = \frac{b}{2}$

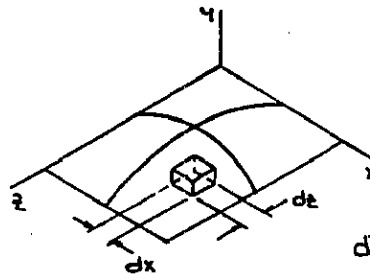

CHOOSE AS THE
 ELEMENT OF
 VOLUME A
 FILAMENT OF BASE
 $dx \cdot dz$ AND
 HEIGHT y. THEN
 $dV = y dx dz$, $\bar{y}_{el} = \frac{1}{2} y$

THEN $V = \int_0^b \int_0^a \frac{16h}{a^2b} (ax-x^2)(bz-z^2) dx dz$
 OR $dV = \frac{16h}{a^2b} (ax-x^2)(bz-z^2) dx dz$
 (CONTINUED)

5.144 CONTINUED

$$V = \frac{16h}{a^2b^2} \int_0^b (bz-z^2) \left[\frac{a}{2}x^2 - \frac{1}{3}x^3 \right]_0^a dz$$

$$= \frac{16h}{a^2b^2} \left[\frac{a}{2}(a^2) - \frac{1}{3}(a^3) \right] \left[\frac{1}{2}z^2 - \frac{1}{3}z^3 \right]_0^b$$

$$= \frac{8ah}{3b^2} \left[\frac{1}{2}(b^2) - \frac{1}{3}(b^3) \right] = \frac{4}{9}abh$$

AND $\int y_{EL} dV = \int_0^b \int_0^a \frac{16h}{a^2b^2} (ax-x^2)(bz-z^2) \left[\frac{16h}{a^2b^2} (ax-x^2)(bz-z^2) dx dz \right]$

$$= \frac{128h^2}{a^4b^4} \int_0^b \int_0^a (a^2x^2 - 2ax^3 + x^4) (b^2z^2 - 2bz^3 + z^4) dx dz$$

$$= \frac{128h^2}{a^4b^4} \int_0^b (b^2z^2 - 2bz^3 + z^4) \left[\frac{a^3}{3}x^3 - \frac{a}{2}x^4 + \frac{1}{5}x^5 \right]_0^a dz$$


$$= \frac{128h^2}{a^4b^4} \left[\frac{a^3}{3}(a)^3 - \frac{a}{2}(a)^4 + \frac{1}{5}(a)^5 \right] \left[\frac{1}{3}z^3 - \frac{1}{2}z^4 + \frac{1}{5}z^5 \right]_0^b$$

$$= \frac{64ah^2}{15b^4} \left[\frac{1}{3}(b^3) - \frac{1}{2}(b^4) + \frac{1}{5}(b^5) \right]$$

$$= \frac{32}{225} abh^2$$


Now.. $\bar{y}V = \int y_{EL} dV: \bar{y}(\frac{4}{9}abh) = \frac{32}{225} abh^2$
OR $\bar{y} = \frac{8}{25}h$

5.145



GIVEN: THE PORTION OF A CIRCULAR PIPE SHOWN
FIND: LOCATION OF THE CENTROID

FIRST NOTE THAT SYMMETRY IMPLIES $\bar{x} = 0$
ASSUME THAT THE PIPE HAD A UNIFORM WALL THICKNESS t AND CHOOSE AS THE ELEMENT OF VOLUME A VERTICAL STRIP OF WIDTH $a \cos \theta$ AND HEIGHT $(y_2 - y_1)$. THEN

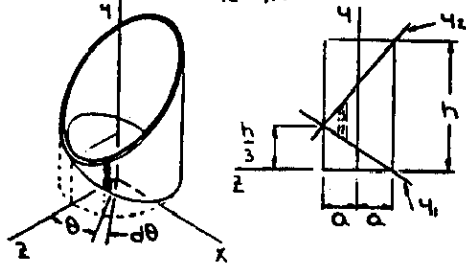

$$dV = (y_2 - y_1)t a \cos \theta, \quad \bar{y}_{EL} = \frac{1}{2}(y_1 + y_2), \quad \bar{z}_{EL} = z$$

Now.. $y_1 = \frac{h}{2a}z + \frac{h}{2}$
 $y_2 = -\frac{2h}{2a}z + \frac{3}{2}h$

$$= \frac{h}{2a}(z+a) = \frac{h}{3a}(-z+2a)$$

AND $z = a \cos \theta$
THEN $(y_2 - y_1) = \frac{h}{3a}(-a \cos \theta + 2a) - \frac{h}{6a}(a \cos \theta + a)$
 $= \frac{h}{2}(1 - \cos \theta)$

AND $(y_1 + y_2) = \frac{h}{6a}(a \cos \theta + a) + \frac{h}{3a}(-a \cos \theta + 2a)$
 $= \frac{h}{6}(5 - \cos \theta)$

(CONTINUED)

5.145 CONTINUED

$$\therefore dV = \frac{ah}{2}(1 - \cos \theta)d\theta, \quad \bar{y}_{EL} = \frac{h}{2}(5 - \cos \theta), \quad \bar{z}_{EL} = a \cos \theta$$

THEN $V = 2 \int_0^\pi \frac{ah}{2}(1 - \cos \theta)d\theta = aht[\theta - \sin \theta]_0^\pi$
 $= \pi aht$


AND $\int y_{EL} dV = 2 \int_0^\pi \frac{h}{2}(5 - \cos \theta) \left[\frac{ah}{2}(1 - \cos \theta)d\theta \right]$
 $= \frac{ah^2}{2} \int_0^\pi (5 - 6 \cos \theta + \cos^2 \theta)d\theta$
 $= \frac{ah^2}{2} \left[5\theta - 6 \sin \theta + \frac{\theta}{2} + \frac{\sin 2\theta}{4} \right]_0^\pi$
 $= \frac{11}{24} \pi a h^2 t$

$\int \bar{z}_{EL} dV = 2 \int_0^\pi a \cos \theta \left[\frac{ah}{2}(1 - \cos \theta)d\theta \right]$
 $= a^2ht \left[\sin \theta - \frac{\theta}{2} - \frac{\sin 2\theta}{4} \right]_0^\pi$
 $= -\frac{1}{2} \pi a^2ht$

Now.. $\bar{y}V = \int y_{EL} dV: \bar{y}(\pi aht) = \frac{11}{24} \pi a h^2 t$
OR $\bar{y} = \frac{11}{24}h$


AND $\bar{z}V = \int \bar{z}_{EL} dV: \bar{z}(\pi aht) = -\frac{1}{2} \pi a^2ht$
OR $\bar{z} = -\frac{1}{2}a$

* 5.146



GIVEN: THE PORTION OF AN ELLIPTICAL CYLINDER SHOWN
FIND: LOCATION OF THE CENTROID

FIRST NOTE THAT SYMMETRY IMPLIES $\bar{x} = 0$

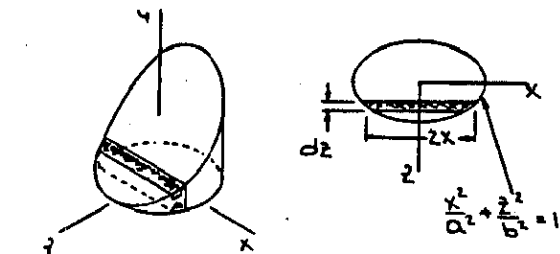

CHOOSE AS THE ELEMENT OF VOLUME A VERTICAL SLICE OF WIDTH $2x$, THICKNESS dz , AND HEIGHT y . THEN

$$dV = 2xy dz, \quad \bar{y}_{EL} = \frac{1}{2}y, \quad \bar{z}_{EL} = z$$

Now $x = \frac{a}{b} \sqrt{b^2 - z^2}$

THEN $V = \int_0^b \left(\frac{2a}{b} \sqrt{b^2 - z^2} \right) \left[\frac{h}{2b}(b-z) \right] dz$

LET $z = b \sin \theta, \quad dz = b \cos \theta d\theta$
THEN $V = \frac{ah}{b^2} \int_0^{\pi/2} (b \cos \theta) (b(1 - \sin \theta)) b \cos \theta d\theta$
 $= abh \int_0^{\pi/2} (\cos^2 \theta - \sin \theta \cos^2 \theta) d\theta$
 $= abh \left[\frac{\theta}{2} + \frac{\sin 2\theta}{4} + \frac{1}{3} \cos^3 \theta \right]_0^{\pi/2}$

(CONTINUED)

5.146 CONTINUED

$$V = \frac{1}{2} \pi a b h$$

AND $\int \bar{y}_{EL} dV = \int_{-b}^b \left[\frac{1}{2} \cdot \frac{h}{2b} (b-z) \right] \left[\frac{2}{b} \sqrt{b^2-z^2} \right] \left[\frac{h}{2b} (b-z) \right] dz$

$$= \frac{1}{4} \frac{a h^2}{b^2} \int_{-b}^b (b-z)^2 \sqrt{b^2-z^2} dz$$

LET $z = b \sin \theta$, $dz = b \cos \theta d\theta$

THEN $\int \bar{y}_{EL} dV = \frac{1}{4} \frac{a h^2}{b^2} \int_{-\pi/2}^{\pi/2} [b(1-\sin \theta)]^2 (b \cos \theta) \times (b \cos \theta d\theta)$

$$= \frac{1}{4} a b h^2 \int_{-\pi/2}^{\pi/2} (\cos^2 \theta - 2 \sin \theta \cos^2 \theta + \sin^2 \theta \cos^2 \theta) d\theta$$

NOW $\sin^2 \theta = \frac{1}{2} (1 - \cos 2\theta)$ $\cos^2 \theta = \frac{1}{2} (1 + \cos 2\theta)$

SO THAT $\sin^2 \theta \cos^2 \theta = \frac{1}{4} (1 - \cos^2 2\theta)$

THEN $\int \bar{y}_{EL} dV = \frac{1}{4} a b h^2 \int_{-\pi/2}^{\pi/2} [\cos^4 \theta - 2 \sin \theta \cos^2 \theta + \frac{1}{4} (1 - \cos^2 2\theta)] d\theta$

$$= \frac{1}{4} a b h^2 \left[\left(\frac{\theta}{2} + \frac{\sin 2\theta}{4} \right) + \frac{1}{3} \cos^3 \theta + \frac{1}{4} \theta - 4 \left(\frac{\theta}{2} + \frac{\sin 4\theta}{8} \right) \right]_{-\pi/2}^{\pi/2}$$

$$= \frac{5}{32} \pi a b h^2$$

ALSO $\int \bar{z}_{EL} dV = \int_{-b}^b z \left[\frac{2}{b} \sqrt{b^2-z^2} \right] \left[\frac{h}{2b} (b-z) \right] dz$

$$= \frac{a h}{b^2} \int_{-b}^b z (b-z) \sqrt{b^2-z^2} dz$$

LET $z = b \sin \theta$, $dz = b \cos \theta d\theta$

THEN $\int \bar{z}_{EL} dV = \frac{a h}{b^2} \int_{-\pi/2}^{\pi/2} (b \sin \theta) [b(1-\sin \theta)] (b \cos \theta) \times (b \cos \theta d\theta)$

$$= a b^2 h \int_{-\pi/2}^{\pi/2} (\sin \theta \cos^2 \theta - \sin^2 \theta \cos^2 \theta) d\theta$$

USING $\sin^2 \theta \cos^2 \theta = \frac{1}{4} (1 - \cos^2 2\theta)$ FROM ABOVE..

$$\int \bar{z}_{EL} dV = a b^2 h \int_{-\pi/2}^{\pi/2} [\sin \theta \cos^2 \theta - \frac{1}{4} (1 - \cos^2 2\theta)] d\theta$$

$$= a b^2 h \left[-\frac{1}{3} \cos^3 \theta - \frac{1}{4} \theta + \frac{1}{4} \left(\frac{\theta}{2} + \frac{\sin 4\theta}{8} \right) \right]_{-\pi/2}^{\pi/2}$$

$$= -\frac{1}{8} \pi a b^2 h$$

NOW.. $\bar{y} V = \int \bar{y}_{EL} dV$: $\bar{y} \left(\frac{1}{2} \pi a b h \right) = \frac{5}{32} \pi a b h^2$

OR $\bar{y} = \frac{5}{16} h$

AND $\bar{z} V = \int \bar{z}_{EL} dV$: $\bar{z} \left(\frac{1}{2} \pi a b h \right) = -\frac{1}{8} \pi a b^2 h$

OR $\bar{z} = -\frac{1}{4} b$

5.147 CONTINUED

	A, mm ²	\bar{x} , mm	\bar{y} , mm	$\bar{x}A$, mm ³	$\bar{y}A$, mm ³
1	20 × 60 = 1200	10	30	12 000	36 000
2	$\frac{1}{2} \times 30 \times 36 = 540$	30	36	16 200	19 440
Σ	1740			28 200	55 440

THEN $\bar{x} \Sigma A = \Sigma \bar{x} A$

$$\bar{x} (1740) = 28 200$$


OR $\bar{x} = 16.21 \text{ mm}$

AND $\bar{y} \Sigma A = \Sigma \bar{y} A$

$$\bar{y} (1740) = 55 440$$


OR $\bar{y} = 31.9 \text{ mm}$

5.148



GIVEN: PLANE AREA SHOWN

FIND: \bar{X} AND \bar{Y}

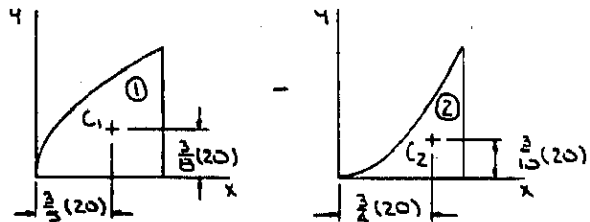

DIMENSIONS IN IN.

	A, IN ²	\bar{x} , IN.	\bar{y} , IN.	$\bar{x}A$, IN ³	$\bar{y}A$, IN ³
1	$\frac{1}{3} (20 \times 20) = 800/3$	12	7.5	3200	2000
2	$-\frac{1}{3} (20 \times 20) = -800/3$	15	6	-2000	-800
Σ	$400/3$			1200	1200

THEN $\bar{x} \Sigma A = \Sigma \bar{x} A$

$$\bar{x} (400/3) = 1200$$

OR $\bar{x} = 9.00 \text{ in.}$


AND $\bar{y} \Sigma A = \Sigma \bar{y} A$

$$\bar{y} (400/3) = 1200$$

OR $\bar{y} = 9.00 \text{ in.}$


NOTE: SYMMETRY IMPLIES $\bar{x} = \bar{y}$, WHICH IS CONFIRMED BY THE ABOVE SOLUTION.

5.147



GIVEN: PLANE AREA SHOWN


FIND: \bar{X} AND \bar{Y}



DIMENSIONS IN MM

(CONTINUED)

5.149



GIVEN: HOMOGENEOUS WIRE, BCD IS HORIZONTAL

FIND: L


FIRST NOTE THAT FOR EQUILIBRIUM, THE CENTER OF GRAVITY OF THE WIRE MUST LIE ON A VERTICAL LINE THROUGH C. FURTHER, BECAUSE THE WIRE IS HOMOGENEOUS, THE CENTER OF GRAVITY OF THE WIRE WILL COINCIDE WITH THE CENTROID OF THE CORRESPONDING LINE. THUS,

$$\bar{x} = 0 \quad (\text{SEE SKETCH ON THE NEXT PAGE})$$

SO THAT $\Sigma \bar{x} L = 0$


(CONTINUED)

5.149 CONTINUED




THEN $\frac{1}{2}(L) + (-40 \text{ mm})(80 \text{ mm}) + (-40 \text{ mm})(100 \text{ mm}) = 0$
 OR $L^2 = 14400 \text{ mm}^2$
 OR $L = 120.0 \text{ mm}$ ◀

5.150



GIVEN: PLANE AREA SHOWN
 FIND: \bar{x} AND \bar{y} USING DIRECT INTEGRATION



AT (a, b)
 $y_1: b = ka^2$ OR $k = \frac{b}{a^2}$
 $y_2: b = ma$ OR $m = \frac{b}{a}$
 NOW... $\bar{x}_{EL} = x$
 $\bar{y}_{EL} = \frac{1}{2}(y_1 + y_2)$

AND $dA = (y_2 - y_1)dx$
 $= (\frac{b}{a}x - \frac{b}{a^2}x^2)dx$
 $= \frac{b}{a^2}(ax - x^2)dx$


THEN $A = \int dA = \int_0^a \frac{b}{a^2}(ax - x^2)dx = \frac{b}{a^2}[\frac{a}{2}x^2 - \frac{1}{3}x^3]_0^a$
 $= \frac{1}{6}ab$

AND $\int \bar{x}_{EL} dA = \int_0^a x[\frac{b}{a^2}(ax - x^2)]dx = \frac{b}{a^2}[\frac{a}{3}x^3 - \frac{1}{4}x^4]_0^a$
 $= \frac{1}{12}a^2b$


$\int \bar{y}_{EL} dA = \int \frac{1}{2}(y_1 + y_2)(y_2 - y_1)dx$
 $= \int \frac{1}{2}(y_2^2 - y_1^2)dx$
 $= \frac{1}{2} \int_0^a (\frac{b^2}{a^2}x^2 - \frac{b^2}{a^2}x^4)dx$
 $= \frac{1}{2} \frac{b^2}{a^2} [\frac{a^3}{3}x^3 - \frac{1}{5}x^5]_0^a$
 $= \frac{1}{15}ab^2$

$\bar{x}A = \int \bar{x}_{EL} dA: \bar{x}(\frac{1}{6}ab) = \frac{1}{12}a^2b$ $\bar{x} = \frac{1}{2}a$ ◀
 $\bar{y}A = \int \bar{y}_{EL} dA: \bar{y}(\frac{1}{6}ab) = \frac{1}{15}ab^2$ $\bar{y} = \frac{2}{15}b$ ◀

5.151



GIVEN: PLANE AREA SHOWN
 FIND: \bar{y} BY DIRECT INTEGRATION

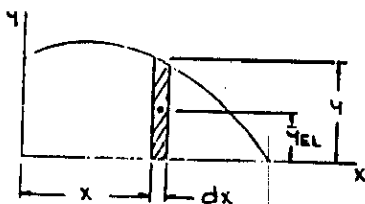

(CONTINUED)


5.151 CONTINUED

HAVE $dA = y dx = h(1 - \frac{x}{L} - 2\frac{x^2}{L^2})dx$
 AND $\bar{y}_{EL} = \frac{1}{2}y = \frac{1}{2}h(1 - \frac{x}{L} - 2\frac{x^2}{L^2})$

THEN $A = \int dA = \int_0^L h(1 - \frac{x}{L} - 2\frac{x^2}{L^2})dx$
 $= h[x - \frac{1}{2L}x^2 - \frac{2}{3L^2}x^3]_0^L = \frac{5}{6}hL$
 AND $\int \bar{y}_{EL} dA = \int_0^L \frac{1}{2}h(1 - \frac{x}{L} - 2\frac{x^2}{L^2})[h(1 - \frac{x}{L} - 2\frac{x^2}{L^2})dx]$
 $= \frac{1}{2}h^2 \int_0^L (1 + 2\frac{x}{L} - 3\frac{x^2}{L^2} - 4\frac{x^3}{L^3} + 4\frac{x^4}{L^4})dx$
 $= \frac{1}{2}h^2 [x + \frac{1}{L}x^2 - \frac{1}{L^2}x^3 - \frac{1}{L^3}x^4 + \frac{4}{5L^4}x^5]_0^L$
 $= \frac{2}{5}Lh^2$


$\bar{y}A = \int \bar{y}_{EL} dA: \bar{y}(\frac{5}{6}hL) = \frac{2}{5}Lh^2$ $\bar{y} = \frac{12}{25}h$
 OR $\bar{y} = 0.48h$ ◀

5.152



GIVEN: WOODEN SPHERE WITH TWO EQUAL CAPS REMOVED
 FIND: SURFACE AREA OF BODY

THE SURFACE AREA CAN BE GENERATED BY ROTATING THE LINE SHOWN ABOUT THE y AXIS. APPLYING THE FIRST THEOREM OF PAPPUS-GULBINUS HAVE




$A = 2\pi \bar{x}L = 2\pi \sum \bar{x}L$
 $= 2\pi(2\bar{x}_1L_1 + \bar{x}_2L_2)$

NOW $\tan \alpha = \frac{4}{3}$
 OR $\alpha = 53.130^\circ$
 THEN $\bar{x}_2 = \frac{\sin \alpha \cdot \sin 53.130^\circ}{53.130^\circ} = \frac{\pi}{180^\circ}$

AND $L_2 = 2(53.130^\circ \cdot \frac{\pi}{180^\circ})(5 \text{ in.})$
 $= 9.2729 \text{ in.}$


$\therefore A = 2\pi[2(\frac{3}{2} \text{ in.})(3 \text{ in.}) + (4.3136 \text{ in.})(9.2729 \text{ in.})]$
 OR $A = 308 \text{ in}^2$ ◀

5.153



GIVEN: BEAM AND LOADING SHOWN
 FIND: REACTIONS AT THE SUPPORTS

FIRST REPLACE THE GIVEN LOADING WITH THE LOADING SHOWN BELOW. THE TWO LOADINGS ARE EQUIVALENT BECAUSE BOTH ARE DEFINED BY A LINEAR RELATION BETWEEN LOAD AND DISTANCE AND THE VALUES AT THE END POINTS ARE THE SAME.

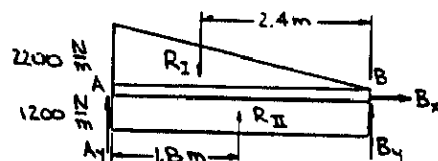


(CONTINUED)

5.153 CONTINUED


HAVE... $R_I = \frac{1}{2}(3.6\text{ m})(2200 \frac{\text{N}}{\text{m}}) = 3960\text{ N}$
 $R_{II} = (3.6\text{ m})(1200 \frac{\text{N}}{\text{m}}) = 4320\text{ N}$

THEN... $\sum F_x = 0: B_x = 0$
 $\sum M_B = 0: -(3.6\text{ m})A_y + (2.4\text{ m})(3960\text{ N}) - (1.8\text{ m})(4320\text{ N}) = 0$
 OR $A_y = 480\text{ N}$ $A = 180\text{ N} \uparrow$
 $\sum F_y = 0: 480\text{ N} - 3960\text{ N} + 4320\text{ N} + B_y = 0$
 OR $B_y = -840\text{ N}$ $B = 840\text{ N} \downarrow$

5.154




GIVEN: BEAM AND LOADING SHOWN.
 $w_A = 20\text{ kN/m}$
 FIND: (a) A
 (b) w_B

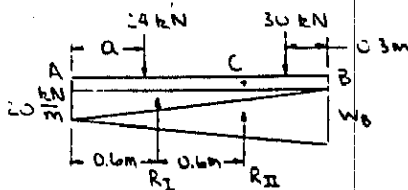


HAVE... $R_I = \frac{1}{2}(1.8\text{ m})(20 \frac{\text{kN}}{\text{m}}) = 18\text{ kN}$
 $R_{II} = \frac{1}{2}(1.8\text{ m})(w_B \frac{\text{kN}}{\text{m}}) = 0.9 w_B\text{ kN}$
 (a) $\sum M_C = 0: (1.2 - a)\text{ m} = 24\text{ kN} \cdot 0.6\text{ m} - 18\text{ kN} \cdot 0.3\text{ m} - 0.3\text{ m} = 30\text{ kN} \cdot 0$
 OR $a = 0.375\text{ m}$
 (b) $\sum F_y = 0: -24\text{ kN} + 18\text{ kN} + 0.9 w_B\text{ kN} - 30\text{ kN} = 0$
 OR $w_B = 40 \frac{\text{kN}}{\text{m}}$

5.155

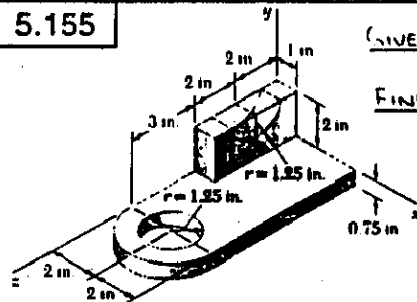

GIVEN: MACHINE ELEMENT SHOWN
 FIND: \bar{z}

FIRST ASSUME THAT THE MACHINE ELEMENT IS HOMOGENEOUS SO THAT ITS CENTER OF GRAVITY WILL COINCIDE WITH THE CENTROIDS OF THE CORRESPONDING VOLUME.

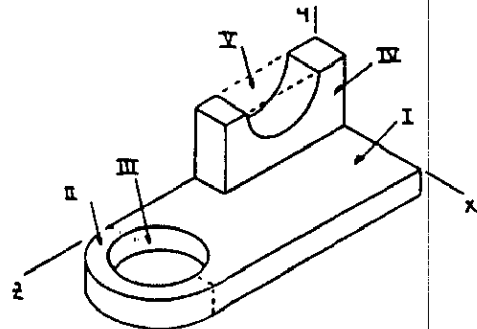


(CONTINUED)

5.155 CONTINUED

	V, in^3	$\bar{z}, \text{in.}$	$\bar{z}V, \text{in}^4$
I	$(4)(0.15)(7) = 21$	3.5	73.5
II	$\frac{1}{2}(27)(0.75) = 4.7124$	$7 + \frac{0.75}{3} = 7.8 + 0.25$	36.987
III	$-\pi(1.25)^2(0.75) = -3.6816$	7	-25.771
IV	$(17)(2)(4) = 136$	2	16
V	$-\frac{1}{2}(1.25)^2(7) = -2.4544$	2	-4.9088
Σ	27.576		95.807


HAVE... $\bar{z} = \frac{\Sigma \bar{z}V}{\Sigma V} = \frac{95.807\text{ in}^4}{27.576\text{ in}^3} = 3.47\text{ in.}$

5.156



GIVEN: SHEET-METAL FORM SHOWN
 FIND: LOCATION OF CENTER OF GRAVITY

FIRST ASSUME THAT THE SHEET METAL IS HOMOGENEOUS SO THAT THE CENTER OF GRAVITY OF THE FORM WILL COINCIDE WITH THE CENTROIDS OF THE CORRESPONDING AREA. NOW NOTE THAT SYMMETRY IMPLIES

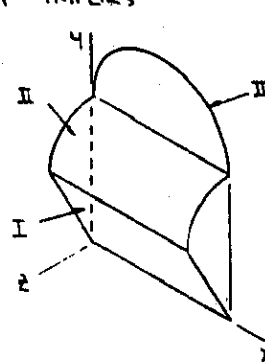


$\bar{x} = 125\text{ mm}$
 $\bar{y}_{II} = 150 + \frac{2 \times 80}{\pi} = 200.93\text{ mm}$
 $\bar{z}_{II} = \frac{2 \times 80}{\pi} = 50.930\text{ mm}$
 $\bar{y}_{III} = 230 + \frac{4 \times 125}{3\pi} = 283.05\text{ mm}$

	A, mm^2	\bar{y}, mm	\bar{z}, mm	$\bar{y}A, \text{mm}^3$	$\bar{z}A, \text{mm}^3$
I	$(250)(170) = 42500$	75	40	3187500	1700000
II	$\frac{1}{2}(80)(250) = 31416$	200.93	50.930	6312400	1600000
III	$\frac{1}{2}(125)^2 = 24544$	283.05	0	6947200	0
Σ	98460			16447100	3300000

HAVE... $\bar{y} = \frac{\Sigma \bar{y}A}{\Sigma A} = \frac{16447100\text{ mm}^3}{98460\text{ mm}^2} = 167.0\text{ mm}$
 OR $\bar{y} = 167.0\text{ mm}$
 $\bar{z} = \frac{\Sigma \bar{z}A}{\Sigma A} = \frac{3300000\text{ mm}^3}{98460\text{ mm}^2} = 33.5\text{ mm}$
 OR $\bar{z} = 33.5\text{ mm}$

5.157




GIVEN: VOLUME GENERATED BY ROTATING THE AREA SHOWN ABOUT THE X AXIS
FIND: LOCATION OF THE CENTROIDS OF THE VOLUME

FIRST NOTE THAT SYMMETRY IMPLIES

$$\bar{y} = 0$$

$$\bar{z} = 0$$

CHOOSE AS THE ELEMENT OF VOLUME A DISK OF RADIUS r AND THICKNESS dx . THEN



$$dV = \pi r^2 dx \quad \bar{x}_{EL} = x$$

Now $r = kx^{1/3}$ SO THAT

$$dV = \pi k^2 x^{2/3} dx$$

AT $x = h, y = a: a = kh^{1/3}$
 OR $k = a^3/h^3$

THEN $dV = \pi \frac{a^2}{h^3} x^{2/3} dx$

$$\text{AND } V = \int_0^h \pi \frac{a^2}{h^3} x^{2/3} dx$$

$$= \pi \frac{a^2}{h^3} \left[\frac{3}{5} x^{5/3} \right]_0^h$$

$$= \frac{3}{5} \pi a^2 h$$


$$\text{ALSO: } \int \bar{x}_{EL} dV = \int_0^h x \left(\pi \frac{a^2}{h^3} x^{2/3} dx \right) = \pi \frac{a^2}{h^3} \left[\frac{3}{8} x^{8/3} \right]_0^h$$

$$= \frac{3}{8} \pi a^2 h^2$$


$$\text{NOW: } \bar{x} V = \int \bar{x} dV: \bar{x} \left(\frac{3}{5} \pi a^2 h \right) = \frac{3}{8} \pi a^2 h^2$$

$$\text{OR } \bar{x} = \frac{5}{8} h$$

5.158



GIVEN: 1.8-1.8-ft GATE,
 $d = 3.5$ ft, WATER
FIND: FORCE F_B EXERTED BY PIN AT B ON GATE



FIRST CONSIDER THE FORCE OF THE WATER ON THE GATE. HAVE

$$P = \frac{1}{2} A \rho$$

$$= \frac{1}{2} A (\gamma h)$$

THEN ...

$$P_I = \frac{1}{2} (1.8 \text{ ft})^2 (62.4 \frac{\text{lb}}{\text{ft}^3}) (1.7 \text{ ft})$$

$$= 171.850 \text{ lb}$$

$$P_{II} = \frac{1}{2} (1.8 \text{ ft})^2 (62.4 \frac{\text{lb}}{\text{ft}^3})$$

$$\times (1.7 + 1.8 \cos 30^\circ) \text{ ft}$$


$$= 329.43 \text{ lb}$$

$$\text{NOW: } \sum M_A = 0: \left(\frac{1}{3} L \sin \theta \right) P_I + \left(\frac{2}{3} L \sin \theta \right) P_{II} - L \sin \theta F_B = 0$$

$$\text{OR } \frac{1}{3} (171.850 \text{ lb}) + \frac{2}{3} (329.43 \text{ lb}) - F_B = 0$$

$$\text{OR } F_B = 276.90 \text{ lb}$$

$$F_B = 277 \text{ lb } \angle 30^\circ$$



GIVEN:
TRUSS AND LOADING SHOWN.
FIND:
FORCE IN EACH MEMBER

FREE BODY: ENTIRE TRUSS




$$\begin{aligned} \sum F_x = 0: C_x = 0 \quad C_x = 0 \\ \sum M_B = 0: (1.92 \text{ kN})(3 \text{ m}) + C_y(4.5 \text{ m}) = 0 \\ C_y = -1.28 \text{ kN} \quad C_y = 1.28 \text{ kN} \uparrow \\ \sum F_y = 0: B - 1.92 \text{ kN} - 1.28 \text{ kN} = 0 \\ B = 3.20 \text{ kN} \uparrow \end{aligned}$$

FREE BODY: JOINT B


$$\begin{aligned} \frac{F_{AB}}{5} = \frac{F_{BC}}{4} = \frac{3.20 \text{ kN}}{3} \\ F_{AB} = 4.00 \text{ kN} \text{ C} \\ F_{BC} = 2.40 \text{ kN} \text{ C} \end{aligned}$$

FREE BODY: JOINT C

$$\begin{aligned} \sum F_x = 0: -\frac{7.5}{8.5} F_{AC} + 2.40 \text{ kN} = 0 \\ F_{AC} = +2.72 \text{ kN} \quad F_{AC} = 2.72 \text{ kN} \text{ T} \\ \sum F_y = 0: \frac{4}{8.5}(2.72 \text{ kN}) - 1.28 \text{ kN} = 0 \text{ (CHECKS)} \end{aligned}$$



6.3



GIVEN:
TRUSS AND LOADING SHOWN
FIND:
FORCE IN EACH MEMBER

FREE BODY: ENTIRE TRUSS



$$\begin{aligned} \sum F_x = 0: B_x = 0 \\ \sum M_B = 0: (15.75 \text{ ft}) - (945 \text{ lb})(12 \text{ ft}) = 0 \\ C = 720 \text{ lb} \uparrow \\ \sum F_y = 0: B_y + 720 \text{ lb} - 945 \text{ lb} = 0 \\ B_y = 225 \text{ lb} \uparrow \end{aligned}$$

FREE BODY: JOINT B


$$\begin{aligned} \frac{F_{AB}}{5} = \frac{F_{BC}}{4} = \frac{225 \text{ lb}}{3} \\ F_{AB} = 375 \text{ lb} \text{ C} \\ F_{BC} = 300 \text{ lb} \text{ T} \end{aligned}$$

FREE BODY: JOINT C

$$\begin{aligned} \frac{F_{AC}}{9.75} = \frac{F_{BC}}{3.75} = \frac{720 \text{ lb}}{9} \\ F_{AC} = 780 \text{ lb} \text{ C} \\ F_{BC} = 300 \text{ lb} \text{ T (CHECKS)} \end{aligned}$$

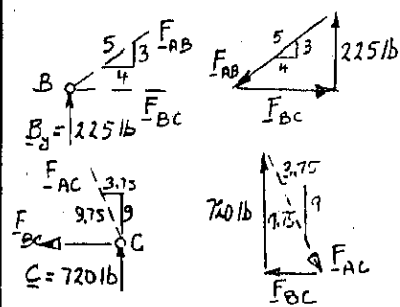

6.4

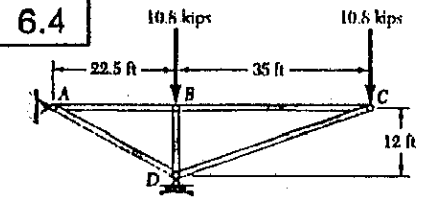

GIVEN:
TRUSS AND LOADING SHOWN.
FIND:
FORCE IN EACH MEMBER

FREE BODY: TRUSS

$$\begin{aligned} \sum F_x = 0: A_x = 0 \\ \sum M_A = 0: D(22.5) - (10.8 \text{ kips})(57.5) = 0 \\ D = 38.4 \text{ kips} \uparrow \\ \sum F_y = 0: A_y = 16.8 \text{ kips} \uparrow \end{aligned}$$

FREE BODY: JOINT A





$$\begin{aligned} \frac{F_{AB}}{22.5} = \frac{F_{AD}}{35.5} = \frac{16.8 \text{ kips}}{12} \\ F_{AB} = 31.5 \text{ kips} \text{ T} \\ F_{AD} = 35.7 \text{ kips} \text{ C} \end{aligned}$$

FREE BODY: JOINT B


$$\begin{aligned} \sum F_x = 0: F_{BC} = 31.5 \text{ kips} \text{ T} \\ \sum F_y = 0: F_{BD} = 10.80 \text{ kips} \text{ C} \end{aligned}$$

FREE BODY: JOINT C

$$\begin{aligned} \frac{F_{CD}}{37} = \frac{F_{BC}}{35} = \frac{10.8 \text{ kips}}{12} \\ F_{CD} = 33.3 \text{ kips} \text{ C} \\ F_{BC} = 31.5 \text{ kips} \text{ T (CHECKS)} \end{aligned}$$

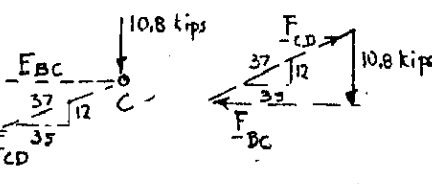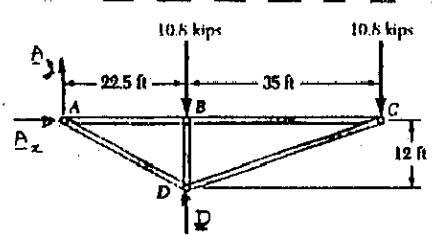

6.2



GIVEN:
TRUSS AND LOADING SHOWN.
FIND:
FORCE IN EACH MEMBER

FREE BODY: ENTIRE TRUSS




$$\begin{aligned} \sum M_A = 0: C(1.4 \text{ m}) - (2.8 \text{ kN})(0.75 \text{ m}) = 0 \\ C = +1.500 \text{ kN} \quad C = 1.500 \text{ kN} \rightarrow \\ \sum F_x = 0: A_x + 1.500 \text{ kN} = 0 \\ A_x = -1.500 \text{ kN} \quad A_x = 1.500 \text{ kN} \leftarrow \\ \sum F_y = 0: A_y - 2.8 \text{ kN} = 0 \\ A_y = 2.8 \text{ kN} \uparrow \end{aligned}$$

FREE BODY: JOINT A


$$\begin{aligned} \sum F_x = 0: \frac{7.5}{8.5} F_{AB} - 1.500 \text{ kN} = 0 \\ F_{AB} = 1.700 \text{ kN} \text{ T} \\ \sum F_y = 0: 2.8 \text{ kN} - \frac{4}{8.5}(1.700 \text{ kN}) - F_{AC} = 0 \\ F_{AC} = 2.00 \text{ kN} \text{ T} \end{aligned}$$

FREE BODY: JOINT C

$$\begin{aligned} \frac{F_{BC}}{1.25} = \frac{F_{AC}}{0.75} = \frac{1.500 \text{ kN}}{1} \\ F_{BC} = 2.50 \text{ kN} \text{ C} \\ F_{AC} = 2.00 \text{ kN} \text{ T (CHECKS)} \end{aligned}$$




6.5

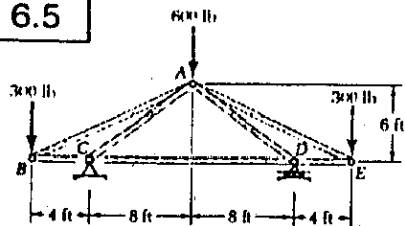

GIVEN:
TRUSS AND LOADING SHOWN
FIND:
FORCE IN EACH MEMBER

FREE BODY: TRUSS FROM THE SYMMETRY OF THE TRUSS AND LOADING, WE FIND $C = \frac{I}{2} = 600 \text{ lb} \uparrow$



FREE BODY: JOINT B

$$\frac{F_{AB}}{\sqrt{5}} = \frac{F_{BC}}{2} = \frac{300 \text{ lb}}{1}$$

$$F_{AB} = 671 \text{ lb T}, F_{BC} = 600 \text{ lb C}$$


FREE BODY: JOINT C

$$\begin{aligned} \uparrow \sum F_y = 0: & \frac{3}{5} F_{AC} + 600 \text{ lb} = 0 \\ & F_{AC} = -1000 \text{ lb} \quad F_{AC} = 1000 \text{ lb C} \\ \pm \sum F_x = 0: & \frac{4}{5} (-1000 \text{ lb}) + 600 \text{ lb} + F_{CD} = 0 \\ & F_{CD} = 200 \text{ lb T} \end{aligned}$$

FROM SYMMETRY:

$$F_{AD} = F_{AC} = 1000 \text{ lb C}, F_{AE} = F_{AB} = 671 \text{ lb T}, F_{DE} = F_{BC} = 600 \text{ lb C}$$

6.6



GIVEN:
TRUSS AND LOADING SHOWN
FIND:
FORCE IN EACH MEMBER

FREE BODY: TRUSS

$$\begin{aligned} \uparrow \sum M_E = 0: & \\ & F(3 \text{ m}) - (9000 \text{ N})(2.25 \text{ m}) - (9000 \text{ N})(4.5 \text{ m}) = 0 \\ & F = 2025 \text{ N} \uparrow \end{aligned}$$

$$\pm \sum F_x = 0: E_x + 9000 \text{ N} + 9000 \text{ N} = 0$$

$$E_x = -18000 \text{ N} \quad E_x = 18000 \text{ N} \leftarrow$$

$$\uparrow \sum F_y = 0: E_y + 2025 \text{ N} = 0$$

$$E_y = -2025 \text{ N} \quad E_y = 2025 \text{ N} \downarrow$$

WE NOTE THAT AB AND BD ARE ZERO-FORCE MEMBERS: $F_{AB} = F_{BD} = 0$

FREE BODY: JOINT A

$$\frac{F_{AC}}{2.25} = \frac{F_{AD}}{3.75} = \frac{9000 \text{ N}}{3}$$

$$F_{AC} = 675 \text{ N T}$$

$$F_{AD} = 1125 \text{ N C}$$

FREE BODY: JOINT D

$$\frac{F_{CD}}{3} = \frac{F_{DF}}{3.75} = \frac{1125 \text{ N}}{3}$$

$$F_{CD} = 900 \text{ N T}$$

$$F_{DF} = 675 \text{ N C}$$

CONTINUED

6.6 CONTINUED


FREE BODY: JOINT E

$$\begin{aligned} \pm \sum F_x = 0: & F_{EF} - 1800 \text{ N} = 0 \\ & F_{EF} = 1800 \text{ N} \\ \uparrow \sum F_y = 0: & F_{CE} - 2025 \text{ N} = 0 \\ & F_{CE} = 2025 \text{ N} \end{aligned}$$

FREE BODY: JOINT C

$$\begin{aligned} \uparrow \sum F_y = 0: & \frac{2.25}{3.75} F_{CF} + 2025 \text{ N} = 0 \\ & F_{CF} = -2250 \text{ N} \\ \pm \sum F_x = 0: & -\frac{3}{3.75} (-2250 \text{ N}) - 1800 \text{ N} = 0 \end{aligned}$$

6.7



GIVEN:
TRUSS AND LOADING SHOWN
FIND:
FORCE IN EACH MEMBER

FREE BODY: TRUSS

$$\uparrow \sum F_y = 0: B_y = 8 \text{ kN}$$

$$\rightarrow \sum M_B = 0:$$


$$D(4.5 \text{ m}) + (8.4 \text{ kN})(4.5 \text{ m}) = 0$$

$$D = -8.4 \text{ kN}$$

$$\pm \sum F_x = 0:$$

$$B_x - 8.4 \text{ kN} - 8.4 \text{ kN} = 0$$

$$B_x = +25.2 \text{ kN}$$



FREE BODY: JOINT A

$$\frac{F_{AB}}{5.3} = \frac{F_{AC}}{4.5}$$

$$F_{AB} = 13.5 \text{ kN}$$

$$F_{AC} = 11.25 \text{ kN}$$

FREE BODY: JOINT C

$$\uparrow \sum F_y = 0: 13.50 \text{ kN} - \frac{4}{5.3} F_{CD} = 0$$

$$F_{CD} = +15.90 \text{ kN} \quad F_{CD} = 15.90 \text{ kN T}$$

$$\pm \sum F_x = 0:$$

$$-F_{BC} - 8.4 \text{ kN} - \frac{2.8}{5.3} (15.90 \text{ kN}) = 0$$

$$F_{BC} = -16.80 \text{ kN} \quad F_{BC} = 16.80 \text{ kN C}$$

FREE BODY: JOINT D

$$\frac{F_{BD}}{4.5} = \frac{F_{CD}}{2.8}$$

$$F_{BD} = 13.50 \text{ kN}$$


$$F_{BD} = 13.50 \text{ kN T}$$

WE CAN ALSO WRITE THE PROPORTION

$$\frac{F_{BD}}{4.5} = \frac{15.90 \text{ kN}}{5.3}$$

$$F_{BD} = 13.50 \text{ kN T}$$

(CHECK)

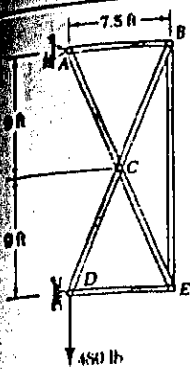


GIVEN:
TRUSS AND LOADING SHOWN

FIND:
FORCE IN EACH MEMBER

FREE BODY: TRUSS

$$\begin{aligned} \uparrow \sum F_y = 0: & A_y - 480 \text{ lb} = 0 \\ & A_y = +480 \text{ lb} \quad A_y = 480 \text{ lb} \uparrow \\ \rightarrow \sum M_A = 0: & (D)(18 \text{ ft}) = 0 \\ & D = 0 \\ \perp \sum F_x = 0: & A_x + D = 0 \\ & A_x = 0 \end{aligned}$$

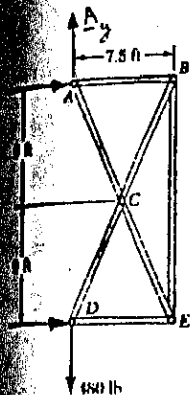

FREE BODY: JOINT A

$$\frac{F_{AB}}{7.5} = \frac{F_{AC}}{19.5} = \frac{480 \text{ lb}}{18}$$

$$F_{AB} = 200 \text{ lb C}$$

$$F_{AC} = 520 \text{ lb T}$$

FREE BODY: JOINT B

$$\frac{F_{BC}}{19.5} = \frac{F_{BE}}{18} = \frac{200 \text{ lb}}{7.5}$$

$$F_{BC} = 520 \text{ lb T}$$

$$F_{BE} = 480 \text{ lb C}$$

FREE BODY: JOINT C

SINCE THE FORCE POLYGON IS A RHOMBUS:

$$F_{CD} = 520 \text{ lb T}$$

$$F_{CE} = 520 \text{ lb T}$$


FREE BODY: JOINT E

$$\frac{F_{DE}}{7.5} = \frac{F_{CE}}{19.5} = \frac{480 \text{ lb}}{18}$$

$$F_{DE} = 200 \text{ lb C}$$

$$F_{CE} = 520 \text{ lb T (CHECKS)}$$

6.9

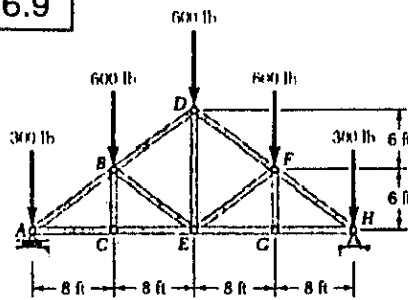

GIVEN:
HOWE ROOF TRUSS
LOADED AS SHOWN.

FIND:
FORCE IN EACH
MEMBER.


FREE BODY: TRUSS

$$\sum F_x = 0: \quad H_x = 0$$

BECAUSE OF THE
SYMMETRY OF THE
TRUSS AND LOADING:

$$A = H_y = \frac{1}{2} \text{ TOTAL LOAD}$$

$$A = H_y = 1200 \text{ lb} \uparrow$$

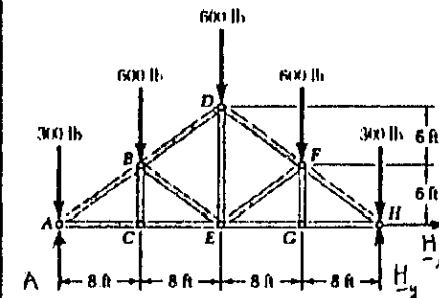

FREE BODY: JOINT A

$$\frac{F_{AB}}{5} = \frac{F_{AC}}{4} = \frac{900 \text{ lb}}{3}$$

$$F_{AB} = 1500 \text{ lb C}$$

$$F_{AC} = 1200 \text{ lb T}$$

FREE BODY: JOINT C

BC IS A ZERO-FORCE MEMBER

$$F_{BC} = 0 \quad F_{CE} = 1200 \text{ lb T}$$

FREE BODY: JOINT B

$$\perp \sum F_y = 0: \quad \frac{4}{5} F_{BD} + \frac{4}{5} F_{BE} + \frac{4}{5} (1500 \text{ lb}) = 0$$

$$\text{OR:} \quad F_{BD} + F_{BE} = -1500 \text{ lb (1)}$$

$$\uparrow \sum F_x = 0: \quad \frac{3}{5} F_{BD} - \frac{3}{5} F_{BE} + \frac{3}{5} (1500 \text{ lb}) - 600 \text{ lb} = 0$$

$$\text{OR:} \quad F_{BD} - F_{BE} = -500 \text{ lb (2)}$$

$$\text{ADD EQS. (1) AND (2):} \quad 2F_{BD} = -2000 \text{ lb} \quad F_{BD} = 1000 \text{ lb C}$$

$$\text{SUBTRACT (2) FROM (1):} \quad 2F_{BE} = -1000 \text{ lb} \quad F_{BE} = 500 \text{ lb C}$$

FREE BODY: JOINT D

$$\perp \sum F_x = 0: \quad \frac{4}{5} (1000 \text{ lb}) + \frac{4}{5} F_{DF} = 0$$

$$F_{DF} = -1000 \text{ lb} \quad F_{DF} = 1000 \text{ lb C}$$

$$\uparrow \sum F_y = 0:$$

$$\frac{3}{5} (1000 \text{ lb}) - \frac{3}{5} (-1000 \text{ lb}) - 600 \text{ lb} - F_{DE} = 0$$

$$F_{DE} = +600 \text{ lb} \quad F_{DE} = 600 \text{ lb T}$$

BECAUSE OF THE SYMMETRY OF THE TRUSS AND
LOADING, WE DEDUCE THAT

$$F_{EF} = F_{BE}$$

$$F_{EG} = F_{CE}$$

$$F_{FG} = F_{BC}$$

$$F_{FH} = F_{AE}$$

$$F_{GH} = F_{AC}$$

$$F_{EF} = 500 \text{ lb C}$$


$$F_{EG} = 1200 \text{ lb T}$$

$$F_{FG} = 0$$

$$F_{FH} = 1500 \text{ lb C}$$

$$F_{GH} = 1200 \text{ lb T}$$



6.10

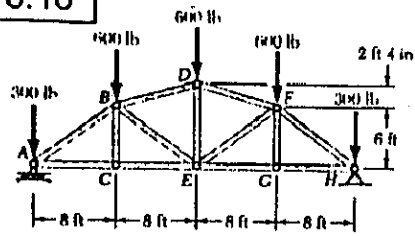


GIVEN:
 GABLE ROOF TRUSS WITH LOADING SHOWN
FIND:
 FORCE IN EACH MEMBER.

FREE BODY: TRUSS


$\sum F_x = 0: H_x = 0$
 BECAUSE OF THE SYMMETRY OF THE TRUSS AND LOADING:
 $A_x = H_x = \frac{1}{2} \text{ TOTAL LOAD}$
 $A_x = H_x = 1200 \text{ lb } \uparrow$

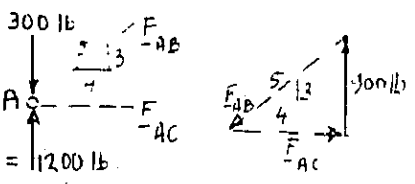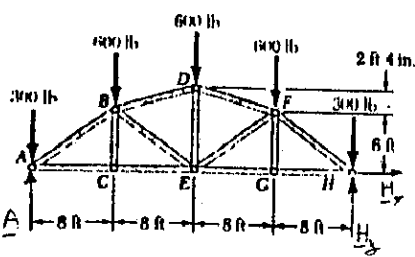

FREE BODY: JOINT A
 $\frac{F_{AB}}{5} = \frac{F_{AC}}{4} = \frac{900 \text{ lb}}{3}$
 $F_{AB} = 1500 \text{ lb C}$
 $F_{AC} = 1200 \text{ lb T}$




FREE BODY: JOINT C
 BC IS A ZERO-FORCE MEMBER
 $F_{BC} = 0$
 $F_{CE} = 1200 \text{ lb T}$

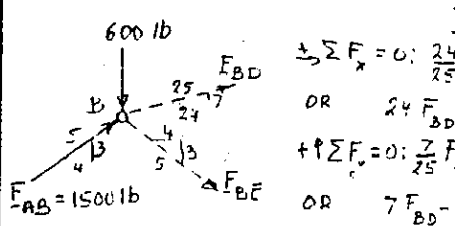

FREE BODY: JOINT B
 $\sum F_x = 0: \frac{24}{25} F_{BD} + \frac{4}{5} F_{BE} + \frac{2}{5} (1500 \text{ lb}) = 0$
 OR $24 F_{BD} + 20 F_{BE} = -30,000 \text{ lb (1)}$
 $\sum F_y = 0: \frac{3}{25} F_{BD} - \frac{3}{5} F_{BE} + \frac{3}{5} (1500) - 600 = 0$
 OR $7 F_{BD} - 15 F_{BE} = -7,500 \text{ lb (2)}$

MULTIPLY (1) BY 2, (2) BY 4, AND ADD:
 $100 F_{BD} = -120,000 \text{ lb}$
 $F_{BD} = 1200 \text{ lb C}$
 MULTIPLY (1) BY 7, (2) BY -24, AND ADD:
 $500 F_{BE} = -30,000 \text{ lb}$
 $F_{BE} = 60.0 \text{ lb C}$

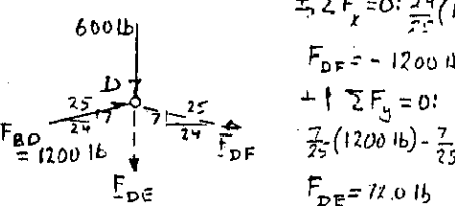


FREE BODY: JOINT D
 $\sum F_x = 0: \frac{24}{25} (1200 \text{ lb}) + \frac{24}{25} F_{DF} = 0$
 $F_{DF} = -1200 \text{ lb}$
 $F_{DF} = 1200 \text{ lb C}$
 $\sum F_y = 0: \frac{3}{25} (1200 \text{ lb}) - \frac{3}{25} (-1200 \text{ lb}) - 600 \text{ lb} - F_{DE} = 0$
 $F_{DE} = 72.0 \text{ lb}$
 $F_{DE} = 72.0 \text{ lb T}$

BECAUSE OF THE SYMMETRY OF THE TRUSS AND LOADING, WE DEDUCE THAT

- $F_{EF} = F_{BE}$ $F_{EF} = 60.0 \text{ lb C}$
- $F_{EG} = F_{CE}$ $F_{EG} = 1200 \text{ lb T}$
- $F_{FG} = F_{CG}$ $F_{FG} = 0$
- $F_{FH} = F_{AB}$ $F_{FH} = 1500 \text{ lb C}$
- $F_{GH} = F_{AC}$ $F_{GH} = 1200 \text{ lb T}$

NOTE: COMPARE RESULTS WITH THOSE OF PROB. 6.7.



6.11

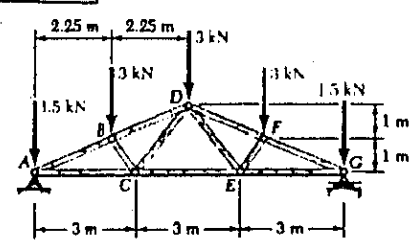


GIVEN:
 GABLE ROOF TRUSS WITH LOADING SHOWN.
FIND:
 FORCE IN EACH MEMBER.

FREE BODY: TRUSS

$\sum F_x = 0: A_x = 0$
 BECAUSE OF THE SYMMETRY OF THE TRUSS AND LOADING:
 $A_y = G_y = \frac{1}{2} \text{ TOTAL LOAD}$
 $A_y = G_y = 6.00 \text{ kN}$

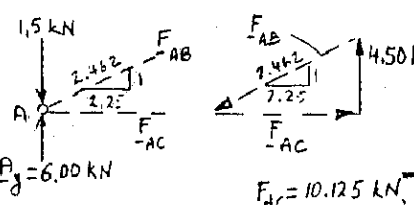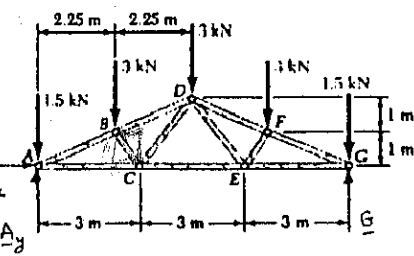


FREE BODY: JOINT A
 $\frac{F_{AB}}{2.462} = \frac{F_{AC}}{2.25} = \frac{4.50 \text{ kN}}{2.25}$
 $F_{AB} = 11.08 \text{ kN C}$
 $F_{AC} = 10.125 \text{ kN T}$

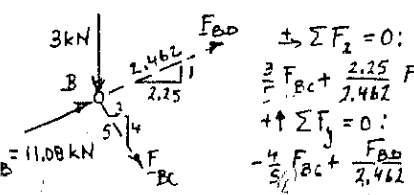

FREE BODY: JOINT B

$\sum F_x = 0: \frac{3}{5} F_{BC} + \frac{2.25}{2.462} F_{BD} + \frac{2.25}{2.462} (11.08 \text{ kN}) = 0$
 $\sum F_y = 0: -\frac{4}{5} F_{BC} + \frac{F_{BD}}{2.462} + \frac{11.08 \text{ kN}}{2.462} - 3 \text{ kN} = 0$

MULTIPLY EQ. (2) BY -2.25 AND ADD TO EQ. (1):
 $\frac{12}{5} F_{BC} + 6.75 \text{ kN} = 0$
 $F_{BC} = -2.8125 \text{ kN}$
 $F_{BC} = 2.81 \text{ kN C}$
 MULTIPLY EQ. (1) BY 4, EQ. (2) BY 3, AND ADD:
 $\frac{12}{2.462} F_{BD} + \frac{12}{2.462} (11.08 \text{ kN}) - 9 \text{ kN} = 0$
 $F_{BD} = -9.2335 \text{ kN}$
 $F_{BD} = 9.23 \text{ kN C}$

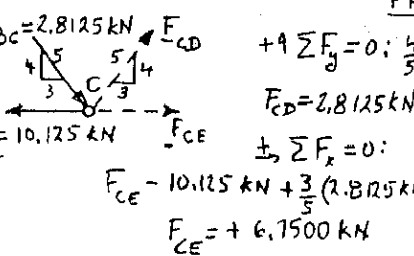


FREE BODY: JOINT C

$\sum F_y = 0: \frac{4}{5} F_{CD} - \frac{4}{5} (2.8125 \text{ kN}) = 0$
 $F_{CD} = 2.8125 \text{ kN}$
 $F_{CD} = 2.81 \text{ kN T}$
 $\sum F_x = 0: F_{CE} - 10.125 \text{ kN} + \frac{3}{5} (2.8125 \text{ kN}) + \frac{3}{5} (2.8125 \text{ kN}) = 0$
 $F_{CE} = +6.7500 \text{ kN}$
 $F_{CE} = 6.75 \text{ kN T}$


BECAUSE OF THE SYMMETRY OF THE TRUSS AND LOADING, WE DEDUCE THAT

- $F_{DE} = F_{CD}$ $F_{CD} = 2.81 \text{ kN T}$
- $F_{DF} = F_{BD}$ $F_{DF} = 9.23 \text{ kN C}$
- $F_{EF} = F_{BC}$ $F_{EF} = 2.81 \text{ kN C}$
- $F_{EG} = F_{AC}$ $F_{EG} = 10.13 \text{ kN T}$
- $F_{FG} = F_{AB}$ $F_{FG} = 11.08 \text{ kN C}$


2




GIVEN:
FAN ROOF TRUSS AND LOADING SHOWN.
FIND:
FORCE IN EACH MEMBER.



FREE BODY: TRUSS
 $\sum F_x = 0; \quad A_x = 0$
FROM SYMMETRY OF TRUSS AND LOADING:
 $A_y = I_y = \frac{1}{2} \text{ TOTAL LOAD}$
 $A_y = I_y = 6 \text{ kN} \uparrow$

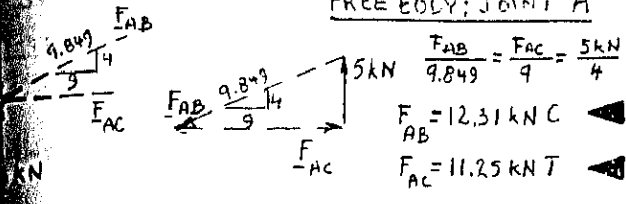


FREE BODY: JOINT A
 $\frac{F_{AB}}{9.849} = \frac{F_{AC}}{9} = \frac{5 \text{ kN}}{4}$
 $F_{AB} = 12.31 \text{ kN C}$
 $F_{AC} = 11.25 \text{ kN T}$

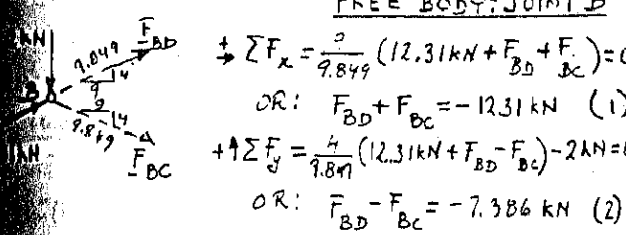


FREE BODY: JOINT B
 $\sum F_x = \frac{3}{9.849} (12.31 \text{ kN} + F_{BD} + F_{BC}) = 0$
OR: $F_{BD} + F_{BC} = -12.31 \text{ kN} \quad (1)$
 $\sum F_y = \frac{4}{9.849} (12.31 \text{ kN} + F_{BD} - F_{BC}) - 2 \text{ kN} = 0$
OR: $F_{BD} - F_{BC} = -7.386 \text{ kN} \quad (2)$

(1) AND (2):
 $F_{BD} = -9.85 \text{ kN C}$
 $F_{BC} = 2.46 \text{ kN C}$
TRACT (2) FROM (1):
 $F_{BD} = -4.924 \text{ kN}$

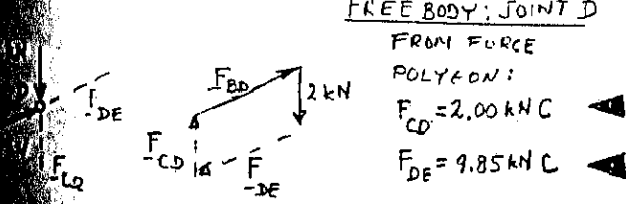


FREE BODY: JOINT D
FROM FORCE POLYGON:
 $F_{CD} = 2.00 \text{ kN C}$
 $F_{DE} = 9.85 \text{ kN C}$

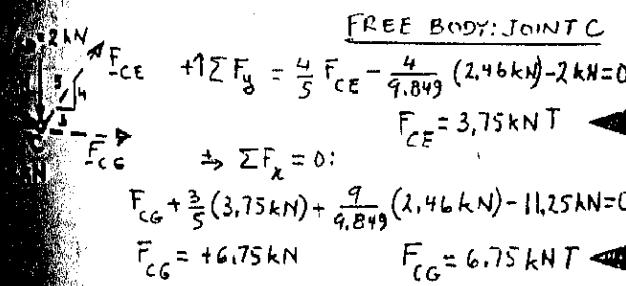


FREE BODY: JOINT C
 $\sum F_y = \frac{4}{5} F_{CE} - \frac{4}{9.849} (2.46 \text{ kN}) - 2 \text{ kN} = 0$
 $F_{CE} = 3.75 \text{ kN T}$
 $\sum F_x = 0:$
 $F_{CG} + \frac{3}{5} (3.75 \text{ kN}) + \frac{9}{9.849} (2.46 \text{ kN}) - 11.25 \text{ kN} = 0$
 $F_{CG} = 6.75 \text{ kN T}$

THE SYMMETRY OF THE TRUSS AND LOADING:
 $F_{DE} = F_{DE}$
 $F_{EG} = F_{CE}$
 $F_{FG} = F_{CD}$
 $F_{GH} = F_{BD}$
 $F_{HI} = F_{BC}$
 $F_{GI} = F_{AC}$
 $F_{HI} = F_{AB}$
 $F_{EF} = 9.85 \text{ kN C}$
 $F_{EG} = 3.75 \text{ kN T}$
 $F_{FG} = 2.00 \text{ kN C}$
 $F_{GH} = 9.85 \text{ kN C}$
 $F_{HI} = 2.46 \text{ kN C}$
 $F_{GI} = 11.25 \text{ kN T}$
 $F_{HI} = 12.31 \text{ kN C}$

6.13

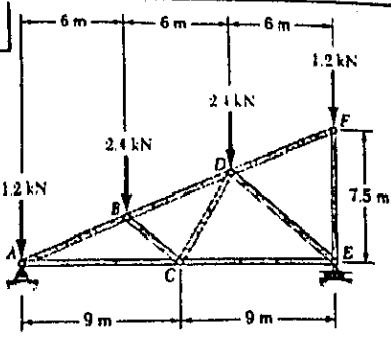


GIVEN:
ROOF TRUSS AND LOADING SHOWN.
FIND:
FORCE IN EACH MEMBER.

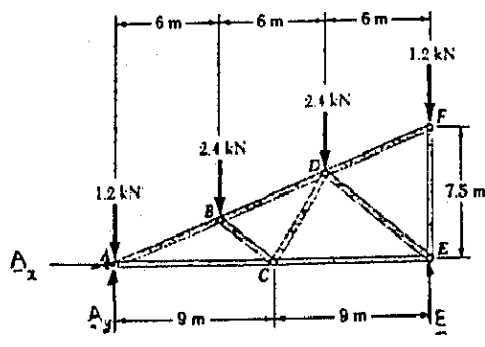


FREE BODY: TRUSS
 $\sum F_x = 0; \quad A_x = 0$
FROM SYMMETRY OF LOADING:
 $A_y = E_y = \frac{1}{2} \text{ TOTAL LOAD}$
 $A_y = E_y = 3.6 \text{ kN} \uparrow$


WE NOTE THAT DF IS A ZERO-FORCE MEMBER AND THAT EF IS ALIGNED WITH THE LOAD. THUS $F_{DF} = 0$
 $F_{EF} = 1.2 \text{ kN C}$

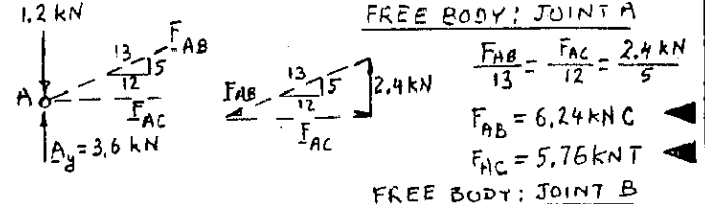


FREE BODY: JOINT A
 $\frac{F_{AB}}{13} = \frac{F_{AC}}{12} = \frac{2.4 \text{ kN}}{5}$
 $F_{AB} = 6.24 \text{ kN C}$
 $F_{AC} = 5.76 \text{ kN T}$

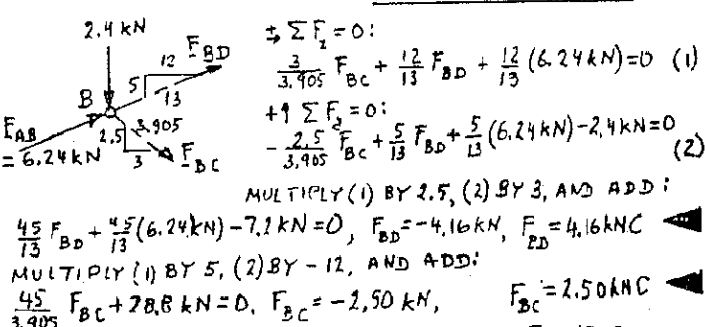

FREE BODY: JOINT B
 $\sum F_x = 0:$
 $\frac{3}{3.905} F_{BC} + \frac{12}{13} F_{BD} + \frac{12}{13} (6.24 \text{ kN}) = 0 \quad (1)$
 $\sum F_y = 0:$
 $-\frac{2.5}{3.905} F_{BC} + \frac{5}{13} F_{BD} + \frac{5}{13} (6.24 \text{ kN}) - 2.4 \text{ kN} = 0 \quad (2)$
MULTIPLY (1) BY 2.5, (2) BY 3, AND ADD:
 $\frac{45}{13} F_{BD} + \frac{45}{13} (6.24 \text{ kN}) - 7.1 \text{ kN} = 0, \quad F_{BD} = -4.16 \text{ kN}, \quad F_{BD} = 4.16 \text{ kN C}$
MULTIPLY (1) BY 5, (2) BY -12, AND ADD:
 $\frac{45}{3.905} F_{BC} + 28.8 \text{ kN} = 0, \quad F_{BC} = -2.50 \text{ kN}, \quad F_{BC} = 2.50 \text{ kN C}$

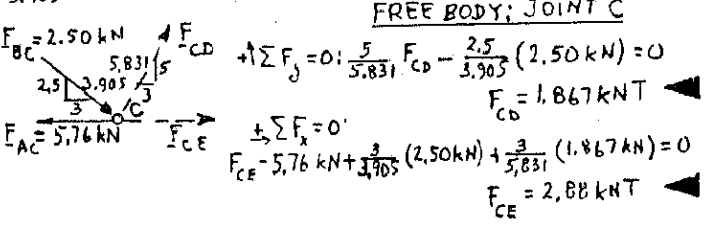


FREE BODY: JOINT C
 $\sum F_y = 0: \frac{5}{5.831} F_{CD} - \frac{2.5}{3.905} (2.50 \text{ kN}) = 0$
 $F_{CD} = 1.867 \text{ kN T}$
 $\sum F_x = 0:$
 $F_{CE} - 5.76 \text{ kN} + \frac{3}{3.905} (2.50 \text{ kN}) + \frac{3}{5.831} (1.867 \text{ kN}) = 0$
 $F_{CE} = 2.88 \text{ kN T}$

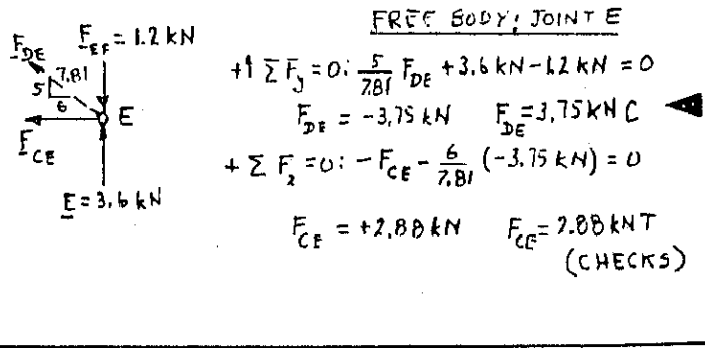

FREE BODY: JOINT E
 $\sum F_y = 0: \frac{5}{7.81} F_{DE} + 3.6 \text{ kN} - 12 \text{ kN} = 0$
 $F_{DE} = -3.75 \text{ kN}, \quad F_{DE} = 3.75 \text{ kN C}$
 $\sum F_x = 0: -F_{CE} - \frac{6}{7.81} (-3.75 \text{ kN}) = 0$
 $F_{CE} = +2.88 \text{ kN}, \quad F_{CE} = 2.88 \text{ kN T (CHECKS)}$

6.14

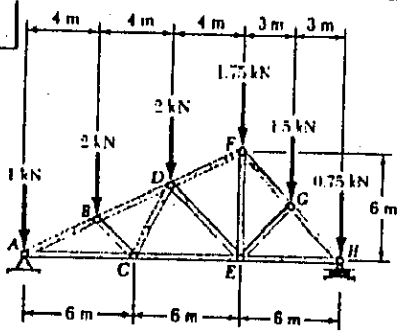


GIVEN:
DOUBLE-PITCH
ROOF TRUSS AND
LOADING SHOWN.
FIND:
FORCE IN
EACH MEMBER.

FREE BODY: TRUSS

$$\begin{aligned}
 +\sum M_A = 0: & \\
 H(18m) - (2kN)(4m) & \\
 - (2kN)(8m) - (1.75kN)(12m) & \\
 - (1.5kN)(15m) - (0.75kN)(18m) & \\
 = 0 & \\
 H = 4.50 kN \uparrow & \\
 \sum F_x = 0: A_x = 0 & \\
 \sum F_y = 0: A_y + H - 9 = 0 & \\
 A_y = 9 - 4.50, A_y = 4.50 kN \uparrow &
 \end{aligned}$$


FREE BODY: JOINT A



$$\frac{F_{AB}}{\frac{\sqrt{5}}{2}} = \frac{F_{AC}}{1} = \frac{3.50 kN}{1}$$

$$\begin{aligned}
 F_{AB} &= 7.8262 kN C \\
 F_{AB} &= 7.83 kN C \quad \blacktriangleleft \\
 F_{AC} &= 7.00 kN T \quad \blacktriangleleft
 \end{aligned}$$

FREE BODY: JOINT B




$$\begin{aligned}
 \pm \sum F_z = 0: & \\
 \frac{2}{\sqrt{5}} F_{BD} + \frac{2}{\sqrt{5}} (7.8262 kN) + \frac{1}{\sqrt{2}} F_{BC} = 0 & \\
 \text{OR: } F_{BD} + 0.79057 F_{BC} = -7.8262 kN \quad (1) & \\
 +\uparrow \sum F_y = 0: & \\
 \frac{1}{\sqrt{5}} F_{BD} + \frac{1}{\sqrt{5}} (7.8262 kN) - \frac{1}{\sqrt{2}} F_{BC} - 2 kN = 0 & \\
 \text{OR: } F_{BD} - 1.58114 F_{BC} = -3.3541 \quad (2) &
 \end{aligned}$$

MULTIPLY (1) BY 2 AND ADD (2):

$$\begin{aligned}
 3F_{BD} &= -19.0465, F_{BD} = -6.3355 kN \quad F_{BD} = 6.34 kN C \quad \blacktriangleleft \\
 \text{SUBTRACT (2) FROM (1):} & \\
 2.37111 F_{BC} &= -4.4721, F_{BC} = -1.8841 kN \quad F_{BC} = 1.88 kN C \quad \blacktriangleleft
 \end{aligned}$$

FREE BODY: JOINT C




$$\begin{aligned}
 +\uparrow \sum F_y = 0: \frac{2}{\sqrt{5}} F_{CD} - \frac{1}{\sqrt{2}} (1.8841 kN) = 0 & \\
 F_{CD} = 1.4911 kN \quad F_{CD} = 1.4911 kN T \quad \blacktriangleleft & \\
 \pm \sum F_x = 0: & \\
 F_{CE} - 7.00 kN + \frac{1}{\sqrt{2}} (1.8841 kN) + \frac{1}{\sqrt{5}} (1.4911 kN) = 0 & \\
 F_{CE} = 5.000 kN \quad F_{CE} = 5.00 kN T \quad \blacktriangleleft &
 \end{aligned}$$

CONTINUED

6.14 CONTINUED

FREE BODY: JOINT D



$$\begin{aligned}
 \pm \sum F_x = 0: & \\
 \frac{2}{\sqrt{5}} F_{DF} + \frac{1}{\sqrt{2}} F_{DE} + \frac{2}{\sqrt{5}} (6.3355 kN) & \\
 - \frac{1}{\sqrt{5}} (1.4911 kN) & \\
 \text{OR: } F_{DF} + 0.79057 F_{DE} = -5.5900 & \\
 +\uparrow \sum F_y = 0: & \\
 \frac{1}{\sqrt{5}} F_{DF} - \frac{1}{\sqrt{2}} F_{DE} + \frac{1}{\sqrt{5}} (6.3355 kN) & \\
 - \frac{2}{\sqrt{5}} (1.4911 kN) - 2 kN = 0 &
 \end{aligned}$$

$$\text{OR: } F_{DF} - 0.79057 F_{DE} = -1.1188 kN \quad (2)$$


$$\text{ADD (1) AND (2): } 2 F_{DF} = -6.7088 kN$$

$$F_{DF} = -3.3544 kN \quad F_{DF} = 3.35 kN C$$

$$\text{SUBTRACT (2) FROM (1): } 1.58114 F_{DE} = -4.4712 kN$$

$$F_{DE} = -2.8278 kN \quad F_{DE} = 2.83 kN C$$

FREE BODY: JOINT F




$$\pm \sum F_x = 0: \frac{1}{\sqrt{2}} F_{FG} + \frac{2}{\sqrt{5}} (3.3544 kN) = 0$$

$$F_{FG} = -4.243 kN, F_{FG} = 4.24 kN C$$

$$\begin{aligned}
 +\uparrow \sum F_y = 0: & \\
 -F_{EF} - 1.75 kN + \frac{1}{\sqrt{5}} (3.3544 kN) & \\
 - \frac{1}{\sqrt{2}} (-4.243 kN) = 0 &
 \end{aligned}$$

$$F_{EF} = 2.750 kN \quad F_{EF} = 2.75 kN T$$

FREE BODY: JOINT G



$$\pm \sum F_z = 0:$$

$$\frac{1}{\sqrt{2}} F_{GH} - \frac{1}{\sqrt{2}} F_{EG} + \frac{1}{\sqrt{2}} (4.243 kN) = 0$$

$$\text{OR: } F_{GH} - F_{EG} = -4.243 kN \quad (1)$$

$$+\uparrow \sum F_y = 0:$$

$$-\frac{1}{\sqrt{2}} F_{GH} - \frac{1}{\sqrt{2}} F_{EG} - \frac{1}{\sqrt{2}} (4.243 kN) - 1.5 kN = 0$$

$$\text{OR: } F_{GH} + F_{EG} = -6.364 kN \quad (2)$$


$$\text{ADD (1) AND (2): } 2 F_{GH} = -10.607$$

$$F_{GH} = -5.303 \quad F_{GH} = 5.30 kN C$$

$$\text{SUBTRACT (1) FROM (2): } 2 F_{EG} = -2.121 kN$$

$$F_{EG} = -1.0605 kN \quad F_{EG} = 1.061 kN C$$


FREE BODY: JOINT H



$$\frac{F_{EH}}{1} = \frac{3.75 kN}{1}$$


WE CAN ALSO WRITE:

$$\frac{F_{GH}}{\frac{\sqrt{2}}{2}} = \frac{3.75 kN}{1}$$




$$F_{EH} = 3.75 kN T$$

$$F_{GH} = 5.30 kN C \quad (\text{CHECK})$$

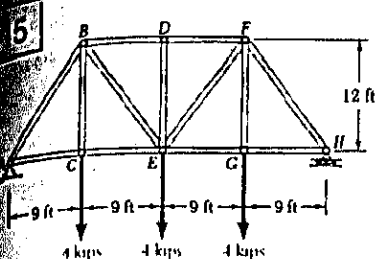

GIVEN:
PRATT BRIDGE TRUSS AND LOADING SHOWN.

FIND:
FORCE IN EACH MEMBER.

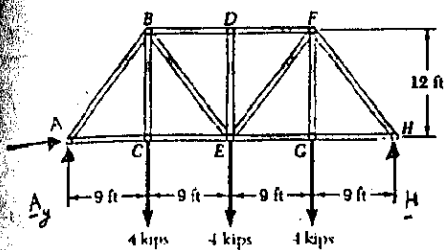

FREE BODY: TRUSS

$$\sum F_x = 0: A_x = 0$$

$$\sum M_A = 0: H(36 ft) - (4 kips)(9 ft) - (4 kips)(18 ft) - (4 kips)(27 ft) = 0$$

$$H = 6 kips \uparrow$$

$$\sum F_y = 0: A_y + 6 kips - 12 kips = 0 \quad A_y = 6 kips \uparrow$$

FREE BODY: JOINT A

$$\frac{F_{AB}}{5} = \frac{F_{AC}}{3} = \frac{6 kips}{4}$$

$$F_{AB} = 7.50 kips \text{ C}$$

$$F_{AC} = 4.50 kips \text{ T}$$

FREE BODY: JOINT C

$$\sum F_x = 0: F_{CE} = 4.50 kips \text{ T}$$

$$\sum F_y = 0: F_{BC} = 4.00 kips \text{ T}$$

FREE BODY: JOINT B

$$+\uparrow \sum F_y = 0: -\frac{4}{5} F_{BE} + \frac{4}{5} (7.50 kips) - 4.00 kips = 0$$

$$F_{BE} = 2.50 kips \text{ T}$$

$$\pm \sum F_x = 0: \frac{3}{5} (7.50 kips) + \frac{3}{5} (2.50 kips) + F_{BD} = 0$$

$$F_{BD} = -6.00 kips \quad F_{BD} = 6.00 kips \text{ C}$$

FREE BODY: JOINT D

WE NOTE THAT DE IS A ZERO-FORCE MEMBER: $F_{DE} = 0$

ALSO: $F_{DF} = 6.00 kips \text{ C}$

FROM MEMBER C/D:

$$F_{EF} = F_{BE} = 2.50 kips \text{ T}$$

$$F_{EG} = F_{CE} = 4.50 kips \text{ T}$$


$$F_{FG} = F_{BC} = 4.00 kips \text{ T}$$

$$F_{FH} = F_{AB} = 7.50 kips \text{ C}$$

$$F_{GH} = F_{AC} = 4.50 kips \text{ T}$$

6.16 **GIVEN:** TRUSS OF PROB. 6.15, ASSUMING THAT THE LOAD APPLIED AT E HAS BEEN REMOVED.

FIND: FORCE IN EACH MEMBER.

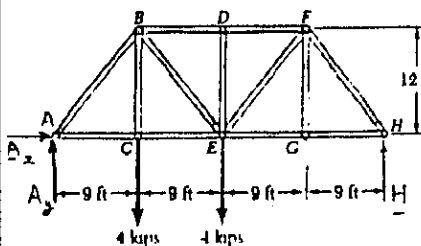

FREE BODY: TRUSS

$$\sum F_x = 0: A_x = 0$$

$$\sum M_A = 0: H(36 ft) - (4 kips)(9 ft) - (4 kips)(18 ft) = 0$$

$$H = 3.00 kips \uparrow$$

$$+\uparrow \sum F_y = 0: A_y = 5.00 kips \uparrow$$

WE NOTE THAT DE AND FG ARE ZERO-FORCE MEMBERS. THEREFORE: $F_{DE} = 0, F_{FG} = 0$.

ALSO: $F_{BD} = F_{DF}$ (1) AND $F_{EG} = F_{GH}$ (2)

FREE BODY: JOINT A

$$\frac{F_{AB}}{5} = \frac{F_{AC}}{3} = \frac{5 kips}{4}$$

$$F_{AB} = 6.25 kips \text{ C}$$

$$F_{AC} = 3.75 kips \text{ T}$$

FREE BODY: JOINT C

$$\sum F_x = 0: F_{CE} = 3.75 kips \text{ T}$$

$$\sum F_y = 0: F_{BC} = 4.00 kips \text{ T}$$

FREE BODY: JOINT B

$$+\uparrow \sum F_y = 0: \frac{4}{5} (6.25 kips) - 4.00 kips - \frac{4}{5} F_{BE} = 0$$

$$F_{BE} = 1.250 kips \text{ T}$$

$$\pm \sum F_x = 0: F_{BD} + \frac{3}{5} (6.25 kips) + \frac{3}{5} (1.250 kips) = 0$$

$$F_{BD} = -4.50 kips \quad F_{BD} = 4.50 kips \text{ C}$$

FREE BODY: JOINT F

WE RECALL THAT $F_{FS} = 0$, AND FROM (1) THAT $F_{DF} = F_{BD} \quad F_{DF} = 4.50 kips \text{ C}$

$$\frac{F_{EF}}{5} = \frac{F_{FH}}{5} = \frac{4.50 kips}{6}$$

$$F_{EF} = 3.75 kips \text{ T}$$

$$F_{FH} = 3.75 kips \text{ C}$$

FREE BODY: JOINT H

$$\frac{F_{GH}}{3} = \frac{3.00 kips}{4}$$

$$F_{GH} = 2.25 kips \text{ T}$$

ALSO: $\frac{F_{FH}}{5} = \frac{3.00 kips}{4}$


$$F_{FH} = 3.75 kips \text{ C}$$

(CHECKS)


FROM EQ. (2):

$$F_{EG} = F_{GH} = 2.25 kips \text{ T}$$

6.17

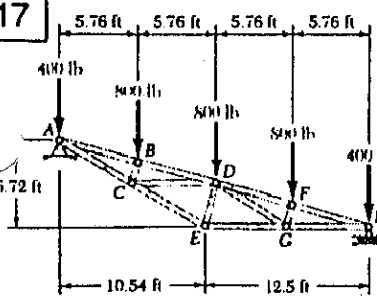


GIVEN:
 INVERTED HOWE ROOF TRUSS AND LOADING SHOWN.
FIND:
 FORCE IN MEMBER DE AND IN MEMBERS TO THE LEFT OF DE.

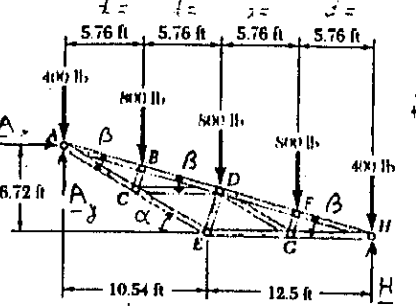


FREE BODY: TRUSS
 $\sum F_x = 0: A_x = 0$
 $\sum M_H = 0:$
 $(400 \text{ lb})(4d) + (800 \text{ lb})(3d) + (800 \text{ lb})(2d) + (800 \text{ lb})d - A_y(4d) = 0$
 $A_y = 1600 \text{ lb} \uparrow$


ANGLES: $\tan \alpha = \frac{6.72}{10.54} \quad \alpha = 32.52^\circ$
 $\tan \beta = \frac{6.72}{23.04} \quad \beta = 16.26^\circ$

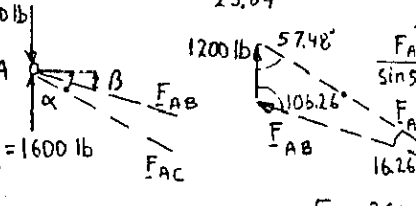


FREE BODY: JOINT A
 $\frac{F_{AB}}{\sin 57.48^\circ} = \frac{F_{AC}}{\sin 106.26^\circ} = \frac{1200 \text{ lb}}{\sin 16.26^\circ}$
 $F_{AB} = 3613.8 \text{ lb C}$
 $F_{AC} = 4114.3 \text{ lb T}$

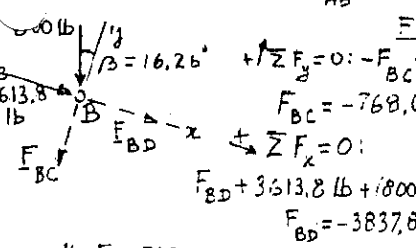

FREE BODY: JOINT B
 $\sum F_y = 0: -F_{BC} - (800 \text{ lb}) \cos 16.26^\circ = 0$
 $F_{BC} = -768.0 \text{ lb} \quad F_{BC} = 768 \text{ lb C}$
 $\sum F_x = 0:$
 $F_{BD} + 3613.8 \text{ lb} + (800 \text{ lb}) \sin 16.26^\circ = 0$
 $F_{BD} = -3837.8 \text{ lb} \quad F_{BD} = 3840 \text{ lb C}$

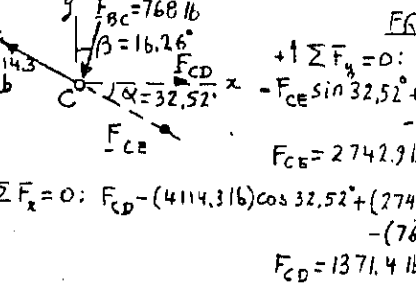


FREE BODY: JOINT C
 $\sum F_y = 0:$
 $-F_{CE} \sin 32.52^\circ + (4114.3 \text{ lb}) \sin 32.52^\circ - (768 \text{ lb}) \cos 16.26^\circ = 0$
 $F_{CE} = 2742.9 \text{ lb} \quad F_{CE} = 2740 \text{ lb T}$
 $\sum F_x = 0: F_{CD} - (4114.3 \text{ lb}) \cos 32.52^\circ + (2742.9 \text{ lb}) \cos 32.52^\circ - (768 \text{ lb}) \sin 16.26^\circ = 0$
 $F_{CD} = 1371.4 \text{ lb} \quad F_{CD} = 1371 \text{ lb T}$

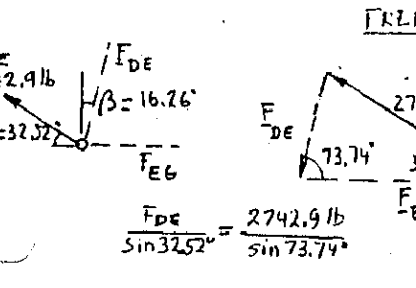


FREE BODY: JOINT E
 $\frac{F_{DE}}{\sin 32.52^\circ} = \frac{2742.9 \text{ lb}}{\sin 73.74^\circ}$
 $F_{DE} = 1536 \text{ lb C}$

6.18

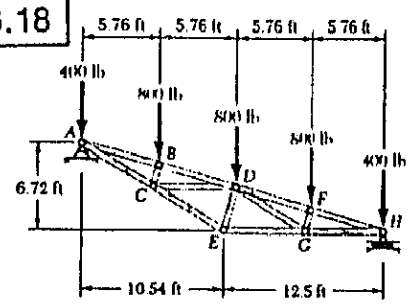


GIVEN:
 INVERTED HOWE ROOF TRUSS AND LOADING SHOWN.
FIND:
 FORCE IN MEMBERS TO THE RIGHT OF DE.

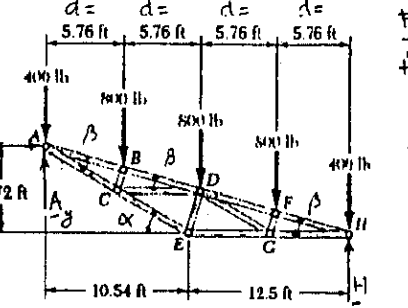


FREE BODY: TRUSS
 $\sum M_A = 0:$
 $H(4d) - (800 \text{ lb})d - (800 \text{ lb})(2d) - (800 \text{ lb})(3d) - (400 \text{ lb})(4d) = 0$
 $H = 1600 \text{ lb} \uparrow$


ANGLES: $\tan \alpha = \frac{6.72}{10.54} \quad \alpha = 32.52^\circ$
 $\tan \beta = \frac{6.72}{23.04} \quad \beta = 16.26^\circ$

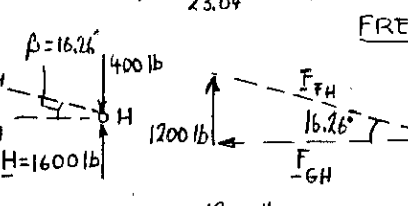


FREE BODY: JOINT H
 $F_{GH} = (1200 \text{ lb}) \cot 16.26^\circ$
 $F_{GH} = 4114.3 \text{ lb T}$
 $F_{GH} = 4110 \text{ lb T}$
 $F_{FH} = 4290 \text{ lb C}$

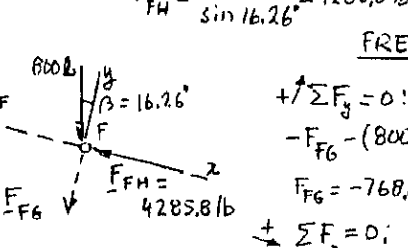

FREE BODY: JOINT F
 $\sum F_y = 0:$
 $-F_{FG} - (800 \text{ lb}) \cos 16.26^\circ = 0$
 $F_{FG} = -768.0 \text{ lb} \quad F_{FG} = 768 \text{ lb C}$
 $\sum F_x = 0:$
 $-F_{DF} - 4285.8 \text{ lb} + (800 \text{ lb}) \sin 16.26^\circ = 0$
 $F_{DF} = -4061.8 \text{ lb} \quad F_{DF} = 4060 \text{ lb C}$

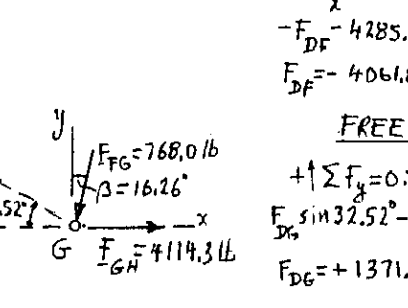


FREE BODY: JOINT G
 $\sum F_y = 0:$
 $F_{DG} \sin 32.52^\circ - (768.0 \text{ lb}) \cos 16.26^\circ = 0$
 $F_{DG} = 1371.4 \text{ lb}$
 $F_{DG} = 1371 \text{ lb T}$

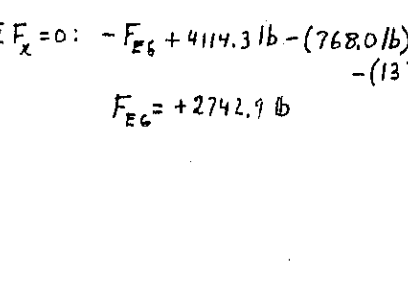

$\sum F_x = 0: -F_{EG} + 4114.3 \text{ lb} - (768.0 \text{ lb}) \sin 16.26^\circ - (1371.4 \text{ lb}) \cos 32.52^\circ = 0$
 $F_{EG} = 2742.9 \text{ lb}$
 $F_{EG} = 2740 \text{ lb T}$

6.19

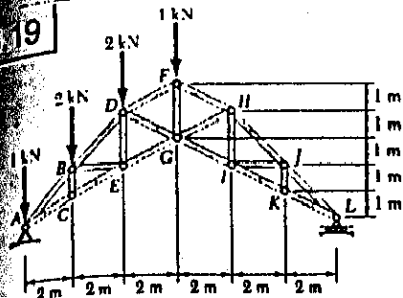

GIVEN:
SCISSORS ROOF TRUSS AND LOADING SHOWN.
FIND:
FORCE IN MEMBER TO THE LEFT OF FG.

FREE BODY: TRUSS

$$\sum F_x = 0: \quad A_x = 0$$

$$\sum M_L = 0:$$

$$(1\text{ kN})(12\text{ m}) + (2\text{ kN})(10\text{ m}) + (2\text{ kN})(8\text{ m}) + (1\text{ kN})(6\text{ m}) - A_y(12\text{ m}) = 0$$

$$A_y = 4.50\text{ kN} \uparrow$$

WE NOTE THAT BC IS A ZERO-FORCE MEMBER: $F_{BC} = 0$
ALSO: $F_{CE} = F_{AC}$ (1)

FREE BODY: JOINT A

$$\sum F_x = 0: \quad \frac{1}{\sqrt{2}} F_{AB} + \frac{4}{\sqrt{5}} F_{AC} = 0 \quad (2)$$

$$\sum F_y = 0: \quad \frac{1}{\sqrt{2}} F_{AB} + \frac{1}{\sqrt{5}} F_{AC} + 3.50\text{ kN} = 0 \quad (3)$$

MULTIPLY (3) BY -2 AND ADD (2):

$$-\frac{1}{\sqrt{2}} F_{AB} - 7\text{ kN} = 0 \quad F_{AB} = 9.90\text{ kN} \leftarrow$$

SUBTRACT (3) FROM (2):

$$\frac{1}{\sqrt{5}} F_{AC} - 3.50\text{ kN} = 0, \quad F_{AC} = 7.826\text{ kN}, \quad F_{CE} = 7.83\text{ kN} \leftarrow$$

$$\text{FROM (1): } F_{CE} = F_{AC} = 7.826\text{ kN}$$

FREE BODY: JOINT B

$$\sum F_y = 0: \quad \frac{1}{\sqrt{2}} F_{BD} + \frac{1}{\sqrt{2}} (9.90\text{ kN}) - 2\text{ kN} = 0$$

$$F_{BD} = -7.071\text{ kN} \quad F_{BD} = 7.07\text{ kN} \leftarrow$$

$$\sum F_x = 0: \quad F_{BE} + \frac{1}{\sqrt{2}} (9.90 - 7.071)\text{ kN} = 0$$

$$F_{BE} = -2.000\text{ kN} \quad F_{BE} = 2.00\text{ kN} \leftarrow$$

FREE BODY: JOINT E

$$\sum F_x = 0: \quad \frac{2}{\sqrt{5}} (F_{EG} - 7.826\text{ kN}) + 2.00\text{ kN} = 0$$

$$F_{EG} = 5.590\text{ kN} \quad F_{EG} = 5.59\text{ kN} \leftarrow$$

$$\sum F_y = 0: \quad F_{DE} - \frac{1}{\sqrt{5}} (7.826 - 5.590)\text{ kN} = 0$$

$$F_{DE} = 1.000\text{ kN} \quad F_{DE} = 1.000\text{ kN} \leftarrow$$

FREE BODY: JOINT D

$$\sum F_x = 0: \quad \frac{2}{\sqrt{5}} (F_{DF} + F_{DG}) + \frac{1}{\sqrt{2}} (7.071\text{ kN}) = 0$$

$$\text{OR: } F_{DF} + F_{DG} = -5.590\text{ kN} \quad (4)$$


$$\sum F_y = 0: \quad \frac{1}{\sqrt{5}} (F_{DF} - F_{DG}) + \frac{1}{\sqrt{2}} (7.071\text{ kN}) - 2\text{ kN} - 1\text{ kN} = 0$$

$$\text{OR: } F_{DF} - F_{DG} = -4.472 \quad (5)$$

$$\text{ADD (4) AND (5): } 2F_{DF} = -10.062\text{ kN} \quad F_{DF} = 5.03\text{ kN} \leftarrow$$

$$\text{SUBTRACT (5) FROM (4): } 2F_{DG} = -1.1180\text{ kN} \quad F_{DG} = 0.559\text{ kN} \leftarrow$$

6.20

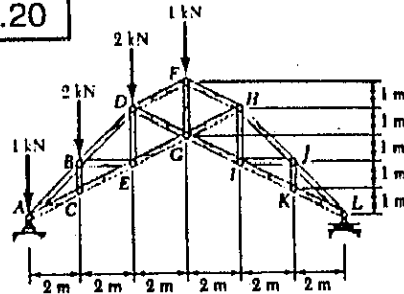

GIVEN:
SCISSORS ROOF TRUSS AND LOADING SHOWN.
FIND:
FORCE IN MEMBER FG AND IN MEMBERS TO THE RIGHT OF FG.

FREE BODY: TRUSS

$$\sum M_A = 0:$$

$$L(12\text{ m}) - (2\text{ kN})(2\text{ m}) - (2\text{ kN})(4\text{ m}) - (1\text{ kN})(6\text{ m}) = 0$$

$$L = 1.500\text{ kN} \uparrow$$

ANGLES:
 $\tan \alpha = \frac{1}{2} \quad \alpha = 45^\circ$
 $\tan \beta = \frac{1}{2} \quad \beta = 26.57^\circ$

ZERO-FORCE MEMBERS:

EXAMINING SUCCESSIVELY JOINTS K, J, AND I, WE NOTE THAT THE FOLLOWING MEMBERS TO THE RIGHT OF FG ARE ZERO-FORCE MEMBERS: JK, IJ, AND HI. THUS:

$$F_{HI} = F_{IJ} = F_{JK} = 0 \leftarrow$$

WE ALSO NOTE THAT

$$F_{GI} = F_{IK} = F_{KL} \quad (1) \quad \text{AND} \quad F_{HJ} = F_{JL} \quad (2)$$

FREE BODY: JOINT L

$$\frac{F_{JL}}{\sin 116.57^\circ} = \frac{F_{KL}}{\sin 45^\circ} = \frac{1.500\text{ kN}}{\sin 18.43^\circ}$$

$$F_{JL} = 4.2436\text{ kN} \quad F_{KL} = 3.35\text{ kN} \leftarrow$$

$$\text{FROM EQ. (1): } F_{GI} = F_{IK} = F_{KL} \quad F_{GI} = F_{IK} = 3.35\text{ kN} \leftarrow$$

$$\text{FROM EQ. (2): } F_{HJ} = F_{JL} = 4.2436\text{ kN}, \quad F_{HJ} = 4.24\text{ kN} \leftarrow$$

FREE BODY: JOINT H

$$\frac{F_{FH}}{\sin 108.43^\circ} = \frac{F_{GH}}{\sin 18.43^\circ} = \frac{4.2436}{\sin 53.14^\circ}$$

$$F_{FH} = 5.03\text{ kN} \leftarrow \quad F_{GH} = 1.677\text{ kN} \leftarrow$$


FREE BODY: JOINT F

$$\sum F_x = 0: \quad -F_{DF} \cos 26.57^\circ - (5.03\text{ kN}) \cos 26.57^\circ = 0$$

$$F_{DF} = -5.03\text{ kN}$$


$$\sum F_y = 0: \quad -F_{FG} - 1\text{ kN} + (5.03\text{ kN}) \sin 26.57^\circ - (-5.03\text{ kN}) \sin 26.57^\circ = 0$$

$$F_{FG} = +3.500\text{ kN} \quad F_{FG} = 3.50\text{ kN} \leftarrow$$

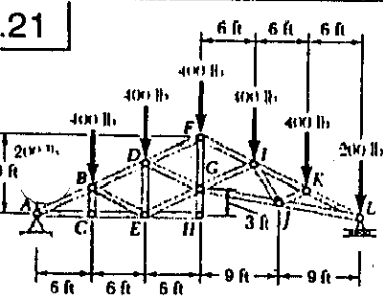

GIVEN:
STUDIO ROOF TRUSS
AND LOADING SHOWN.

FIND:
FORCE IN MEMBERS
TO THE LEFT OF LINE
FGH.

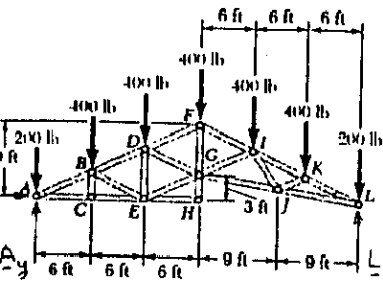

FREE BODY: TRUSS


$$\sum F_x = 0: A_x = 0$$

BECAUSE OF SYMMETRY
OF LOADING:

$$A_y = L = \frac{1}{2} \text{TOTAL LOAD}$$

$$A_y = L = 1200 \text{ lb} \uparrow$$

ZERO-FORCE MEMBERS. EXAMINING JOINTS C AND H,
CONCLUDE THAT BC, EH, AND GH ARE ZERO-FORCE
MEMBERS. THUS:

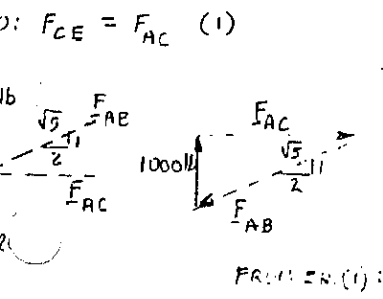

$F_{BC} = F_{EH} = 0$

FREE BODY: JOINT A


$$\frac{F_{AB}}{\sqrt{5}} = \frac{F_{AC}}{2} = \frac{1000 \text{ lb}}{1}$$

$$F_{AC} = 2236 \text{ lb C}$$

$$F_{AB} = 2240 \text{ lb C}$$

$$F_{AC} = 2000 \text{ lb T}$$

FROM EQ. (1): $F_{CE} = 2000 \text{ lb T}$

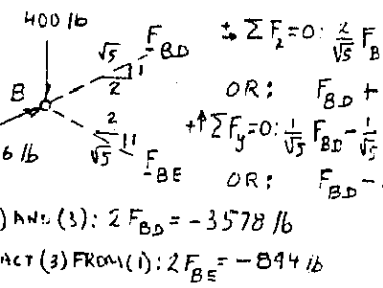

FREE BODY: JOINT B

$$\sum F_x = 0: \frac{2}{\sqrt{5}} F_{BD} + \frac{2}{\sqrt{5}} F_{BE} + \frac{2}{\sqrt{5}} (2236 \text{ lb}) = 0$$


OR: $F_{BD} + F_{BE} = -2236 \text{ lb}$ (2)

$$\sum F_y = 0: \frac{1}{\sqrt{5}} F_{BD} - \frac{1}{\sqrt{5}} F_{BE} + \frac{1}{\sqrt{5}} (2236 \text{ lb}) - 400 \text{ lb} = 0$$

OR: $F_{BD} - F_{BE} = -1342 \text{ lb}$ (3)

ADD (2) AND (3): $2 F_{BD} = -3578 \text{ lb}$

$$F_{BD} = 1789 \text{ lb C}$$

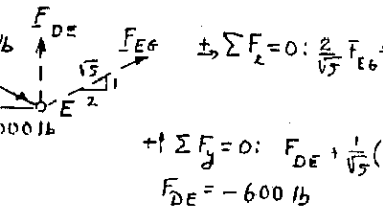
$$F_{BE} = 447 \text{ lb C}$$


FREE BODY: JOINT E

$$\sum F_x = 0: \frac{2}{\sqrt{5}} F_{EG} + \frac{2}{\sqrt{5}} (447 \text{ lb}) - 2000 \text{ lb} = 0$$

$$F_{EG} = 1789 \text{ lb T}$$

$$\sum F_y = 0: F_{DE} + \frac{1}{\sqrt{5}} (1789 \text{ lb}) - \frac{1}{\sqrt{5}} (447 \text{ lb}) = 0$$
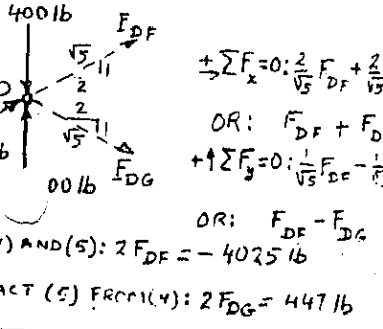
$$F_{DE} = 600 \text{ lb C}$$


FREE BODY: JOINT D

$$\sum F_x = 0: \frac{2}{\sqrt{5}} F_{DF} + \frac{2}{\sqrt{5}} F_{DG} + \frac{2}{\sqrt{5}} (1789 \text{ lb}) = 0$$

OR: $F_{DF} + F_{DG} = -1789 \text{ lb}$ (4)


$$\sum F_y = 0: \frac{1}{\sqrt{5}} F_{DF} - \frac{1}{\sqrt{5}} F_{DG} + \frac{1}{\sqrt{5}} (1789 \text{ lb}) + 600 \text{ lb} - 400 \text{ lb} = 0$$

OR: $F_{DF} - F_{DG} = -2236 \text{ lb}$ (5)

ADD (4) AND (5): $2 F_{DF} = -4025 \text{ lb}$

$$F_{DF} = 2010 \text{ lb C}$$


ACT (5) FROM (4): $2 F_{DG} = 447 \text{ lb}$
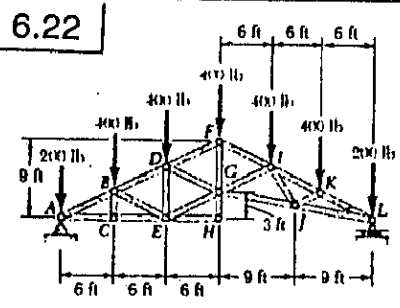
$$F_{DG} = 224 \text{ lb T}$$


GIVEN:
STUDIO ROOF TRUSS
AND LOADING SHOWN.

FIND:
FORCE IN FG AND
IN MEMBERS TO THE
RIGHT OF FG.

REACTION AT L: BECAUSE OF THE SYMMETRY OF THE
LOADING, $L = \frac{1}{2} \text{TOTAL LOAD}$, $L = 1200 \text{ lb} \uparrow$
(SEE F.B. DIAGRAM TO THE LEFT FOR MORE DETAILS.)




FREE BODY: JOINT L

$$\alpha = \tan^{-1} \frac{9}{18} = 26.57^\circ$$

$$\beta = \tan^{-1} \frac{3}{18} = 9.46^\circ$$

$$\frac{F_{JL}}{\sin 63.43^\circ} = \frac{F_{KL}}{\sin 99.46^\circ} = \frac{1000 \text{ lb}}{\sin 17.11^\circ}$$

$$F_{JL} = 3040 \text{ lb T}$$

$$F_{KL} = 3352.7 \text{ lb C}$$


FREE BODY: JOINT K

$$\sum F_x = 0: -\frac{2}{\sqrt{5}} F_{JK} - \frac{2}{\sqrt{5}} F_{JK} - \frac{2}{\sqrt{5}} (3352.7 \text{ lb}) = 0$$


OR: $F_{JK} + F_{JK} = -3352.7 \text{ lb}$ (1)

$$\sum F_y = 0: \frac{1}{\sqrt{5}} F_{JK} - \frac{1}{\sqrt{5}} F_{JK} + \frac{1}{\sqrt{5}} (3352.7) - 400 = 0$$

OR: $F_{JK} - F_{JK} = -2458.3 \text{ lb}$ (2)

ADD (1) AND (2): $2 F_{JK} = -5811.0$, $F_{JK} = -2905.5 \text{ lb}$, $F_{JK} = 2910 \text{ lb C}$

SUBTRACT (2) FROM (1): $2 F_{JK} = -8474$, $F_{JK} = -4237 \text{ lb}$, $F_{JK} = 4237 \text{ lb C}$



FREE BODY: JOINT J

$$\sum F_x = 0: -\frac{2}{\sqrt{5}} F_{JL} - \frac{2}{\sqrt{5}} F_{JK} - \frac{2}{\sqrt{5}} (3040 \text{ lb}) - \frac{2}{\sqrt{5}} (4237) = 0$$


$$+ \sum F_y = 0: \frac{1}{\sqrt{5}} F_{JL} + \frac{1}{\sqrt{5}} F_{JK} - \frac{1}{\sqrt{5}} (3040 \text{ lb}) - \frac{1}{\sqrt{5}} (4237) = 0$$

MULTIPLY (4) BY 6 AND ADD TO (3):

$$\frac{16}{\sqrt{5}} F_{JL} - \frac{8}{\sqrt{5}} (4237) = 0, F_{JL} = 360.54 \text{ lb}$$

MULTIPLY (3) BY 3, (4) BY 2, AND ADD:

$$-\frac{16}{\sqrt{5}} (F_{JK} - 3040) - \frac{8}{\sqrt{5}} (4237) = 0, F_{JK} = 2431.7 \text{ lb}$$

$$F_{JK} = 2430 \text{ lb T}$$


FREE BODY: JOINT I

$$\sum F_x = 0: -\frac{2}{\sqrt{5}} F_{FI} - \frac{2}{\sqrt{5}} F_{FI} - \frac{2}{\sqrt{5}} (2905.5) + \frac{2}{\sqrt{5}} (360.54) = 0$$


OR: $F_{FI} + F_{FI} = -2681.9 \text{ lb}$ (5)

$$\sum F_y = 0: \frac{1}{\sqrt{5}} F_{FI} - \frac{1}{\sqrt{5}} F_{FI} + \frac{1}{\sqrt{5}} (2905.5) - \frac{3}{\sqrt{5}} (360.54) - 400 = 0$$

OR: $F_{FI} - F_{FI} = -1340.3 \text{ lb}$ (6)

ADD (5) AND (6): $2 F_{FI} = -4022.2$, $F_{FI} = -2011.1 \text{ lb}$, $F_{FI} = 2010 \text{ lb C}$

SUBTRACT (6) FROM (5): $2 F_{GI} = -1341.6 \text{ lb}$


$$F_{GI} = 671 \text{ lb C}$$


FREE BODY: JOINT F


FROM $\sum F_x = 0$: $F_{DF} = F_{FI} = 2011.1 \text{ lb C}$

$$\sum F_y = 0: -F_{FG} - 400 \text{ lb} + 2(\frac{1}{\sqrt{5}} 2011.1) = 0$$


$$F_{FG} = 1400 \text{ lb}$$
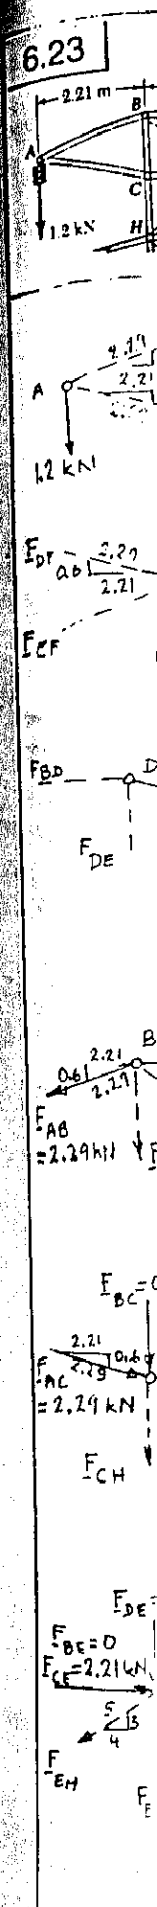
$$F_{FG} = 1400 \text{ lb T}$$


6.21

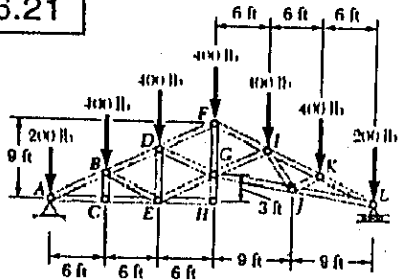

GIVEN:
STUDIO ROOF TRUSS
AND LOADING SHOWN.
FIND:
FORCE IN MEMBERS
TO THE LEFT OF LINE
FGH.

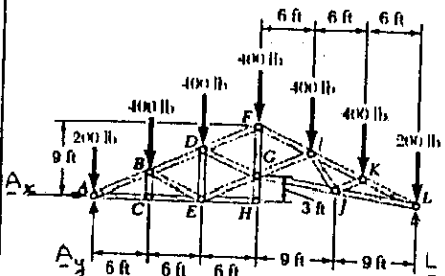

FREE BODY: TRUSS

$$\sum F_x = 0: A_x = 0$$

BECAUSE OF SYMMETRY
OF LOADING:

$$A_y = L = \frac{1}{2} \text{TOTAL LOAD}$$

$$A_y = L = 1200 \text{ lb} \uparrow$$

ZERO-FORCE MEMBERS. EXAMINING JOINTS C AND H,
WE CONCLUDE THAT BC, EH, AND GH ARE ZERO-FORCE
MEMBERS. THUS:

ALSO: $F_{CE} = F_{AC}$ (1)

$$F_{BC} = F_{EH} = 0$$

FREE BODY: JOINT A

$$\frac{F_{AB}}{\sqrt{5}} = \frac{F_{AC}}{2} = \frac{1000 \text{ lb}}{1}$$

$$F_{AE} = 2236 \text{ lb C}$$

$$F_{AB} = 2240 \text{ lb C}$$

$$F_{AC} = 2000 \text{ lb T}$$

FROM EQ. (1): $F_{CE} = 2000 \text{ lb T}$

FREE BODY: JOINT B

$$\sum F_x = 0: \frac{2}{\sqrt{5}} F_{BD} + \frac{2}{\sqrt{5}} F_{BE} + \frac{2}{\sqrt{5}} (2236 \text{ lb}) = 0$$

OR: $F_{BD} + F_{BE} = -2236 \text{ lb}$ (2)

$$\sum F_y = 0: \frac{1}{\sqrt{5}} F_{BD} - \frac{1}{\sqrt{5}} F_{BE} + \frac{1}{\sqrt{5}} (2236 \text{ lb}) - 400 \text{ lb} = 0$$

OR: $F_{BD} - F_{BE} = -1342 \text{ lb}$ (3)

ADD (2) AND (3): $2 F_{BD} = -3578 \text{ lb}$

SUBTRACT (3) FROM (1): $2 F_{BE} = -894 \text{ lb}$

FREE BODY: JOINT E

$$\sum F_x = 0: \frac{2}{\sqrt{5}} F_{EG} + \frac{2}{\sqrt{5}} (447 \text{ lb}) - 2000 \text{ lb} = 0$$

$$F_{EG} = 1789 \text{ lb T}$$

$$\sum F_y = 0: F_{DE} + \frac{1}{\sqrt{5}} (1789 \text{ lb}) - \frac{1}{\sqrt{5}} (447 \text{ lb}) = 0$$

$$F_{DE} = -600 \text{ lb}$$

FREE BODY: JOINT D

$$\sum F_x = 0: \frac{2}{\sqrt{5}} F_{DF} + \frac{2}{\sqrt{5}} F_{DG} + \frac{2}{\sqrt{5}} (1789 \text{ lb}) = 0$$

OR: $F_{DF} + F_{DG} = -1789 \text{ lb}$ (4)

$$\sum F_y = 0: \frac{1}{\sqrt{5}} F_{DF} - \frac{1}{\sqrt{5}} F_{DG} + \frac{1}{\sqrt{5}} (1789 \text{ lb}) + 600 \text{ lb} - 400 \text{ lb} = 0$$

OR: $F_{DF} - F_{DG} = -2236 \text{ lb}$ (5)


ADD (4) AND (5): $2 F_{DF} = -4025 \text{ lb}$

$$F_{DF} = 2010 \text{ lb C}$$

SUBTRACT (5) FROM (4): $2 F_{DG} = 447 \text{ lb}$


$$F_{DG} = 224 \text{ lb T}$$

6.22

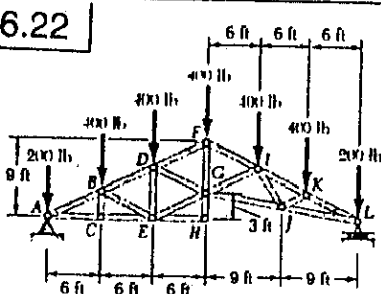

GIVEN:
STUDIO ROOF
AND LOADING
FIND:
FORCE IN MEMBERS
TO THE RIGHT OF FG.

REACTION AT L: BECAUSE OF THE SYMMETRY OF
LOADING, $L = \frac{1}{2} \text{TOTAL LOAD}$, $L = 1200 \text{ lb} \uparrow$
(SEE F.B. DIAGRAM TO THE LEFT FOR MORE DETAILS)



$$\alpha = \tan^{-1} \frac{2}{18} = 26.57^\circ$$


$$\beta = \tan^{-1} \frac{3}{18} = 9.46^\circ$$

$$\frac{F_{JL}}{\sin 63.43^\circ} = \frac{F_{KL}}{\sin 99.46^\circ} = \frac{1000 \text{ lb}}{\sin 17.11^\circ}$$

$$F_{JL} = 3040 \text{ lb T}$$

$$F_{KL} = 3352.7 \text{ lb C} \quad F_{KL} = 3350 \text{ lb C}$$

FREE BODY: JOINT K



$$\sum F_x = 0: -\frac{2}{\sqrt{5}} F_{JK} - \frac{2}{\sqrt{5}} F_{JK} - \frac{2}{\sqrt{5}} (3352.7 \text{ lb}) = 0$$

OR: $F_{JK} + F_{JK} = -3352.7 \text{ lb}$


$$\sum F_y = 0: \frac{1}{\sqrt{5}} F_{JK} - \frac{1}{\sqrt{5}} F_{JK} + \frac{1}{\sqrt{5}} (3352.7) - 400 = 0$$

OR: $F_{JK} - F_{JK} = -2458.3 \text{ lb}$

ADD (1) AND (2): $2 F_{JK} = -5811.0$, $F_{JK} = -2905.5 \text{ lb}$, $F_{JK} = 2910 \text{ lb C}$

SUBTRACT (2) FROM (1): $2 F_{JK} = -894.4$, $F_{JK} = -447.2 \text{ lb}$, $F_{JK} = 447 \text{ lb C}$

FREE BODY: JOINT J



$$\sum F_x = 0: -\frac{2}{\sqrt{5}} F_{JL} - \frac{2}{\sqrt{5}} F_{JL} + \frac{2}{\sqrt{5}} (3040 \text{ lb}) - \frac{2}{\sqrt{5}} (447.2) = 0$$

$$- \frac{2}{\sqrt{5}} F_{JL} - \frac{6}{\sqrt{5}} F_{JG} + \frac{6}{\sqrt{5}} (3040 \text{ lb}) - \frac{2}{\sqrt{5}} (447.2) = 0$$

$$+ \sum F_y = 0: \frac{1}{\sqrt{5}} F_{JL} + \frac{1}{\sqrt{5}} F_{JG} - \frac{1}{\sqrt{5}} (3040 \text{ lb}) - \frac{1}{\sqrt{5}} (447.2) = 0$$


MULTIPLY (4) BY 6 AND ADD TO (3):

$$\frac{16}{\sqrt{5}} F_{JL} - \frac{6}{\sqrt{5}} (447.2) = 0, \quad F_{JL} = 360.54 \text{ lb} \quad F_{JL} = 361 \text{ lb T}$$

MULTIPLY (3) BY 3, (4) BY 2, AND ADD:

$$-\frac{16}{\sqrt{5}} (F_{JG} - 3040) - \frac{6}{\sqrt{5}} (447.2) = 0, \quad F_{JG} = 2431.7 \text{ lb} \quad F_{JG} = 2430 \text{ lb T}$$

FREE BODY: JOINT I



$$\sum F_x = 0: -\frac{1}{\sqrt{5}} F_{IF} - \frac{2}{\sqrt{5}} F_{IF} - \frac{2}{\sqrt{5}} (2905.5) + \frac{2}{\sqrt{5}} (360.5) = 0$$

OR: $F_{IF} + F_{IF} = -2681.9 \text{ lb}$


$$\sum F_y = 0: \frac{1}{\sqrt{5}} F_{IF} - \frac{1}{\sqrt{5}} F_{IF} + \frac{1}{\sqrt{5}} (2905.5) - \frac{3}{\sqrt{5}} (360.5) - 400 = 0$$

OR: $F_{IF} - F_{IF} = -1340.3 \text{ lb}$

ADD (5) AND (6): $2 F_{IF} = -4022.2$, $F_{IF} = -2011.1 \text{ lb}$, $F_{IF} = 2010 \text{ lb C}$

SUBTRACT (6) FROM (5): $2 F_{IG} = -1341.6 \text{ lb}$, $F_{IG} = 671 \text{ lb C}$

FREE BODY: JOINT F




FROM $\sum F_x = 0: F_{DF} = F_{FI} = 2011.1 \text{ lb C}$

$$\sum F_y = 0: -F_{FG} - 400 \text{ lb} + 2 \left(\frac{1}{\sqrt{5}} (2011.1 \text{ lb}) \right) = 0$$


$$F_{FG} = +1400 \text{ lb} \quad F_{FG} = 1400 \text{ lb T}$$

6.23

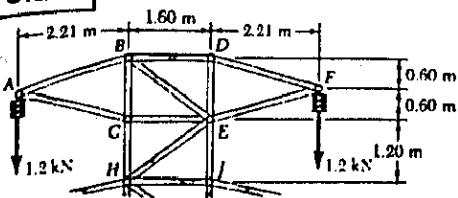

GIVEN: TOP VIEW OF POWER TRANSMISSION LINE TOWER AND LOADS AS SHOWN. FIND: FORCE IN MEMBERS LOCATED ABOVE HJ.

FREE BODY: JOINT A

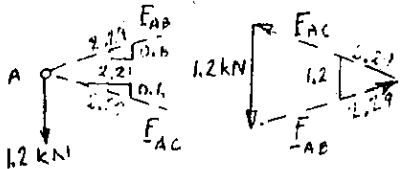


$$\frac{F_{AB}}{2.29} = \frac{F_{AC}}{2.29} = \frac{1.2\text{kN}}{1.2}$$

$$F_{AB} = 2.29\text{kN T}$$

$$F_{AC} = 2.29\text{kN C}$$

FREE BODY: JOINT F

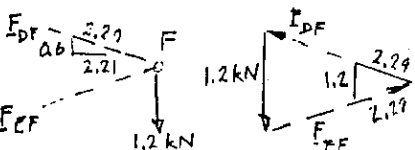


$$\frac{F_{DF}}{2.29} = \frac{F_{EF}}{2.29} = \frac{1.2\text{kN}}{1.2}$$

$$F_{DF} = 2.29\text{kN T}$$

$$F_{EF} = 2.29\text{kN C}$$

FREE BODY: JOINT D




$$\frac{F_{BD}}{2.21} = \frac{F_{DE}}{0.6} = \frac{2.29\text{kN}}{2.29}$$

$$F_{BD} = 2.21\text{kN T}$$

$$F_{DE} = 0.600\text{kN C}$$

FREE BODY: JOINT B



$$\pm \sum F_x = 0:$$

$$\frac{4}{5} F_{BE} + 2.21\text{kN} - \frac{2.21}{2.29} (2.29\text{kN}) = 0$$


$$F_{BE} = 0$$

$$+\uparrow \sum F_y = 0:$$

$$-F_{BC} - \frac{3}{5}(0) - \frac{0.6}{2.29} (2.29\text{kN}) = 0$$

$$F_{BC} = -0.600\text{kN}, F_{BC} = 0.600\text{kN C}$$

FREE BODY: JOINT C



$$\pm \sum F_x = 0:$$

$$F_{CE} + \frac{2.21}{2.29} (2.29\text{kN}) = 0$$


$$F_{CE} = -2.21\text{kN}, F_{CE} = 2.21\text{kN C}$$

$$+\uparrow \sum F_y = 0:$$

$$-F_{CH} - 0.600\text{kN} - \frac{0.6}{2.29} (2.29\text{kN}) = 0$$

$$F_{CH} = -1.200\text{kN}, F_{CH} = 1.200\text{kN C}$$

FREE BODY: JOINT E



$$\pm \sum F_x = 0:$$

$$2.21\text{kN} - \frac{2.21}{2.29} (2.29\text{kN}) - \frac{4}{5} F_{EH} = 0$$


$$F_{EH} = 0$$

$$+\uparrow \sum F_y = 0:$$

$$-F_{EJ} - 0.600\text{kN} - \frac{0.6}{2.29} (2.29\text{kN}) - 0 = 0$$


$$F_{EJ} = -1.200\text{kN}, F_{EJ} = 1.200\text{kN C}$$

6.24

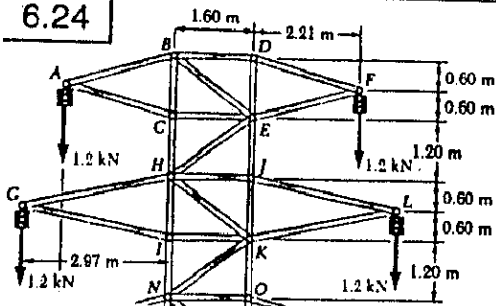

GIVEN: POWER TRANSMISSION LINE TOWER AND LOADS AS SHOWN WITH $F_{CH} = 1.2\text{kN C}$ AND $F_{HI} = 1.800\text{kN C}$. FIND: FORCE IN MEMBERS BETWEEN HJ AND N.

FREE BODY: JOINT G




$$\frac{F_{GH}}{3.03} = \frac{F_{GI}}{3.03} = \frac{1.2\text{kN}}{1.2}$$

$$F_{GH} = 3.03\text{kN T}$$

$$F_{GI} = 3.03\text{kN C}$$

FREE BODY: JOINT L




$$\frac{F_{JL}}{3.03} = \frac{F_{KL}}{3.03} = \frac{1.2\text{kN}}{1.2}$$

$$F_{JL} = 3.03\text{kN T}$$

$$F_{KL} = 3.03\text{kN C}$$

FREE BODY: JOINT J




$$\pm \sum F_x = 0: -F_{HJ} + \frac{2.97}{3.03} (3.03\text{kN}) = 0$$

$$F_{HJ} = 2.97\text{kN T}$$

$$+\uparrow \sum F_y = 0: -F_{JK} - 1.2\text{kN} - \frac{0.6}{3.03} (3.03\text{kN}) = 0$$

$$F_{JK} = -1.800\text{kN}, F_{JK} = 1.800\text{kN C}$$

FREE BODY: JOINT H



$$\pm \sum F_x = 0:$$

$$\frac{4}{5} F_{HK} + 2.97\text{kN} - \frac{2.97}{3.03} (3.03\text{kN}) = 0$$


$$F_{HK} = 0$$

$$+\uparrow \sum F_y = 0:$$

$$-F_{HI} - 1.2\text{kN} - \frac{0.6}{3.03} (3.03\text{kN}) - \frac{3}{5}(0) = 0$$

$$F_{HI} = -1.800\text{kN}, F_{HI} = 1.800\text{kN C}$$

FREE BODY: JOINT I




$$\pm \sum F_x = 0: F_{IK} + \frac{2.97}{3.03} (3.03\text{kN}) = 0$$

$$F_{IK} = -2.97\text{kN}, F_{IK} = 2.97\text{kN C}$$

$$+\uparrow \sum F_y = 0: -F_{IN} - 1.800\text{kN} - \frac{0.6}{3.03} (3.03\text{kN}) = 0$$

$$F_{IN} = -2.40\text{kN}, F_{IN} = 2.40\text{kN C}$$

FREE BODY: JOINT K



$$\pm \sum F_x = 0:$$

$$-\frac{4}{5} F_{KN} + 2.97\text{kN} - \frac{2.97}{3.03} (3.03\text{kN}) = 0$$


$$F_{KN} = 0$$

$$+\uparrow \sum F_y = 0:$$

$$-F_{KO} - \frac{0.6}{3.03} (3.03\text{kN}) - 1.800\text{kN} - \frac{3}{5}(0) = 0$$

$$F_{KO} = -2.40\text{kN}, F_{KO} = 2.40\text{kN C}$$

6.25

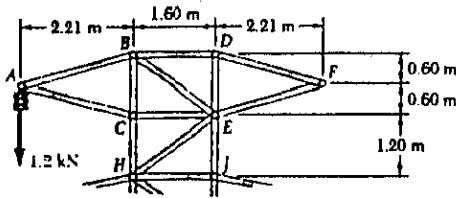

GIVEN: TOP PORTION OF LOWER TRANSMISSION LINE OF P.F. 6.23, ASSUMING THAT CABLES ON RIGHT-HAND SIDE ARE MISSING. (LOADING WILL BE AS SHOWN ABOVE.)
FIND: FORCE IN MEMBERS LOCATED ABOVE HJ.

ZERO-FORCE MEMBERS.

CONSIDERING JOINT F, WE NOTE THAT DF AND EF ARE ZERO-FORCE MEMBERS:
 $F_{DF} = F_{EF} = 0$

CONSIDER: NEXT JOINT D, WE NOTE THAT BD AND DE ARE ZERO-FORCE MEMBERS:
 $F_{BD} = F_{DE} = 0$


FREE BODY: JOINT A
 $F_{AB} = F_{AC} = 1.2 \text{ kN}$
 $F_{AB} = 2.29 \text{ kN}$
 $F_{AC} = 2.29 \text{ kN}$

FREE BODY: JOINT B
 $F_{BD} = 0$
 $F_{BE} = 2.7625 \text{ kN}$
 $F_{BC} = -2.2575 \text{ kN}$
 $F_{BC} = 2.26 \text{ kN}$

FREE BODY: JOINT C
 $F_{CE} = 2.21 \text{ kN}$
 $F_{CH} = -2.8575 \text{ kN}$
 $F_{CH} = 2.86 \text{ kN}$

FREE BODY: JOINT E
 $F_{EJ} = +1.6575 \text{ kN}$
 $F_{EJ} = 1.658 \text{ kN}$

6.26

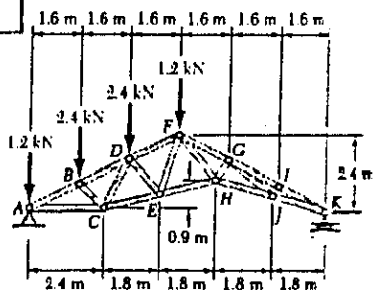

GIVEN:
VERTICAL LOADS
7.5 kN AT JOINT D
1.2 kN AT JOINT F
1.2 kN AT JOINT G
1.2 kN AT JOINT I
1.2 kN AT JOINT K

FREE BODY: JOINT A
 $\sum F_x = 0$
 $\sum F_y = 0$
 $A_x = 4.20 \text{ kN}$
 $A_y = 5.40 \text{ kN}$

FREE BODY: JOINT B
 $\sum F_x = 0$
 $\sum F_y = 0$
 $F_{BD} = -7.6026 \text{ kN}$
 $F_{BD} = 7.60 \text{ kN}$

MULTIPLY (2) BY -2 AND ADD (1):
 $F_{BC} = -2.2627 \text{ kN}$
 $F_{BC} = 2.2627 \text{ kN}$

MULTIPLY (4) BY -4 AND ADD (1):
 $F_{CD} = -0.1278 \text{ kN}$
 $F_{CD} = 0.1278 \text{ kN}$


MULTIPLY (1) BY 2 AND SUBTRACT (2):
 $F_{CE} = 7.068 \text{ kN}$
 $F_{CE} = 7.07 \text{ kN}$

FREE BODY: JOINT D
 $F_{DF} = 7.0626 \text{ kN}$
 $F_{CD} = 0.1278 \text{ kN}$

MULTIPLY (6) BY -2 AND ADD (5):
 $F_{DE} = -2.138 \text{ kN}$
 $F_{DE} = 2.14 \text{ kN}$

FREE BODY: JOINT E
 $F_{EF} = 2.138 \text{ kN}$
 $F_{CE} = 7.068 \text{ kN}$

6.27



GIVEN:
TRUSS AND LOADING SHOWN.


FIND:
FORCE IN EACH MEMBER OF THE TRUSS.

FREE BODY: TRUSS

$\rightarrow \sum M_F = 0:$
 $G(20 \text{ ft}) - (15 \text{ kips})(16 \text{ ft}) - (40 \text{ kips})(15 \text{ ft}) = 0$
 $G = 42 \text{ kips} \uparrow$

$\rightarrow \sum F_x = 0: F_x + 15 \text{ kips} = 0$
 $F_x = 15 \text{ kips} \leftarrow$


$\uparrow \sum F_y = 0: F_y - 40 \text{ kips} + 42 \text{ kips} = 0$
 $F_y = 2 \text{ kips} \downarrow$



FREE BODY: JOINT F

$\rightarrow \sum F_x = 0: \frac{1}{\sqrt{5}} F_{DF} - 15 \text{ kips} = 0$
 $F_{DF} = 33.54 \text{ kips}, F_{DF} = 33.5 \text{ kips T}$

$\uparrow \sum F_y = 0: F_{BF} - 2 \text{ kips} + \frac{2}{\sqrt{5}} (33.54 \text{ kips}) = 0$
 $F_{BF} = -28.00 \text{ kips}, F_{BF} = 28.0 \text{ kips C}$




FREE BODY: JOINT B

$\rightarrow \sum F_x = 0: \frac{5}{\sqrt{29}} F_{AB} + \frac{5}{\sqrt{61}} F_{BD} + 15 \text{ kips} = 0$ (1)

$\uparrow \sum F_y = 0: \frac{2}{\sqrt{29}} F_{AB} - \frac{6}{\sqrt{61}} F_{BD} + 28 \text{ kips} = 0$ (2)

MULTIPLY (1) BY 6, (2) BY 5, AND ADD:


$\frac{40}{\sqrt{29}} F_{AB} + 230 \text{ kips} = 0$ $F_{AB} = -30.96 \text{ kips}$
 $F_{AB} = 31.0 \text{ kips C}$



FREE BODY: JOINT D

$\uparrow \sum F_y = 0: \frac{2}{\sqrt{5}} F_{AD} - \frac{2}{\sqrt{5}} (33.54) + \frac{6}{\sqrt{61}} (21.48) = 0$
 $F_{AD} = 15.09 \text{ kips T}$

$\rightarrow \sum F_x = 0: F_{DE} + \frac{1}{\sqrt{5}} (15.09 - 33.54) - \frac{5}{\sqrt{61}} (21.48) = 0$
 $F_{DE} = 22.0 \text{ kips T}$



FREE BODY: JOINT A

$\rightarrow \sum F_x = 0: \frac{5}{\sqrt{29}} F_{AC} + \frac{1}{\sqrt{5}} F_{AE} + \frac{5}{\sqrt{29}} (30.96) - \frac{1}{\sqrt{5}} (15.09) = 0$ (3)


$\uparrow \sum F_y = 0: -\frac{2}{\sqrt{29}} F_{AC} - \frac{2}{\sqrt{5}} F_{AE} + \frac{2}{\sqrt{29}} (30.96) - \frac{2}{\sqrt{5}} (15.09) = 0$ (4)

MULTIPLY (3) BY 2 AND ADD (4):

$\frac{8}{\sqrt{29}} F_{AC} + \frac{2}{\sqrt{5}} (30.96) - \frac{4}{\sqrt{5}} (15.09) = 0$
 $F_{AC} = -28.27 \text{ kips}, F_{AC} = 28.3 \text{ kips C}$

MULTIPLY (3) BY 2, (4) BY 5 AND ADD:

$-\frac{8}{\sqrt{5}} F_{AE} + \frac{20}{\sqrt{29}} (30.96) - \frac{12}{\sqrt{5}} (15.09) = 0$
 $F_{AE} = 9.50 \text{ kips T}$



(CONTINUED)

6.27 CONTINUED

FREE BODY: JOINT C

FROM FORCE TRIANGLE:

$\frac{F_{CE}}{\sqrt{61}} = \frac{F_{CG}}{8} = \frac{28.27 \text{ kips}}{\sqrt{29}}$

$F_{CE} = 41.0 \text{ kips T}$

$F_{CG} = 42.0 \text{ kips C}$


FREE BODY: JOINT G

$F_{EG} = 0$

$\rightarrow \sum F_x = 0:$

$\uparrow \sum F_y = 0: 42 \text{ kips} - 42 \text{ kips} = 0$ (CHECKS)

6.28

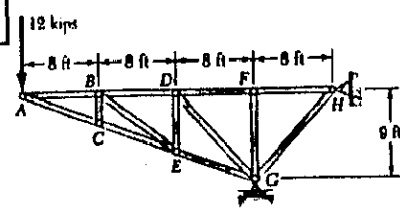

GIVEN:
TRUSS AND LOADING SHOWN.


FIND:
FORCE IN EACH MEMBER

FREE BODY: TRUSS

$\rightarrow \sum F_x = 0: H_x = 0$

$\uparrow \sum M_G = 0:$
 $(12 \text{ kips})(24 \text{ ft}) + H_y(8 \text{ ft}) = 0$
 $H_y = -36 \text{ kips}, H_y = 36 \text{ kips} \downarrow$

$\rightarrow \sum F_y = 0: G = 48 \text{ kips} \uparrow$

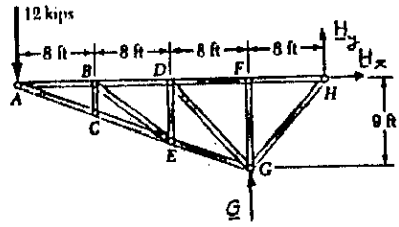

ZERO-FORCE MEMBERS


- JOINT F: $F_{DF} = F_{FH}$ (1) AND $F_{FG} = 0$
- JOINT C: $F_{AC} = F_{CE}$ (2) AND $F_{BC} = 0$
- JOINT B: $F_{AB} = F_{BD}$ (3) AND $F_{BE} = 0$
- JOINT E: $F_{CE} = F_{EG}$ (4) AND $F_{DE} = 0$
- JOINT D: $F_{BD} = F_{DF}$ (5) AND $F_{DG} = 0$

FREE BODY: JOINT A

$\frac{F_{AB}}{8} = \frac{F_{AC}}{\sqrt{73}} = \frac{12 \text{ kips}}{3}$

$F_{AB} = 32.0 \text{ kips T}$

$F_{AC} = 34.2 \text{ kips C}$

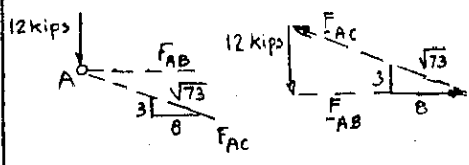


FROM EQS. (3), (5), AND (1): $F_{BD} = F_{DF} = F_{FH} = 32.0 \text{ kips T}$

FROM EQS. (2) AND (4): $F_{CE} = F_{EG} = 34.2 \text{ kips C}$


FREE BODY: JOINT H

$\uparrow \sum F_y = 0: -\frac{9}{12.04} F_{GH} - 36 \text{ kips} = 0$
 $F_{GH} = -48.16 \text{ kips}, F_{GH} = 48.2 \text{ kips C}$

$\rightarrow \sum F_x = -32 \text{ kips} - \frac{8}{12.04} (-48.16 \text{ kips}) = 0$ (CHECK)

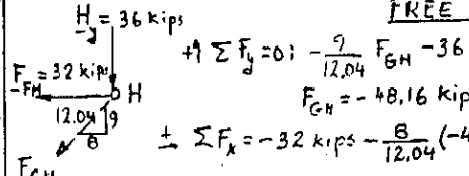

SUMMARY OF FORCES

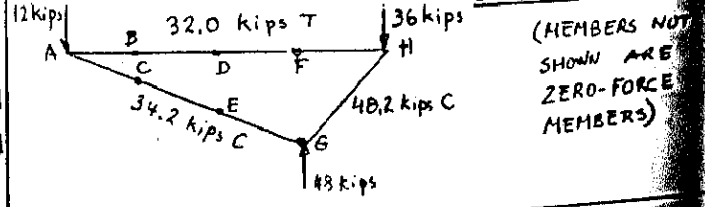


(MEMBERS NOT SHOWN ARE ZERO-FORCE MEMBERS)

6.29


DETERMINE WHETHER THE TRUSSES OF PROBS. 6.31a, 6.32a, AND 6.33a ARE SIMPLE TRUSSES.

TRUSS OF PROB. 6.31a




STARTING WITH TRIANGLE ABC AND ADDING TWO MEMBERS AT A TIME, WE OBTAIN SUCCESSIVELY JOINTS D, E, G, F, AND H, BUT CANNOT GO FURTHER. THUS, THIS TRUSS IS NOT A SIMPLE TRUSS

TRUSS OF PROB. 6.32a



STARTING WITH TRIANGLE HDI AND ADDING TWO MEMBERS AT A TIME, WE OBTAIN SUCCESSIVELY JOINTS A, E, J, AND B, BUT CANNOT GO FURTHER. THUS, THIS TRUSS IS NOT A SIMPLE TRUSS

TRUSS OF PROB. 6.33a




STARTING WITH TRIANGLE EHK AND ADDING TWO MEMBERS AT A TIME, WE OBTAIN SUCCESSIVELY JOINTS D, J, C, G, I, B, F, AND A, THUS COMPLETING THE TRUSS. THEREFORE, THIS TRUSS IS A SIMPLE TRUSS

6.30


DETERMINE WHETHER THE TRUSSES OF PROBLEMS 6.31b, 6.32b, AND 6.33b ARE SIMPLE TRUSSES.

TRUSS OF PROB. 6.31b




STARTING WITH TRIANGLE ABC AND ADDING TWO MEMBERS AT A TIME, WE OBTAIN SUCCESSIVELY JOINTS E, D, F, G, AND H, BUT CANNOT GO FURTHER. THUS, THIS TRUSS IS NOT A SIMPLE TRUSS

TRUSS OF PROB. 6.32b



STARTING WITH TRIANGLE CGM AND ADDING TWO MEMBERS AT A TIME, WE OBTAIN SUCCESSIVELY JOINTS B, L, F, A, K, J, THEN H, D, N, I, E, O, AND P, THUS COMPLETING THE TRUSS. THEREFORE, THIS TRUSS IS A SIMPLE TRUSS

TRUSS OF PROB. 6.33b




STARTING WITH TRIANGLE GLM AND ADDING TWO MEMBERS AT A TIME, WE OBTAIN JOINTS K AND J BUT CANNOT CONTINUE. STARTING INSTEAD WITH TRIANGLE BCH, WE OBTAIN JOINT D BUT CANNOT CONTINUE. THUS, THIS TRUSS IS NOT A SIMPLE TRUSS

6.31


DETERMINE THE ZERO-FORCE MEMBERS IN EACH OF THE TRUSSES SHOWN FOR THE GIVEN LOADING

TRUSS (a)

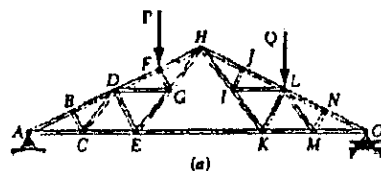

FB: JOINT B: $F_{BC} = 0$
 FB: JOINT C: $F_{CD} = 0$
 FB: JOINT J: $F_{JL} = 0$
 FB: JOINT I: $F_{IL} = 0$
 FB: JOINT N: $F_{MN} = 0$
 FB: JOINT M: $F_{LM} = 0$

THE ZERO-FORCE MEMBERS, THEREFORE, ARE BC, CD, IJ, IL, LM, MN



TRUSS (b)


FB: JOINT C: $F_{BC} = 0$
 FB: JOINT B: $F_{BE} = 0$
 FB: JOINT G: $F_{FG} = 0$
 FB: JOINT F: $F_{EF} = 0$
 FB: JOINT E: $F_{DE} = 0$
 FB: JOINT I: $F_{IJ} = 0$
 FB: JOINT M: $F_{MN} = 0$
 FB: JOINT N: $F_{KN} = 0$

THE ZERO-FORCE MEMBERS, THEREFORE, ARE BC, BE, DE, EF, FG, IJ, KN, MN

6.32

DETERMINE THE ZERO-FORCE MEMBERS IN EACH OF THE TRUSSES SHOWN FOR THE GIVEN LOADING


TRUSS (a)

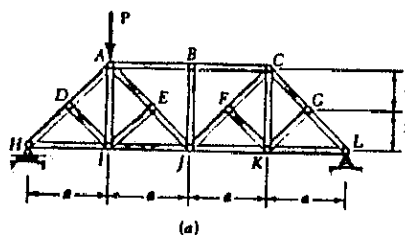

FB: JOINT B: $F_{BJ} = 0$
 FB: JOINT D: $F_{DI} = 0$
 FB: JOINT E: $F_{EI} = 0$
 FB: JOINT I: $F_{AI} = 0$
 FB: JOINT F: $F_{FK} = 0$
 FB: JOINT G: $F_{GK} = 0$
 FB: JOINT K: $F_{CK} = 0$

THE ZERO-FORCE MEMBERS, THEREFORE, ARE AI, BJ, CK, DI, EI, FK, GK

TRUSS (b)

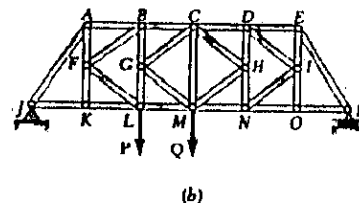

FB: JOINT K: $F_{FK} = 0$
 FB: JOINT O: $F_{IO} = 0$


THE ZERO-FORCE MEMBERS, THEREFORE, ARE FK AND IO

ALL OTHER MEMBERS ARE EITHER IN TENSION OR COMPRESSION.

33

DETERMINE THE ZERO-FORCE MEMBERS IN EACH OF THE TRUSSES SHOWN FOR THE GIVEN LOADING.


TRUSS (a)



- FB: JOINT F: $F_{BF} = 0$
- FB: JOINT B: $F_{BG} = 0$
- FB: JOINT C: $F_{GJ} = 0$
- FB: JOINT D: $F_{DH} = 0$
- FB: JOINT J: $F_{HJ} = 0$
- FB: JOINT H: $F_{EH} = 0$

(a)

THE ZERO-FORCE MEMBERS, THEREFORE, ARE BF, BG, DH, EH, GJ, HJ

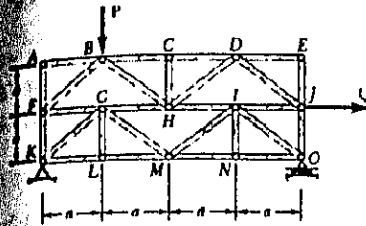

TRUSS (b)


- FB: JOINT A: $F_{AB} = F_{AF} = 0$
- FB: JOINT C: $F_{CH} = 0$
- FB: JOINT E: $F_{DE} = F_{EJ} = 0$
- FB: JOINT L: $F_{GL} = 0$
- FB: JOINT N: $F_{IN} = 0$

(b)

THE ZERO-FORCE MEMBERS, THEREFORE, ARE AB, AF, CH, DE, EJ, GL, IN

6.34

DETERMINE THE ZERO-FORCE MEMBERS IN THE TRUSS OF (a) PROB. 6.26, (b) PROB. 6.28

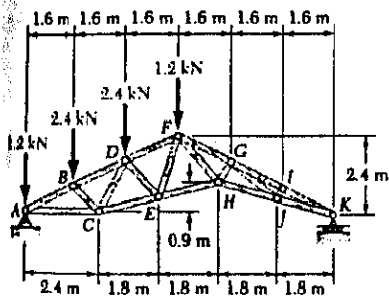


(a) TRUSS OF PROB. 6.26

- FB: JOINT I: $F_{IJ} = 0$
- FB: JOINT J: $F_{GJ} = 0$
- FB: JOINT G: $F_{GH} = 0$

THE ZERO-FORCE MEMBERS, THEREFORE, ARE GH, GJ, IJ


(b) TRUSS OF PROB. 6.28

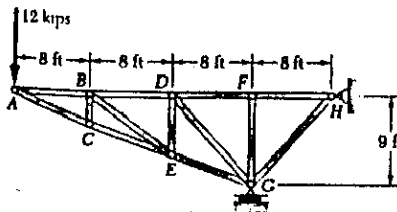


- FB: JOINT C: $F_{BC} = 0$
- FB: JOINT B: $F_{BE} = 0$
- FB: JOINT E: $F_{DE} = 0$
- FB: JOINT D: $F_{DG} = 0$
- FB: JOINT F: $F_{FG} = 0$

THE ZERO-FORCE MEMBERS, THEREFORE, ARE BC, BE, DE, DG, FG

* 6.35

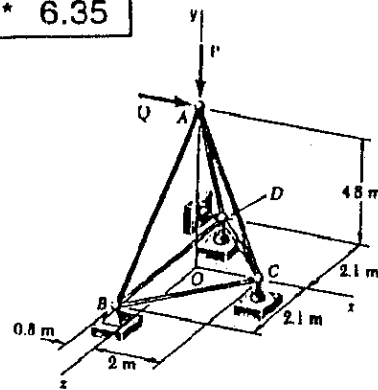

GIVE:
TRUSS SHOWN, WITH
 $P = (-2184 \text{ N})_j$
 $Q = 0$
FIND:
FORCE IN EACH MEMBER.

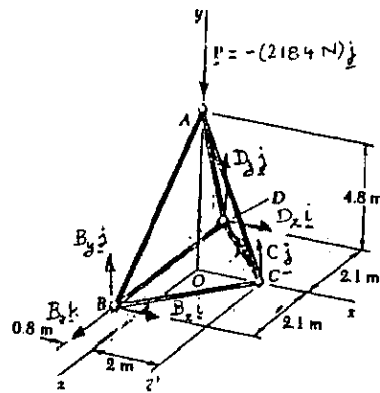

FREE BODY: TRUSS
FROM SYMMETRY:
 $D_x = B_x$ AND $D_y = B_y$
 $\sum F_x = 0: 2B_x = 0$
 $B_x = D_x = 0$
 $\sum F_z = 0: B_z = 0$
 $\sum M_{Cz} = 0:$
 $-2B_y(2.8 \text{ m}) + (2184 \text{ N})(2 \text{ m}) = 0$
 $B_y = 780 \text{ N}$
THUS: $B = (780 \text{ N})_j$

FREE BODY: A


$F_{AB} = F_{AB} \frac{AB}{AB} = \frac{F_{AB}}{5.30} (-0.8i - 4.8j + 2.1k)$
 $F_{AC} = F_{AC} \frac{AC}{AC} = \frac{F_{AC}}{5.20} (2i - 4.8j)$
 $F_{AD} = F_{AD} \frac{AD}{AD} = \frac{F_{AD}}{5.30} (-0.8i - 4.8j - 2.1k)$
 $\sum F = 0: F_{AB} + F_{AC} + F_{AD} - (2184 \text{ N})_j = 0$
SUBSTITUTING FOR F_{AB}, F_{AC}, F_{AD} , AND EQUATING TO ZERO THE COEFFICIENTS OF i, j, k :
(1) $-\frac{0.8}{5.30} (F_{AB} + F_{AD}) + \frac{2}{5.20} F_{AC} = 0$
(2) $-\frac{4.8}{5.30} (F_{AB} + F_{AD}) - \frac{4.8}{5.20} F_{AC} - 2184 \text{ N} = 0$
(3) $\frac{2.1}{5.30} (F_{AB} - F_{AD}) = 0 \implies F_{AD} = F_{AB}$

MULTIPLY (1) BY -6 AND ADD (2):
 $-(16.8/5.20) F_{AC} - 2184 \text{ N} = 0, F_{AC} = -676 \text{ N}, F_{AC} = 676 \text{ N}$
SUBSTITUTE FOR F_{AC} AND F_{AD} IN (1):
 $-(0.8/5.30) 2F_{AB} + (2/5.20)(-676 \text{ N}) = 0, F_{AB} = -861.25 \text{ N}$
 $F_{AB} = F_{AD} = 861 \text{ N}$


FREE BODY: B

$F_{AB} = (861.25 \text{ N}) \frac{AB}{AB} = -(130 \text{ N})_i - (780 \text{ N})_j + (341.25 \text{ N})_k$
 $F_{BC} = F_{BC} \frac{BC}{BC} = F_{BC} (0.8i - 0.6k)$
 $F_{BD} = -F_{BD} k$
 $B = (780 \text{ N})_j$
 $\sum F = 0: F_{AB} + F_{BC} + F_{BD} + (780 \text{ N})_j = 0$
SUBSTITUTING FOR F_{AB}, F_{BC}, F_{BD} AND EQUATING TO ZERO THE COEFFICIENTS OF i AND k :
(1) $-130 \text{ N} + 0.8 F_{BC} = 0 \implies F_{BC} = +162.5 \text{ N}, F_{BC} = 162.5 \text{ N}$
(2) $341.25 \text{ N} - 0.6 F_{BC} - F_{BD} = 0$
 $F_{BD} = 341.25 - 0.6(162.5) = +243.75 \text{ N}$
 $F_{BD} = 244 \text{ N}$
FROM SYMMETRY: $F_{CD} = F_{BC}$
 $F_{CD} = 162.5 \text{ N}$


6.36

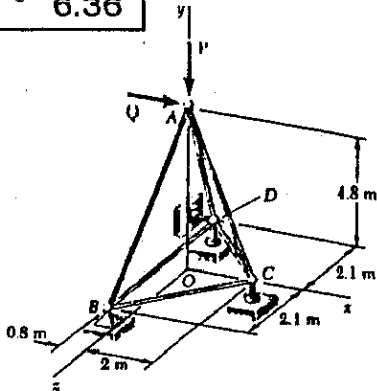

GIVEN:
TRUSS SHOWN, WITH
 $P=0$
 $Q=(2968\text{ N})\underline{i}$
FIND:
FORCE IN EACH MEMBER

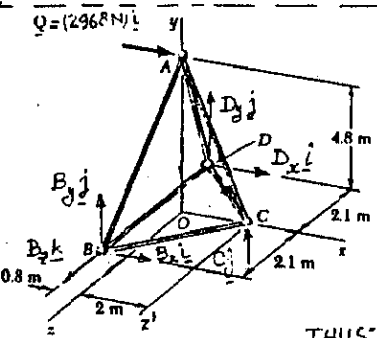

FREE BODY: TRUSS
FROM SYMMETRY:
 $D_x = B_x$ AND $D_y = B_y$
 $\sum F_x = 0: 2B_x + 2968\text{ N} = 0$
 $B_x = D_x = -1484\text{ N}$
 $\sum M_{Cz} = 0$
 $-2B_y(2.8\text{ m}) - (2968\text{ N})(4.8\text{ m}) = 0$
 $B_y = -2544\text{ N}$
THUS: $\underline{B} = -(1484\text{ N})\underline{i} - (2544\text{ N})\underline{j}$

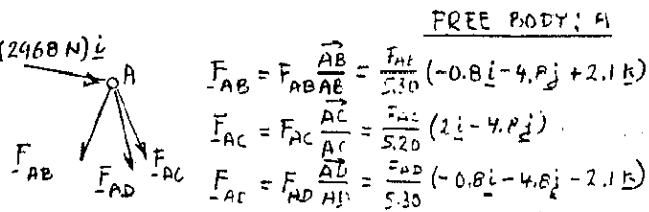

FREE BODY: A

$$F_{AB} = F_{AB} \frac{\vec{AB}}{AB} = \frac{F_{AB}}{5.30} (-0.8\underline{i} - 4.8\underline{j} + 2.1\underline{k})$$

$$F_{AC} = F_{AC} \frac{\vec{AC}}{AC} = \frac{F_{AC}}{5.20} (2\underline{i} - 4.8\underline{j})$$

$$F_{AD} = F_{AD} \frac{\vec{AD}}{AD} = \frac{F_{AD}}{5.30} (-0.8\underline{i} - 4.8\underline{j} - 2.1\underline{k})$$

$$\sum \underline{F} = 0: F_{AB} + F_{AC} + F_{AD} + (2968\text{ N})\underline{i} = 0$$

SUBSTITUTING FOR F_{AB} , F_{AC} , F_{AD} AND EQUATING TO ZERO THE COEFFICIENTS OF \underline{i} , \underline{j} , \underline{k} :

$$\textcircled{1} -\frac{0.8}{5.30}(F_{AB} + F_{AD}) + \frac{2}{5.20}F_{AC} + 2968\text{ N} = 0 \quad (1)$$


$$\textcircled{2} -\frac{4.8}{5.20}(F_{AB} + F_{AD}) - \frac{4.8}{5.20}F_{AC} = 0 \quad (2)$$

$$\textcircled{3} \frac{2.1}{5.30}(F_{AB} - F_{AD}) = 0 \quad F_{AB} = F_{AD}$$


MULTIPLY (1) BY -6 AND ADD (2):
 $-(16.8/5.20)F_{AC} - 6(2968\text{ N}) = 0, F_{AC} = -5512\text{ N}, F_{AC} = 5510\text{ N C}$
SUBSTITUTE FOR F_{AC} AND F_{AD} IN (2):
 $-(4.8/5.30)2F_{AB} - (4.8/5.20)(-5512\text{ N}) = 0, F_{AB} = +2809\text{ N}$
 $F_{AB} = F_{AD} = 2810\text{ N T}$

FREE BODY: B
 $F_{Bx} = (2809\text{ N}) \frac{0.8}{5.30} = (424\text{ N})\underline{i} + (2544\text{ N})\underline{j} - (1113\text{ N})\underline{k}$
 $F_{Bc} = F_{Bc} \frac{(2.8\underline{i} - 2.1\underline{k})}{3.5} = F_{Bc}(0.8\underline{i} - 0.6\underline{k})$
 $F_{BD} = -F_{BD}\underline{k}$
 $\sum \underline{F} = 0: F_{Bx} + F_{Bc} + F_{BD} - (1484\text{ N})\underline{i} - (2544\text{ N})\underline{j} = 0$
SUBSTITUTING FOR F_{Bx} , F_{Bc} , F_{BD} AND EQUATING TO ZERO THE COEFFICIENTS OF \underline{i} AND \underline{k} :


6.37

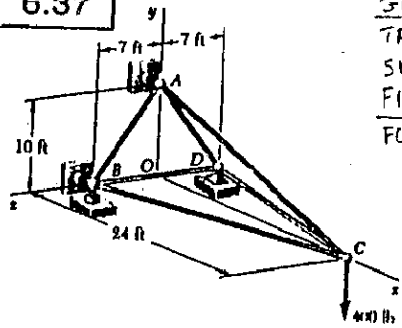

GIVEN:
TRUSS AND LOADING SHOWN
FIND:
FORCE IN EACH MEMBER

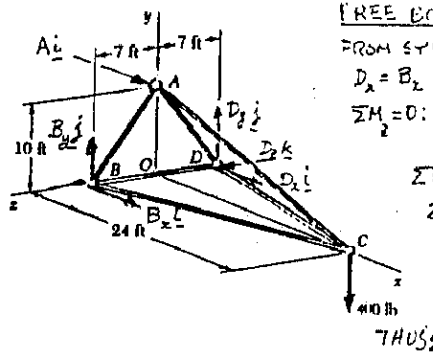

FREE BODY: TRUSS
FROM SYMMETRY:
 $D_x = B_x$ AND $D_z = B_z$
 $\sum M_x = 0: -A(10\text{ ft}) - (400\text{ lb})(24\text{ ft}) = 0$
 $A = -960\text{ lb}$
 $\sum F_x = 0: B_x + D_x + A = 0$
 $2B_x - 960\text{ lb} = 0, B_x = 480\text{ lb}$
 $\sum F_y = 0: B_y - D_y - 400\text{ lb} = 0$
 $2B_y = 400\text{ lb}$
 $B_y = 200\text{ lb}$
THUS: $\underline{B} = (480\text{ lb})\underline{i} + (200\text{ lb})\underline{j}$



FREE BODY: C

$$F_{CA} = F_{AC} \frac{\vec{CA}}{CA} = \frac{F_{AC}}{26} (-24\underline{i} - 10\underline{j})$$

$$F_{CB} = F_{BC} \frac{\vec{CB}}{CB} = \frac{F_{BC}}{25} (-24\underline{i} + 7\underline{k})$$

$$F_{CD} = F_{CD} \frac{\vec{CD}}{CD} = \frac{F_{CD}}{25} (-24\underline{i} - 7\underline{k})$$

$$\sum \underline{F} = 0: F_{CA} + F_{CB} + F_{CD} - (400\text{ lb})\underline{j} = 0$$


SUBSTITUTING FOR F_{CA} , F_{CB} , F_{CD} AND EQUATING TO ZERO THE COEFFICIENTS OF \underline{i} , \underline{j} , \underline{k} :

$$\textcircled{1} -\frac{24}{26}F_{AC} - \frac{24}{25}(F_{BC} + F_{CD}) = 0 \quad (1)$$

$$\textcircled{2} \frac{10}{26}F_{AC} - 400\text{ lb} = 0 \quad F_{AC} = 1040\text{ lb T}$$

$$\textcircled{3} \frac{7}{25}(F_{BC} - F_{CD}) = 0 \quad F_{CD} = F_{BC}$$

SUBSTITUTE FOR F_{AC} AND F_{CD} IN EQ. (1):
 $-\frac{24}{26}(1040\text{ lb}) - \frac{24}{25}(2F_{BC}) = 0 \quad F_{BC} = -500\text{ lb}$
 $F_{BC} = F_{CD} = 500\text{ lb C}$



FREE BODY: B

$$F_{BC} = (500\text{ lb}) \frac{\vec{CB}}{CB} = -(480\text{ lb})\underline{i} + (140\text{ lb})\underline{k}$$

$$F_{BA} = F_{AB} \frac{\vec{BA}}{BA} = \frac{F_{AB}}{12.21} (10\underline{j} - 7\underline{k})$$


$$F_{BD} = -F_{BD}\underline{k}$$

$$\sum \underline{F} = 0: F_{BA} + F_{BD} + F_{BC} + (480\text{ lb})\underline{i} + (200\text{ lb})\underline{j} = 0$$

SUBSTITUTING FOR F_{BA} , F_{BD} , F_{BC} AND EQUATING TO ZERO THE COEFFICIENTS OF \underline{j} AND \underline{k} :


$$\textcircled{1} 10F_{AB} = 0 \quad F_{AB} = 0$$

6.38

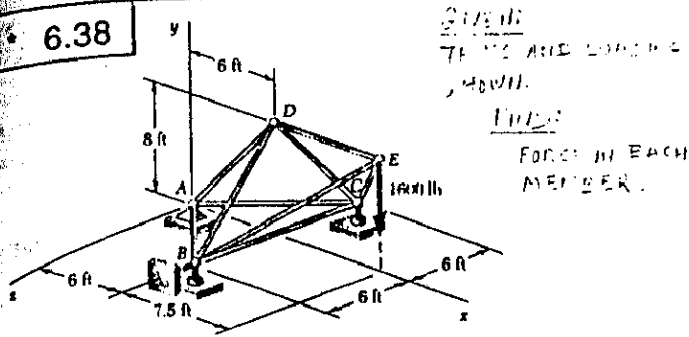

Find the force in each member.


FREE BODY: TRUSS

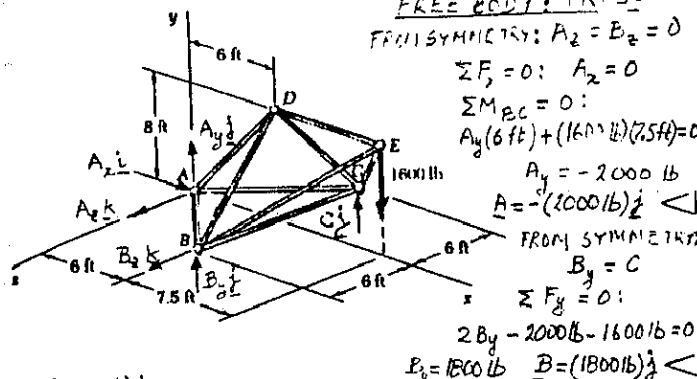

FROM SYMMETRY: $A_z = B_z = 0$
 $\sum F_x = 0: A_x = 0$
 $\sum M_{BC} = 0:$
 $A_y(6 \text{ ft}) + (1600 \text{ lb})(7.5 \text{ ft}) = 0$
 $A_y = -2000 \text{ lb}$
 $A = -(2000 \text{ lb})\underline{j}$
 FROM SYMMETRY: $B_x = C$
 $\sum F_y = 0:$

$2B_y - 2000 \text{ lb} - 1600 \text{ lb} = 0$
 $B_y = 1800 \text{ lb}$ $B = (1800 \text{ lb})\underline{j}$

FREE BODY: A

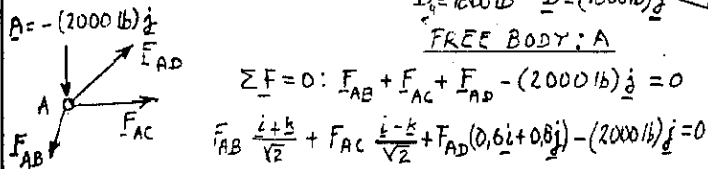

$\sum F = 0: F_{AB} + F_{AC} + F_{AD} - (2000 \text{ lb})\underline{j} = 0$


$F_{AB} \frac{\underline{i} + \underline{j}}{\sqrt{2}} + F_{AC} \frac{\underline{i} - \underline{j}}{\sqrt{2}} + F_{AD}(0.6\underline{i} + 0.8\underline{j}) - (2000 \text{ lb})\underline{j} = 0$

Factoring $\underline{i}, \underline{j}, \underline{k}$ and equating their coefficients to zero:

$\frac{1}{\sqrt{2}} F_{AB} + \frac{1}{\sqrt{2}} F_{AC} + 0.6 F_{AD} = 0$ (1)
 $0.8 F_{AD} - 2000 \text{ lb} = 0$ $F_{AD} = 2500 \text{ lb T}$
 $\frac{1}{\sqrt{2}} F_{AB} - \frac{1}{\sqrt{2}} F_{AC} = 0$ $F_{AC} = F_{AB}$

Substitute for F_{AD} and F_{AC} into (1):
 $\frac{2}{\sqrt{2}} F_{AB} + 0.6(2500 \text{ lb}) = 0$, $F_{AB} = -1060.7 \text{ lb}$, $F_{AB} = F_{AC} = 1061 \text{ lb C}$

FREE BODY: B

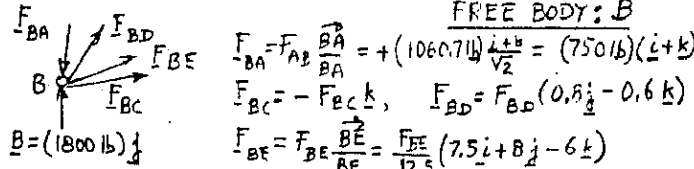

$F_{BA} = F_{AB} \frac{\underline{BA}}{BA} = + (1060.7 \text{ lb}) \frac{\underline{i} + \underline{j}}{\sqrt{2}} = (750 \text{ lb})(\underline{i} + \underline{j})$

$F_{BC} = -F_{BC} \underline{k}$, $F_{BD} = F_{BD}(0.8\underline{j} - 0.6\underline{k})$

$F_{BE} = F_{BE} \frac{\underline{BE}}{BE} = \frac{F_{BE}}{12.5} (7.5\underline{i} + 8\underline{j} - 6\underline{k})$


$\sum F = 0: F_{BA} + F_{BC} + F_{BD} + F_{BE} + (1800 \text{ lb})\underline{j} = 0$

Substitute for $F_{BA}, F_{BC}, F_{BD}, F_{BE}$ and equate to zero the coefficients of $\underline{i}, \underline{j}, \underline{k}$:

(1) $750 \text{ lb} + (7.5/12.5)F_{BE} = 0$, $F_{BE} = -1250 \text{ lb}$, $F_{BE} = 1250 \text{ lb C}$
 (2) $0.8 F_{BD} + (8/12.5)(-1250 \text{ lb}) + 1800 \text{ lb} = 0$, $F_{BD} = 1250 \text{ lb C}$
 (3) $750 \text{ lb} - F_{BC} - 0.6(-1250 \text{ lb}) - \frac{6}{12.5}(-1250 \text{ lb}) = 0$
 $F_{BC} = 2100 \text{ lb T}$

From symmetry: $F_{CE} = F_{CD} = 1250 \text{ lb C}$

FREE BODY: D




$\sum F = 0: F_{DA} + F_{DB} + F_{DC} + F_{DE} = 0$

We now substitute for F_{DA}, F_{DB}, F_{DC} and equate to zero the coefficient of \underline{i} . Only F_{DA} contains \underline{i} and its coefficient is $0.6 F_{DA} = -0.6(2500 \text{ lb}) = -1500 \text{ lb}$


(1) $-1500 \text{ lb} + F_{DE} = 0$ $F_{DE} = 1500 \text{ lb T}$

6.39

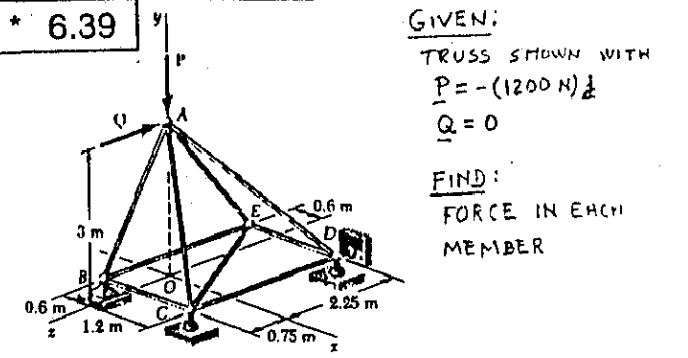

GIVEN: $P = -(1200 \text{ N})\underline{j}$
 $Q = 0$
 FIND: FORCE IN EACH MEMBER


FREE BODY: TRUSS

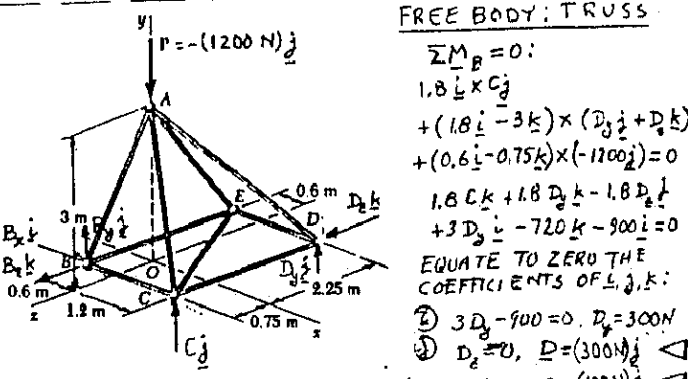

$\sum M_B = 0:$
 $1.8 \underline{i} \times C \underline{j}$
 $+ (1.8 \underline{i} - 3 \underline{k}) \times (D \underline{j} + D \underline{k})$
 $+ (0.6 \underline{i} - 0.75 \underline{k}) \times (-1200 \underline{j}) = 0$
 $1.8 C \underline{k} + 1.8 D \underline{k} - 1.8 D \underline{j}$
 $+ 3 D \underline{j} - 720 \underline{k} - 900 \underline{i} = 0$
 EQUATE TO ZERO THE COEFFICIENTS OF $\underline{i}, \underline{j}, \underline{k}$:
 (1) $3 D - 900 = 0$, $D = 300 \text{ N}$
 (2) $D = 0$, $D = (300 \text{ N})\underline{j}$
 (3) $1.8 C + 1.8(300) - 720 = 0$, $C = (100 \text{ N})\underline{k}$
 $B = (800 \text{ N})\underline{j}$

$\sum F = 0: B + 300 \underline{j} + 100 \underline{k} - 1200 \underline{j} = 0$ $B = (800 \text{ N})\underline{j}$

FREE BODY: B

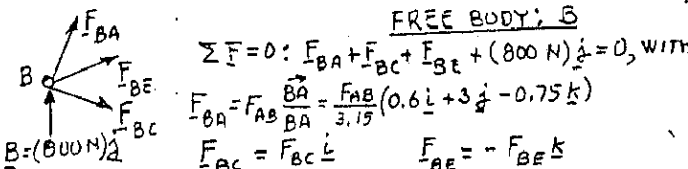


$\sum F = 0: F_{BA} + F_{BC} + F_{BE} + (800 \text{ N})\underline{j} = 0$, WITH

$F_{BA} = F_{AB} \frac{\underline{BA}}{BA} = \frac{F_{AB}}{3.15} (0.6 \underline{i} + 3 \underline{j} - 0.75 \underline{k})$
 $F_{BC} = F_{BC} \underline{i}$ $F_{BE} = -F_{BE} \underline{k}$

SUBSTITUTE AND EQUATE TO ZERO THE COEFF. OF $\underline{j}, \underline{i}, \underline{k}$:

(1) $(3/3.15)F_{AB} + 800 \text{ N} = 0$, $F_{AB} = -840 \text{ N}$, $F_{AB} = 840 \text{ N C}$
 (2) $(0.6/3.15)(-840 \text{ N}) + F_{BC} = 0$ $F_{BC} = 160 \text{ N T}$
 (3) $(-0.75/3.15)(-840 \text{ N}) - F_{BE} = 0$ $F_{BE} = 200 \text{ N T}$

FREE BODY: C

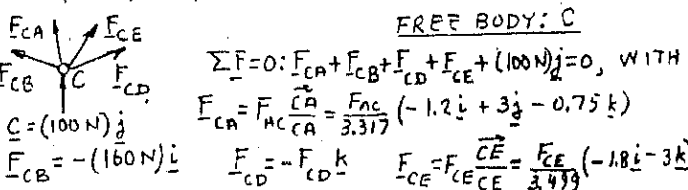


$\sum F = 0: F_{CA} + F_{CB} + F_{CD} + F_{CE} + (100 \text{ N})\underline{k} = 0$, WITH

$F_{CA} = F_{AC} \frac{\underline{CA}}{CA} = \frac{F_{AC}}{3.317} (-1.2 \underline{i} + 3 \underline{j} - 0.75 \underline{k})$
 $F_{CB} = -(160 \text{ N})\underline{i}$ $F_{CD} = -F_{CD} \underline{k}$ $F_{CE} = F_{CE} \frac{\underline{CE}}{CE} = \frac{F_{CE}}{3.499} (-1.8 \underline{i} - 3 \underline{k})$

SUBSTITUTE AND EQUATE TO ZERO THE COEFF. OF $\underline{j}, \underline{i}, \underline{k}$:

(1) $(3/3.317)F_{AC} + 100 \text{ N} = 0$, $F_{AC} = -110.57 \text{ N}$, $F_{AC} = 110.6 \text{ N C}$
 (2) $-\frac{1.2}{3.317}(-110.57) - 160 - \frac{1.8}{3.499}F_{CE} = 0$, $F_{CE} = -233.3$, $F_{CE} = 233 \text{ N C}$
 (3) $-\frac{0.75}{3.317}(-110.57) - F_{CD} - \frac{3}{3.499}(-233.3) = 0$ $F_{CD} = 225 \text{ N T}$

FREE BODY: D

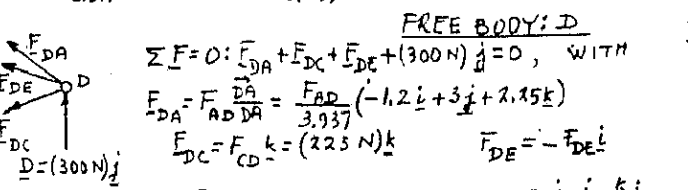


$\sum F = 0: F_{DA} + F_{DC} + F_{DE} + (300 \text{ N})\underline{j} = 0$, WITH

$F_{DA} = F_{AD} \frac{\underline{DA}}{DA} = \frac{F_{AD}}{3.937} (-1.2 \underline{i} + 3 \underline{j} + 2.25 \underline{k})$
 $F_{DC} = F_{CD} \underline{k} = (225 \text{ N})\underline{k}$ $F_{DE} = -F_{DE} \underline{i}$

SUBSTITUTE AND EQUATE TO ZERO THE COEFF. OF $\underline{j}, \underline{i}, \underline{k}$:


(1) $(3/3.937)F_{AD} + 300 \text{ N} = 0$, $F_{AD} = -393.7 \text{ N}$, $F_{AD} = 394 \text{ N C}$
 (2) $(-1.2/3.937)(-393.7 \text{ N}) - F_{DE} = 0$ $F_{DE} = 120 \text{ N T}$
 (3) $(2.25/3.937)(-393.7 \text{ N}) + 225 \text{ N} = 0$ (CHECKS)

FREE BODY: E



MEMBER AE IS THE ONLY MEMBER AT E WHICH DOES NOT LIE IN THE XZ PLANE. THEREFORE, IT IS A ZERO-FORCE MEMBER.
 $F_{AE} = 0$

6.40

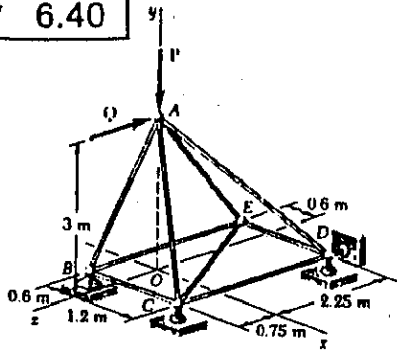

GIVEN:

TRUSS SHOWN WITH
 $P=0$
 $Q=(-900N)\underline{j}$

FIND:

FORCE IN EACH MEMBER.

FREE BODY: TRUSS

$$\sum M_B = 0: 1.8\hat{i} \times C\hat{j} + (1.8\hat{i} - 3\hat{k}) \times (D_y\hat{j} + D_z\hat{k}) + (0.6\hat{i} + 3\hat{j} - 0.75\hat{k}) \times (-900N)\hat{j} = 0$$


$$1.8C_k + 1.8D_y\hat{k} - 1.8D_z\hat{j} + 3D_y\hat{i} + 540\hat{j} - 2700\hat{k} = 0$$

EQUATE TO ZERO THE COEFF. OF $\hat{i}, \hat{j}, \hat{k}$:

$$3D_y - 2700 = 0 \Rightarrow D_y = 900N$$

$$-1.8D_z + 540 = 0 \Rightarrow D_z = 300N$$

$$1.8C_k + 18D_y = 0, C_k = -D_y = -900N$$

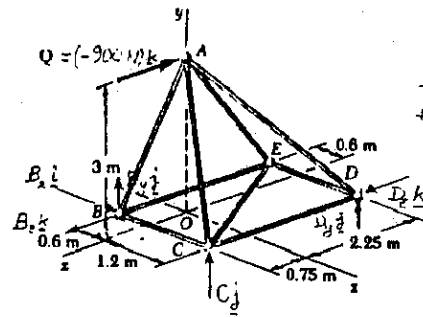

THUS: $C = -(900N)\hat{j}$; $D = (900N)\hat{j} + (300N)\hat{k}$

$$\sum F = 0: B - 900\hat{j} + 900\hat{j} + 300\hat{k} - 900\hat{k} = 0 \Rightarrow B = (600N)\hat{k}$$

FREE BODY: B



SINCE B IS ALIGNED WITH MEMBER BE:
 $F_{AB} = F_{BC} = 0, F_{BE} = 600NT$

FREE BODY: C

$$\sum F = 0: F_{CA} + F_{CD} + F_{CE} - (900N)\hat{j} = 0, \text{ WITH}$$

$$F_{CA} = F_{AC} \frac{CA}{CA} = \frac{F_{AC}}{3.317} (-1.2\hat{i} + 3\hat{j} - 0.75\hat{k})$$

$$F_{CD} = -F_{DC} \frac{CD}{CD} = -F_{DC} \frac{(-1.8\hat{i} - 3\hat{k})}{3.439}$$



SUBSTITUTE AND EQUATE TO ZERO THE COEFF. OF $\hat{j}, \hat{i}, \hat{k}$:

(i) $(3/3.317)F_{AC} - 900N = 0, F_{AC} = 995.1N, F_{AC} = 995NT$


(ii) $-\frac{1.2}{3.317}(995.1) - \frac{1.8}{3.439}F_{DC} = 0, F_{DC} = -699.8N, F_{DC} = 700NC$

(iii) $-\frac{0.75}{3.317}(995.1) - F_{CD} - \frac{3}{3.439}(-699.8) = 0, F_{CD} = 375NT$

FREE BODY: D

$$\sum F = 0: F_{DA} + F_{DC} + (375N)\hat{k} + (900N)\hat{j} + (300N)\hat{k} = 0$$

WITH $F_{DA} = F_{AD} \frac{DA}{DA} = \frac{F_{AD}}{3.437} (-1.2\hat{i} + 3\hat{j} + 2.25\hat{k})$
 AND $F_{DE} = -F_{ED}$



SUBSTITUTE AND EQUATE TO ZERO THE COEFF. OF $\hat{i}, \hat{j}, \hat{k}$:

(i) $(3/3.437)F_{AD} + 900N = 0, F_{AD} = -1181.1N, F_{AD} = 1181NC$


(ii) $-(1.2/3.437)(-1181.1N) - F_{DE} = 0, F_{DE} = 360NT$

(iii) $(2.25/3.437)(-1181.1N) + 375N + 300N = 0$ (CHECKS)


FREE BODY: E

MEMBER AE IS THE ONLY MEMBER AT E WHICH DOES NOT LIE IN THE XE PLANE. THEREFORE, IT IS A ZERO-FORCE MEMBER.

$F_{AE} = 0$



6.41

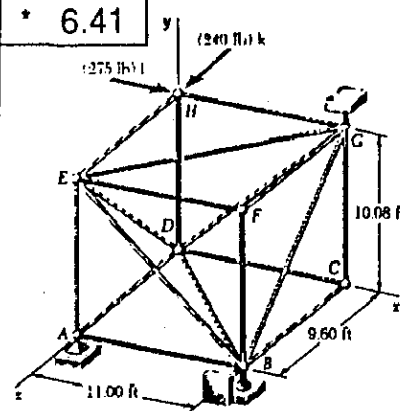

GIVEN:

TRUSS AND LOADING. SHOW
 (a) CHECK THAT TRUSS IS SIMPLE TRUSS, COMPLETELY CONSTRAINED, AND REACTIONS STATICALLY DETERMINABLE
 (b) FIND:

FORCE IN EACH OF THE SIX MEMBERS JOINED AT E.


- CHECK SIMPLE TRUSS, (1) START WITH TETRAHEDRON BEFG
 - ADD MEMBER, BD, ED, GD JOINING AT D.
 - ADD MEMBERS BA, DA, EA JOINING AT A.
 - ADD MEMBERS DH, EH, GH JOINING AT H.
 - ADD MEMBERS BC, DC, GC JOINING AT C
- TRUSS HAS BEEN COMPLETED; IT IS A SIMPLE TRUSS

FREE BODY: TRUSS

CHECK CONSTRAINTS AND REACTIONS:

SIX UNKNOWN REACTIONS - OK - HOWEVER SUPPORTS AT A AND B CONSTRAIN TRUSS TO ROTATE ABOUT AB AND SUPPORT AT G PREVENTS SUCH A ROTATION. THUS TRUSS IS COMPLETELY CONSTRAINED AND REACTIONS ARE STATICALLY DETERMINABLE

DETERMINATION OF REACTIONS:

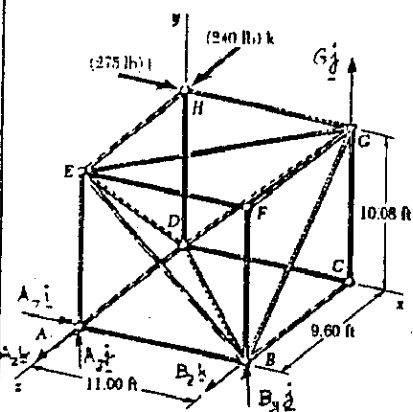

$$\sum M_A = 0: 11\hat{i} \times (B_y\hat{j} + B_z\hat{k}) + (11\hat{i} - 9.6\hat{k}) \times G\hat{j} + (10.08\hat{j} - 9.6\hat{k}) \times (275\hat{i} + 240\hat{k}) = 0$$

$$11B_y\hat{k} - 11B_z\hat{j} + 11G\hat{k} + 9.6G\hat{j} - (10.08)(275)\hat{k} + (10.08)(240)\hat{i} - (9.6)(275)\hat{j} = 0$$

EQUATE TO ZERO THE COEFF. OF $\hat{i}, \hat{j}, \hat{k}$:

(i) $9.6G + (10.08)(240) = 0 \Rightarrow G = -252lb, G = (-252lb)\hat{j}$

(ii) $-11B_z - (9.6)(275) = 0 \Rightarrow B_z = -240lb$

(iii) $11B_y + 11(-252) - (10.08)(275) = 0, B_y = 504lb$
 $B = (504lb)\hat{j} - (240lb)\hat{k}$

$$\sum F = 0: A + (504lb)\hat{j} - (240lb)\hat{k} - (252lb)\hat{j} + (275lb)\hat{i} + (240lb)\hat{k} = 0$$

$$A = -(275lb)\hat{i} - (252lb)\hat{j}$$

ZERO-FORCE MEMBERS

THE DETERMINATION OF THESE MEMBERS WILL FACILITATE OUR SOLUTION

FB: C. WRITING $\sum F_x = 0, \sum F_y = 0, \sum F_z = 0$ YIELDS $F_{BC} = F_{CD} = F_{CG} = 0$

FB: E. WRITING $\sum F_x = 0, \sum F_y = 0, \sum F_z = 0$ YIELDS $F_{BE} = F_{EF} = F_{EG} = 0$


FB: A. SINCE $A_x = 0$, WRITING $\sum F_x = 0$ YIELDS $F_{AD} = 0$

FB: H. WRITING $\sum F_y = 0$ YIELDS $F_{DH} = 0$


FB: D. SINCE $F_{AD} = F_{CD} = F_{DH} = 0$, WE NEED CONSIDER ONLY MEMBERS DB, DE, AND DG.

SINCE F_{DE} IS THE ONLY FORCE NOT CONTAINED IN PLANE BDG, IT MUST BE ZERO. SIMILAR REASONING SHOWS THAT THE OTHER TWO FORCES ARE ALSO ZERO $F_{BD} = F_{DE} = F_{DG} = 0$

(CONTINUED)



6.41 CONTINUED

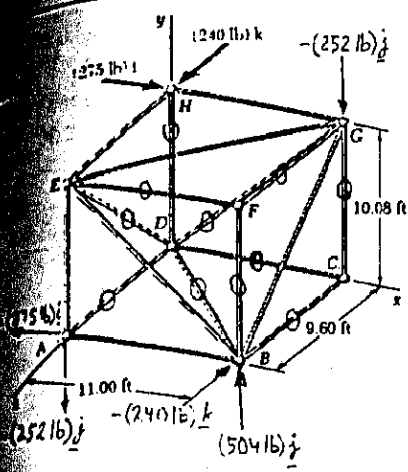

THE RESULTS OBTAINED FOR THE REACTIONS AT THE SUPPORTS AND THE ZERO-FORCE MEMBERS ARE SHOWN ON THE ADJACENT FIGURE.


ZERO-FORCE MEMBERS ARE INDICATED BY A ZERO ("0").

(b) FORCE IN EACH OF THE MEMBERS JOINED AT E

WE ALREADY FOUND THAT $F_{DE} = F_{EF} = 0$

FREE BODY: A $\sum F_y = 0$ YIELDS $F_{AE} = 252 \text{ lb T}$

FREE BODY: H $\sum F_x = 0$ YIELDS $F_{EH} = 240 \text{ lb L}$



FREE BODY: E

$$\sum \underline{F} = 0: F_{EB} + F_{EG} + (240 \text{ lb})\underline{k} - (252 \text{ lb})\underline{j} = 0$$


$$\frac{F_{BE}(11\hat{i} - 10.08\hat{j})}{14.92} + \frac{F_{EG}(11\hat{i} - 9.6\hat{j})}{14.6} + 240\hat{k} - 252\hat{j} = 0$$

EQUATE TO ZERO THE COEFF. OF \underline{j} AND \underline{k} :

① $-(10.08/14.92)F_{BE} - 252 = 0$ $F_{BE} = 373 \text{ lb C}$

② $-(9.6/14.6)F_{EG} + 240 = 0$ $F_{EG} = 365 \text{ lb T}$

6.42

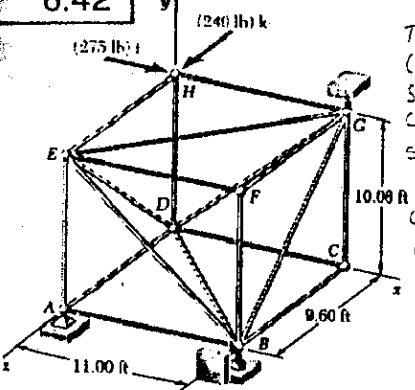

GIVEN: TRUSS AND LOADING SHOWN. (a) CHECK THAT TRUSS IS SIMPLE TRUSS, COMPLETELY CONSTRAINED, AND REACTIONS STATICALLY DETERMINATE. (b) **FIND:** FORCE IN EACH OF THE SIX MEMBERS JOINED AT G.


SEE SOLUTION OF PROB. 6.41 FOR PART (a) AND FOR REACTIONS AND ZERO-FORCE MEMBERS

(b) FORCE IN EACH OF THE MEMBERS JOINED AT G.

WE ALREADY KNOW (SEE FIG. AT TOP OF PAGE) THAT

$$F_{CG} = F_{DG} = F_{FG} = 0$$

FREE BODY: H $\sum F_x = 0$ YIELDS: $F_{GH} = 275 \text{ lb C}$

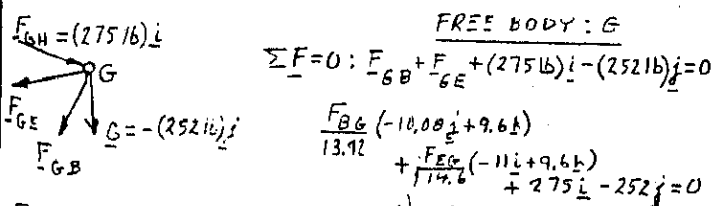

FREE BODY: G

$$\sum \underline{F} = 0: F_{GB} + F_{GE} + (275 \text{ lb})\underline{i} - (252 \text{ lb})\underline{j} = 0$$

$$\frac{F_{BG}(-10.08\hat{j} + 9.6\hat{k})}{13.92} + \frac{F_{EG}(-11\hat{i} + 9.6\hat{k})}{14.6} + 275\hat{i} - 252\hat{j} = 0$$


EQUATE TO ZERO THE COEFF. OF \underline{i} , \underline{j} , \underline{k} :

① $-(11/14.6)F_{EG} + 275 = 0$ $F_{EG} = 365 \text{ lb T}$

② $-(10.08/13.92)F_{BG} - 252 = 0$ $F_{BG} = 348 \text{ lb C}$

③ $(9.6/13.92)(-348) + (9.6/14.6)(365) = 0$ (CHECKS)

6.43

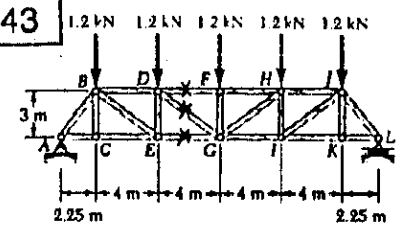


GIVEN: MANSARD ROOF TRUSS AND LOADING SHOWN. **FIND:** FORCE IN MEMBERS DF, DG, AND EG.

REACTIONS AT SUPPORTS

BECAUSE OF THE SYMMETRY OF THE TRUSS AND LOADING, $A_x = 0, A_y = L = \frac{1}{2}(\text{TOTAL LOAD}) = \frac{1}{2}(6 \text{ kN})$ $A = L = 3 \text{ kN } \uparrow$

WE PASS A SECTION THROUGH DF, DG, AND EG AND USE THE FREE BODY SHOWN.



$$\sum M_C = 0: (1.2 \text{ kN})(8 \text{ m}) + (1.2 \text{ kN})(4 \text{ m}) - (3 \text{ kN})(10.25 \text{ m}) - F_{DF}(3 \text{ m}) = 0$$

$$F_{DF} = -5.45 \text{ kN}, F_{DF} = 5.45 \text{ kN C}$$


$$\sum F_y = 0: 3 \text{ kN} - 1.2 \text{ kN} - 1.2 \text{ kN} - \frac{3}{5}F_{DG} = 0$$

$$F_{DG} = +1.00 \text{ kN}, F_{DG} = 1.00 \text{ kN T}$$

$$\sum M_D = 0: (1.2 \text{ kN})(4 \text{ m}) - (3 \text{ kN})(6.25 \text{ m}) + F_{EG}(3 \text{ m}) = 0$$

$$F_{EG} = +4.65 \text{ kN}, F_{EG} = 4.65 \text{ kN T}$$

6.44

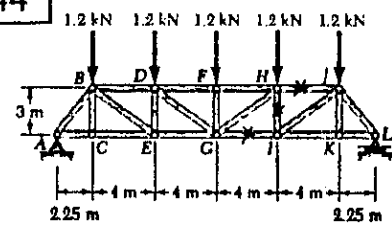


GIVEN: MANSARD ROOF TRUSS AND LOADING SHOWN. **FIND:** FORCE IN MEMBERS GI, HI, AND HJ.

REACTIONS AT SUPPORTS

BECAUSE OF THE SYMMETRY OF THE TRUSS AND LOADING, $A_x = 0, A_y = L = \frac{1}{2}(\text{TOTAL LOAD}) = \frac{1}{2}(6 \text{ kN})$ $A = L = 3 \text{ kN } \uparrow$

WE PASS A SECTION THROUGH GI, HI, AND HJ AND USE THE FREE BODY SHOWN.



$$\sum M_H = 0: (3 \text{ kN})(6.25 \text{ m}) - (1.2 \text{ kN})(4 \text{ m}) - F_{GI}(3 \text{ m}) = 0$$

$$F_{GI} = +4.65 \text{ kN}, F_{GI} = 4.65 \text{ kN T}$$

$$\sum F_y = 0: F_{HI} - 1.2 \text{ kN} + 3 \text{ kN} = 0$$


$$F_{HI} = -1.80 \text{ kN}, F_{HI} = 1.80 \text{ kN C}$$

$$\sum M_I = 0: F_{HJ}(3 \text{ m}) - (1.2 \text{ kN})(4 \text{ m}) + (3 \text{ kN})(6.25 \text{ m}) = 0$$

$$F_{HJ} = -4.65 \text{ kN}, F_{HJ} = 4.65 \text{ kN C}$$


CHECK: $\sum F_x = 4.65 \text{ kN} - 4.65 \text{ kN} = 0$

6.45

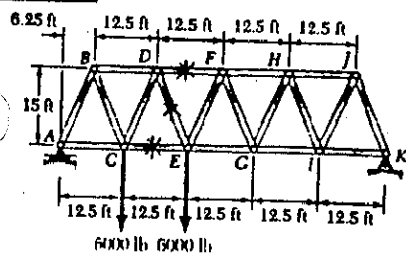


GIVEN: WARREN BRIDGE TRUSS AND LOADING SHOWN.
FIND:
FORCE IN MEMBERS CE, DE, AND DF.

FREE BODY: TRUSS

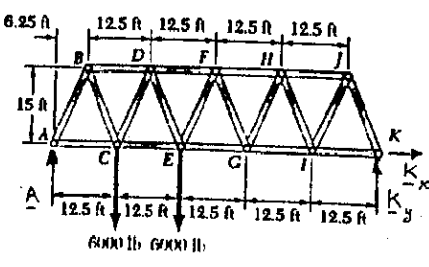


$$\begin{aligned} \sum F_x = 0: & K_x = 0 \\ \sum M_A = 0: & K_y(62.5 \text{ ft}) - (6000 \text{ lb})(12.5 \text{ ft}) - (6000 \text{ lb})(25 \text{ ft}) = 0 \\ & K_y = K_x = 3600 \text{ lb} \uparrow \\ \sum F_y = 0: & A + 3600 \text{ lb} - 6000 \text{ lb} - 6000 \text{ lb} = 0 \\ & A = 8400 \text{ lb} \uparrow \end{aligned}$$

WE PASS A SECTION THROUGH MEMBERS CE, DE, AND DF. AND USE THE FREE BODY SHOWN.



$$\begin{aligned} \sum M_D = 0: & F_{CE}(15 \text{ ft}) - (8400 \text{ lb})(18.75 \text{ ft}) + (6000 \text{ lb})(6.25 \text{ ft}) = 0 \\ & F_{CE} = +8000 \text{ lb} \quad F_{CE} = 8000 \text{ lb T} \\ \sum F_y = 0: & 8400 \text{ lb} - 6000 \text{ lb} - \frac{15}{16.25} F_{DE} = 0 \\ & F_{DE} = +2600 \text{ lb} \quad F_{DE} = 2600 \text{ lb T} \\ \sum M_E = 0: & 6000 \text{ lb}(12.5 \text{ ft}) - (8400 \text{ lb})(15 \text{ ft}) - F_{DF}(15 \text{ ft}) = 0 \\ & F_{DF} = -9000 \text{ lb} \quad F_{DF} = 9000 \text{ lb C} \end{aligned}$$


6.46

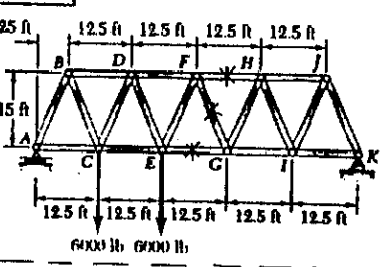

GIVEN: WARREN BRIDGE TRUSS AND LOADING SHOWN.
FIND:
FORCE IN MEMBERS EG, FG, AND FH.


SEE SOLUTION OF PROB. 6.45 FOR FREE-BODY DIAGRAM OF TRUSS AND DETERMINATION OF REACTION: A = 8400 lb, K = 3600 lb

WE PASS A SECTION THROUGH MEMBERS EG, FG, AND FH, AND USE THE FREE BODY SHOWN.




$$\begin{aligned} \sum M_F = 0: & (3600 \text{ lb})(31.25 \text{ ft}) - F_{EG}(15 \text{ ft}) = 0 \\ & F_{EG} = +7500 \text{ lb} \quad F_{EG} = 7500 \text{ lb T} \\ \sum F_y = 0: & \frac{15}{16.25} F_{FG} + 3600 \text{ lb} = 0 \\ & F_{FG} = -3900 \text{ lb} \quad F_{FG} = 3900 \text{ lb C} \\ \sum M_G = 0: & F_{FH}(15 \text{ ft}) + (3600 \text{ lb})(25 \text{ ft}) = 0 \\ & F_{FH} = -6000 \text{ lb} \quad F_{FH} = 6000 \text{ lb C} \end{aligned}$$

6.47

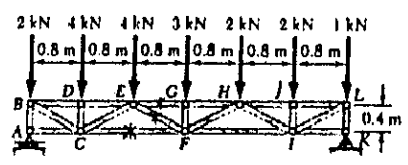

GIVEN:
FLOOR TRUSS WITH LOADING SHOWN.
FIND:
FORCE IN MEMBERS CF, EF, AND EG.


FREE BODY: TRUSS

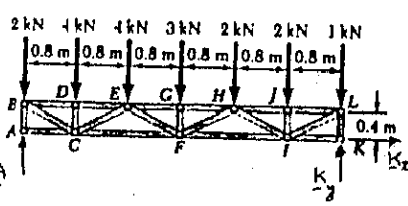

$$\sum F_x = 0: K_x = 0$$


$$\begin{aligned} \sum M_A = 0: & K_y(4.8 \text{ m}) - (4 \text{ kN})(0.8 \text{ m}) - (4 \text{ kN})(1.6 \text{ m}) - (3 \text{ kN})(2.4 \text{ m}) \\ & - (2 \text{ kN})(3.2 \text{ m}) - (2 \text{ kN})(4 \text{ m}) - (1 \text{ kN})(4.8 \text{ m}) = 0 \\ & K_y = 7.5 \text{ kN} \quad \text{THUS: } K = 7.5 \text{ kN} \uparrow \\ \sum F_y = 0: & A + 7.5 \text{ kN} - 18 \text{ kN} = 0 \quad A = 10.5 \text{ kN} \quad \underline{A} = 10.5 \text{ kN} \uparrow \end{aligned}$$

WE PASS A SECTION THROUGH MEMBERS CF, EF, AND EG AND USE THE FREE BODY SHOWN.



$$\begin{aligned} \sum M_E = 0: & F_{CF}(0.4 \text{ m}) - (10.5 \text{ kN})(1.6 \text{ m}) + (2 \text{ kN})(1.6 \text{ m}) + (4 \text{ kN})(0.8 \text{ m}) = 0 \\ & F_{CF} = +26.0 \text{ kN} \quad F_{CF} = 26.0 \text{ kN T} \\ \sum F_y = 0: & 10.5 \text{ kN} - 2 \text{ kN} - 4 \text{ kN} - 4 \text{ kN} - \frac{1}{\sqrt{5}} F_{EF} = 0 \\ & F_{EF} = +1.118 \text{ kN} \quad F_{EF} = 1.118 \text{ kN T} \\ \sum M_F = 0: & (2 \text{ kN})(2.4 \text{ m}) + (4 \text{ kN})(1.6 \text{ m}) + (4 \text{ kN})(0.8 \text{ m}) - (10.5 \text{ kN})(2.4 \text{ m}) \\ & - F_{EG}(0.4 \text{ m}) = 0 \\ & F_{EG} = -27.0 \text{ kN} \quad F_{EG} = 27.0 \text{ kN C} \end{aligned}$$


6.48

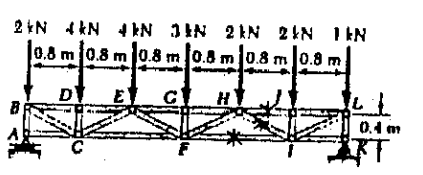

GIVEN:
FLOOR TRUSS WITH LOADING SHOWN.
FIND:
FORCE IN MEMBERS FI, HI, AND HJ.


SEE SOLUTION OF PROB. 6.47 FOR FREE-BODY DIAGRAM OF TRUSS AND DETERMINATION OF REACTIONS. A = 10.5 kN, K = 7.5 kN

WE PASS A SECTION THROUGH MEMBERS FI, HI, AND HJ, AND USE THE FREE BODY SHOWN.



$$\begin{aligned} \sum M_H = 0: & (7.5 \text{ kN})(1.6 \text{ m}) - (2 \text{ kN})(0.8 \text{ m}) - (1 \text{ kN})(1.6 \text{ m}) - F_{FI}(0.4 \text{ m}) = 0 \\ & F_{FI} = +22.0 \text{ kN} \quad F_{FI} = 22.0 \text{ kN T} \\ \sum F_y = 0: & \frac{1}{\sqrt{5}} F_{HI} - 2 \text{ kN} - 1 \text{ kN} + 7.5 \text{ kN} = 0 \\ & F_{HI} = -10.06 \text{ kN} \quad F_{HI} = 10.06 \text{ kN C} \\ \sum M_I = 0: & F_{HJ}(0.4 \text{ m}) + (7.5 \text{ kN})(0.8 \text{ m}) - (1 \text{ kN})(0.8 \text{ m}) = 0 \\ & F_{HJ} = -13.00 \text{ kN} \quad F_{HJ} = 13.00 \text{ kN C} \end{aligned}$$

6.49

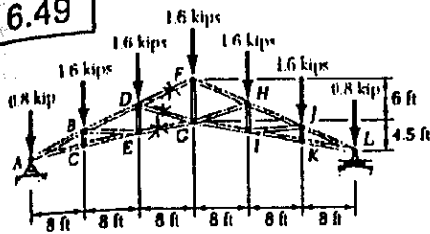

REACTIONS AT SUPPORTS:

BECAUSE OF SYMMETRY OF LOADING:

$$A_x = 0, A_y = L = \frac{1}{2}(\text{TOTAL LOAD}) = \frac{1}{2}(9.60 \text{ kips}) = 4.80 \text{ kips}$$

$$A = L = 4.80 \text{ kips} \uparrow$$

WE PASS A SECTION THROUGH MEMBERS DF, DE, AND EG, AND USE THE FREE BODY SHOWN.

WE SLIDE $F_{D,E}$ TO APPLY IT AT F.

$$\begin{aligned} +\circlearrowleft \sum M_G = 0: & (0.8 \text{ kip})(24 \text{ ft}) \\ & + (1.6 \text{ kip})(16 \text{ ft}) + (1.6 \text{ kip})(8 \text{ ft}) \\ & - (4.8 \text{ kips})(24 \text{ ft}) - \frac{8 F_{DF}}{\sqrt{8^2 + 3.5^2}}(6 \text{ ft}) = 0 \end{aligned}$$

$$F_{DF} = -10.48 \text{ kips}, F_{DF} = 10.48 \text{ kips} \leftarrow$$


$$\begin{aligned} +\circlearrowleft \sum M_H = 0: & -(1.6 \text{ kips})(8 \text{ ft}) \\ & - (1.6 \text{ kips})(16 \text{ ft}) - \frac{8 F_{DE}}{\sqrt{8^2 + 2.5^2}}(16 \text{ ft}) \\ & - \frac{8 F_{EG}}{\sqrt{8^2 + 2.5^2}}(7 \text{ ft}) = 0 \end{aligned}$$

$$F_{DE} = -3.35 \text{ kips}, F_{DE} = 3.35 \text{ kips} \leftarrow$$

$$+\circlearrowleft \sum M_D = 0: (0.8 \text{ kips})(16 \text{ ft}) + (1.6 \text{ kips})(8 \text{ ft}) - (4.8 \text{ kips})(16 \text{ ft}) + \frac{8 F_{EG}}{\sqrt{8^2 + 1.5^2}}(4 \text{ ft}) = 0$$

$$F_{EG} = +13.02 \text{ kips}, F_{EG} = 13.02 \text{ kips} \leftarrow$$

6.50

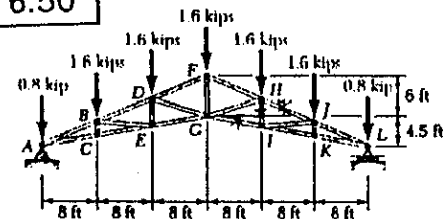

GIVEN:

HOWE TRUSS WITH LOADING

SHOWN.

FIND:

FORCE IN MEMBERS GI, HI, AND HJ.

REACTIONS AT SUPPORTS BECAUSE OF SYMMETRY OF LOADING:

$$A_x = 0, A_y = L = \frac{1}{2}(\text{TOTAL LOAD}) = \frac{1}{2}(9.60 \text{ kips}) = 4.80 \text{ kips}, A = L = 4.80 \text{ kips} \uparrow$$

WE PASS A SECTION THROUGH MEMBERS GI, HI, AND HJ, AND USE THE FREE BODY SHOWN.

$$\begin{aligned} +\circlearrowleft \sum M_H = 0: & -\frac{16 F_{GI}}{\sqrt{16^2 + 3^2}}(4 \text{ ft}) \\ & + (4.8 \text{ kips})(16 \text{ ft}) - (0.8 \text{ kips})(16 \text{ ft}) \\ & - (1.6 \text{ kips})(8 \text{ ft}) = 0 \end{aligned}$$

$$F_{GI} = +13.02 \text{ kips}, F_{GI} = 13.02 \text{ kips} \leftarrow$$


$$\begin{aligned} +\circlearrowleft \sum M_L = 0: & (1.6 \text{ kips})(8 \text{ ft}) - F_{HI}(16 \text{ ft}) = 0, F_{HI} = +0.800 \text{ kips} \\ & F_{HI} = 0.800 \text{ kips} \leftarrow \end{aligned}$$

WE SLIDE $F_{H,G}$ TO APPLY IT AT H.

$$+\circlearrowleft \sum M_I = 0: \frac{8 F_{HJ}}{\sqrt{8^2 + 3.5^2}}(4 \text{ ft}) + (4.8 \text{ kips})(16 \text{ ft}) - (1.6 \text{ kips})(8 \text{ ft}) - (0.8 \text{ kips})(16 \text{ ft}) = 0$$

$$F_{HJ} = -13.17 \text{ kips}, F_{HJ} = 13.17 \text{ kips} \leftarrow$$

6.51

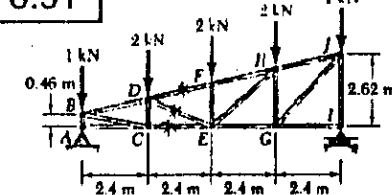

GIVEN: PITCHED FLAT ROOF TRUSS WITH LOADING SHOWN.


FIND:

FORCE IN MEMBERS CE, DE, AND DF.

REACTIONS AT SUPPORTS: BECAUSE OF THE SYMMETRY OF THE

LOADING, $A_x = 0, A_y = I = \frac{1}{2}(\text{TOTAL LOAD}) = \frac{1}{2}(8 \text{ kN})$

$$A = I = 4 \text{ kN} \uparrow$$

WE PASS A SECTION THROUGH MEMBERS CD, DE, AND DF, AND USE THE FREE BODY SHOWN. (WE MOVED $F_{D,E}$ TO E AND $F_{D,F}$ TO F.)

$$\text{SLOPE BJ} = \frac{2.16 \text{ m}}{9.6 \text{ m}} = \frac{9}{40}$$

$$\text{SLOPE DE} = \frac{-1 \text{ m}}{2.4 \text{ m}} = \frac{-5}{12}$$

$$a = \frac{0.46 \text{ m}}{9/40} = 2.0444 \text{ m}$$

$$A = 4 \text{ kN}$$

$$+\circlearrowleft \sum M_D = 0: F_{CE}(1 \text{ m}) + (1 \text{ kN})(2.4 \text{ m}) - (4 \text{ kN})(2.4 \text{ m}) = 0$$

$$F_{CE} = +7.20 \text{ kN}, F_{CE} = 7.20 \text{ kN} \leftarrow$$


$$+\circlearrowleft \sum M_K = 0: (4 \text{ kN})(2.0444 \text{ m}) - (1 \text{ kN})(2.0444 \text{ m}) - (2 \text{ kN})(4.4444 \text{ m}) - \left(\frac{5}{13} F_{DE}\right)(6.8444 \text{ m}) = 0$$

$$F_{DE} = -1.047 \text{ kN}, F_{DE} = 1.047 \text{ kN} \leftarrow$$

$$+\circlearrowleft \sum M_E = 0: (1 \text{ kN})(4.8 \text{ m}) + (2 \text{ kN})(2.4 \text{ m}) - (4 \text{ kN})(4.8 \text{ m}) - \left(\frac{40}{41} F_{DF}\right)(1.54 \text{ m}) = 0$$

$$F_{DF} = -6.39 \text{ kN}, F_{DF} = 6.39 \text{ kN} \leftarrow$$

6.52

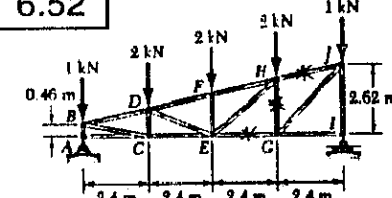

GIVEN: PITCHED FLAT ROOF TRUSS WITH LOADING SHOWN.

FIND:

FORCE IN MEMBERS EG, GH, AND HJ.

REACTIONS AT SUPPORTS: BECAUSE OF THE SYMMETRY OF THE

LOADING, $A_x = 0, A_y = I = \frac{1}{2}(\text{TOTAL LOAD}) = \frac{1}{2}(8 \text{ kN})$


$$A = I = 4 \text{ kN} \uparrow$$

WE PASS A SECTION THROUGH MEMBERS EG, GH, AND HJ, AND USE THE FREE BODY SHOWN.


$$\begin{aligned} +\circlearrowleft \sum M_H = 0: & (4 \text{ kN})(2.4 \text{ m}) - (1 \text{ kN})(2.4 \text{ m}) - F_{EG}(2.08 \text{ m}) = 0 \\ & F_{EG} = +3.4615 \text{ kN}, F_{EG} = 3.46 \text{ kN} \leftarrow \end{aligned}$$

$$\begin{aligned} +\circlearrowleft \sum M_J = 0: & -F_{GH}(2.4 \text{ m}) - F_{EG}(2.62 \text{ m}) = 0 \\ & F_{GH} = -\frac{2.62}{2.4}(3.4615 \text{ kN}) \\ & F_{GH} = -3.7788 \text{ kN}, F_{GH} = 3.78 \text{ kN} \leftarrow \end{aligned}$$

$$\begin{aligned} +\circlearrowleft \sum F = 0: & -F_{EG} \times \frac{2.4}{2.46} F_{HJ} = 0 \\ & F_{HJ} = -\frac{2.46}{2.4} F_{EG} = -\frac{2.46}{2.4}(3.4615 \text{ kN}) \\ & F_{HJ} = -3.548 \text{ kN}, F_{HJ} = 3.55 \text{ kN} \leftarrow \end{aligned}$$



6.53

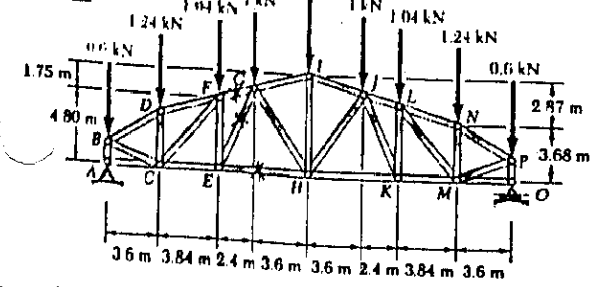

GIVEN: MARKET ROOF TRUSS WITH LOADING SHOWN.
 FIND: FORCE IN MEMBERS FE, EG, AND EH.

REACTIONS AT SUPPORTS. BECAUSE OF THE SYMMETRY OF THE LOADING, $\sum M_A = 0$, $\sum M_O = 0$.
 $A_x = 0 = 4.48 \text{ kN}$

WE PASS A SECTION THROUGH MEMBERS FE, EG, AND EH, AND USE THE FREE BODY SHOWN.

SLOPE FG = SLOPE FI = $\frac{1.75}{6m}$ $\frac{6.25}{6}$ $\frac{I}{1.75}$


SLOPE EG = $\frac{5.50}{2.4m}$ $\frac{5.50}{2.4}$ $\frac{G}{5.50}$

$\sum M_F = 0: (0.6 \text{ kN})(7.44 \text{ m}) + (1.24 \text{ kN})(3.84 \text{ m}) - (4.48 \text{ kN})(7.44 \text{ m}) - (\frac{6}{5.25} F_{EG})(4.80 \text{ m}) = 0$
 $F_{EG} = -5.231 \text{ kN}, F_{EG} = 5.23 \text{ kN C}$

$\sum M_E = 0: F_{EH}(5.50 \text{ m}) + (0.6 \text{ kN})(9.84 \text{ m}) + (1.24 \text{ kN})(6.74 \text{ m}) + (1.04 \text{ kN})(2.4 \text{ m}) - (4.48 \text{ kN})(9.84 \text{ m}) = 0, F_{EH} = 5.08 \text{ kN T}$

$\sum F_y = 0: \frac{1.75}{6.25} F_{EG} + \frac{4.75}{6.25} (-5.231 \text{ kN}) + 4.48 \text{ kN} - 0.6 \text{ kN} - 1.24 \text{ kN} - 1.04 \text{ kN} = 0$
 $F_{EG} = -0.1476 \text{ kN}, F_{EG} = 0.1476 \text{ kN C}$

6.4

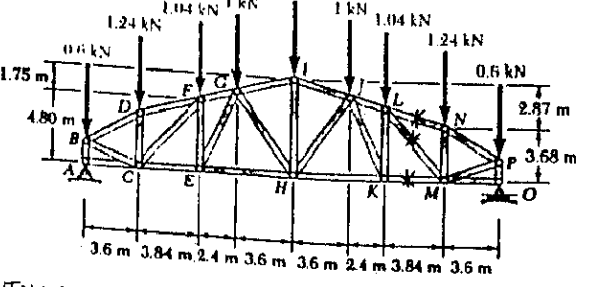

GIVEN: MARKET ROOF TRUSS WITH LOADING SHOWN.
 FIND: FORCE IN MEMBERS KM, LM, AND LN.

BECAUSE OF SYMMETRY OF LOADING, $\sum M_A = 0$, $\sum M_O = 0$.
 $A_x = 0 = 4.48 \text{ kN}$


WE PASS A SECTION THROUGH MEMBERS KM, LM, AND LN, AND USE FREE BODY SHOWN.

$\sum M_M = 0: (\frac{3.84}{4} F_{LN})(3.6 \text{ m}) + (4.48 \text{ kN} - 0.6 \text{ kN})(3.6 \text{ m}) = 0$
 $F_{LN} = -3.954 \text{ kN}, F_{LN} = 3.95 \text{ kN C}$

$\sum M_L = 0: -F_{KM}(4.80 \text{ m}) - (1.24 \text{ kN})(3.84 \text{ m}) + (4.48 \text{ kN} - 0.6 \text{ kN})(7.44 \text{ m}) = 0$
 $F_{KM} = +5.022 \text{ kN}, F_{KM} = 5.02 \text{ kN T}$

$\sum F_x = 0: \frac{4.80}{6.147} F_{LM} + \frac{1.12}{4} (-3.954 \text{ kN}) - 1.24 \text{ kN} - 0.6 \text{ kN} + 4.48 \text{ kN} = 0$
 $F_{LM} = -1.963 \text{ kN}, F_{LM} = 1.963 \text{ kN C}$

6.55

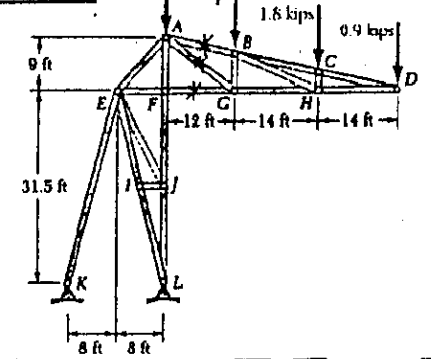

GIVEN: STADIUM ROOF TRUSS WITH LOADING SHOWN.
 FIND: FORCE IN MEMBERS AB, AG, AND FG.


WE PASS A SECTION THROUGH MEMBERS AB, AG, AND FG, AND USE THE FREE BODY SHOWN.

$\sum M_G = 0: (\frac{40}{41} F_{AB})(6.3 \text{ ft}) - (1.8 \text{ kips})(14 \text{ ft}) - (0.9 \text{ kips})(28 \text{ ft}) = 0$
 $F_{AB} = +8.20 \text{ kips}, F_{AB} = 8.20 \text{ kips T}$

$\sum M_D = 0: -(\frac{3}{5} F_{AG})(28 \text{ ft}) + (1.8 \text{ kips})(28 \text{ ft}) + (1.8 \text{ kips})(14 \text{ ft}) = 0$
 $F_{AG} = +4.50 \text{ kips}, F_{AG} = 4.50 \text{ kips T}$

$\sum M_A = 0: -F_{FG}(9 \text{ ft}) - (1.8 \text{ kips})(12 \text{ ft}) - (1.8 \text{ kips})(26 \text{ ft}) - (0.9 \text{ kips})(40 \text{ ft}) = 0$
 $F_{FG} = -11.60 \text{ kips}, F_{FG} = 11.60 \text{ kips C}$

6.56

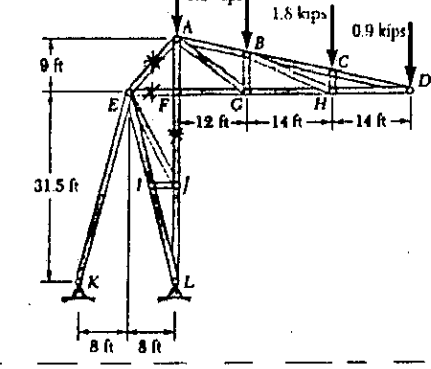

GIVEN: STADIUM ROOF TRUSS WITH LOADING SHOWN.
 FIND: FORCE IN MEMBERS AE, EF, AND FJ.


WE PASS A SECTION THROUGH MEMBERS AE, EF, AND FJ, AND USE THE FREE BODY SHOWN.

$\sum M_F = 0: (\frac{8}{\sqrt{8+9}} F_{AE})(9 \text{ ft}) - (1.8 \text{ kips})(12 \text{ ft}) - (1.8 \text{ kips})(26 \text{ ft}) - (0.9 \text{ kips})(40 \text{ ft}) = 0$
 $F_{AE} = +17.46 \text{ kips}, F_{AE} = 17.46 \text{ kips T}$

$\sum M_A = 0: -F_{EF}(9 \text{ ft}) - (1.8 \text{ kips})(12 \text{ ft}) - (1.8 \text{ kips})(26 \text{ ft}) - (0.9 \text{ kips})(40 \text{ ft}) = 0$
 $F_{EF} = -11.60 \text{ kips}, F_{EF} = 11.60 \text{ kips C}$


$\sum M_E = 0: -F_{FJ}(8 \text{ ft}) - (0.9 \text{ kips})(8 \text{ ft}) - (1.8 \text{ kips})(20 \text{ ft}) - (1.8 \text{ kips})(34 \text{ ft}) - (0.9 \text{ kips})(48 \text{ ft}) = 0$
 $F_{FJ} = -18.45 \text{ kips}, F_{FJ} = 18.45 \text{ kips C}$

6.57

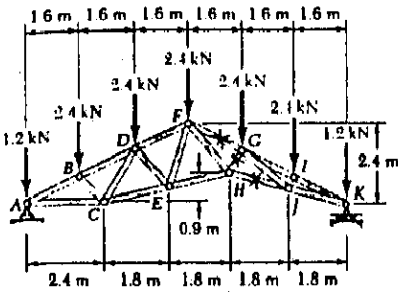

GIVEN: VAULTED ROOF TRUSS WITH LOADING SHOWN.
 FIND: FORCE IN MEMBERS FG, GH, AND HJ.


BECAUSE OF THE SYMMETRY OF THE LOADING, $A = K = 7.20 \text{ kN} \uparrow$
 WE PASS A SECTION THROUGH MEMBERS FG, GH, AND HJ, AND USE THE FREE BODY SHOWN.

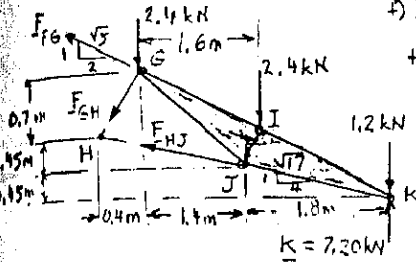

$$\begin{aligned} \sum M_H = 0: & \left(\frac{2}{\sqrt{5}} F_{FG}\right)(0.7 \text{ m}) \\ & + \left(\frac{1}{\sqrt{5}} F_{FG}\right)(0.4 \text{ m}) - (2.4 \text{ kN})(0.9 \text{ m}) \\ & - (2.4 \text{ kN})(2 \text{ m}) \\ & - (1.2 \text{ kN})(3.6 \text{ m}) \\ & + (7.2 \text{ kN})(3.6 \text{ m}) = 0 \\ \frac{16}{\sqrt{5}} F_{FG} & = -15.84 \\ F_{FG} & = 19.68 \text{ kN C} \end{aligned}$$


$$\begin{aligned} \sum M_K = 0: & \left(\frac{4}{\sqrt{5}} F_{GH}\right)(1.6 \text{ m}) + \left(\frac{7}{\sqrt{5}} F_{GH}\right)(3.2 \text{ m}) + (2.4 \text{ kN})(3.2 \text{ m}) + (2.4 \text{ kN})(1.6 \text{ m}) = 0 \\ (28.8/\sqrt{5}) F_{GH} & = -11.52 \\ F_{GH} & = 3.22 \text{ kN C} \\ \sum M_G = 0: & -\left(\frac{4}{\sqrt{17}} F_{HJ}\right)(1.15 \text{ m}) + \left(\frac{1}{\sqrt{17}} F_{HJ}\right)(1.4 \text{ m}) - (2.4 \text{ kN})(1.6 \text{ m}) + (6 \text{ kN})(3.2 \text{ m}) = 0 \\ -\left(3.2/\sqrt{17}\right) F_{HJ} & = -15.36 \\ F_{HJ} & = 19.79 \text{ kN T} \end{aligned}$$

6.58

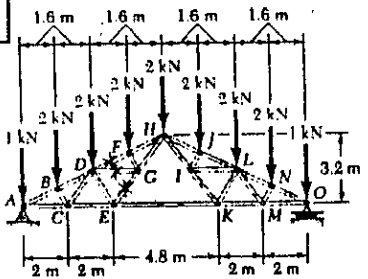


GIVEN: PIN-JOINT ROOF TRUSS WITH LOADING SHOWN.
 FIND: FORCE IN MEMBERS DF, DG, AND EG.

BECAUSE OF THE SYMMETRY OF THE LOADING, $A = B = 8 \text{ kN} \uparrow$
 WE NEXT DETERMINE F_{EK} FROM THE F.B. DIAGRAM OF PANEL AEH:




$$\begin{aligned} \sum M_H = 0: & (1 \text{ kN})(6.4 \text{ m}) + (2 \text{ kN})(4.8 \text{ m}) + (2 \text{ kN})(3.2 \text{ m}) \\ & + (2 \text{ kN})(1.6 \text{ m}) + F_{EK}(3.2 \text{ m}) - (8 \text{ kN})(6.4 \text{ m}) = 0 \\ F_{EK} & = 8.00 \text{ kN T} \end{aligned}$$

FREE BODY: PANEL ADE
 (WE SLIDE F_{EG} TO APPLY IT AT G)



$$\begin{aligned} \sum M_G = 0: & (8 \text{ kN})(1.6 \text{ m}) - (8 \text{ kN})(5.2 \text{ m}) + (1 \text{ kN})(5.2 \text{ m}) \\ & + (2 \text{ kN})(3.6 \text{ m}) + (2 \text{ kN})(2 \text{ m}) - \left(\frac{1}{\sqrt{5}} F_{DF}\right)(2 \text{ m}) = 0 \\ F_{DF} & = -13.86 \text{ kN} \quad F_{DF} = 13.86 \text{ kN C} \\ \sum M_H = 0: & F_{DG}(1.6 \text{ m}) + (8 \text{ kN})(3.2 \text{ m}) - (8 \text{ kN})(6.4 \text{ m}) \\ & + (1 \text{ kN})(6.4 \text{ m}) + (2 \text{ kN})(4.8 \text{ m}) + (2 \text{ kN})(3.2 \text{ m}) = 0 \\ F_{DG} & = 2.00 \text{ kN} \quad F_{DG} = 2.00 \text{ kN T} \\ \sum M_E = 0: & \left(\frac{4}{5} F_{EG}\right)(2 \text{ m}) + (8 \text{ kN})(1.6 \text{ m}) - (8 \text{ kN})(3.2 \text{ m}) \\ & + (1 \text{ kN})(3.2 \text{ m}) + (2 \text{ kN})(1.6 \text{ m}) = 0 \\ F_{EG} & = +4.00 \text{ kN} \quad F_{EG} = 4.00 \text{ kN T} \end{aligned}$$

6.59

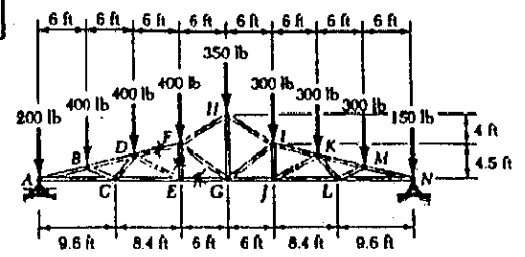


GIVEN: DUOPITCH ROOF TRUSS WITH LOADING SHOWN.
 FIND: FORCE IN MEMBERS DF, EF, AND EG.

FREE BODY: TRUSS

$$\begin{aligned} \sum F_x = 0: & N_2 = 0 \\ \sum M_A = 0: & (200 \text{ lb})(8 \text{ a}) \\ & + (400 \text{ lb})(7 \text{ a} + 6 \text{ a} + 5 \text{ a}) \\ & + (350 \text{ lb})(4 \text{ a}) \\ & + (300 \text{ lb})(3 \text{ a} + 2 \text{ a} + \text{a}) \\ & - A(8 \text{ a}) = 0 \\ A & = 1500 \text{ lb} \uparrow \\ \sum F_y = 0: & 1500 \text{ lb} - 200 \text{ lb} - 3(400 \text{ lb}) - 350 \text{ lb} - 3(300 \text{ lb}) - 150 \text{ lb} + N_y = 0 \\ N_y & = 1300 \text{ lb} \uparrow, N_x = 1300 \text{ lb} \uparrow \end{aligned}$$


WE PASS A SECTION THROUGH DF, EF, AND EG, AND USE THE FREE BODY SHOWN.



(WE APPLY F_{DF} AT F)

$$\begin{aligned} \sum M_E = 0: & (200 \text{ lb})(18 \text{ ft}) + (400 \text{ lb})(12 \text{ ft}) + (400 \text{ lb})(6 \text{ ft}) \\ & - (1500 \text{ lb})(18 \text{ ft}) - \left(\frac{18}{18^2 + 4.5^2} F_{DF}\right)(4.5 \text{ ft}) = 0 \\ F_{DF} & = -3711 \text{ lb}, F_{DF} = 3710 \text{ lb C} \\ \sum M_A = 0: & F_{EF}(18 \text{ ft}) - (400 \text{ lb})(6 \text{ ft}) - (400 \text{ lb})(12 \text{ ft}) = 0 \\ F_{EF} & = +4000 \text{ lb}, F_{EF} = 4000 \text{ lb T} \\ \sum M_F = 0: & F_{EG}(4.5 \text{ ft}) - (1500 \text{ lb})(18 \text{ ft}) + (200 \text{ lb})(18 \text{ ft}) + (400 \text{ lb})(12 \text{ ft}) + (400 \text{ lb})(6 \text{ ft}) = 0 \\ F_{EG} & = +3600 \text{ lb}, F_{EG} = 3600 \text{ lb T} \end{aligned}$$


6.60

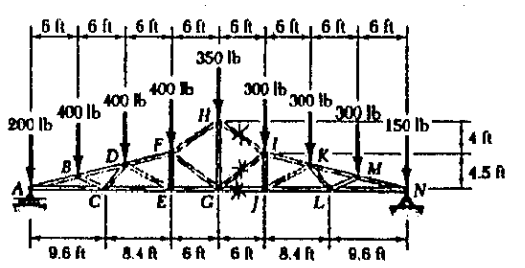

GIVEN: DUOPITCH ROOF TRUSS WITH LOADING SHOWN.
 FIND: FORCE IN MEMBERS HI, GI, AND GJ.


SEE SOLUTION OF PROB. 6.59 FOR REACTIONS: $A = 1500 \text{ lb} \uparrow, N = 1300 \text{ lb} \uparrow$

WE PASS A SECTION THROUGH HI, GI, AND GJ, AND USE THE FREE BODY SHOWN. (WE APPLY F_{HI} AT H.)



$$\begin{aligned} \sum M_G = 0: & \left(\frac{6}{\sqrt{6^2 + 4.5^2}} F_{HI}\right)(8.5 \text{ ft}) \\ & + (1300 \text{ lb})(2.4 \text{ ft}) - (300 \text{ lb})(6 \text{ ft}) \\ & - (300 \text{ lb})(12 \text{ ft}) - (300 \text{ lb})(18 \text{ ft}) \\ & - (150 \text{ lb})(24 \text{ ft}) = 0 \\ F_{HI} & = -2375.4 \text{ lb}, F_{HI} = 2375 \text{ lb C} \\ \sum M_I = 0: & (1300 \text{ lb})(18 \text{ ft}) \\ & - (300 \text{ lb})(6 \text{ ft}) - (300 \text{ lb})(12 \text{ ft}) \\ & - (150 \text{ lb})(18 \text{ ft}) - F_{GJ}(4.5 \text{ ft}) = 0 \\ F_{GJ} & = +3400 \text{ lb}, F_{GJ} = 3400 \text{ lb T} \\ \sum F_x = 0: & -\frac{4}{5} F_{GI} - \frac{6}{\sqrt{6^2 + 4.5^2}} (-2375.4 \text{ lb}) - 3400 \text{ lb} = 0 \\ F_{GI} & = -1179.4 \text{ lb}, F_{GI} = 1179 \text{ lb C} \end{aligned}$$


6.61



GIVEN:
TRUSS SHOWN WITH
 $P = Q = 1.2 \text{ kN}$


FIND:
FORCE IN MEMBERS
AF AND EJ
(USE SECTION a-a)

FREE BODY: ENTIRE TRUSS



$$\begin{aligned} +\circlearrowleft \sum M_A = 0: \\ K(8\text{m}) - (1.2\text{kN})(6\text{m}) \\ - (1.2\text{kN})(12\text{m}) = 0 \\ K = +2.70\text{kN} \\ K = 2.70\text{kN} \rightarrow \end{aligned}$$


FREE BODY: LOWER PORTION

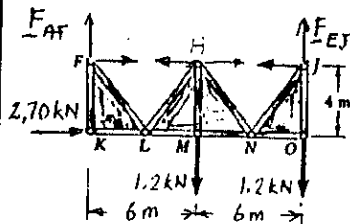

$$\begin{aligned} +\circlearrowleft \sum M_F = 0: \\ F_{EJ}(12\text{m}) + (2.70\text{kN})(4\text{m}) \\ - (1.2\text{kN})(6\text{m}) - (1.2\text{kN})(12\text{m}) = 0 \\ F_{EJ} = +0.900\text{kN} \\ F_{EJ} = 0.900\text{kN} \leftarrow \end{aligned}$$

$$\begin{aligned} +\uparrow \sum F_y = 0: F_{AF} + 0.9\text{kN} - 1.2\text{kN} - 1.2\text{kN} = 0 \\ F_{AF} = +1.500\text{kN} \quad F_{AF} = 1.500\text{kN} \leftarrow \end{aligned}$$


6.62



GIVEN:
TRUSS SHOWN WITH
 $P = 1.2 \text{ kN}, Q = 0$


FIND:
FORCE IN MEMBERS
AF AND EJ
(USE SECTION a-a)

FREE BODY: ENTIRE TRUSS

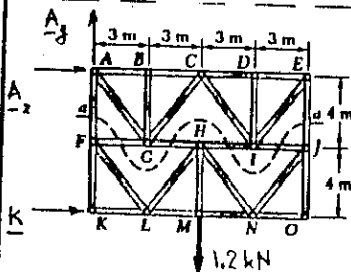

$$\begin{aligned} +\circlearrowleft \sum M_A = 0: \\ K(8\text{m}) - (1.2\text{kN})(6\text{m}) = 0 \\ K = +0.900\text{kN} \\ K = 0.900\text{kN} \rightarrow \end{aligned}$$


FREE BODY: LOWER PORTION

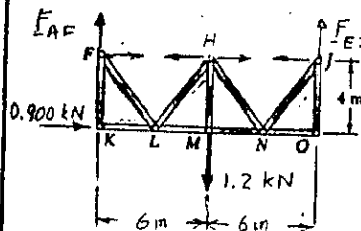

$$\begin{aligned} +\circlearrowleft \sum M_F = 0: \\ F_{EJ}(12\text{m}) + (0.900\text{kN})(4\text{m}) \\ - (1.2\text{kN})(6\text{m}) = 0 \\ F_{EJ} = +0.300\text{kN} \\ F_{EJ} = 0.300\text{kN} \leftarrow \end{aligned}$$


$$\begin{aligned} +\uparrow \sum F_y = 0: \\ F_{AF} + 0.300\text{kN} - 1.2\text{kN} = 0 \\ F_{AF} = +0.900\text{kN}, \quad F_{AF} = 0.900\text{kN} \leftarrow \end{aligned}$$

6.63

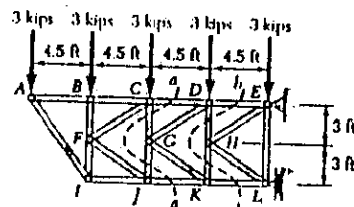

GIVEN:
TRUSS AND LOADING
SHOWN


FIND:
FORCE IN MEMBERS
CD AND JK
(USE SECTION a-a)

FREE BODY:
PORTION OF TRUSS SHOWN

$$\begin{aligned} +\circlearrowleft \sum M_C = 0: \\ F_{JK}(6\text{ft}) + (3\text{kips})(9\text{ft}) + (3\text{kips})(4.5\text{ft}) = 0 \\ F_{JK} = -6.75\text{kips} \\ F_{JK} = 6.75\text{kips} \leftarrow \end{aligned}$$


$$\begin{aligned} +\rightarrow \sum F_x = 0: \\ F_{CD} + F_{JK} = 0 \\ F_{CD} - 6.75\text{kips} = 0 \\ F_{CD} = +6.75\text{kips} \\ F_{CD} = 6.75\text{kips} \leftarrow \end{aligned}$$

6.64

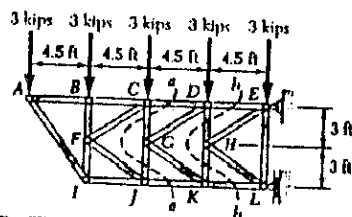

GIVEN:
TRUSS AND LOADING
SHOWN


FIND:
FORCE IN MEMBERS
DE AND KL
(USE SECTION b-b)

FREE BODY:
PORTION OF TRUSS SHOWN

$$\begin{aligned} +\circlearrowleft \sum M_D = 0: \\ F_{KL}(6\text{ft}) + (3\text{kips})(12.5\text{ft}) + (3\text{kips})(9\text{ft}) + (3\text{kips})(4.5\text{ft}) = 0 \\ F_{KL} = -13.50\text{kips} \\ F_{KL} = 13.50\text{kips} \leftarrow \end{aligned}$$

$$\begin{aligned} +\rightarrow \sum F_x = 0: \\ F_{DE} + F_{KL} = 0 \\ F_{DE} - 13.50\text{kips} = 0 \\ F_{DE} = +13.50\text{kips}, \quad F_{DE} = 13.50\text{kips} \leftarrow \end{aligned}$$

AND 6.66

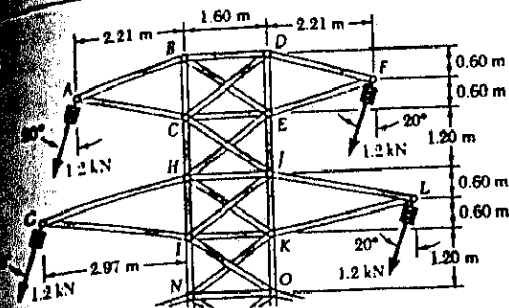


POWER TRANSMISSION LINE TOWER AND LOADS SHOWN.

85 FIND: (a) WHICH OF THE COUNTERS CJ AND HE IS ACTING
(b) THE FORCE IN THAT COUNTER

ANSWER: PORTION ABDFEC OF TOWER

ASSUME THAT COUNTER CJ IS ACTING AND SHOW THE FORCES EXERTED BY THAT COUNTER AND BY MEMBER CH

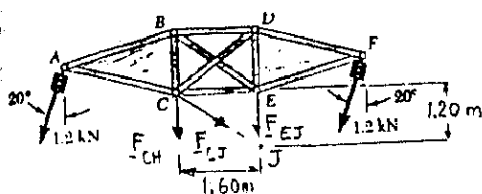


$$\sum F_x = 0; \frac{4}{5} F_{CJ} - 2(1.2 \text{ kN}) \sin 20^\circ = 0 \quad F_{CJ} = +1.026 \text{ kN}$$

SINCE CJ IS FOUND TO BE IN TENSION, OUR ASSUMPTION WAS CORRECT. THUS, THE ANSWERS ARE

- (a) CJ
- (b) 1.026 kN T

6.66 FIND: (a) WHICH OF THE COUNTERS IO AND KN IS ACTING
(b) THE FORCE IN THAT COUNTER.

FREE BODY: PORTION OF TOWER SHOWN

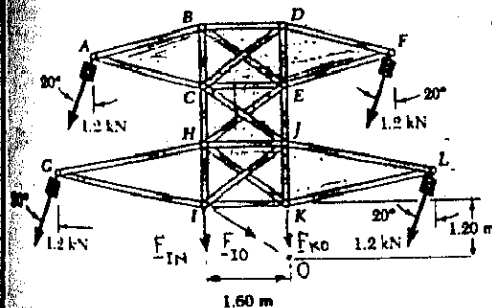


WE ASSUME THAT COUNTER IO IS ACTING AND SHOW THE FORCES EXERTED BY THAT COUNTER AND BY MEMBERS IN AND KO.

$$\sum F_x = 0; \frac{4}{5} F_{IO} - 4(1.2 \text{ kN}) \sin 20^\circ = 0 \quad F_{IO} = +2.05 \text{ kN}$$

SINCE IO IS FOUND TO BE IN TENSION, OUR ASSUMPTION WAS CORRECT. THUS, THE ANSWERS ARE


- (a) IO
- (b) 2.05 kN T

6.67

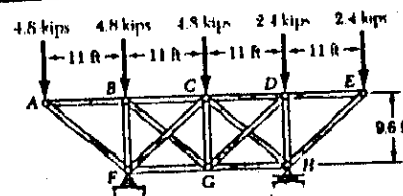

GIVEN:
TRUSS AND LOADING SHOWN.
FIND:
FORCES IN THE COUNTERS ACTING UNDER THIS LOADING

FREE BODY: TRUSS

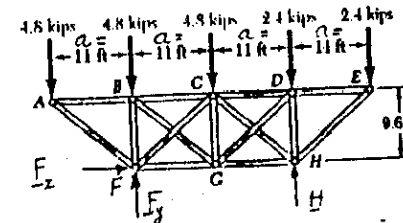

$$\sum F_x = 0; F_x = 0$$


$$+\uparrow \sum M_H = 0; 4.8(3a) + 4.8(2a) + 4.8a - 2.4a - F_y(2a) = 0$$

$$F_y = +13.20 \text{ kips} \quad F = 13.20 \text{ kips} \uparrow$$

$$+\uparrow \sum F_y = 0; H + 13.20 \text{ kips} - 3(4.8 \text{ kips}) - 2(2.4 \text{ kips}) = 0$$

$$H = +6.00 \text{ kips} \quad H = 6.00 \text{ kips} \downarrow$$

FREE BODY: ABF




WE ASSUME THAT COUNTER BG IS ACTING

$$+\uparrow \sum F_y = 0; -\frac{9.6}{14.6} F_{BG} + 13.20 - 2(4.8) = 0$$

$$F_{BC} = +5.475 \quad F_{BG} = 5.48 \text{ kips T}$$

SINCE BG IS IN TENSION, OUR ASSUMPTION WAS CORRECT

FREE BODY: DEH




WE ASSUME THAT COUNTER DG IS ACTING.

$$+\uparrow \sum F_y = 0; -\frac{9.6}{14.6} F_{DG} + 6.00 - 2(2.4) = 0$$

$$F_{DG} = +1.825 \quad F_{DG} = 1.825 \text{ kips T}$$


SINCE DG IS IN TENSION, O.K.

6.68

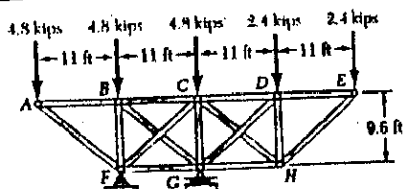

GIVEN:
TRUSS AND LOADING SHOWN.
FIND:
FORCES IN THE COUNTERS ACTING UNDER THIS LOADING

FREE BODY: TRUSS

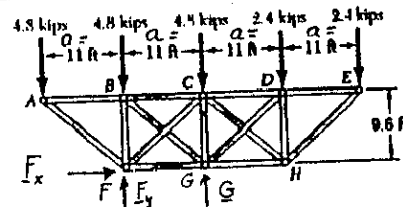


$$\sum F_x = 0; F_x = 0$$

$$+\uparrow \sum M_G = 0; -F_y a + 4.8(2a) + 4.8a - 2.4a - 2.4(2a) = 0$$

$$F_y = 7.20, \quad F = 7.20 \text{ kips} \uparrow$$

FREE BODY: ABF




WE ASSUME THAT COUNTER CF IS ACTING.

$$+\uparrow \sum F_y = 0; \frac{9.6}{14.6} F_{CF} + 7.20 - 2(4.8) = 0$$

$$F_{CF} = +3.65 \quad F_{CF} = 3.65 \text{ kips T}$$

SINCE CF IS IN TENSION, O.K.

FREE BODY: DEH



WE ASSUME THAT COUNTER CH IS ACTING


$$+\uparrow \sum F_x = 0; \frac{9.6}{14.6} F_{CH} - 2(2.4 \text{ kips}) = 0$$

$$F_{CH} = +7.30 \quad F_{CH} = 7.30 \text{ kips T}$$

SINCE CH IS IN TENSION, O.K.


6.70 GIVEN: THE THREE STRUCTURES SHOWN CLASSIFY EACH STRUCTURE AS COMPLETELY, PARTIALLY OR IMPROPERLY CONSTRAINED. IF COMPLETELY CONSTRAINED, FURTHER CLASSIFY AS DETERMINATE OR INDETERMINATE.

STRUCTURE (a)

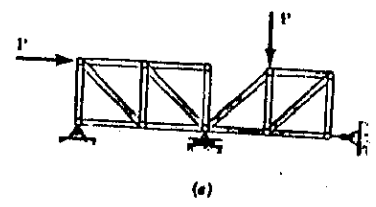

NUMBER OF MEMBERS: $m = 16$
 NUMBER OF JOINTS: $n = 10$
 REACTION COMPONENTS: $\epsilon = 4$
 $m + \epsilon = 20$ $2n = 20$
 THUS: $m + \epsilon = 2n$ ◀


TO DETERMINE WHETHER THE STRUCTURE IS ACTUALLY COMPLETELY CONSTRAINED AND DETERMINATE, WE MUST TRY TO FIND THE REACTIONS AT THE SUPPORTS. WE DIVIDE THE STRUCTURE INTO TWO SIMPLE TRUSSES AND DRAW THE FREE-BODY DIAGRAM OF EACH TRUSS.

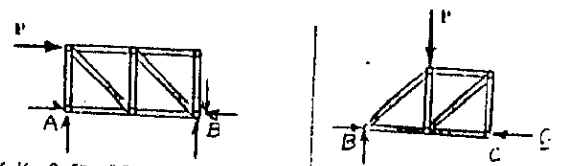

THIS IS A PROPERLY SUPPORTED SIMPLE TRUSS - O.K.
 THIS IS AN IMPROPERLY SUPPORTED SIMPLE TRUSS. (REACTION AT C DOESN'T PASS THROUGH B, THUS, E.G. $\sum M_B = 0$ CAN'T BE SATISFIED)


STRUCTURE IS PARTIALLY CONSTRAINED ◀

STRUCTURE (b)

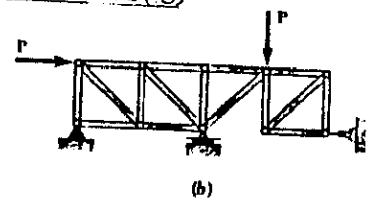


$m = 16$
 $n = 10$
 $\epsilon = 4$
 $m + \epsilon = 20$ $2n = 20$
 THUS: $m + \epsilon = 2n$ ◀

WE MUST AGAIN TRY TO FIND THE REACTIONS AT THE SUPPORTS, DIVIDING THE STRUCTURE AS SHOWN

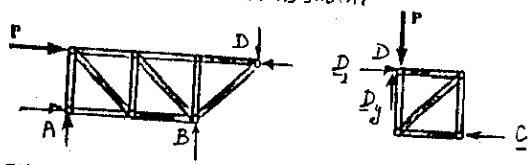

BOTH PORTIONS ARE SIMPLY SUPPORTED SIMPLE TRUSSES
 STRUCTURE IS COMPLETELY CONSTRAINED AND DETERMINATE ◀


STRUCTURE (c)

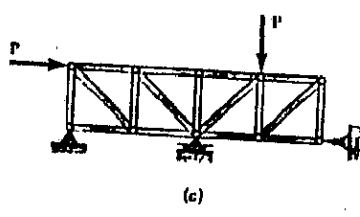

$m = 17$
 $n = 10$
 $\epsilon = 4$
 $m + \epsilon = 21$ $2n = 20$
 THUS: $m + \epsilon > 2n$ ◀


THIS IS A SIMPLE TRUSS WITH AN EXTRA JOINT WHICH CAUSES REACTION AND FORCE MEMBERS TO BE INDETERMINATE
 STRUCTURE IS PARTIALLY CONSTRAINED AND INDETERMINATE ◀

STRUCTURE (a)



NUMBER OF MEMBERS: $m = 16$
 NUMBER OF JOINTS: $n = 10$
 REACTION COMPONENTS: $\epsilon = 4$
 $m + \epsilon = 20$ $2n = 20$
 THUS: $m + \epsilon = 2n$


TO DETERMINE WHETHER THE STRUCTURE IS ACTUALLY COMPLETELY CONSTRAINED AND DETERMINATE, WE MUST TRY TO FIND THE REACTIONS AT THE SUPPORTS. WE DIVIDE THE STRUCTURE INTO TWO SIMPLE TRUSSES AND DRAW THE FREE-BODY DIAGRAM OF EACH TRUSS

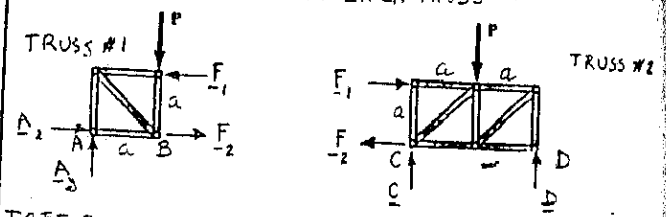

FREE BODY: TRUSS #1
 $\sum M_A = 0: F_1 a - P a = 0$ $F_1 = P$
 $\sum F_y = 0: A_y - P = 0$ $A_y = P$
 FREE BODY: TRUSS #2
 $\sum M_C = 0: D(2a) - P a - P a = 0$ $D = P$
 $\sum F_x = 0: F_1 - F_2 = 0$ $F_2 = F_1$ $F_2 = P$
 $\sum F_y = 0: C - P + P = 0$ $C = 0$
 FREE BODY: TRUSS #1
 $\sum F_x = 0: A_2 - F_1 + F_2 = 0$ $A_2 = 0$
 SINCE ALL UNKNOWN HAD BEEN FOUND AND ALL EQUATIONS SATISFIED,


STRUCTURE IS COMPLETELY CONSTRAINED AND DETERMINATE ◀

STRUCTURE (b)



$m = 16, n = 10, \epsilon = 3$
 $m + \epsilon = 19$ $2n = 20$
 THUS: $m + \epsilon < 2n$ ◀
 STRUCTURE IS PARTIALLY CONSTRAINED

STRUCTURE (c)



$m = 17, n = 10, \epsilon = 3$
 $m + \epsilon = 20$ $2n = 20$
 THUS: $m + \epsilon = 2n$


HOWEVER, WE NOTE THAT THE STRUCTURE IS A SIMPLE TRUSS WHICH IS IMPROPERLY CONSTRAINED, SINCE THE REACTION AT D PASSES THROUGH A, RESULTING IN $\sum M_A \neq 0$.

STRUCTURE IS IMPROPERLY CONSTRAINED ◀

6.71

GIVEN: THE THREE STRUCTURES SHOWN. CLASSIFY EACH STRUCTURE AS COMPLETELY, PARTIALLY, OR IMPROPERLY CONSTRAINED. IF COMPLETELY CONSTRAINED, FURTHER CLASSIFY AS DETERMINATE OR INDETERMINATE.

STRUCTURE (a)



NUMBER OF MEMBERS:

$$m = 12$$

NUMBER OF JOINTS:

$$n = 8$$


REACTION COMPONENTS:

$$r = 4$$

$$m + r = 16 \quad 2n = 16$$

$$\text{THUS: } m + r = 2n$$

TO DETERMINE WHETHER THE STRUCTURE IS ACTUALLY COMPLETELY CONSTRAINED AND DETERMINATE, WE MUST TRY TO FIND THE REACTIONS AT THE SUPPORTS. WE PASS A SECTION AND OBTAIN THE SIMPLE TRUSS ABCDEF AND MEMBER GH.

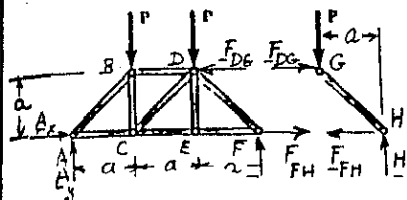

FREE BODY: GH

$$\sum M_H = 0:$$

$$Pa - F_{DG}a = 0$$

$$F_{DG} = P$$

$$\sum F_x = 0: F_{FH} = F_{DG} = P$$

$$\sum F_y = 0: H = P$$

FREE BODY: TRUSS ABCDEF


$$\sum F_x = 0: A_x + F_{FH} - F_{DG} = 0 \quad A_x + P - P = 0 \quad A_x = 0$$

$$\sum M_A = 0: F(3a) + Pa - Pa - P(2a) = 0 \quad F = \frac{2}{3}P$$

$$\sum F_y = 0: A_y - P - P + \frac{2}{3}P = 0 \quad A_y = \frac{4}{3}P$$

SINCE ALL UNKNOWN HAS BEEN FOUND AND ALL EQUATIONS SATISFIED.

STRUCTURE IS COMPLETELY CONSTRAINED AND DETERMINATE



STRUCTURE (b)


$$m = 13, \quad n = 8, \quad r = 4$$

$$m + r = 17 \quad 2n = 16$$

$$\text{THUS: } m + r > 2n$$

MOOREOVER, WE NOTE THAT STRUCTURE IS A SIMPLE TRUSS (FOLLOW LETTERING TO CHECK THIS)

STRUCTURE IS COMPLETELY CONSTRAINED AND INDETERMINATE



STRUCTURE (c)

$$m = 13, \quad n = 8, \quad r = 3$$

$$m + r = 16 \quad 2n = 16$$


$$\text{THUS: } m + r = 2n$$

WE PASS A SECTION AND OBTAIN THE TWO FREE BODIES SHOWN.

FREE BODY: FG

WE RECALL FROM PART (a) THAT

$$F_{DG} = F_{FH} = H = P$$

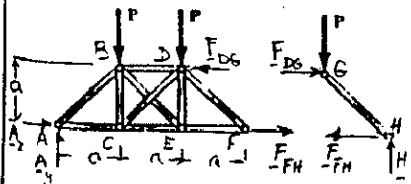

FREE BODY: ABCDEF

$$\sum M_A = F_{DG}a - Pa - P(2a) = Pa - 3Pa = -2Pa \neq 0$$


THIS EQUILIBRIUM EQUATION IS NOT SATISFIED, THEREFORE

STRUCTURE IS IMPROPERLY CONSTRAINED

6.72

GIVEN: THE THREE STRUCTURES SHOWN. CLASSIFY EACH STRUCTURE AS COMPLETELY, PARTIALLY, OR IMPROPERLY CONSTRAINED. IF COMPLETELY CONSTRAINED, FURTHER CLASSIFY AS DETERMINATE OR INDETERMINATE.

STRUCTURE (a)



NUMBER OF MEMBERS:

$$m = 12$$

NUMBER OF JOINTS:

$$n = 8$$

REACTION COMPONENTS:


$$r = 3$$

$$m + r = 15 \quad 2n = 16$$

$$\text{THUS: } m + r < 2n$$

STRUCTURE IS PARTIALLY CONSTRAINED

STRUCTURE (b)



$$m = 13, \quad n = 8$$

$$r = 3$$


$$m + r = 16 \quad 2n = 16$$

$$\text{THUS: } m + r = 2n$$

TO VERIFY THAT THE STRUCTURE IS ACTUALLY COMPLETELY CONSTRAINED AND DETERMINATE, WE OBSERVE THAT IT IS A SIMPLE TRUSS (FOLLOW LETTERING TO CHECK THIS) AND THAT IT IS SIMPLY SUPPORTED BY A PIN-AND-BRACKET AND A ROLLER. THUS:

STRUCTURE IS COMPLETELY CONSTRAINED AND DETERMINATE.

STRUCTURE (c)



$$m = 13, \quad n = 8$$

$$r = 4$$

$$m + r = 17 \quad 2n = 16$$

$$\text{THUS: } m + r > 2n$$

STRUCTURE IS COMPLETELY CONSTRAINED AND INDETERMINATE


THIS RESULT CAN BE VERIFIED BY OBSERVING THAT THE STRUCTURE IS A SIMPLE TRUSS (FOLLOW LETTERING TO CHECK THIS), THEREFORE RIGID, AND THAT ITS SUPPORTS INVOLVE 4 UNKNOWN.

6.73

GIVEN: THE THREE STRUCTURES SHOWN CLASSIFY EACH STRUCTURE AS COMPLETELY

PARTIALLY, OR IMPROPERLY CONSTRAINED. IF COMPLETELY CONSTRAINED, FURTHER CLASSIFY AS DETERMINATE OR INDETERMINATE.

STRUCTURE (a)



NUMBER OF MEMBERS: $m = 14$
 NUMBER OF JOINTS: $n = 8$
 REACTION COMPONENTS: $r = 3$


$m + r = 17$ $2n = 16$

THUS: $m + r > 2n$

STRUCTURE IS COMPLETELY CONSTRAINED AND INDETERMINATE

THIS RESULT CAN BE VERIFIED BY OBSERVING THAT THE STRUCTURE IS AN OVERRIGID TRUSS (ONE EXTRA MEMBER).

STRUCTURE (b)




$m = 13$, $n = 8$
 $r = 3$
 $m + r = 16$ $2n = 16$
 THUS: $m + r = 2n$

WE OBSERVE THAT THE STRUCTURE IS A SIMPLE TRUSS (FOLLOW LETTERING TO CHECK THIS) AND THAT IT IS SIMPLY SUPPORTED BY A PIN AND ROLLER AND A ROLLER. THUS:

STRUCTURE IS COMPLETELY CONSTRAINED AND DETERMINATE

STRUCTURE (c)



$m = 13$, $n = 8$
 $r = 3$
 $m + r = 16$ $2n = 16$
 THUS: $m + r = 2n$

WE OBSERVE THAT THE STRUCTURE IS A SIMPLE TRUSS, BUT THAT IT IS IMPROPERLY CONSTRAINED, SINCE THE REACTION AT A PASSES THROUGH THE SUPPORT D THE EQUATION $\sum M_D = 0$, THEREFORE, IS NOT SATISFIED.


THUS: STRUCTURE IS IMPROPERLY CONSTRAINED

6.74

GIVEN: THE THREE STRUCTURES SHOWN CLASSIFY EACH STRUCTURE AS COMPLETELY


PARTIALLY, OR IMPROPERLY CONSTRAINED. IF COMPLETELY CONSTRAINED, FURTHER CLASSIFY AS DETERMINATE OR INDETERMINATE.

STRUCTURE (a)



NUMBER OF MEMBERS: $m = 12$
 NUMBER OF JOINTS: $n = 8$
 REACTION COMPONENTS: $r = 4$
 $m + r = 16$ $2n = 16$
 THUS: $m + r = 2n$

TO VERIFY WHETHER OR NOT THE STRUCTURE IS COMPLETELY CONSTRAINED AND DETERMINATE, WE PASS A SECTION AND CONSIDER THE FREE BODIES ABCDEF (A SIMPLE TRUSS) AND

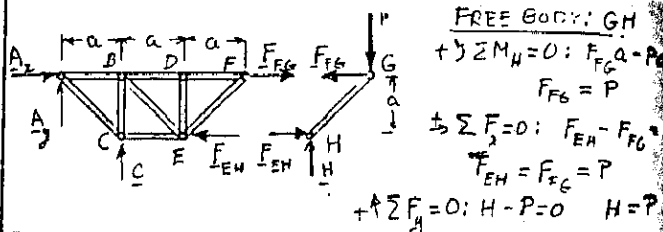


FREE BODY: GH
 $\sum M_H = 0: F_{FG}a - Pa = 0 \implies F_{FG} = P$
 $\sum F_x = 0: F_{EH} - F_{FG} = 0 \implies F_{EH} = F_{FG} = P$
 $\sum F_y = 0: H - P = 0 \implies H = P$

FREE BODY: TRUSS ABCDEF
 $\sum M_A = 0: Ca - F_{EH}a = 0 \implies C = F_{EH} = P$
 $\sum F_x = 0: A_2 + F_{FG} - F_{EH} = 0 \implies A_2 = 0$
 $\sum F_y = 0: A_y + C = 0 \implies A_y = -C = -P$

SINCE ALL UNKNOWN HAVE BEEN FOUND AND ALL EQUATIONS SATISFIED, STRUCTURE IS COMPLETELY CONSTRAINED AND DETERMINATE


STRUCTURE (b)



$m = 12$, $n = 8$
 $r = 3$
 $m + r = 15$ $2n = 16$
 THUS: $m + r < 2n$

STRUCTURE IS PARTIALLY CONSTRAINED

STRUCTURE (c)




$m = 13$, $n = 8$
 $r = 4$
 $m + r = 17$ $2n = 16$
 THUS: $m + r > 2n$


WE OBSERVE THAT THE STRUCTURE IS A SIMPLE TRUSS AND THAT ITS SUPPORTS INVOLVE 4 UNKNOWN (INSTEAD OF 3 FOR A SIMPLY SUPPORTED TRUSS), THUS

STRUCTURE IS COMPLETELY CONSTRAINED AND INDETERMINATE

6.75



FIND: FORCE
IN AC AND
REACTION
AT B WHEN
(a) $\theta = 30^\circ$
(b) $\theta = 60^\circ$.

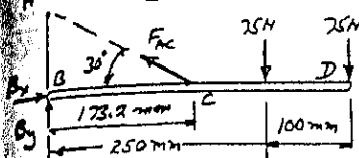
(a) $\theta = 30^\circ$ 

SINCE $AC = 200 \text{ mm}$
 $BC = (200) \cos 30^\circ = 173.2 \text{ mm}$

$$\begin{aligned} \sum M_B = 0: & -75(250 \text{ mm}) - 75(350 \text{ mm}) \\ & + F_{AC} \sin 30^\circ (173.2 \text{ mm}) = 0 \\ F_{AC} = 519.6 \text{ N}; & F_{AC} = 520 \text{ N T.} \end{aligned}$$

$$\begin{aligned} \sum F_x = 0: & B_x - (519.6 \text{ N}) \cos 30^\circ = 0 & B_x = 450 \text{ N} \rightarrow \\ \sum F_y = 0: & B_y + (519.6 \text{ N}) \sin 30^\circ - 75 \text{ N} - 75 \text{ N} = 0 \\ & B_y = -109.8 \text{ N} & B_y = 109.8 \text{ N} \downarrow \end{aligned}$$

$$109.8 \text{ N} \quad 450 \text{ N} \quad B = 463 \text{ N} \angle 13.7^\circ$$

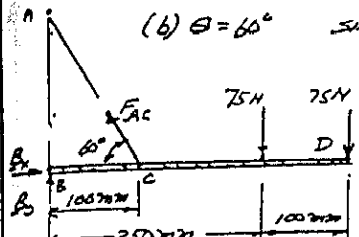(b) $\theta = 60^\circ$ 


SINCE $AC = 200 \text{ mm}$
 $BC = (200) \cos 60^\circ = 100 \text{ mm}$

$$\begin{aligned} \sum M_B = 0: & -75(250 \text{ mm}) - 75(350 \text{ mm}) \\ & + F_{AC} \sin 60^\circ (100 \text{ mm}) = 0 \\ F_{AC} = 519.6 \text{ N}; & F_{AC} = 520 \text{ N T.} \end{aligned}$$


$$\begin{aligned} \sum F_x = 0: & B_x - (519.6 \text{ N}) \cos 60^\circ = 0 & B_x = 259.8 \text{ N} \rightarrow \\ \sum F_y = 0: & B_y + (519.6 \text{ N}) \sin 60^\circ - 75 \text{ N} - 75 \text{ N} = 0 \\ & B_y = -300 \text{ N} & B_y = 300 \text{ N} \downarrow \end{aligned}$$

$$300 \text{ N} \quad 259.8 \text{ N} \quad B = 397 \text{ N} \angle 49.1^\circ$$

6.76

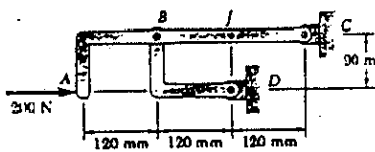

FIND: FORCE
ACTING ON
MEMBER ABC
(a) AT B,
(b) AT C.

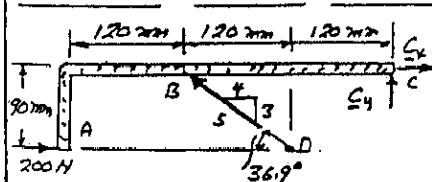


NOTE THAT BD
IS A TWO-FORCE
MEMBER. FORCE
B IS DIRECTED
ALONG DB

$$\begin{aligned} \sum M_C = 0: & (200 \text{ N})(90 \text{ mm}) - \frac{3}{5} B (240 \text{ mm}) = 0 \\ & B = 125 \text{ N} \\ & B = 125 \text{ N} \angle 36.9^\circ \end{aligned}$$


$$\begin{aligned} \sum F_x = 0: & C_x + 200 \text{ N} - \frac{4}{5} (125 \text{ N}) = 0 & C_x = -100 \text{ N} & C_x = 100 \text{ N} \leftarrow \\ \sum F_y = 0: & C_y + \frac{3}{5} (125 \text{ N}) = 0 & C_y = -75 \text{ N} & C_y = 75 \text{ N} \downarrow \end{aligned}$$

$$100 \text{ N} \quad 75 \text{ N} \quad C = 125 \text{ N} \angle 36.9^\circ$$

6.77

GIVEN: $\theta = 30^\circ$

FIND:
(a) FORCE IN CD,
(b) REACTION AT B.



NOTE THAT CD IS
A TWO-FORCE
MEMBER. F_{CD} MUST
BE DIRECTED
ALONG DC.


$$\begin{aligned} \sum M_B = 0: & (20 \text{ lb})(2R) - (F_{CD} \sin 30^\circ) R = 0 \\ & F_{CD} = 80 \text{ lb} & F_{CD} = 80 \text{ lb T} \end{aligned}$$

$$\begin{aligned} \sum M_C = 0: & (20 \text{ lb}) R + (B_y) R = 0 \\ & B_y = -20 \text{ lb} & B_y = 20 \text{ lb} \downarrow \end{aligned}$$


$$\begin{aligned} \sum F_x = 0: & F_{CD} \cos 30^\circ + B_x = 0 \\ & (80 \text{ lb})(\cos 30^\circ) + B_x = 0 \\ & B_x = -69.28 \text{ lb} & B_x = 69.28 \text{ lb} \leftarrow \end{aligned}$$

$$69.28 \text{ lb} \quad 20 \text{ lb} \quad B = 72.1 \text{ lb} \angle 16.1^\circ$$

6.78

GIVEN: $\theta = 150^\circ$

FIND:
(a) FORCE IN CD
(b) REACTION AT B.

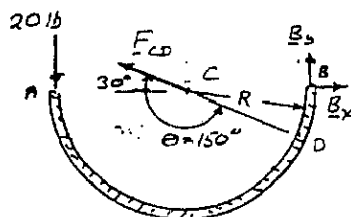

NOTE THAT CD
IS A TWO-FORCE
MEMBER. F_{CD} MUST
BE DIRECTED
ALONG DC.

$$\begin{aligned} \sum M_B = 0: & (20 \text{ lb})(2R) - (F_{CD} \sin 30^\circ) R = 0 \\ & F_{CD} = 80 \text{ lb} & F_{CD} = 80 \text{ lb T} \end{aligned}$$


$$\begin{aligned} \sum M_C = 0: & (20 \text{ lb}) R + (B_y) R = 0 \\ & B_y = -20 \text{ lb} & B_y = 20 \text{ lb} \downarrow \end{aligned}$$

$$\begin{aligned} \sum F_x = 0: & -F_{CD} \cos 30^\circ + B_x = 0 \\ & -(80 \text{ lb}) \cos 30^\circ + B_x = 0 \\ & B_x = 69.28 \text{ lb} & B_x = 69.28 \text{ lb} \rightarrow \end{aligned}$$


$$69.28 \text{ lb} \quad 20 \text{ lb} \quad B = 72.1 \text{ lb} \angle 16.1^\circ$$

6.29

6.79



FIND: COMPONENTS OF FORCES ACTING ON MEMBER ABC.




FREE BODY: ENTIRE FRAME

$$\begin{aligned} \pm \sum F_x = 0: & A_x + 18 \text{ kN} = 0 \\ & A_x = -18 \text{ kN} \quad A_x = 18 \text{ kN} \leftarrow \\ + \sum M_E = 0: & -(18 \text{ kN})(4 \text{ m}) - A_y(3.6 \text{ m}) = 0 \\ & A_y = -20 \text{ kN} \quad A_y = 20 \text{ kN} \uparrow \\ + \sum F_y = 0: & 18 \text{ kN} + F = 0 \\ & F = +20 \text{ kN} \quad F = 20 \text{ kN} \uparrow \end{aligned}$$


FREE BODY: MEMBER ABC

NOTE: BE IS A TWO-FORCE MEMBER. THUS B IS DIRECTED ALONG LINE BE.




$$\begin{aligned} + \sum M_C = 0: & B(4 \text{ m}) - (18 \text{ kN})(6 \text{ m}) + (20 \text{ kN})(3.6 \text{ m}) = 0 \\ & B = 9 \text{ kN} \quad B = 9 \text{ kN} \leftarrow \\ \pm \sum F_x = 0: & C_x - 18 \text{ kN} + 9 \text{ kN} = 0 \\ & C_x = 9 \text{ kN} \quad C_x = 9 \text{ kN} \rightarrow \\ + \sum F_y = 0: & C_y - 20 \text{ kN} = 0 \\ & C_y = 20 \text{ kN} \quad C_y = 20 \text{ kN} \uparrow \end{aligned}$$

6.81



FIND: COMPONENTS OF FORCES ACTING ON MEMBER ABC.




FREE BODY: ENTIRE FRAME

$$\begin{aligned} + \sum M_E = 0: & -A_x(4) - (20)(5) = 0 \\ & A_x = -25 \text{ kips} \quad A_x = 25 \text{ kips} \leftarrow \\ + \sum F_y = 0: & A_y - 20 \text{ kips} = 0 \\ & A_y = 20 \text{ kips} \quad A_y = 20 \text{ kips} \uparrow \end{aligned}$$


FREE BODY: MEMBER ABC

NOTE: BE IS A TWO-FORCE MEMBER, THUS B IS DIRECTED ALONG LINE BE. AND $B_x = \frac{3}{4} B$

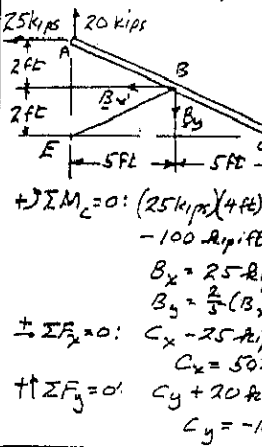


$$\begin{aligned} + \sum M_C = 0: & (25 \text{ kips})(4 \text{ ft}) - (20 \text{ kips})(10 \text{ ft}) + B_x(2 \text{ ft}) + B_y(5 \text{ ft}) = 0 \\ & -100 \text{ kips}\cdot\text{ft} + B_x(2 \text{ ft}) + \frac{3}{4} B_x(5 \text{ ft}) = 0 \\ & B_x = 25 \text{ kips} \quad B_x = 25 \text{ kips} \leftarrow \\ & B_y = \frac{3}{4} B_x = \frac{3}{4}(25) = 18.75 \text{ kips} \quad B_y = 10 \text{ kips} \downarrow \\ \pm \sum F_x = 0: & C_x - 25 \text{ kips} - 18.75 \text{ kips} = 0 \\ & C_x = 50 \text{ kips} \quad C_x = 50 \text{ kips} \rightarrow \\ + \sum F_y = 0: & C_y + 20 \text{ kips} - 10 \text{ kips} = 0 \\ & C_y = -10 \text{ kips} \quad C_y = 10 \text{ kips} \downarrow \end{aligned}$$

6.80



GIVEN: $M = 72 \text{ kN}\cdot\text{m}$.
FIND: COMPONENTS OF FORCES ACTING ON MEMBER ABC.




FREE BODY: ENTIRE FRAME

$$\begin{aligned} \pm \sum F_x = 0: & A_x = 0 \\ + \sum M_A = 0: & -72 \text{ kN}\cdot\text{m} - A_y(3.6 \text{ m}) = 0 \\ & A_y = -20 \text{ kN} \quad A_y = 20 \text{ kN} \uparrow \\ & A = 20 \text{ kN} \uparrow \end{aligned}$$


FREE BODY: MEMBER ABC

NOTE: BE IS A TWO-FORCE MEMBER, THUS B IS DIRECTED ALONG LINE BE.




$$\begin{aligned} + \sum M_C = 0: & B(4 \text{ m}) + (20 \text{ kN})(3.6 \text{ m}) = 0 \\ & B = -18 \text{ kN} \quad B = 18 \text{ kN} \leftarrow \\ \pm \sum F_x = 0: & -18 \text{ kN} + C_x = 0 \\ & C_x = 18 \text{ kN} \quad C_x = 18 \text{ kN} \rightarrow \\ + \sum F_y = 0: & C_y - 20 \text{ kN} = 0 \\ & C_y = 20 \text{ kN} \quad C_y = 20 \text{ kN} \uparrow \end{aligned}$$

6.82



FIND: COMPONENTS OF FORCES ACTING ON MEMBER ABC.




FREE BODY ENTIRE FRAME

$$\begin{aligned} + \sum F_x = 0: & A_x = 0 \\ + \sum M_E = 0: & -A_x(4 \text{ ft}) - 100 \text{ kip}\cdot\text{ft} = 0 \\ & A_x = -25 \text{ kips} \quad A_x = 25 \text{ kips} \leftarrow \\ & A = 25 \text{ kips} \leftarrow \end{aligned}$$


FREE BODY: MEMBER ABC

NOTE: BE IS A TWO-FORCE MEMBER, THUS B IS DIRECTED ALONG LINE BE AND $B_x = \frac{3}{4} B_y$

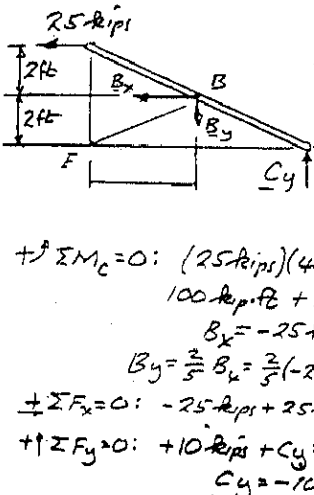


$$\begin{aligned} + \sum M_C = 0: & (25 \text{ kips})(4 \text{ ft}) + B_x(2 \text{ ft}) + B_y(5 \text{ ft}) = 0 \\ & 100 \text{ kips}\cdot\text{ft} + B_x(2 \text{ ft}) + \frac{3}{4} B_x(5 \text{ ft}) = 0 \\ & B_x = -25 \text{ kips} \quad B_x = 25 \text{ kips} \leftarrow \\ & B_y = \frac{3}{4} B_x = \frac{3}{4}(-25) = -18.75 \text{ kips} \quad B_y = 10 \text{ kips} \uparrow \\ \pm \sum F_x = 0: & -25 \text{ kips} + 25 \text{ kips} + C_x = 0 \\ & C_x = 0 \\ + \sum F_y = 0: & 10 \text{ kips} + C_y = 0 \\ & C_y = -10 \text{ kips} \quad C_y = 10 \text{ kips} \downarrow \\ & C = 10 \text{ kips} \downarrow \end{aligned}$$

6.83



FIND: COMPONENTS OF REACTIONS AT A AND E IF A 750 N Force is APPLIED (a) AT B, (b) AT D.




FREE-BODY: ENTIRE FRAME

THE FOLLOWING ANALYSIS IS VALID FOR BOTH (a) AND (b) SINCE POSITION OF LOAD ON ITS LINE OF ACTION IS INVARIABLE.

$$\begin{aligned} \uparrow \sum M_E = 0: & -(750\text{N})(240\text{mm}) - A_x(400\text{mm}) = 0 \\ & A_x = -950\text{N} \quad A_x = 450\text{N} \leftarrow \\ \rightarrow \sum F_x = 0: & E_x - 450\text{N} = 0; \quad E_x = 450\text{N} \rightarrow \\ \uparrow \sum F_y = 0: & A_y + E_y - 750\text{N} = 0 \end{aligned} \quad (1)$$

(a) LOAD APPLIED AT B. FREE BODY: MEMBER CE

CE IS A TWO-FORCE MEMBER. THUS, THE REACTION AT E MUST BE DIRECTED ALONG CE.

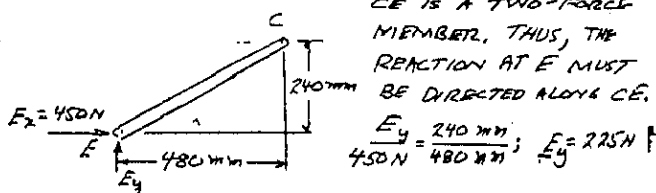

$$\frac{E_y}{450\text{N}} = \frac{240\text{mm}}{480\text{mm}}; \quad E_y = 225\text{N} \uparrow$$


$$\text{FROM EQ.(1): } A_y + 225 - 750 = 0; \quad A_y = 525\text{N} \uparrow$$

THUS, REACTIONS ARE:

$$\begin{aligned} A_x &= 450\text{N} \leftarrow, \quad A_y = 525\text{N} \uparrow \\ E_x &= 450\text{N} \rightarrow, \quad E_y = 225\text{N} \uparrow \end{aligned}$$

(b) LOAD APPLIED AT D. FREE BODY: MEMBER AC

AC IS A TWO-FORCE MEMBER. THUS, THE REACTION AT A MUST BE DIRECTED ALONG AC.

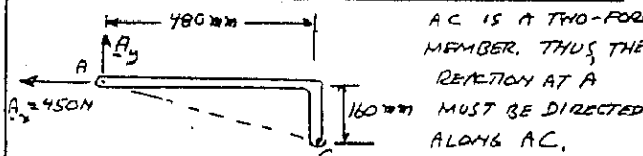


$$\frac{A_y}{450\text{N}} = \frac{160\text{mm}}{480\text{mm}} \quad A_y = 150\text{N} \uparrow$$

$$\begin{aligned} \text{FROM EQ.(1): } & A_y + E_y - 750\text{N} = 0 \\ & 150\text{N} + E_y - 750\text{N} = 0 \\ & E_y = 600\text{N} \quad E_y = 600\text{N} \uparrow \end{aligned}$$


THUS, REACTIONS ARE:

$$\begin{aligned} A_x &= 450\text{N} \leftarrow, \quad A_y = 150\text{N} \uparrow \\ E_x &= 450\text{N} \rightarrow, \quad E_y = 600\text{N} \uparrow \end{aligned}$$

6.84



FIND: COMPONENTS OF REACTIONS AT A AND E IF A 750 N Force is APPLIED (a) AT B, (b) AT D.




FREE BODY: ENTIRE FRAME

THE FOLLOWING ANALYSIS IS VALID FOR BOTH (a) AND (b) SINCE POSITION OF LOAD ON ITS LINE OF ACTION IS INVARIABLE.

$$\begin{aligned} \uparrow \sum M_E = 0: & -(750\text{N})(60\text{mm}) - A_x(200\text{mm}) = 0 \\ & A_x = -300\text{N} \quad A_x = 300\text{N} \leftarrow \\ \rightarrow \sum F_x = 0: & E_x - 300\text{N} = 0; \quad E_x = 300\text{N} \rightarrow \\ \uparrow \sum F_y = 0: & A_y + E_y - 750\text{N} = 0 \end{aligned} \quad (1)$$

(a) LOAD APPLIED AT B. FREE BODY: MEMBER CE

CE IS A TWO-FORCE MEMBER. THUS, THE REACTION AT E MUST BE DIRECTED ALONG CE.



$$\frac{E_y}{300\text{N}} = \frac{75\text{mm}}{250\text{mm}}; \quad E_y = 90\text{N} \uparrow$$


$$\text{FROM EQ.(1): } A_y + 90 - 750 = 0; \quad A_y = 660\text{N} \uparrow$$

THUS REACTIONS ARE:

$$\begin{aligned} A_x &= 300\text{N} \leftarrow, \quad A_y = 660\text{N} \uparrow \\ E_x &= 300\text{N} \rightarrow, \quad E_y = 90\text{N} \uparrow \end{aligned}$$

(b) LOAD APPLIED AT D. FREE BODY: MEMBER AC

AC IS A TWO-FORCE MEMBER. THUS, THE REACTION AT A MUST BE DIRECTED ALONG AC.

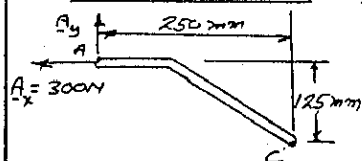


$$\frac{A_y}{300\text{N}} = \frac{125\text{mm}}{250\text{mm}} \quad A_y = 150\text{N} \uparrow$$

$$\begin{aligned} \text{FROM EQ.(1): } & A_y + E_y - 750\text{N} = 0 \\ & 150\text{N} + E_y - 750\text{N} = 0 \\ & E_y = 600\text{N} \quad E_y = 600\text{N} \uparrow \end{aligned}$$


THUS, REACTIONS ARE:

$$\begin{aligned} A_x &= 300\text{N} \leftarrow, \quad A_y = 150\text{N} \uparrow \\ E_x &= 300\text{N} \rightarrow, \quad E_y = 600\text{N} \uparrow \end{aligned}$$

6.85



FIND: COMPONENTS OF REACTIONS AT A AND E IF A $36 \text{ N}\cdot\text{m}$ COUPLE IS APPLIED (a) AT B, (b) AT D.




FREE BODY: ENTIRE FRAME

THE FOLLOWING ANALYSIS IS VALID FOR BOTH (a) AND (b) SINCE THE POINT OF APPLICATION OF THE COUPLE IS IMMATERIAL.

$$\begin{aligned} \uparrow \Sigma M_E = 0: & -36 \text{ N}\cdot\text{m} - A_x(0.4 \text{ m}) = 0 \\ & A_x = -90 \text{ N} \quad A_x = 90 \text{ N} \leftarrow \\ \rightarrow \Sigma F_x = 0: & -90 + E_x = 0 \\ & E_x = 90 \text{ N} \quad E_x = 90 \text{ N} \rightarrow \\ \uparrow \Sigma F_y = 0: & A_y + E_y = 0 \end{aligned} \quad (1)$$

(a) COUPLE APPLIED AT B. FREE BODY: MEMBER CE



AC IS A TWO-FORCE MEMBER. THUS, THE REACTION AT E MUST BE DIRECTED ALONG EC.


$$\frac{E_y}{90 \text{ N}} = \frac{0.24 \text{ m}}{0.48 \text{ m}}; \quad E_y = 45 \text{ N} \uparrow$$

$$\text{FROM EQ(1): } A_y + 45 \text{ N} = 0 \\ A_y = -45 \text{ N} \quad A_y = 45 \text{ N} \downarrow$$

THUS, REACTIONS ARE

$$\begin{aligned} A_x = 90 \text{ N} \leftarrow, \quad A_y = 45 \text{ N} \downarrow \\ E_x = 90 \text{ N} \rightarrow, \quad E_y = 45 \text{ N} \uparrow \end{aligned}$$

(b) COUPLE APPLIED AT D. FREE BODY: MEMBER AC



AC IS A TWO-FORCE MEMBER. THUS, THE REACTION AT A MUST BE DIRECTED ALONG AC.


$$\frac{A_y}{90 \text{ N}} = \frac{0.16 \text{ m}}{0.48 \text{ m}}; \quad A_y = 30 \text{ N} \uparrow$$

$$\text{FROM EQ(1): } A_y + E_y = 0 \\ 30 \text{ N} + E_y = 0 \\ E_y = -30 \text{ N} \quad E_y = 30 \text{ N} \downarrow$$


THUS, REACTIONS ARE:

$$\begin{aligned} A_x = 90 \text{ N} \leftarrow, \quad A_y = 30 \text{ N} \uparrow \\ E_x = 90 \text{ N} \rightarrow, \quad E_y = 30 \text{ N} \downarrow \end{aligned}$$

6.86



FIND: COMPONENTS OF REACTIONS AT A AND E IF A $36 \text{ N}\cdot\text{m}$ COUPLE IS APPLIED (a) AT B, (b) AT D.

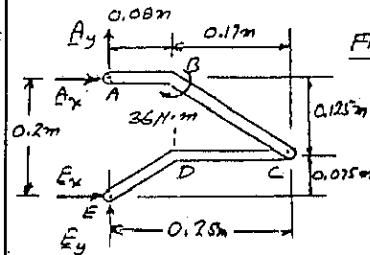


FREE BODY: ENTIRE FRAME

THE FOLLOWING ANALYSIS IS VALID FOR BOTH (a) AND (b) SINCE THE POINT OF APPLICATION OF THE COUPLE IS IMMATERIAL.

$$\begin{aligned} \uparrow \Sigma M_E = 0: & -36 \text{ N}\cdot\text{m} - A_x(0.2 \text{ m}) = 0 \\ & A_x = -180 \text{ N} \quad A_x = 180 \text{ N} \leftarrow \\ \rightarrow \Sigma F_x = 0: & -180 + E_x = 0 \\ & E_x = 180 \text{ N} \quad E_x = 180 \text{ N} \rightarrow \\ \uparrow \Sigma F_y = 0: & A_y + E_y = 0 \end{aligned} \quad (1)$$

(a) COUPLE APPLIED AT B. FREE BODY: MEMBER CE



AC IS A TWO-FORCE MEMBER. THUS, THE REACTION AT E MUST BE DIRECTED ALONG EC.


$$\frac{E_y}{180 \text{ N}} = \frac{0.075 \text{ m}}{0.25 \text{ m}} \quad E_y = 54 \text{ N} \uparrow$$

$$\text{FROM EQ(1): } A_y + 54 \text{ N} = 0 \\ A_y = -54 \text{ N} \quad A_y = 54 \text{ N} \downarrow$$

THUS, REACTIONS ARE

$$\begin{aligned} A_x = 180 \text{ N} \leftarrow, \quad A_y = 54 \text{ N} \downarrow \\ E_x = 180 \text{ N} \rightarrow, \quad E_y = 54 \text{ N} \uparrow \end{aligned}$$

(b) COUPLE APPLIED AT D. FREE BODY: MEMBER AC

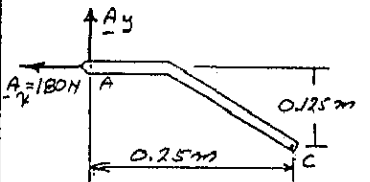

AC IS A TWO-FORCE MEMBER. THUS, THE REACTION AT A MUST BE DIRECTED ALONG AC.


$$\frac{A_y}{180 \text{ N}} = \frac{0.125 \text{ m}}{0.25 \text{ m}} \quad A_y = 90 \text{ N} \uparrow$$

$$\text{FROM EQ(1): } A_y + E_y = 0 \\ 90 \text{ N} + E_y = 0 \\ E_y = -90 \text{ N} \quad E_y = 90 \text{ N} \downarrow$$


THUS, REACTIONS ARE

$$\begin{aligned} A_x = 180 \text{ N} \leftarrow, \quad A_y = 90 \text{ N} \uparrow \\ E_x = 180 \text{ N} \rightarrow, \quad E_y = 90 \text{ N} \downarrow \end{aligned}$$

6.87



FIND: THE COMPONENTS OF THE REACTIONS AT A AND B. WHEN THE 60-1b LOAD IS (a) APPLIED AT D, (b) APPLIED AT E.




FREE BODY: ENTIRE FRAME

THE FOLLOWING ANALYSIS IS VALID FOR BOTH (a) AND (b) SINCE THE POSITION

OF THE LOAD ALONG ITS LINE OF ACTION IS IMMATRIAL.

$$\begin{aligned} \uparrow \Sigma M_B = 0: & -A_y(5\text{ in.}) - (60\text{ lb})(4\text{ in.}) = 0 \\ & A_y = -48\text{ lb} \quad A_y = 48\text{ lb} \downarrow \\ \uparrow \Sigma F_y = 0: & -60\text{ lb} + B_y - 48\text{ lb} = 0 \\ & B_y = 108\text{ lb} \quad B_y = 108\text{ lb} \uparrow \\ \rightarrow \Sigma F_x = 0: & A_x + B_x = 0 \end{aligned} \quad (1)$$


(a) LOAD APPLIED AT D. FREE BODY: MEMBER BCE



BCE IS A TWO-FORCE MEMBER. THUS, REACTION AT B IS: $B = 108\text{ lb} \uparrow$ AND $B_x = 0$

FROM EQ(1): $A_x + B_x = 0$; $A_x + 0 = 0$ $A_x = 0$
 THUS, REACTIONS ARE:
 $A = 48\text{ lb} \downarrow$, $B = 108\text{ lb} \uparrow$

(b) LOAD APPLIED AT E. FREE BODY: MEMBER ACD



ACD IS A TWO-FORCE MEMBER. THUS, THE REACTION AT A MUST BE DIRECTED ALONG AC


$$\frac{48\text{ lb}}{A_x} = \frac{3\text{ in}}{5\text{ in.}} \quad A_x = 80\text{ lb} \rightarrow$$

FROM EQ(1): $A_x + B_x = 0$
 $80\text{ lb} + B_x = 0$
 $B_x = -80\text{ lb} \quad B_x = 80\text{ lb} \leftarrow$


THUS, REACTIONS ARE:

$$\begin{aligned} A_x &= 80\text{ lb} \rightarrow, \quad A_y = 48\text{ lb} \downarrow \\ B_x &= 80\text{ lb} \leftarrow, \quad B_y = 108\text{ lb} \uparrow \end{aligned}$$

6.88



FIND: THE COMPONENTS OF THE REACTIONS AT B AND F WHEN THE 48-1b LOAD IS APPLIED (a) AT A, (b) AT D, (c) AT E.




FREE BODY: ENTIRE FRAME

THE FOLLOWING ANALYSIS IS VALID FOR (a), (b), AND (c), SINCE THE POSITION OF THE LOAD ALONG ITS LINE

OF ACTION IS IMMATRIAL

$$\begin{aligned} \uparrow \Sigma M_F = 0: & (48\text{ lb})(8\text{ in.}) - B_x(12\text{ in.}) = 0 \\ & B_x = 32\text{ lb} \quad B_x = 32\text{ lb} \rightarrow \\ \rightarrow \Sigma F_x = 0: & 32\text{ lb} + F_x = 0 \\ & F_x = -32\text{ lb} \quad F_x = 32\text{ lb} \leftarrow \\ \uparrow \Sigma F_y = 0: & B_y + F_y - 48\text{ lb} = 0 \end{aligned} \quad (1)$$

(a) LOAD APPLIED AT A. FREE BODY: MEMBER CDB



CDB IS A TWO-FORCE MEMBER. THUS, THE REACTION AT B MUST BE DIRECTED ALONG BC.


$$\frac{B_y}{32\text{ lb}} = \frac{5\text{ in.}}{16\text{ in.}} \quad B_y = 10\text{ lb} \uparrow$$

FROM EQ(1): $10\text{ lb} + F_y - 48\text{ lb} = 0$
 $F_y = 38\text{ lb} \quad F_y = 38\text{ lb} \uparrow$

THUS, REACTIONS ARE:

$$\begin{aligned} B_x &= 32\text{ lb} \rightarrow, \quad B_y = 10\text{ lb} \uparrow \\ F_x &= 32\text{ lb} \leftarrow, \quad F_y = 38\text{ lb} \uparrow \end{aligned}$$

(b) LOAD APPLIED AT D. FREE BODY: MEMBER ACF



ACF IS A TWO-FORCE MEMBER. THUS, THE REACTION AT F MUST BE DIRECTED ALONG CF.


$$\frac{F_y}{32\text{ lb}} = \frac{7\text{ in.}}{16\text{ in.}} \quad F_y = 14\text{ lb} \uparrow$$

FROM EQ(1): $B_y + 14\text{ lb} - 48\text{ lb} = 0$
 $B_y = 34\text{ lb} \quad B_y = 34\text{ lb} \uparrow$

THUS REACTIONS ARE:

$$\begin{aligned} B_x &= 32\text{ lb} \leftarrow, \quad B_y = 34\text{ lb} \uparrow \\ F_x &= 32\text{ lb} \rightarrow, \quad F_y = 14\text{ lb} \uparrow \end{aligned}$$


(c) LOAD APPLIED AT E: FREE BODY: MEMBER CDB




THIS IS THE SAME FREE BODY AS IN PART (a).

REACTIONS ARE SAME AS (a)

6.89



FIND: THE COMPONENTS OF THE REACTIONS AT B AND F WHEN THE 288-lb-in. COUPLE IS APPLIED (a) AT A, (b) AT D, (c) AT E.



FREE BODY:

ENTIRE FRAME


THE FOLLOWING ANALYSIS IS VALID FOR (a), (b), AND (c), SINCE THE POINT OF APPLICATION OF THE COUPLE IS IMMATERIAL.

$$\begin{aligned}
 +\sum M_F = 0: & -288 \text{ lb-in.} - B_x(12 \text{ in.}) = 0 \\
 & B_x = -241b \quad B_x = 241b \leftarrow \\
 +\sum F_x = 0: & -241b + F_x = 0 \\
 & F_x = 241b \rightarrow \\
 +\sum F_y = 0: & B_y + F_y = 0 \quad (1)
 \end{aligned}$$

(a) COUPLE APPLIED AT A.

FREE BODY: MEMBER CDB

CDB IS A TWO-FORCE MEMBER, THUS REACTION AT B MUST BE DIRECTED ALONG BC.

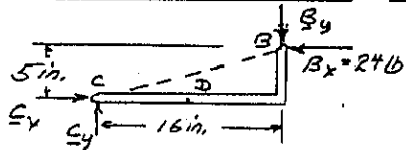

$$\frac{B_y}{241b} = \frac{5 \text{ in.}}{16 \text{ in.}} \quad B_y = 7.51b \downarrow$$


FROM EQ.(1): $-7.51b + F_y = 0$
 $F_y = 7.51b \quad F_y = 7.51b \uparrow$

THUS, REACTIONS ARE:

$$\begin{aligned}
 B_x = 241b \leftarrow, & B_y = 7.51b \downarrow \\
 F_x = 241b \rightarrow, & F_y = 7.51b \uparrow
 \end{aligned}$$

(b) COUPLE APPLIED AT D. FREE BODY: MEMBER ACF

ACF IS A TWO-FORCE MEMBER, THUS, THE REACTION AT F MUST BE DIRECTED ALONG CF.

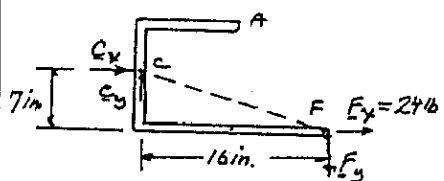


$$\frac{F_y}{241b} = \frac{7 \text{ in.}}{16 \text{ in.}} \quad F_y = 10.51b \downarrow$$

FROM EQ.(1): $B_y - 10.51b = 0$
 $B_y = +10.51b \quad B_y = 10.51b \uparrow$

THUS, REACTIONS ARE:

$$\begin{aligned}
 B_x = 241b \leftarrow, & B_y = 10.51b \uparrow \\
 F_x = 241b \rightarrow, & F_y = 10.51b \downarrow
 \end{aligned}$$

(c) COUPLE APPLIED AT E. FREE BODY: MEMBER CDB.

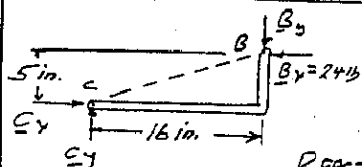


THIS IS THE SAME FREE BODY AS IN PART (a).


REACTION ARE SAME AS IN (a)

6.90


SHOW THAT THE LOADINGS SHOWN ARE EQUIVALENT IN (a) AND THEN IN (b).

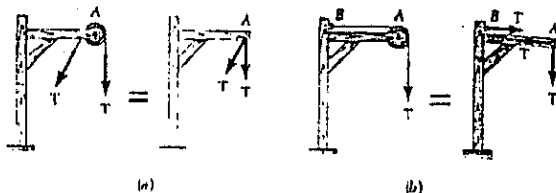


(a) REPLACE EACH FORCE BY A FORCE-COUPLE SYSTEM



(b) CUT CABLE AS SHOWN AND REPLACE FORCES ON PULLEY BY EQUIVALENT FORCES AT A.




6.91




GIVEN: RADIUS OF PULLEY = 0.5m
 FIND: COMPONENTS OF REACTIONS AT A AND E.

FREE BODY: ENTIRE ASSEMBLY

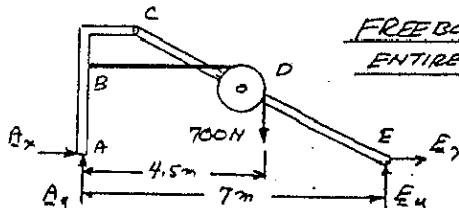

$$\begin{aligned}
 +\sum M_A = 0: & E_y(7 \text{ m}) - (700 \text{ N})(4.5 \text{ m}) = 0 \\
 & E_y = 450 \text{ N} \quad E_y = 450 \text{ N} \uparrow \\
 +\sum F_y = 0: & A_y + 450 \text{ N} - 700 \text{ N} = 0 \\
 & A_y = 250 \text{ N} \quad A_y = 250 \text{ N} \uparrow \\
 +\sum F_x = 0: & A_x + E_x = 0 \quad (1)
 \end{aligned}$$



FREE BODY: MEMBER ABC


$$\begin{aligned}
 +\sum M_C = 0: & (700 \text{ N})(1 \text{ m}) + A_x(3 \text{ m}) - (250 \text{ N})(1 \text{ m}) = 0 \\
 & A_x = -150 \text{ N} \quad A_x = 150 \text{ N} \leftarrow
 \end{aligned}$$

FROM EQ.(1):
 $A_x + E_x = 0$
 $-150 \text{ N} + E_x = 0$
 $E_x = 150 \text{ N} \quad E_x = 150 \text{ N} \rightarrow$

THUS, REACTIONS ARE:


$$\begin{aligned}
 A_x = 150 \text{ N} \leftarrow, & A_y = 250 \text{ N} \uparrow \\
 E_x = 150 \text{ N} \rightarrow, & E_y = 450 \text{ N} \uparrow
 \end{aligned}$$

6.92



GIVEN: RADIUS OF PULLEY = 50 mm.

FIND: COMPONENTS OF REACTIONS AT B AND E.




FREE BODY: ENTIRE ASSEMBLY

$$+\uparrow \Sigma M_E = 0: -(300N)(350mm) - B_x(150mm) = 0$$

$$B_x = -700N \quad B_x = 700N \leftarrow$$

$$+\uparrow \Sigma F_x = 0: -700N + E_x = 0 \quad E_x = 700N$$

$$+\uparrow \Sigma F_y = 0: B_y + E_y - 300N = 0 \quad (1)$$



FREE BODY: MEMBER ACE

$$+\uparrow \Sigma M_C = 0: (700N)(150mm) - (300N)(50mm) - E_y(180mm) = 0$$

$$E_y = 500N \quad E_y = 500N \uparrow$$

FROM EQ.(1): $B_y + 500N - 300N = 0$
 $B_y = -200N \quad B_y = 200N \downarrow$


THUS, REACTIONS ARE:

$$B_x = 700N \leftarrow, \quad B_y = 200N \downarrow$$

$$E_x = 700N \rightarrow, \quad E_y = 500N \uparrow$$



6.93 and 6.94

GIVEN: PIPES WEIGH 30 lb/ft. FRAMES SPACED AT 7.5 ft. FIND: COMPONENTS OF REACTIONS AT A AND G.



FREE BODY: PIPE 2.

$$W = (30 \text{ lb/ft})(7.5 \text{ ft}) = 225 \text{ lb}$$

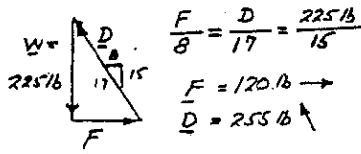

GEOMETRY OF PIPE 2

$$r = 4.5 \text{ in.}$$

BY SYMMETRY: $CF = CD$ (1)

EQUATE HORIZONTAL DISTANCES

$$r + \frac{8}{17}r = CD \left(\frac{15}{17}\right)$$

$$\frac{25}{17}r = CD \left(\frac{15}{17}\right)$$


$$CD = \frac{25}{15}r = \frac{5}{3}r$$

FROM EQ.(1) $CF = \frac{5}{3}r = \frac{5}{3}(4.5 \text{ in})$

$$CF = 7.5 \text{ in.}$$

(CONTINUED)

6.93 and 6.94 CONTINUED




FREE BODY: MEMBER CFG

$$+\uparrow \Sigma M_C = 0: (120 \text{ lb})(7.5 \text{ in}) - G_x(16 \text{ in}) = 0$$

$$G_x = 56.25 \text{ lb} \quad G_x = 56.3 \text{ lb} \leftarrow$$

PROB. 6.93

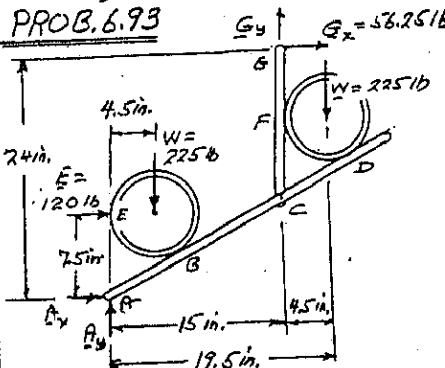

FREE BODY: FRAME AND PIPES

NOTE: PIPE 2 IS SIMILAR TO PIPE 1. $AE = CF = 7.5 \text{ in.}$
 $E = F = 120 \text{ lb}$

$$+\uparrow \Sigma M_A = 0: G_y(15 \text{ in}) - (56.25 \text{ lb})(24 \text{ in}) - (225 \text{ lb})(4.5 \text{ in}) - (225 \text{ lb})(19.5 \text{ in}) - (120 \text{ lb})(7.5 \text{ in}) = 0$$

$$G_y = 570 \text{ lb} \quad G_y = 570 \text{ lb} \uparrow$$

$$+\uparrow \Sigma F_x = 0: A_x + 120 \text{ lb} + 56.25 \text{ lb} = 0$$


$$A_x = -176.25 \text{ lb} \quad A_x = 176.3 \text{ lb} \leftarrow$$

$$+\uparrow \Sigma F_y = 0: A_y + 570 \text{ lb} - 225 \text{ lb} - 225 \text{ lb} = 0$$

$$A_y = -60 \text{ lb} \quad A_y = 60 \text{ lb} \downarrow$$

PROB. 6.94

FREE BODY: FRAME AND PIPE 2

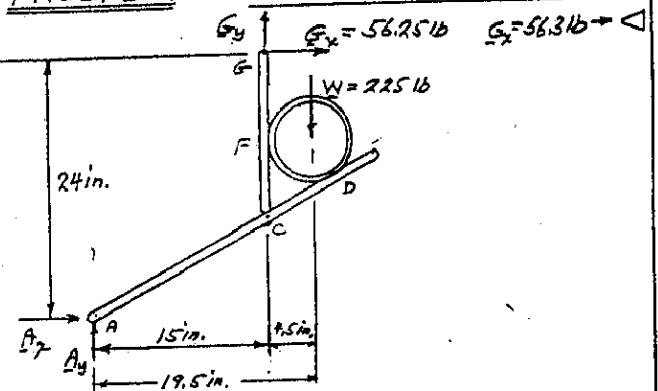

$$+\uparrow \Sigma M_A = 0: G_y(15 \text{ in}) - (56.25 \text{ lb})(24 \text{ in}) - (225 \text{ lb})(19.5 \text{ in}) = 0$$

$$G_y = 382.5 \text{ lb} \quad G_y = 383 \text{ lb} \uparrow$$


$$+\uparrow \Sigma F_x = 0: A_x + 56.25 \text{ lb} = 0$$

$$A_x = -56.25 \text{ lb} \quad A_x = 56.3 \text{ lb} \leftarrow$$

$$+\uparrow \Sigma F_y = 0: A_y + 382.5 \text{ lb} - 225 \text{ lb} = 0$$


$$A_y = -157.5 \text{ lb} \quad A_y = 157.5 \text{ lb} \downarrow$$

6.95

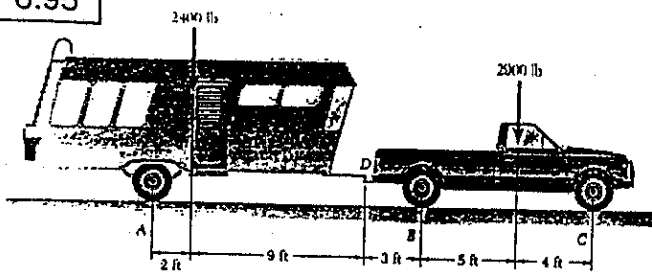

Find: (a) REACTIONS AT EACH OF THE SIX WHEELS.
(b) ADDITIONAL LOAD ON EACH WHEEL DUE TO THE TRAILER

(a)




FREE BODY: TRAILER
(WE SHALL DENOTE BY A, B, C THE REACTION AT ONE WHEEL)

$$+\sum M_A = 0: -(2400 \text{ lb})(2 \text{ ft}) + D(11 \text{ ft}) = 0$$

$$D = 436.36 \text{ lb}$$

$$+\sum F_y = 0: 2A - 2400 \text{ lb} + 436.36 \text{ lb} = 0$$

$$A = 981.87 \text{ lb} \quad A = 982 \text{ lb} \uparrow$$



FREE BODY: TRUCK

$$+\sum M_B = 0:$$

$$(436.36 \text{ lb})(3 \text{ ft}) - (2900 \text{ lb})(5 \text{ ft}) + 2C(9 \text{ ft}) = 0$$

$$C = 732.83 \text{ lb} \quad C = 733 \text{ lb} \uparrow$$

$$+\sum F_y = 0: 2B - 436.36 \text{ lb} - 2900 \text{ lb} + 2(732.83 \text{ lb}) = 0$$

$$B = 935.35 \text{ lb} \quad B = 935 \text{ lb} \uparrow$$

(b) ADDITIONAL LOAD ON TRUCK WHEELS

USE FREE BODY DIAGRAM OF TRUCK WITHOUT 2900 lb.


$$+\sum M_B = 0: (436.36 \text{ lb})(3 \text{ ft}) + 2C(9 \text{ ft}) = 0$$

$$C = 72.73 \text{ lb} \quad \Delta C = -72.7 \text{ lb}$$

$$+\sum F_y = 0: 2B - 436.36 \text{ lb} - 2(72.73 \text{ lb}) = 0$$


$$B = 290.91 \text{ lb} \quad \Delta B = +291 \text{ lb}$$

6.96

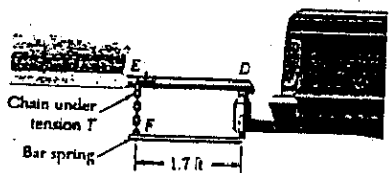

Find: (a) TENSION IN EACH CHAIN FOR EQUAL ADDITIONAL LOAD ON TRUCK WHEELS. (b) REACTION AT EACH WHEEL.

(a) WE SHALL FIRST FIND THE ADDITIONAL REACTION "D" AT EACH WHEEL DUE TO THE TRAILER. FREE BODY DIAGRAM



(SAME D AT EACH TRUCK WHEEL)

$$+\sum M_A = 0: -(2400 \text{ lb})(2 \text{ ft}) + 2B(14 \text{ ft}) + 2D(23 \text{ ft}) = 0$$


$$D = 64.86 \text{ lb}$$

$$+\sum F_y = 0: 2A - 2400 \text{ lb} + 4(64.86 \text{ lb}) = 0; A = 1070 \text{ lb}; A = 1077 \text{ lb} \uparrow$$

(CONTINUED)

6.96 CONTINUED

FREE BODY: TRUCK
(TRAILER LOADING ONLY)



$$+\sum M_D = 0$$


$$2A(12 \text{ ft}) + 2B(3 \text{ ft}) - 2T(1.7 \text{ ft}) = 0$$

$$T = 8.824 \Delta$$

$$= 8.824(64.86 \text{ lb})$$

$$T = 572.31 \text{ lb}$$

$$T = 572 \text{ lb}$$



FREE BODY: TRUCK
(TRUCK WEIGHT ONLY)

$$+\sum M_B = 0:$$

$$-(2900 \text{ lb})(5 \text{ ft}) + 2C'(9 \text{ ft}) = 0$$

$$C' = 805.6 \text{ lb} \quad C = 805.6 \text{ lb} \uparrow$$

$$+\sum F_y = 0: 2B' - 2900 \text{ lb} + 2(805.6 \text{ lb}) = 0$$

$$B' = 644.4 \text{ lb} \quad B = 644.4 \text{ lb} \uparrow$$


ACTUAL REACTIONS

$$B = B' + \Delta = 644.4 \text{ lb} + 64.86 = 709.2 \text{ lb} \quad B = 709 \text{ lb} \uparrow$$

$$C = C' + \Delta = 805.6 \text{ lb} + 64.86 = 870.4 \text{ lb} \quad C = 870 \text{ lb} \uparrow$$

$$(FROM PART a): \quad A = 1077 \text{ lb} \uparrow$$

6.97

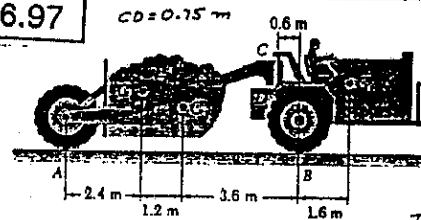

Given: $m_1 = 45 \text{ Mg}$
 $m_2 = 8 \text{ Mg}$
 $m_3 = 10 \text{ Mg}$


Find: (a) REACTIONS AT EACH OF 4 WHEELS
(b) FORCES ACTING ON TRACTOR AT C AND D.

$$W_1 = m_1 g = (45 \text{ Mg})(9.81 \text{ m/s}^2) = 441.45 \text{ kN}$$

$$W_2 = m_2 g = (8 \text{ Mg})(9.81 \text{ m/s}^2) = 78.48 \text{ kN}$$

$$W_3 = m_3 g = (10 \text{ Mg})(9.81 \text{ m/s}^2) = 98.1 \text{ kN}$$

(a)

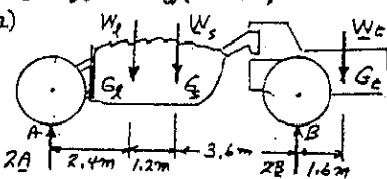

FREE BODY: ENTIRE MACHINE

$$+\sum M_A = 0: 2B(2.2 \text{ m}) - W_2(2.4 \text{ m}) - W_3(3.6 \text{ m}) - W_1(8.8 \text{ m}) = 0$$

$$2B(2.2 \text{ m}) - (441.45 \text{ kN})(2.4 \text{ m}) - (78.48 \text{ kN})(3.6 \text{ m}) - (98.1 \text{ kN})(8.8 \text{ m}) = 0$$


$$B = 153.14 \text{ kN} \quad B = 153.1 \text{ kN} \uparrow$$

$$+\sum F_y = 0: 2A + 2(153.14 \text{ kN}) - 441.45 \text{ kN} - 78.48 \text{ kN} - 98.1 \text{ kN} = 0$$

$$A = 155.87 \text{ kN} \quad A = 155.9 \text{ kN} \uparrow$$

(b)

FREE BODY: TRACTOR



$$2B = 2(153.14 \text{ kN}) = 306.28 \text{ kN}$$

$$+\sum M_D = 0: C(0.75 \text{ m}) + (306.28 \text{ kN})(0.6 \text{ m}) - (98.1 \text{ kN})(2.2 \text{ m}) = 0$$


$$C = 42.74 \text{ kN} \quad C = 42.7 \text{ kN} \uparrow$$

$$\sum F_x = 0: -42.74 \text{ kN} + D_x = 0; \quad D_x = 42.74 \text{ kN} \rightarrow$$

$$+\sum F_y = 0: 306.28 \text{ kN} - 98.1 \text{ kN} - D_y = 0; \quad D_y = 208.68 \text{ kN} \downarrow$$


$$208.68 \text{ kN} \quad D = 213 \text{ kN} \searrow 78.4^\circ$$

6.98

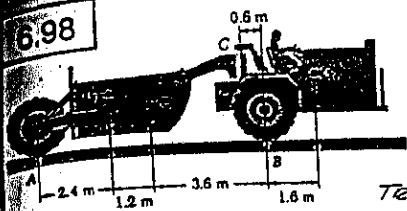


GIVEN: $m_s = 8Mg$
 $m_L = 10Mg$
 (LOAD REMOVED)
 FIND: (a) REACTIONS AT EACH OF 4 WHEELS.
 (b) FORCES ACTING ON TRACTOR AT C AND D.

$W_s = m_s g = (8Mg)(9.81 m/s^2) = 78.48 kN$
 $W_L = m_L g = (10Mg)(9.81 m/s^2) = 98.1 kN$

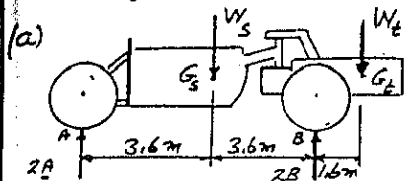

FREE BODY: ENTIRE MACHINE


$\sum M_B = 0: -2A(7.2m) + (78.48kN)(3.6m) - (98.1kN)(1.6m) = 0$
 $A = 8.72 kN$
 $\sum F_y = 0: 2(8.72kN) + 2B - 78.48kN - 98.1kN = 0$
 $B = 79.57 kN$

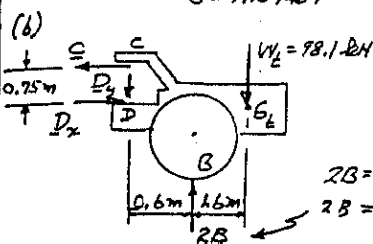


FREE BODY: TRACTOR

$\sum M_D = 0: C(0.75m) + (159.14kN)(0.6m) - (98.1kN)(2.2m) = 0$
 $C = 160.4 kN$
 $\sum F_y = 0: 159.14kN - 98.1kN - D_y = 0$
 $D_y = 61.04 kN$
 $\sum F_x = 0: -160.4kN + D_x = 0$
 $D_x = 160.4 kN$
 $D = 171.6 kN \angle 20.8^\circ$

6.99



FIND: COMPONENTS OF ALL FORCES ACTING ON MEMBER ABE.

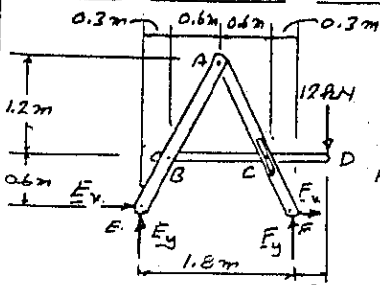


FREE BODY: ENTIRE FRAME

$\sum M_E = 0: F_y(1.8m) - (12kN)(2.1m) = 0$
 $F_y = 14 kN$
 $\sum F_y = 0: E_y + 14kN - 12kN = 0$
 $E_y = -2 kN$
 $F_y = 2 kN$

(CONTINUED)


6.99 CONTINUED



FREE BODY: MEMBER BCD

$\sum M_B = 0: C_y(1.2m) - (12kN)(1.8m) = 0$
 $C_y = 18 kN$
 $\frac{C_y}{C_x} = \frac{1}{2}; \frac{18kN}{C_x} = \frac{1}{2}; C_x = 36 kN$

$\sum F_x = 0: -B_x + 36kN = 0$
 $B_x = 36 kN$
 $\sum F_y = 0: -B_y + 18kN - 12kN = 0$
 $B_y = 6 kN$




FREE BODY: MEMBER ABE

$\sum M_A = 0: -E_x(1.8m) + (2kN)(0.7m) + (36kN)(1.2m) - (6kN)(0.6m) = 0$
 $E_x = 23 kN$
 $\sum F_y = 0: -A_y + 6kN - 2kN = 0$
 $A_y = 4 kN$
 $\sum F_x = 0: -A_x + 36kN - 23kN = 0$
 $A_x = 13 kN$


FORCES ACTING ON ABE:

$A_x = 13 kN \leftarrow, A_y = 4 kN \downarrow; B_x = 36 kN \rightarrow, B_y = 6 kN \uparrow$
 $E_x = 13 kN \leftarrow, E_y = 2 kN \downarrow$

6.100




FIND: COMPONENTS OF ALL FORCES ACTING ON MEMBER ABE.



FREE BODY: ENTIRE FRAME

$\sum M_E = 0: (2400N)(1.2m) - F_y(4.8m) = 0$
 $F_y = 600N$
 $F_y = 600N \uparrow$



FREE BODY: MEMBER BCD


$\sum M_B = 0: C_y(2.4m) - (2400N)(3.1m) = 0$
 $C_y = 3600N$
 $\frac{C_x}{C_y} = \frac{54}{48}; \frac{C_x}{3600N} = \frac{54}{48}$

$\sum F_x = 0: -B_x + 4050N = 0$
 $B_x = 4050N$
 $\sum F_y = 0: -B_y + 3600N - 2400N = 0$
 $B_y = 1200N$


FREE BODY: MEMBER ABE

FROM ABOVE: $F_y = 600N \uparrow$
 $B_x = 4050N \rightarrow, B_y = 1200N \uparrow$
 $\sum M_A = 0: (4050N)(2.7m) - E_x(5.4m) = 0$
 $E_x = 2025N$
 $\sum F_y = 0: -A_y + 1200N + 600N = 0$
 $A_y = 1800N$
 $\sum F_x = 0: -A_x + 4050N - 2025N = 0$
 $A_x = 2025N$

6.101




FIND: COMPONENTS OF FORCES ACTING ON MEMBER CDE AT C AND F.

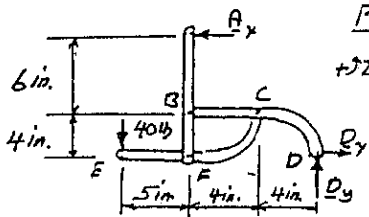

FREE BODY: ENTIRE FRAME

$$+\uparrow \Sigma M_D = 0: (40 \text{ lb})(13 \text{ in.}) + A_x(10 \text{ in.}) = 0$$


$$A_x = -52 \text{ lb}, A_x = 52 \text{ lb} \rightarrow$$



FREE BODY: MEMBER ABF

$$+\uparrow \Sigma M_B = 0: -(52 \text{ lb})(6 \text{ in.}) + F_x(4 \text{ in.}) = 0$$

$$F_x = +78 \text{ lb}$$



FREE BODY: MEMBER CDE

FROM ABOVE: $F_x = 78 \text{ lb} \leftarrow$

$$+\uparrow \Sigma M_C = 0: (40 \text{ lb})(9 \text{ in.}) - (78 \text{ lb})(4 \text{ in.}) - F_y(4 \text{ in.}) = 0$$

$$F_y = +12 \text{ lb}, F_y = 12 \text{ lb} \uparrow$$


$$\pm \Sigma F_x = 0: C_x - 78 \text{ lb} = 0$$

$$C_x = +78 \text{ lb}, C_x = 78 \text{ lb} \rightarrow$$


$$+\uparrow \Sigma F_y = 0: -40 \text{ lb} + 12 \text{ lb} + C_y = 0; C_y + 28 \text{ lb}$$

$$C_y = 28 \text{ lb} \uparrow$$

6.102



FIND: COMPONENTS OF FORCES ACTING ON MEMBER CDE AT C AND D.

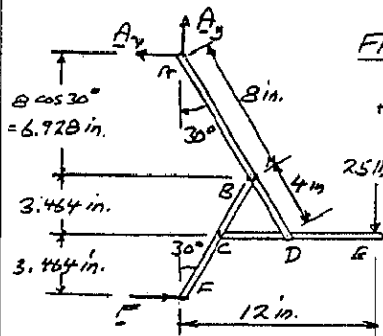

FREE BODY: ENTIRE FRAME

$$+\uparrow \Sigma F_y = 0: A_y - 25 \text{ lb} = 0$$

$$A_y = 25 \text{ lb}, A_y = 25 \text{ lb} \uparrow$$

$$+\uparrow \Sigma M_F = 0: A_x(6.928 + 2 \times 3.464) - (25 \text{ lb})(12 \text{ in.}) = 0$$

$$A_x = 21.651 \text{ lb}, A_x = 21.651 \text{ lb} \leftarrow$$


$$\pm \Sigma F_x = 0: F - 21.651 \text{ lb} = 0$$

$$F = 21.651 \text{ lb}, F = 21.651 \text{ lb} \rightarrow$$

(CONTINUED)

6.102 CONTINUED

FREE BODY: MEMBER CDE

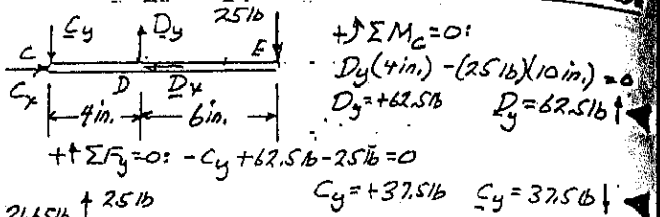


$$+\uparrow \Sigma M_C = 0: D_y(4 \text{ in.}) - (25 \text{ lb})(10 \text{ in.}) = 0$$

$$D_y = +62.5 \text{ lb}, D_y = 62.5 \text{ lb} \uparrow$$

$$+\uparrow \Sigma F_y = 0: -C_y + 62.5 \text{ lb} - 25 \text{ lb} = 0$$

$$C_y = +37.5 \text{ lb}, C_y = 37.5 \text{ lb} \downarrow$$




FREE BODY: MEMBER ABD

$$+\uparrow \Sigma M_B = 0: D_x(3.464 \text{ in.}) + (21.651 \text{ lb})(6.928 \text{ in.}) - (25 \text{ lb})(4 \text{ in.}) - (62.5 \text{ lb})(2 \text{ in.}) = 0$$

$$D_x = +21.651 \text{ lb}$$

RETURN TO FREE BODY: MEMBER CDE FROM ABOVE




$$D_x = +21.651 \text{ lb}, D_x = 21.7 \text{ lb} \leftarrow$$


$$\pm \Sigma F_x = 0: C_x - 21.651 \text{ lb}$$

$$C_x = +21.651 \text{ lb}, C_x = 21.7 \text{ lb} \rightarrow$$

6.103




FIND: COMPONENTS OF FORCES ACTING ON MEMBER DABC AT B AND D.



FREE BODY: ENTIRE FRAME

$$+\uparrow \Sigma M_G = 0: H(0.6 \text{ m}) - (12 \text{ kN})(1 \text{ m}) - (6 \text{ kN})(0.5 \text{ m}) = 0$$


$$H = 25 \text{ kN}, H = 25 \text{ kN} \uparrow$$



FREE BODY: MEMBER BEH

$$+\uparrow \Sigma M_E = 0: B_x(0.5 \text{ m}) - (25 \text{ kN})(0.2 \text{ m}) = 0$$

$$B_x = +10 \text{ kN}$$

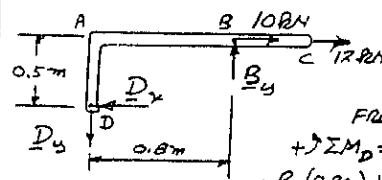

FREE BODY: MEMBER DABC

FROM ABOVE: $B_x = 10 \text{ kN} \rightarrow$

$$+\uparrow \Sigma M_D = 0: -B_y(0.8 \text{ m}) + (10 \text{ kN} + 12 \text{ kN})(0.5 \text{ m}) = 0$$

$$B_y = +13.75 \text{ kN}, B_y = 13.75 \text{ kN} \uparrow$$


$$\pm \Sigma F_x = 0: -D_x + 10 \text{ kN} + 12 \text{ kN} = 0$$

$$D_x = +22 \text{ kN}, D_x = 22 \text{ kN} \leftarrow$$


$$+\uparrow \Sigma F_y = 0: -D_y + 13.75 \text{ kN} = 0$$

$$D_y = +13.75 \text{ kN}, D_y = 13.75 \text{ kN} \uparrow$$


6.104




FIND:
COMPONENTS OF FORCES ACTING ON MEMBER DABC AT B AND D.

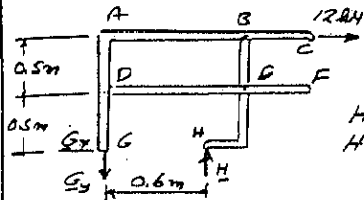

FREE BODY: ENTIRE FRAME
 $\sum M_G = 0$
 $H(0.6m) - (12kN)(1m) = 0$
 $H = 20kN \quad H = 20kN \uparrow$




FREE BODY: MEMBER BEH
 $\sum M_E = 0$
 $B_x(0.5m) - (20kN)(0.2m) = 0$
 $B_x = +8kN$

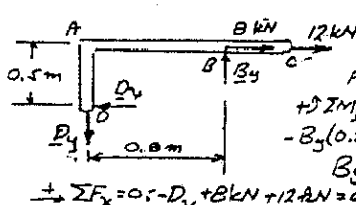

FREE BODY: MEMBER DABC
 FROM ABOVE $B_x = 8kN \rightarrow$


$\sum M_D = 0:$
 $-B_y(0.8m) + (8kN + 12kN)(0.5m) = 0$
 $B_y = +12.5kN \quad B_y = 12.5kN \uparrow$
 $\sum F_x = 0: -D_v + 8kN + 12kN = 0$
 $D_v = +20kN \quad D_v = 20kN \leftarrow$
 $\sum F_y = 0: -D_y + 12.5kN = 0 \quad D_y = +12.5kN \quad D_y = 12.5kN \downarrow$

6.105 and 6.106



FIND: COMPONENTS OF FORCES ACTING ON
 (a) MEMBER BCDF AT C AND D,
 (b) MEMBER ACEG AT E.

PROB. 6.105: WHEN
 $P = 15lb$ AND $Q = 65lb$.
PROB. 6.106: WHEN
 $P = 25lb$ AND $Q = 55lb$.




FREE BODY: ENTIRE FRAME

$\sum M_D = 0: (P+Q)(25in) - (P+Q)(15in) - D_x(8in) = 0$
 $D_x = (P+Q) \frac{10}{8}$
 $D_x = (P+Q) \frac{10}{8} \rightarrow$
 $\sum F_x = 0: -E_x + (P+Q) \frac{10}{8} = 0$
 $E_x = (P+Q) \frac{10}{8}; \quad E_x = (P+Q) \frac{10}{8} \leftarrow$


(CONTINUED)

6.105 and 6.106 CONTINUED



FREE BODY: MEMBER BCDF

FROM ABOVE:
 $D_x = (P+Q) \frac{10}{8} \rightarrow$
 $\sum F_x = 0: -C_x + D_x = 0$
 $C_x = (P+Q) \frac{10}{8} \leftarrow$
 $\sum M_D = 0: -(P+Q) \frac{10}{8} (4in) - P(15in) + Q(25in) + C_y(10in) = 0$
 $C_y = \frac{1}{10}(-20P + 20Q)$
 $C_y = 2Q - 2P \quad C_y = 2Q - 2P \uparrow$
 $\sum F_y = 0: D_y + (2Q - 2P) - P - Q = 0$
 $D_y = -Q + 3P \quad D_y = -Q + 3P \uparrow$



FREE BODY: MEMBER ACEG

FROM ABOVE:
 $E_x = (P+Q) \frac{10}{8} \leftarrow$
 AND $C_y = 2Q - P$
 $\sum F_y = 0: E_y - C_y - P - Q = 0$
 $E_y - (2Q - 2P) - P - Q = 0$
 $E_y = 3Q - P; \quad E_y = 3Q - P \uparrow$


PROB. 6.105: $P = 15lb$ AND $Q = 65lb$

$C_x = (P+Q) \frac{10}{8} = (15+65) \frac{10}{8} = +100lb \quad C_x = 100lb \leftarrow$
 $C_y = 2Q - 2P = 2(65) - 2(15) = +100lb \quad C_y = 100lb \uparrow$
 $D_x = (P+Q) \frac{10}{8} = (15+65) \frac{10}{8} = +100lb \quad D_x = 100lb \rightarrow$
 $D_y = -Q + 3P = -65 + 3(15) = -20lb \quad D_y = 20lb \downarrow$
 $E_x = (P+Q) \frac{10}{8} = (15+15) \frac{10}{8} = +100lb \quad E_x = 100lb \leftarrow$
 $E_y = 3Q - P = 3(65) - 15 = +180lb \quad E_y = 180lb \uparrow$


PROB. 6.106: $P = 25lb$ AND $Q = 55lb$

$C_x = (P+Q) \frac{10}{8} = (25+55) \frac{10}{8} = +100lb \quad C_x = 100lb \leftarrow$
 $C_y = 2Q - 2P = 2(55) - 2(25) = +60lb \quad C_y = 60lb \uparrow$
 $D_x = (P+Q) \frac{10}{8} = (25+55) \frac{10}{8} = +100lb \quad D_x = 100lb \rightarrow$
 $D_y = -Q + 3P = -55 + 3(25) = +20lb \quad D_y = 20lb \uparrow$
 $E_x = (P+Q) \frac{10}{8} = (25+55) \frac{10}{8} = +100lb \quad E_x = 100lb \leftarrow$
 $E_y = 3Q - P = 3(55) - 25 = +140lb \quad E_y = 140lb \uparrow$

6.107 and 6.108

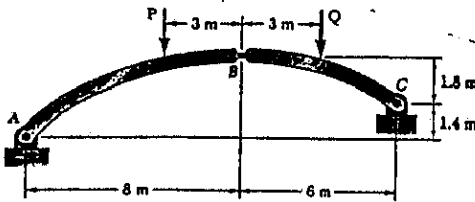

FIND: THE COMPONENTS OF (a) THE REACTION AT A,
 (b) THE FORCE EXERTED AT B ON SEGMENT AB
 PROB. 6.107: GIVEN THAT $P=112 \text{ kN}$ AND $Q=140 \text{ kN}$.
 PROB. 6.108: GIVEN THAT $P=140 \text{ kN}$ AND $Q=112 \text{ kN}$.

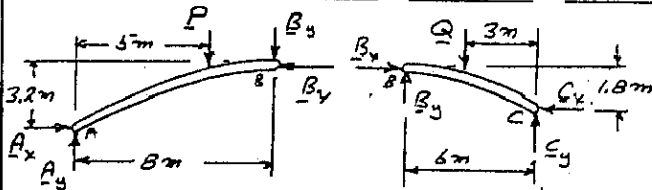

FREE BODY: SEGMENT AB:

$$+\sum M_A = 0: B_x(3.2\text{m}) - B_y(8\text{m}) - P(5\text{m}) = 0 \quad (1)$$

$$\text{O.K. (Eq. 1)} \quad B_x(2.7\text{m}) - B_y(6\text{m}) - P(3.75\text{m}) = 0 \quad (2)$$

FREE BODY: SEGMENT BC:

$$+\sum M_C = 0: B_x(1.8\text{m}) + B_y(6\text{m}) - Q(3\text{m}) = 0 \quad (3)$$

$$\text{ADD (2) AND (3): } 4.2 B_x - 3.75 P - 3 Q = 0 \quad (4)$$

$$B_x = (3.75 P + 3 Q) / 4.2 \quad (4)$$

$$\text{EQ (1): } (3.75 P + 3 Q) \frac{3.2}{4.2} - 8 B_y - 5 P = 0 \quad (5)$$

$$B_y = (-9 P + 9.6 Q) / 33.6 \quad (5)$$

PROB. 6.107: GIVEN THAT $P=112 \text{ kN}$ AND $Q=140 \text{ kN}$

(b) FORCE EXERTED AT B ON AB

$$\text{EQ (4): } B_x = (3.75 \times 112 + 3 \times 140) / 4.2 = 200 \text{ kN}$$

$$B_x = 200 \text{ kN} \leftarrow$$

$$\text{EQ (5): } B_y = (-9 \times 112 + 9.6 \times 140) / 33.6 = +10 \text{ kN}$$

$$B_y = 10 \text{ kN} \downarrow$$

(a) REACTION AT A:

CONSIDERING AGAIN AB AS A FREE BODY

$$\sum F_x = 0: A_x - B_x = 0; A_x = B_x = 200 \text{ kN}$$

$$A_x = 200 \text{ kN} \rightarrow$$

$$\sum F_y = 0: A_y - P - B_y = 0$$

$$A_y - 112 \text{ kN} - 10 \text{ kN} = 0$$

$$A_y = 122 \text{ kN} \uparrow$$

PROB. 6.108 GIVEN THAT $P=140 \text{ kN}$ AND $Q=112 \text{ kN}$.

(b) FORCE EXERTED AT B ON AB.

$$\text{EQ (4): } B_x = (3.75 \times 140 + 3 \times 112) / 4.2 = 205 \text{ kN}$$

$$B_x = 205 \text{ kN} \leftarrow$$

$$\text{EQ (5): } B_y = (-9 \times 140 + 9.6 \times 112) / 33.6 = -5.5 \text{ kN}$$

$$B_y = 5.5 \text{ kN} \uparrow$$

(a) REACTION AT A:

$$\sum F_x = 0: A_x - B_x = 0; A_x = B_x = 205 \text{ kN}$$


$$A_x = 205 \text{ kN} \rightarrow$$

$$\sum F_y = 0: A_y - P - B_y = 0$$


$$A_y - 140 \text{ kN} - (-5.5 \text{ kN}) = 0$$

$$A_y = 134.5 \text{ kN} \uparrow$$

6.109

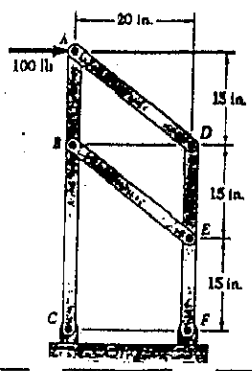


FIND:
 (a) REACTION AT C
 (b) FORCE IN MEMBER AD



FREE BODY: MEMBER ABC

$$+\sum M_C = 0: + (100 \text{ lb})(45 \text{ in.}) + \frac{4}{5} F_{AD}(45 \text{ in.}) + \frac{4}{5} F_{BE}(30 \text{ in.}) = 0$$

$$3 F_{AD} + 2 F_{BE} = -375 \quad (1)$$



FREE BODY: MEMBER DEF

$$+\sum M_F = 0$$

$$\frac{4}{5} F_{AD}(30 \text{ in.}) + \frac{4}{5} F_{BE}(15 \text{ in.}) = 0$$

$$F_{BE} = -2 F_{AD} \quad (2)$$

(a) SUBSTITUTE FROM (2) INTO (1)

$$3 F_{AD} + 2(-2 F_{AD}) = -375 \text{ lb}$$

$$-F_{AD} = -375 \text{ lb} \quad F_{AD} = 375 \text{ lb Tension}$$

(2)

$$F_{BE} = -2 F_{AD} = -2(375 \text{ lb})$$

$$F_{BE} = -750 \text{ lb} \quad F_{BE} = 750 \text{ lb comp.}$$

(b) RETURN TO FREE BODY OF MEMBER ABC

$$\sum F_x = 0:$$

$$C_x + 100 \text{ lb} + \frac{4}{5} F_{AD} + \frac{4}{5} F_{BE} = 0$$

$$C_x + 100 + \frac{4}{5}(375) + \frac{4}{5}(-750) = 0$$

$$C_x = +200 \text{ lb} \quad C_x = 200 \text{ lb} \rightarrow$$

$$+\sum F_y = 0: C_y - \frac{3}{5} F_{AD} - \frac{3}{5} F_{BE} = 0$$

$$C_y - \frac{3}{5}(375) - \frac{3}{5}(-750) = 0$$


$$C_y = -225 \text{ lb} \quad C_y = 225 \text{ lb} \downarrow$$

Reaction at C:


$$C = 301 \text{ lb} \quad \alpha = 48.37^\circ$$

$$C = 301 \text{ lb} \quad \angle 48.4^\circ$$

6.110




FIND REACTIONS AT A, B, D, AND E.




FREE BODY: ENTIRE FRAME

$$\begin{aligned} +\sum F_x = 0: & A - B + (1000 \text{ lb}) \sin 30^\circ = 0 \\ & A - B + 500 = 0 \quad (1) \\ +\sum F_y = 0: & D + E - (1000 \text{ lb}) \cos 30^\circ = 0 \\ & D + E - 866.03 = 0 \quad (2) \end{aligned}$$



FREE BODY: MEMBER ACE

$$\begin{aligned} +\sum M_C = 0: & -A(6 \text{ in.}) + E(6 \text{ in.}) = 0 \\ & E = \frac{2}{3}A \quad (3) \end{aligned}$$



FREE BODY: MEMBER BCD

$$\begin{aligned} +\sum M_C = 0: & -D(6 \text{ in.}) + B(6 \text{ in.}) = 0 \\ & D = \frac{2}{3}B \quad (4) \end{aligned}$$

SUBSTITUTE E AND D FROM (3) AND (4) INTO (2):

$$\begin{aligned} \frac{2}{3}A + \frac{2}{3}B - 866.06 &= 0 \\ A + B - 1154.7 &= 0 \quad (5) \\ A - B + 500 &= 0 \quad (6) \\ (5) + (6) \quad 2A - 654.7 &= 0; \quad A = 327.4 \text{ lb} \\ (5) - (6) \quad 2B - 1654.7 &= 0; \quad B = 827.4 \text{ lb} \\ (4) \quad D = \frac{2}{3}(827.4) \quad D &= 620.5 \text{ lb} \\ (3) \quad E = \frac{2}{3}(327.4) \quad E &= 245.5 \text{ lb} \end{aligned}$$

6.111 CONTINUED

$$\begin{aligned} (2) - (1): & -Pa + C_y(2a) + 2C_y(a) = 0; \quad C_y = +\frac{1}{4}P \\ (2): & C_x = 2C_y = 2\left(\frac{1}{4}P\right); \quad C_x = +\frac{1}{2}P \end{aligned}$$

RETURN TO FREE BODY OF ABC:

$$\begin{aligned} +\sum F_x = 0: & C_x + \frac{1}{2}B = 0; \\ \frac{1}{2}P + \frac{1}{2}B = 0; & B = -\frac{P}{2} \quad F_{BG} = \frac{P}{\sqrt{2}} \text{ comp.} \end{aligned}$$


$$\begin{aligned} +\sum M_B = 0: & C_y(a) + A(a) \\ \frac{1}{4}Pa + Aa = 0; & A = -\frac{P}{4} \quad F_{AF} = \frac{P}{4} \text{ comp.} \end{aligned}$$

RETURN TO FREE BODY OF CDE:


$$\begin{aligned} +\sum F_x = 0: & -C_x - \frac{1}{2}D = 0 \\ -\frac{P}{2} - \frac{1}{2}D = 0; & D = -\frac{P}{2}; \quad F_{DG} = \frac{P}{\sqrt{2}} \text{ comp.} \end{aligned}$$

$$\begin{aligned} +\sum M_D = 0: & C_y(a) - E(a) = 0 \\ \frac{1}{4}Pa - Ea = 0; & E = \frac{P}{4}; \quad F_{EH} = \frac{P}{4} \text{ comp.} \end{aligned}$$

6.112




FIND: THE FORCE IN EACH LINK.



FREE BODY: MEMBER ABC

$$\begin{aligned} +\sum M_J = 0: & C_x\left(\frac{1}{2}a\right) + C_y\left(\frac{3}{2}a\right) + P\left(\frac{a}{2}\right) = 0 \\ C_x + 3C_y + P &= 0 \quad (1) \end{aligned}$$

FREE BODY: MEMBER CDE



$$\begin{aligned} +\sum M_K = 0: & C_x\left(\frac{a}{2}\right) - C_y\left(\frac{3a}{2}\right) = 0 \\ C_x &= +3C_y \quad (2) \end{aligned}$$

$$\begin{aligned} (2) \rightarrow (1): & +3C_y + 3C_y + P = 0; \\ & 6C_y + P = 0 \quad C_y = -\frac{P}{6} \\ (2): & C_x = 3C_y = 3\left(-\frac{P}{6}\right) \quad C_x = -\frac{P}{2} \end{aligned}$$

RETURN TO FREE BODY OF ABC:

$$\begin{aligned} +2\sum M_B = 0: & -\frac{P}{\sqrt{2}}(a) + C_y(a) = 0 \\ -\frac{P}{\sqrt{2}}a - \frac{P}{2}a = 0; & A = -\frac{\sqrt{2}}{3}P \quad F_{AG} = \frac{\sqrt{2}}{3}P \text{ comp.} \end{aligned}$$


$$\begin{aligned} +2\sum M_A = 0: & \frac{B}{\sqrt{2}}(a) + C_y(2a) + P(a) = 0 \\ \frac{B}{\sqrt{2}}(a) - \frac{P}{2}(2a) + P(a) &= 0 \\ B &= -\frac{2\sqrt{2}}{3}P \quad F_{BF} = \frac{2\sqrt{2}}{3}P \text{ comp.} \end{aligned}$$

RETURN TO FREE BODY OF CDE:


$$\begin{aligned} +\sum M_E = 0: & \frac{D}{\sqrt{2}}(a) - C_y(2a) = 0 \\ \frac{D}{\sqrt{2}}(a) - \left(-\frac{P}{6}\right)(2a) &= 0 \\ D &= -\frac{\sqrt{2}}{3}P \quad F_{DI} = \frac{\sqrt{2}}{3}P \text{ comp.} \end{aligned}$$

$$\begin{aligned} +2\sum M_D = 0: & \frac{E}{\sqrt{2}}(a) + C_y(a) = 0 \\ \frac{E}{\sqrt{2}}(a) - \frac{P}{6}(a) &= 0 \\ E &= \frac{\sqrt{2}}{6}P \quad F_{EH} = \frac{\sqrt{2}}{6}P \text{ comp.} \end{aligned}$$

6.111



FIND: THE FORCE IN EACH LINK




FREE BODY: MEMBER ABC


$$\begin{aligned} +\sum M_J = 0: & -Pa + C_y(2a) + C_x(a) = 0 \quad (1) \end{aligned}$$

FREE BODY: MEMBER CDE


$$\begin{aligned} +\sum M_K = 0: & C_y(2a) - C_x(a) = 0 \\ C_x &= 2C_y \quad (2) \end{aligned}$$



6.113



FIND: THE FORCE IN EACH LINK



$$\pm \Sigma F_x = 0: C_x + \frac{D}{\sqrt{2}} + \frac{E}{\sqrt{2}} = 0$$


$$C_x - \frac{2E}{\sqrt{2}} + \frac{E}{\sqrt{2}} = 0$$

$$C_x = \frac{E}{\sqrt{2}}$$

$$+\uparrow \Sigma F_y = 0: C_y + \frac{D}{\sqrt{2}} + \frac{E}{\sqrt{2}} = 0$$


$$C_y - \frac{2E}{\sqrt{2}} + \frac{E}{\sqrt{2}} = 0$$

$$C_y = \frac{E}{\sqrt{2}}$$



FREE BODY: MEMBER ABC

$$\Delta_{45^\circ} \Sigma F = 0: -\frac{P}{\sqrt{2}} + \frac{C_x}{\sqrt{2}} + \frac{C_y}{\sqrt{2}} = 0: C_x + C_y = +P \quad (1)$$



FREE BODY: MEMBER CDE

$$45^\circ \Sigma F = 0: +\frac{C_x}{\sqrt{2}} - \frac{C_y}{\sqrt{2}} = 0 \quad C_x = C_y \quad (2)$$

$$(2) \rightarrow (1) \quad C_y + C_y = P; \quad C_y = \frac{P}{2} \quad C_x = \frac{P}{2}$$

$$+\uparrow \Sigma M_D = 0: C_y(a) - \frac{E}{\sqrt{2}}(a) = 0$$

$$E = \sqrt{2} C_y = \frac{\sqrt{2}}{2} P \quad F_{DE} = \frac{\sqrt{2}}{2} P \text{ ten.}$$

$$+\uparrow \Sigma M_E = 0: \frac{D}{\sqrt{2}}(a) + C_y(2a) = 0$$

$$D = -2\sqrt{2} C_y = -2\sqrt{2} \frac{P}{2} \quad F_{DE} = \sqrt{2} P \text{ comp.}$$

RETURN TO FREE BODY OF ABC


$$+\uparrow \Sigma M_B = 0: \frac{A}{\sqrt{2}}(a) + C_y(a)$$

$$A = \sqrt{2} C_y = \frac{\sqrt{2}}{2} P \quad F_{AB} = \frac{\sqrt{2}}{2} P \text{ ten.}$$


$$+\uparrow \Sigma M_A = 0: \frac{B}{\sqrt{2}}a + Pa - C_y(2a) = 0$$

$$B = \sqrt{2}(P - \frac{P}{2}a) = 0 \quad F_{BC} = 0$$

6.114




FIND: THE FORCE IN EACH LINK



FREE BODY: MEMBER ABC

$$+\uparrow \Sigma M_H = 0: C_x(a) - C_y(2a) = 0$$

$$C_x = 2C_y$$



FREE BODY: MEMBER CDE

$$+\uparrow \Sigma M_D = 0$$

$$C_x(2a) - C_y(a) + P(a) = 0$$

$$2C_x - C_y + P = 0$$

$$2(2C_y) - C_y + P = 0$$

$$C_y = -\frac{1}{3}P$$

$$C_x = 2C_y; \quad C_x = -\frac{2}{3}P$$

$$\pm \Sigma F = 0: C_x - \frac{E}{\sqrt{2}} = 0; \quad -\frac{2}{3}P - \frac{E}{\sqrt{2}} = 0$$

$$E = -\frac{2\sqrt{2}}{3}P \quad F_{EH} = \frac{2\sqrt{2}}{3}P \text{ comp.}$$

$$+\uparrow \Sigma M_E = 0: D(2a) + C_y(3a) - P(3a) = 0$$

$$D(2a) - \frac{P}{3}(3a) - P(3a) = 0$$

$$D = +2P \quad F_{DE} = 2P \text{ ten.}$$

RETURN TO FREE BODY OF ABC

$$+\uparrow \Sigma F_y = 0: \frac{A}{\sqrt{2}} + C_y = 0$$

$$\frac{A}{\sqrt{2}} - \frac{P}{3} = 0$$


$$A = +\frac{\sqrt{2}}{3}P \quad F_{AB} = \frac{\sqrt{2}}{3}P \text{ ten.}$$

$$+\uparrow \Sigma M_A = 0: B(2a) - C_x(3a) = 0$$


$$B(2a) + \frac{2}{3}P(3a) = 0$$

$$B = -P \quad F_{BC} = P \text{ comp.}$$

6.115




FIND: THE FORCE IN EACH LINK



FREE BODY: MEMBER ABC

$$\begin{aligned} +\sum M_B = 0 \\ C_y(2a) + C_x(a) = 0 \\ C_x = -2C_y \end{aligned}$$



FREE BODY: MEMBER CDE

$$\begin{aligned} +\sum M_D = 0: \\ C_y(2a) - C_x(a) - M_0 = 0 \\ C_y(2a) - (-2C_y)(a) - M_0 = 0 \\ C_y = M_0/4a \\ C_x = -2C_y; C_x = -M_0/2a \end{aligned}$$

$$\pm \sum F_x = 0: \frac{D}{\sqrt{2}} + C_x = 0; \frac{D}{\sqrt{2}} - \frac{M_0}{2a} = 0$$

$$D = \frac{M_0}{\sqrt{2}a} \quad F_{DE} = \frac{M_0}{\sqrt{2}a} \text{ ten.}$$

$$+\sum M_D = 0: E(a) - C_y(a) + M_0 = 0$$

$$E(a) - \left(\frac{M_0}{4a}\right)(a) + M_0 = 0$$

$$E = -\frac{3M_0}{4a} \quad F_{ED} = \frac{3M_0}{4a} \text{ comp.}$$

RETURN TO FREE BODY OF ABC

$$\pm \sum F_x = 0: \frac{B}{\sqrt{2}} + C_x = 0; \frac{B}{\sqrt{2}} - \frac{M_0}{2a} = 0$$


$$B = \frac{M_0}{\sqrt{2}a} \quad F_{BA} = \frac{M_0}{\sqrt{2}a} \text{ ten.}$$

$$+\sum M_B = 0: A(a) + C_y(a); A(a) + \frac{M_0}{4a}(a) = 0$$

$$A = -\frac{M_0}{4a} \quad F_{AB} = \frac{M_0}{4a} \text{ comp.}$$

6.116 CONTINUED

FREE BODY: MEMBER CDE



$$\begin{aligned} +\sum M_D = 0 \\ C_x(2a) - C_y(a) - M_0 = 0 \\ (2C_y)(2a) - C_y(a) - M_0 = 0 \\ C_y = \frac{M_0}{3a} \\ C_x = 2C_y; C_x = \frac{2M_0}{3a} \end{aligned}$$

$$\pm \sum F_x = 0: C_x - \frac{E}{\sqrt{2}} = 0; \frac{2M_0}{3a} - \frac{E}{\sqrt{2}} = 0$$

$$E = \frac{2\sqrt{2}M_0}{3} \quad F_{EH} = \frac{2\sqrt{2}M_0}{3}$$

$$+\sum F_y = 0: D + \frac{E}{\sqrt{2}} + C_y = 0$$

$$D + \frac{2\sqrt{2}M_0}{3} \frac{1}{\sqrt{2}} + \frac{M_0}{3a} = 0$$

$$D = -\frac{M_0}{a} \quad F_{DG} = \frac{M_0}{a} \text{ comp.}$$

RETURN TO FREE BODY OF ABC

$$+\sum F_y = 0: \frac{A}{\sqrt{2}} + C_y = 0; \frac{A}{\sqrt{2}} + \frac{M_0}{3a} = 0$$


$$A = -\frac{\sqrt{2}M_0}{3} \quad F_{AF} = \frac{\sqrt{2}M_0}{3} \text{ comp.}$$

$$+\sum M_B = 0: B(2a) - C_x(3a) = 0$$


$$B(2a) - \left(\frac{2M_0}{3a}\right)(3a) = 0$$

$$B = +\frac{M_0}{a} \quad F_{BG} = \frac{M_0}{a} \text{ ten.}$$

6.116



FIND: THE FORCE IN EACH LINK




FREE BODY: MEMBER ABC

$$\begin{aligned} +\sum M_B = 0: \\ C_x(a) - C_y(2a) = 0 \\ C_x = 2C_y \end{aligned}$$

(CONTINUED)

6.117

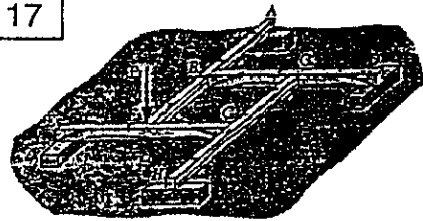

FIND: THE VERTICAL REACTIONS AT A, D, E, AND H

WE SHALL DRAW A FREE BODY OF EACH MEMBER. FORCE P WILL BE APPLIED TO MEMBER EFG. STARTING WITH MEMBER ABF, WE SHALL EXPRESS ALL FORCES IN TERMS OF REACTION A.


MEMBER ABF



$$+\sum M_B = 0: A(2a) - B_y(a) = 0; B_y = 2A$$

$$+\sum M_F = 0: -F_y(a) + A(a) = 0; F_y = A$$


MEMBER BCD



$$+\sum M_C = 0: -(2A)(a) + D(a) = 0; D = 2A \quad (1)$$

$$+\sum M_D = 0: -(2A)(2a) + C_y(a) = 0; C_y = 4A$$


MEMBER CGH



$$+\sum M_G = 0: -(4A)(a) + H(a) = 0; H = 4A \quad (2)$$

$$+\sum M_H = 0: -(4A)(2a) + G_y(a) = 0; G_y = 8A$$

MEMBER EFG



$$+\sum M_F = 0: -(8A)(a) + E(a) = 0 \quad (3)$$


$$\begin{aligned} +\sum F_y = 0: \\ E - A + 8A - P = 0 \\ 8A - A + 8A - P = 0; A = \frac{P}{15} \end{aligned}$$

SUBSTITUTE $A = \frac{P}{15}$ INTO EGS. (1), (2), AND (3):

ANSWERS:

$$A = \frac{1}{15} P; D = \frac{2}{15} P; H = \frac{4}{15} P; E = \frac{8}{15} P$$

6.118

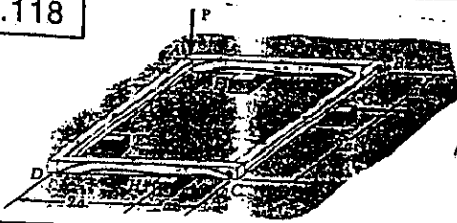

FIND: THE VERTICAL REACTIONS AT A, D, E, AND H.

WE SHALL DRAW THE FREE BODY OF EACH MEMBER. FORCE P WILL BE APPLIED TO MEMBER AFB. STARTING WITH MEMBER AED, WE SHALL EXPRESS ALL FORCES IN TERMS OF REACTION E.

MEMBER AED:

$$\begin{aligned}
 +\sum M_D = 0: & A(3a) + E(a) = 0 \\
 & A = -E/3 \\
 +\sum M_A = 0: & -D(3a) - E(2a) = 0 \\
 & D = -2E/3
 \end{aligned}$$

MEMBER DHC:

$$\begin{aligned}
 +\sum M_C = 0: & (-\frac{2E}{3})(3a) - H(a) = 0 \\
 & H = -2E \\
 +\sum M_H = 0: & (-\frac{2E}{3})(2a) + C(a) = 0 \\
 & C = +4E/3
 \end{aligned} \quad (1)$$

MEMBER CGB:

$$\begin{aligned}
 +\sum M_B = 0: & +(\frac{4E}{3})(3a) - G(a) = 0 \\
 & G = +4E \\
 +\sum M_G = 0: & +(\frac{4E}{3})(2a) + B(a) = 0 \\
 & B = -8E/3
 \end{aligned} \quad (2)$$


MEMBER AFB:

$$\begin{aligned}
 +\sum F_y = 0 \\
 F - A - B - P = 0 \\
 P - (-\frac{E}{3}) - (-\frac{8E}{3}) - P = 0 \\
 F = P - 3E \quad (3)
 \end{aligned}$$

$$\begin{aligned}
 +\sum M_A = 0: & F(a) - B(3a) = 0 \\
 (P - 3E)(a) - (-\frac{8E}{3})(3a) = 0 \\
 P - 3E + 8E = 0; & E = -\frac{P}{5}
 \end{aligned}$$


SUBSTITUTE $E = -\frac{P}{5}$ INTO EQS. (1), (2), AND (3).

$$\begin{aligned}
 H = -2E = -2(-\frac{P}{5}); & H = +\frac{2P}{5} \quad H = \frac{2P}{5} \uparrow \\
 G = +4E = 4(-\frac{P}{5}); & G = -\frac{4P}{5} \quad G = \frac{4P}{5} \downarrow \\
 F = P - 3E = P - 3(-\frac{P}{5}); & F = +\frac{8P}{5} \quad F = \frac{8P}{5} \uparrow
 \end{aligned}$$

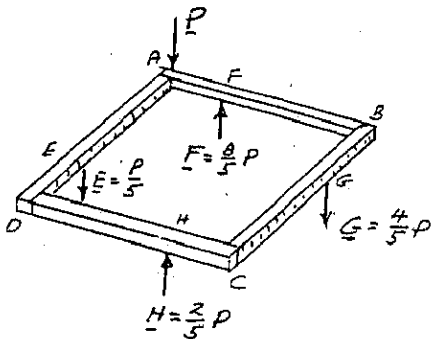

6.119

FOR EACH FRAME SHOWN FIND THE REACTIONS AND WHETHER FRAME IS RIGID



(a)


FREE BODY: LEFT PORTION

$$\begin{aligned}
 +\sum F_y = 0: & A_y - P = 0; A_y = P; A_y = P \uparrow \\
 +\sum M_A = 0: & -P(2a) - F_1(a) = 0 \quad F_1 = -2P \\
 +\sum F_x = 0: & A_x + F_1 + F_2 = 0; A_x - 2P + F_2 = 0 \quad (1)
 \end{aligned}$$

FREE BODY: RIGHT PORTION

$$\begin{aligned}
 +\sum F_y = 0: & B_y = 0 \quad B_y = 0 \\
 +\sum M_B = 0: & F_2(a) = 0 \quad F_2 = 0 \\
 +\sum F_x = 0: & B_x - F_1 - F_2 = 0; B_x - (-2P) = 0 \\
 & B_x = -2P \quad B_x = 2P \rightarrow \\
 & A_x = 2P \rightarrow
 \end{aligned}$$

FROM (1) WITH $F_2 = 0$, $A_x = 2P$
 $A = 2.24P \angle 76.6^\circ$; $B = 2P \rightarrow$
 FRAME IS RIGID



(b)


FREE BODY: LEFT PORTION

$$\begin{aligned}
 +\sum M_C = 0: & A_x(\frac{a}{2}) - A_y(\frac{5}{2}a) + P(\frac{a}{2}) = 0 \\
 & P = A_x + 5A_y \quad (1)
 \end{aligned}$$

FREE BODY: ENTIRE FRAME

$$\begin{aligned}
 +\sum M_B = 0 \\
 A_x(a) - A_y(5a) + P(3a) = 0 \\
 3P - A_x + 5A_y = 0 \quad (2)
 \end{aligned}$$

EQ(2) - EQ(1): $3P - P = 0$; $2P = 0$ $P = 0$
 FOR $P \neq 0$, EQUILIBRIUM IS NOT MAINTAINED AND
 FRAME IS NOT RIGID



(c)

FREE BODY: LEFT PORTION

$$\begin{aligned}
 +\sum F_y = 0: & A - P = 0; A = P; A = P \uparrow \\
 +\sum M_A = 0: & -P(2a) - F_1(a) = 0 \\
 & F_1 = -2P
 \end{aligned}$$


FREE BODY: RIGHT PORTION

$$\begin{aligned}
 +\sum M_B = 0: & F_1(a) + C(2a) = 0 \\
 & C = -\frac{1}{2}F_1 = -\frac{1}{2}(-2P) \\
 & C = P \quad C = P \uparrow \\
 +\sum F_y = 0: & B + C = 0 \\
 & B + P = 0 \\
 & B = -P \quad B = P \downarrow
 \end{aligned}$$


FRAME IS RIGID

6.120


FOR EACH FRAME FIND THE REACTIONS AND WHETHER THE FRAME IS RIGID.



(a)




FREE BODY: RIGHT PORTION
 $\rightarrow \sum M_B = 0: F_2(a) = 0$
 $F_2 = 0$




FREE BODY: LEFT PORTION
 $\rightarrow \sum M_A = 0: P(2a) = 0$
 $P = 0$


FOR $P \neq 0$, EQUILIBRIUM IS NOT MAINTAINED. FRAME IS NOT RIGID



(b) THIS FRAME IS INDETERMINATE, 2 FREE BODIES = 6 EQS. 5 REACTION COMPONENTS PLUS 2 LINK FORCES = 7 UNES



FREE BODY: LEFT PORTION
 $\rightarrow \sum M_A = 0: F_1(a) - P(2a) = 0$
 $F_1 = 2P$




FREE BODY: RIGHT PORTION
 $\rightarrow \sum M_C = 0: -F_1(a) + B_x(a) - B_y(2a) = 0$
 $B_y = \frac{1}{2}(B_x - P)$
 $\rightarrow \sum F_y = 0: C + B_y = 0; C = -\frac{1}{2}(B_x - P)$
 $\pm \sum F_x = 0: -F_1 - F_2 + B_x = 0$
 $F_1 = B_x - F_2 = B_x - 2P$


RETURN TO FREE BODY OF LEFT PORTION

$\rightarrow \sum F_y = 0: A_y - P = 0; A_y = P$
 $\pm \sum F_x = 0: A_x + F_1 + F_2 = 0; A_x = -F_1 - F_2$
 $A_x = -(B_x - 2P) - 2P; A_x = -B_x$

WE NOTE THAT REACTIONS CAN BE FOUND FOR AN ARBITRARY VALUE OF B_x . FRAME IS RIGID



(c)




FREE BODY: ENTIRE FRAME
 $\rightarrow \sum M_A = 0: B_y(2a) - P(2a) = 0$
 $B_y = \frac{2}{3}P; B_x = \frac{2}{3}P$
 $\rightarrow \sum F_y = 0: A_y - P + \frac{2}{3}P = 0; A_y = \frac{1}{3}P; A_x = \frac{1}{3}P$



FREE BODY: RIGHT PORTION
 $\rightarrow \sum M_C = 0: \frac{2}{3}P(\frac{3}{2}a) - B_x(\frac{3}{2}a) = 0$
 $B_x = 2P; B_y = 2P$


RETURN TO FREE BODY OF ENTIRE FRAME

$\pm \sum F_x = 0: A_x + 2P = 0; A_x = -2P; A_y = 2P$
 $A = 2.09P \angle 16.7^\circ$
 $B = 2.04P \angle 11.3^\circ$



6.121


FOR EACH FRAME FIND THE REACTIONS AND WHETHER THE FRAME IS RIGID.



(a)




FREE BODY: RIGHT PORTION
 FOR EQUILIBRIUM, B MUST BE PARALLEL TO LINKS, THAT IS
 $B_x = 4B_y$




FREE BODY: ENTIRE FRAME

$\rightarrow \sum M_A = 0: B_y(2a) - (4B_y)\frac{a}{2} - P(2a) = 0$
 $B_y = \frac{1}{2}P; B_x = \frac{1}{2}P$
 $B_y = 4B_x; B_x = 2P$


$\rightarrow \sum F_x = 0: A_x - B_x = 0; A_x = 2P$
 $\pm \sum F_y = 0: A_y - P + \frac{1}{2}P = 0; A_y = \frac{1}{2}P$




$A = 2.06P \angle 14.0^\circ$
 $B = 2.06P \angle 14.0^\circ$



(b)




FREE BODY: RIGHT PORTION
 FOR EQUILIBRIUM, B MUST BE PARALLEL TO LINKS, THAT IS
 $B_x = 4B_y$




FREE BODY: ENTIRE FRAME

$\rightarrow \sum M_A = 0: B_y(2a) - 4B_y(\frac{3a}{2}) - P(2a) = 0$
 $5B_y - 5B_y - 2P = 0$
 $P = 0$


FOR $P \neq 0$, EQUILIBRIUM IS NOT MAINTAINED. FRAME IS NOT RIGID.



(c)



FREE BODY: RIGHT PORTION
 FOR EQUILIBRIUM, B MUST BE PARALLEL TO LINKS, THAT IS
 $B_x = 4B_y$




FREE BODY: ENTIRE FRAME

$\rightarrow \sum M_A = 0: B_y(2a) + (4B_y)\frac{3a}{2} - P(2a) = 0$
 $B_y = \frac{1}{4}P; B_x = \frac{1}{4}P$
 $B_x = 4(B_y); B_y = P$

$\pm \sum F_x = 0: A_x + B_x = 0; A_x = -P$
 $\rightarrow \sum F_y = 0: A_y - P + \frac{1}{4}P = 0; A_y = \frac{3}{4}P$


FRAME IS RIGID: $A = 1.25P \angle 36.9^\circ; B = 1.031P \angle 14.0^\circ$

6.122




FIND:
 (a) FORCE P FOR EQUILIBRIUM,
 (b) FORCE IN BD ,
 (c) REACTION AT C .


WE NOTE THAT BD IS A TWO-FORCE MEMBER

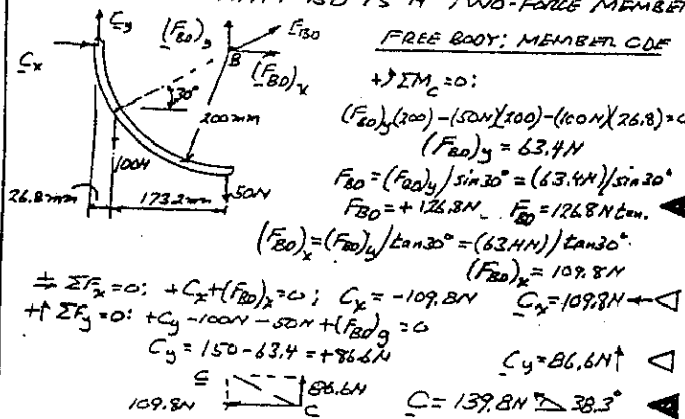


6.124




GIVEN: $a = 8 \text{ in.}$
 $BD = 6 \text{ in.}$
 FIND: HORIZONTAL FORCE EXERTED ON BLOCK E

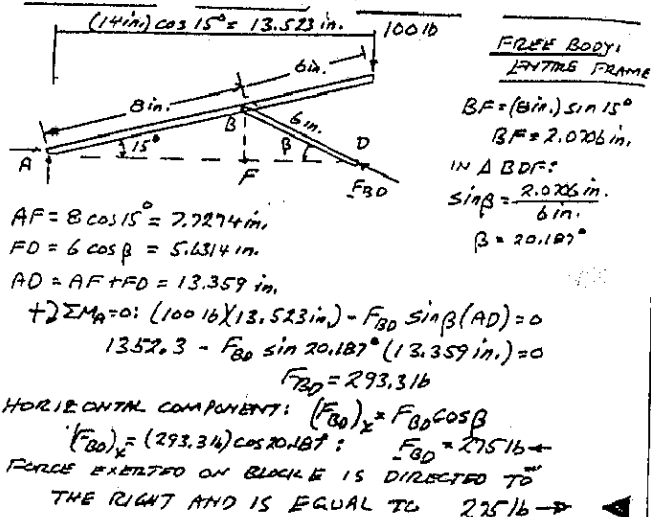


6.125

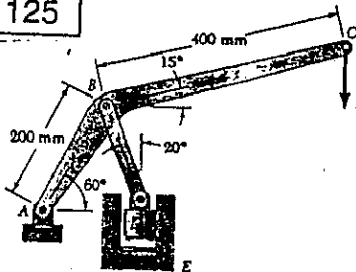


GIVEN: $P = 250N$
 FIND: (a) VERTICAL COMPONENT OF FORCE EXERTED ON SEAL.
 (b) REACTION AT A.

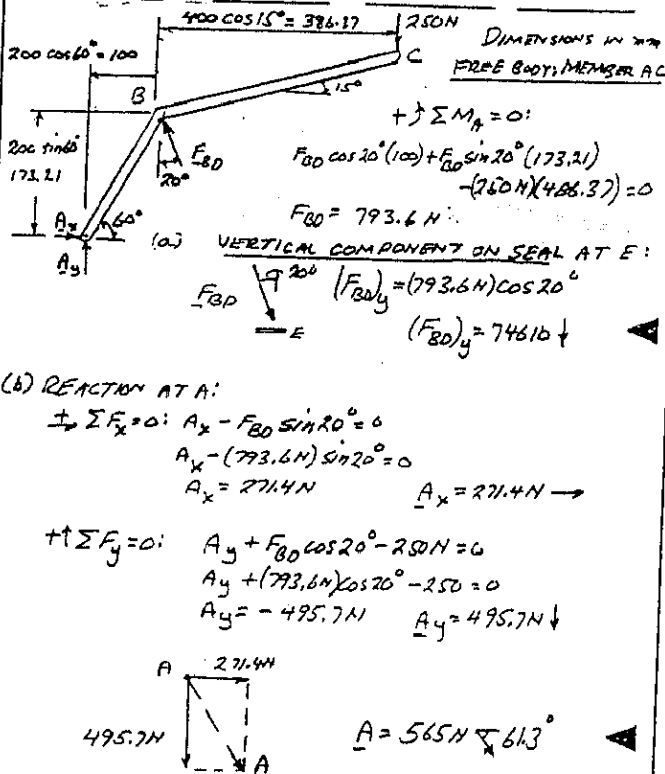


6.123



GIVEN: $a = 4 \text{ in.}$
 $BD = 6 \text{ in.}$
 FIND: HORIZONTAL FORCE EXERTED ON BLOCK E.

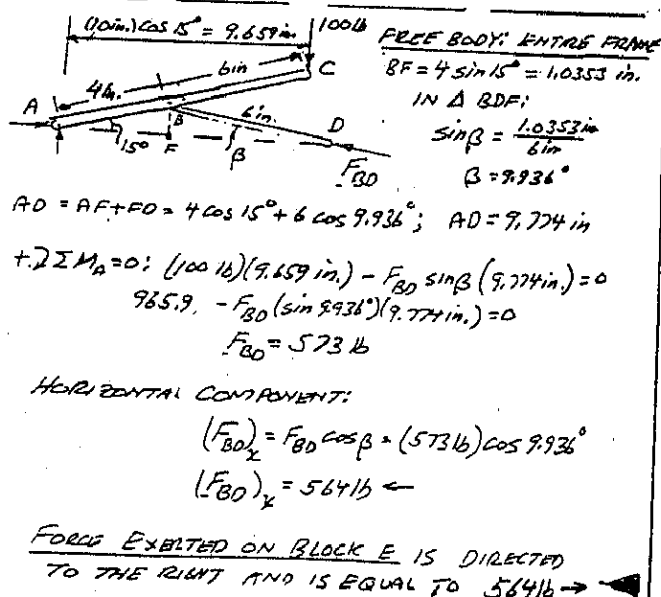

6.126

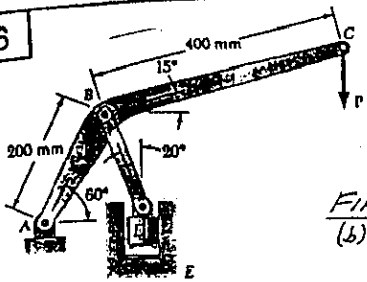

GIVEN: VERTICAL COMPONENT OF FORCE EXERTED ON SEAL E IS 900 N

FIND: (a) FORCE P.
(b) REACTION AT A

WE NOTE THAT BD IS A TWO-FORCE MEMBER

FREE BODY: MEMBER ABC
DIMENSIONS IN mm

$(F_{BD})_y = F_{BD} \cos 20^\circ = 900 \text{ N}$
 $F_{BD} = 957.76 \text{ N comp.}$

$200 \cos 60^\circ = 100$
 $400 \cos 15^\circ = 386.37$
 $200 \sin 60^\circ = 173.21$


$+\sum M_A = 0:$
 $957.76 \cos 20^\circ (100) + 957.76 \sin 20^\circ (173.21) - P(406.37) = 0$
 $P = 301.7 \text{ N}$

$\pm \sum F_x = 0: A_x - (957.76 \text{ N}) \sin 20^\circ = 0; A_x = 327.6 \text{ N}; A_x = 327.6 \text{ N}$
 $+\uparrow \sum F_y = 0: A_y + (957.76 \text{ N}) \cos 20^\circ - 301.7 \text{ N} = 0$
 $A_y = -598.3 \text{ N}; A_y = 598.3 \text{ N}$

$A = 682 \text{ N } \searrow 61.3^\circ$

6.128

GIVEN: $BD = 250 \text{ mm}$

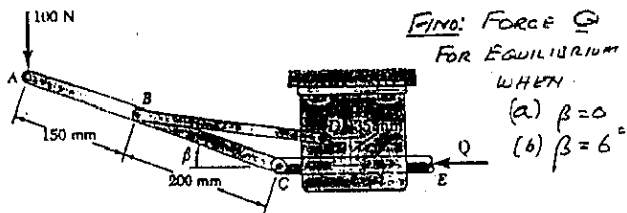

FIND: FORCE Q FOR EQUILIBRIUM WHEN

(a) $\beta = 0$
(b) $\beta = 6^\circ$

WE NOTE THAT BD IS A TWO-FORCE MEMBER
(a) $\beta = 0$: FREE BODY: MEMBER ABC

100 N
 150 mm
 200 mm
 35 mm


SINCE $BD = 250 \text{ mm}$, $\sin \theta = \frac{35}{250}$; $\theta = 8.048^\circ$
 $+\sum M_C = 0: (100 \text{ N})(350 \text{ mm}) - F_{BD} \sin \theta (200 \text{ mm}) = 0$
 $F_{BD} = 1250 \text{ N}$

$\pm \sum F_x = 0: F_{BD} \cos \theta - C_x = 0$
 $(1250 \text{ N})(\cos 8.048^\circ) - C_x = 0$
 $C_x = 1237.7 \text{ N}$

MEMBER CE: $\pm \sum F_x = 0: (1237.7 \text{ N}) - Q = 0$
 $Q = 1237.7 \text{ N}$

$Q = 1238 \text{ N} \leftarrow$

(b) $\beta = 6^\circ$: FREE BODY: MEMBER ABC

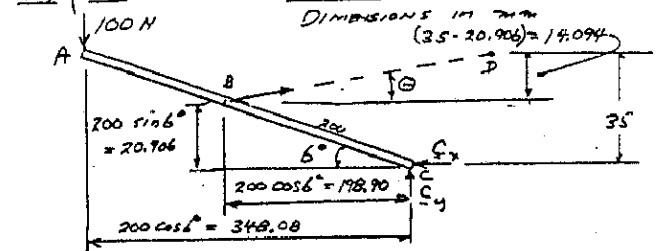

SINCE $BD = 250 \text{ mm}$, $\theta = \sin^{-1} \frac{14.094}{250}$
 $\theta = 3.232^\circ$

$+\sum M_A = 0: (F_{BD} \sin \theta) 198.90 + (F_{BD} \cos \theta) 20.906 - (100 \text{ N}) 348.08 = 0$
 $F_{BD} [198.90 \sin 3.232^\circ + 20.906 \cos 3.232^\circ] = 34808$
 $F_{BD} = 1084.8 \text{ N}$


$\pm \sum F_x = 0: F_{BD} \cos \theta - C_x = 0$
 $(1084.8 \text{ N}) \cos 3.232^\circ - C_x = 0$
 $C_x = +1083.1 \text{ N}$

MEMBER DE:

$\sum F_x = 0: Q = C_x$
 $Q = 1083.1 \text{ N}$
 $Q = 1083 \text{ N} \leftarrow$


6.127

GIVEN: $BD = 250 \text{ mm}$, $\beta = 20^\circ$

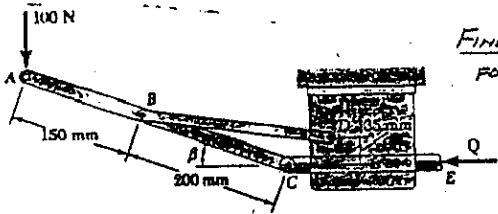

FIND: FORCE Q FOR EQUILIBRIUM

WE NOTE THAT BD IS A TWO-FORCE MEMBER
FREE BODY: MEMBER ABC
DIMENSIONS IN mm

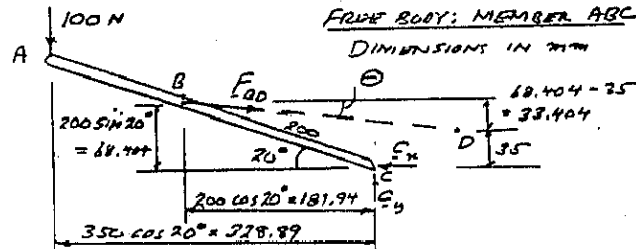

SINCE $BD = 250$, $\theta = \sin^{-1} \frac{33.404}{250}$; $\theta = 7.679^\circ$




$+\sum M_A = 0: (F_{BD} \sin \theta) 187.94 - (F_{BD} \cos \theta) 68.404 - (100 \text{ N}) 328.89 = 0$
 $F_{BD} [187.94 \sin 7.679^\circ - 68.404 \cos 7.679^\circ] = 32889$
 $F_{BD} = 770.6 \text{ N}$

$\pm \sum F_x = 0: (770.6 \text{ N}) \cos 7.679^\circ - C_x = 0$
 $C_x = +763.7 \text{ N}$

MEMBER CE: $\sum F_x = 0: Q = C_x = 763.7 \text{ N}$
 $Q = 764 \text{ N} \leftarrow$

6.129

GIVEN: $M = 1.5 \text{ kN}\cdot\text{m}$. FIND: FORCE P

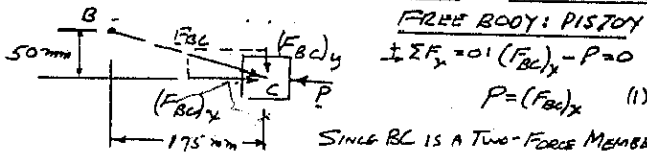

FREE BODY: PISTON


$$\sum F_x = 0: (F_{bc})_x - P = 0$$

$$P = (F_{bc})_x \quad (1)$$

SINCE BC IS A TWO-FORCE MEMBER

$$\frac{(F_{bc})_y}{50} = \frac{(F_{bc})_x}{175}; (F_{bc})_y = \frac{50}{175}(F_{bc})_x$$

USE (1): $(F_{bc})_y = \frac{50}{175}P$; $(F_{bc})_y = \frac{2}{7}P$




FREE BODY: CRANK AB

$$\sum M_A = 0:$$

$$(F_{bc})_y(0.25) - 1.5 \text{ kN}\cdot\text{m} = 0$$

$$\frac{2}{7}P(0.25) = 1.5$$

$$P = 21 \text{ kN} \quad P = 21 \text{ kN} \leftarrow$$

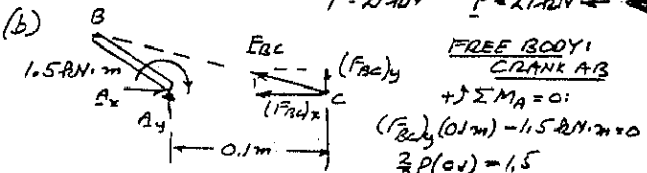

FREE BODY: CRANK AB

$$\sum M_A = 0:$$




$$(F_{bc})_y(0.1) - 1.5 \text{ kN}\cdot\text{m} = 0$$

$$\frac{2}{7}P(0.1) = 1.5$$

$$P = 52.5 \text{ kN} \quad P = 52.5 \text{ kN} \leftarrow$$

6.130

GIVEN: $P = 16 \text{ kN}$. FIND: COUPLE M




FREE BODY: PISTON

$$\sum F_x = 0: (F_{bc})_x = 16 \text{ kN}$$

SINCE BC IS A TWO-FORCE MEMBER

$$\frac{(F_{bc})_y}{50} = \frac{16 \text{ kN}}{175}; (F_{bc})_y = 4.571 \text{ kN}$$

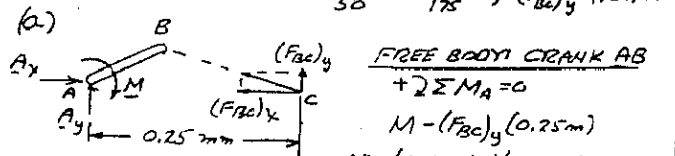


FREE BODY: CRANK AB

$$\sum M_A = 0:$$

$$M - (F_{bc})_y(0.25) = 0$$

$$M = (4.571 \text{ kN})(0.25)$$

$$M = 1.143 \text{ kN}\cdot\text{m} \quad M = 1143 \text{ N}\cdot\text{m} \leftarrow$$

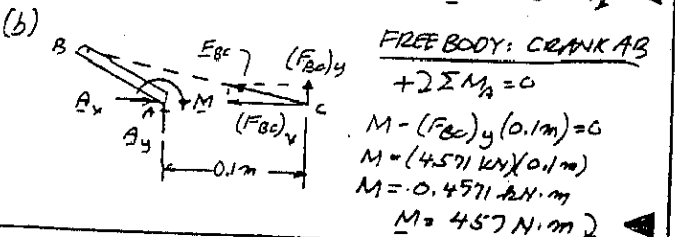

FREE BODY: CRANK AB

$$\sum M_A = 0:$$


$$M - (F_{bc})_y(0.1) = 0$$

$$M = (4.571 \text{ kN})(0.1)$$

$$M = 0.4571 \text{ kN}\cdot\text{m}$$


$$M = 457 \text{ N}\cdot\text{m} \leftarrow$$

6.131



GIVEN: $\theta = 0$

FIND: COUPLE M FOR EQUILIBRIUM

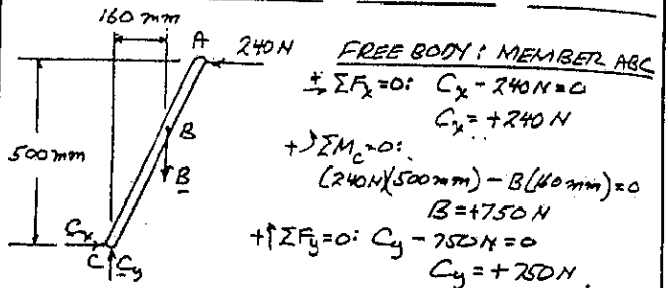

FREE BODY: MEMBER ABC

$$\sum F_x = 0: C_x - 240 \text{ N} = 0$$

$$C_x = +240 \text{ N}$$


$$\sum M_C = 0:$$

$$(240 \text{ N})(500 \text{ mm}) - B(40 \text{ mm}) = 0$$

$$B = 750 \text{ N}$$

$$\sum F_y = 0: C_y - 750 \text{ N} = 0$$

$$C_y = +750 \text{ N}$$

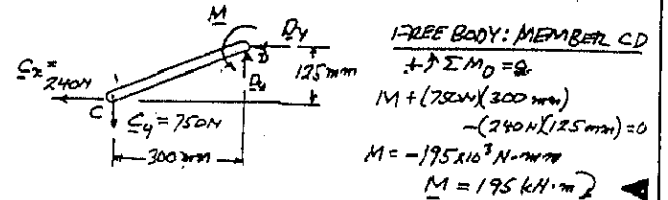

FREE BODY: MEMBER CD

$$\sum M_D = 0:$$


$$M + (750 \text{ N})(300 \text{ mm})$$

$$- (240 \text{ N})(125 \text{ mm}) = 0$$

$$M = -195 \times 10^3 \text{ N}\cdot\text{mm}$$


$$M = 195 \text{ kN}\cdot\text{m} \leftarrow$$

6.132



GIVEN: $\theta = 90^\circ$

FIND: COUPLE M FOR EQUILIBRIUM

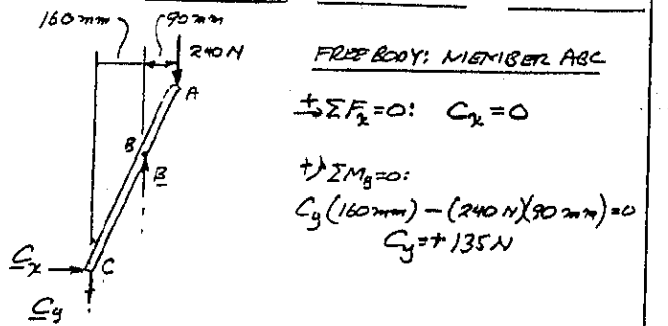


FREE BODY: MEMBER ABC

$$\sum F_x = 0: C_x = 0$$

$$\sum M_B = 0:$$

$$C_y(160 \text{ mm}) - (240 \text{ N})(90 \text{ mm}) = 0$$

$$C_y = +135 \text{ N}$$

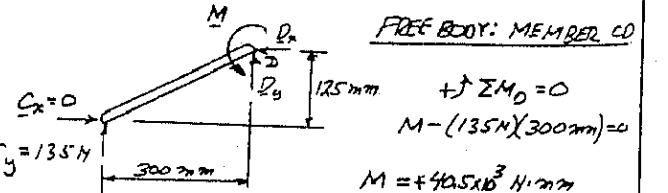

FREE BODY: MEMBER CD


$$\sum M_D = 0:$$

$$M - (135 \text{ N})(300 \text{ mm}) = 0$$


$$M = 40.5 \times 10^3 \text{ N}\cdot\text{mm}$$

$$M = 40.5 \text{ kN}\cdot\text{m} \leftarrow$$


6.133



GIVEN: $\theta = 30^\circ$
 FIND: COUPLE M
 FOR EQUILIBRIUM

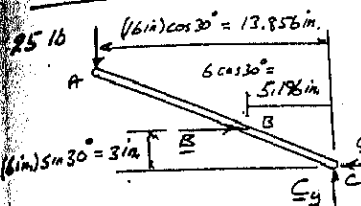


FREE BODY: MEMBER ABC
 $\sum M_C = 0$
 $(25 \text{ lb})(13.856 \text{ in}) - B(3 \text{ in}) = 0$
 $B = +115.47 \text{ N}$
 $\sum F_x = 0$
 $-25 \text{ lb} + C_x = 0$
 $C_x = +25 \text{ lb}$
 $\sum F_y = 0$
 $115.47 \text{ N} - C_y = 0$
 $C_y = +115.47 \text{ lb}$

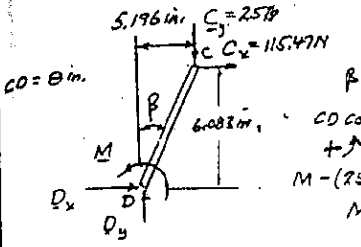


FREE BODY: MEMBER CD
 $\beta = \sin^{-1} \frac{5.196}{8}$; $\beta = 40.505^\circ$
 $CD \cos \beta = (8 \text{ in}) \cos 40.505^\circ = 6.082 \text{ in}$
 $\sum M_D = 0$
 $M - (25 \text{ lb})(5.196 \text{ in}) - (115.47 \text{ lb})(6.082 \text{ in}) = 0$
 $M = +832.3 \text{ lb}\cdot\text{in.}$
 $M = 832 \text{ lb}\cdot\text{in.}$


6.134



GIVEN: $\theta = 60^\circ$
 FIND: COUPLE M
 FOR EQUILIBRIUM

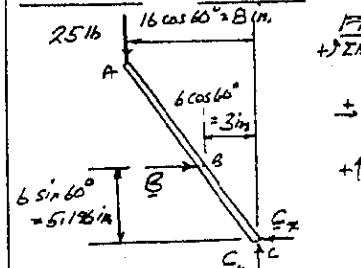


FREE BODY: MEMBER ABC
 $\sum M_C = 0$: $(25 \text{ lb})(8 \text{ in}) - B(5.196 \text{ in}) = 0$
 $B = +38.49 \text{ lb}$
 $\sum F_x = 0$: $38.49 \text{ lb} - C_x = 0$
 $C_x = +38.49 \text{ lb}$
 $\sum F_y = 0$: $-25 \text{ lb} + C_y = 0$
 $C_y = +25 \text{ lb}$

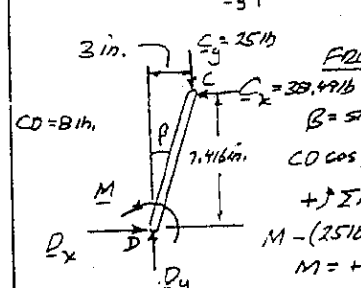


FREE BODY: MEMBER CD
 $\beta = \sin^{-1} \frac{3}{8}$; $\beta = 22.024^\circ$
 $CD \cos \beta = (8 \text{ in}) \cos 22.024^\circ = 7.416 \text{ in.}$
 $\sum M_D = 0$
 $M - (25 \text{ lb})(3 \text{ in}) - (38.49 \text{ lb})(7.416 \text{ in}) = 0$
 $M = +380.4 \text{ lb}\cdot\text{in.}$
 $M = 380 \text{ lb}\cdot\text{in.}$


6.135




FIND: COUPLE M_A
 FOR EQUILIBRIUM



GEOMETRY: $\triangle ABD$ IS ISOSCELES
 $\theta = 2 \angle ABD = 50^\circ$
 $BD = 2[(15 \text{ in}) \cos 25^\circ] = 27.189 \text{ in.}$




FREE BODY: MEMBER AC
 F IS \perp TO AD , $\angle 40^\circ$
 $\sum M_A = 0$: $M_A - F(15 \text{ in}) = 0$
 $M_A = (15 \text{ in.})F$ (1)




FREE BODY: MEMBER BD
 $\sum M_B = 0$:
 $(F \sin 65^\circ)(27.189 \text{ in.}) - 250 \text{ lb}\cdot\text{in.} = 0$
 $F = +10.145 \text{ lb}$
 FROM EQ (1):
 $M_A = (15 \text{ in.})(10.145 \text{ lb})$
 $M_A = 152.2 \text{ lb}\cdot\text{in.}$


6.136




FIND: COUPLE M_A
 FOR EQUILIBRIUM



GEOMETRY: $\triangle ABC$ IS ISOSCELES
 $\theta = 50^\circ$
 $BC = 2[(15 \text{ in}) \cos 25^\circ] = 27.189 \text{ in.}$




FREE BODY: MEMBER BC
 $\sum M_B = 0$
 $F(27.189 \text{ in.}) - 250 \text{ lb}\cdot\text{in.} = 0$
 $F = +9.195 \text{ lb}$




FREE BODY: MEMBER AC
 $\beta = 90^\circ - 25^\circ - 40^\circ = 25^\circ$
 $\sum M_A = 0$
 $M_A - (F \cos 25^\circ)(15 \text{ in.}) = 0$
 $M_A = (9.195 \text{ lb}) \cos 25^\circ (15 \text{ in.})$
 $M_A = +125.0 \text{ lb}\cdot\text{in.}$
 $M_A = 125 \text{ lb}\cdot\text{in.}$

6.137

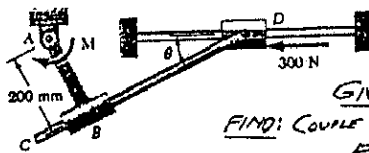


GIVEN: $\theta = 30^\circ$
 FIND: COUPLE M FOR EQUILIBRIUM

FREE BODY: ROD CD

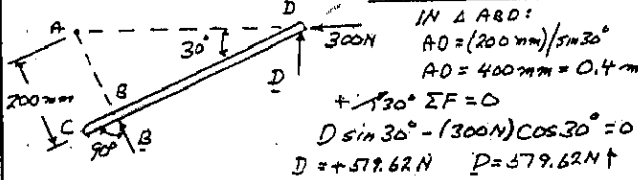


IN ΔABD :
 $AD = (200 \text{ mm}) / \sin 30^\circ$
 $AD = 400 \text{ mm} = 0.4 \text{ m}$
 $+\uparrow \Sigma F = 0$
 $D \sin 30^\circ - (300 \text{ N}) \cos 30^\circ = 0$
 $D = +519.62 \text{ N} \quad P = 379.62 \text{ N} \uparrow$

FREE BODY: ENTIRE FRAME

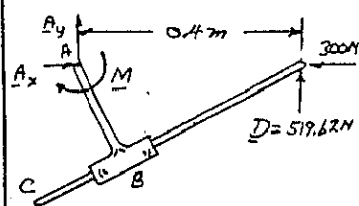


$+\uparrow \Sigma M_A = 0$:
 $(519.62 \text{ N})(0.4 \text{ m}) - M = 0$
 $M = +207.85 \text{ N}\cdot\text{m}$
 $M = 208 \text{ N}\cdot\text{m}$

6.138



GIVEN: $\theta = 30^\circ$
 FIND: COUPLE M FOR EQUILIBRIUM


FREE BODY: ENTIRE FRAME

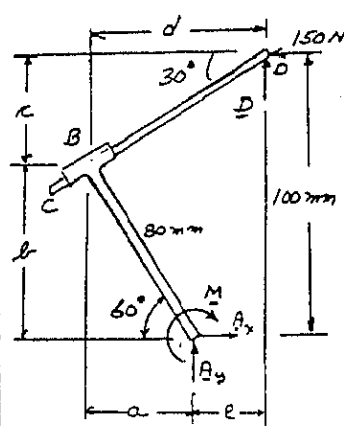

GEOMETRY
 $a = 80 \cos 60^\circ = 40 \text{ mm}$
 $b = 80 \sin 60^\circ = 69.282 \text{ mm}$
 $c = 100 - b = 30.718 \text{ mm}$
 $d = c / \tan 30^\circ = 53.205 \text{ mm}$
 $e = d - a = 53.205 - 40$
 $e = 13.205 \text{ mm}$

$+\uparrow \Sigma M_A = 0$
 $(150 \text{ N})(100 \text{ mm}) + D(13.205 \text{ mm}) - M = 0$
 $M = 15 \text{ N}\cdot\text{m} + D(13.205 \text{ mm}) \quad (i)$

FREE BODY: ROD CD




$+\uparrow \Sigma F = 0$
 $D \sin 30^\circ - (150 \text{ N}) \cos 30^\circ = 0$
 $D = 259.81 \text{ N}$

RETURN TO EQ (i):


$M = 15 \text{ N}\cdot\text{m} + (259.81 \text{ N})(0.013205 \text{ m})$
 $M = 418.431 \text{ N}\cdot\text{m}$

$M = 418.43 \text{ N}\cdot\text{m}$

6.139

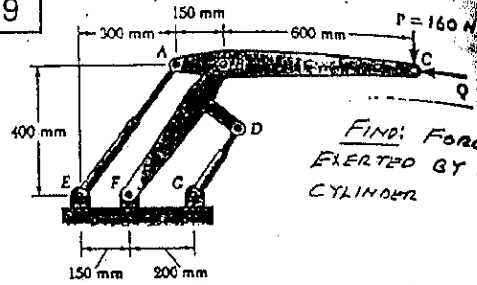


FIND: FORCE EXERTED BY THE CYLINDER

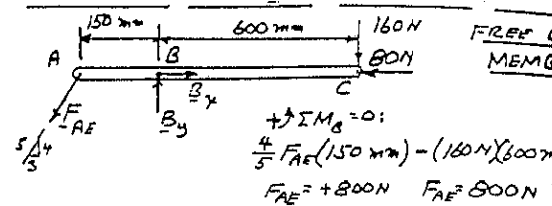

$+\uparrow \Sigma M_B = 0$:
 $\frac{4}{5} F_{AE}(150 \text{ mm}) - (160 \text{ N})(600 \text{ mm}) = 0$
 $F_{AE} = +800 \text{ N} \quad F_{AE} = 800 \text{ N T}$


$\pm \Sigma F_x = 0$: $-\frac{3}{5}(800 \text{ N}) + B_x - 80 \text{ N} = 0 \quad B_x = +560 \text{ N}$

$+\uparrow \Sigma F_y = 0$: $-\frac{4}{5}(800 \text{ N}) + B_y - 160 \text{ N} = 0 \quad B_y = +800 \text{ N}$

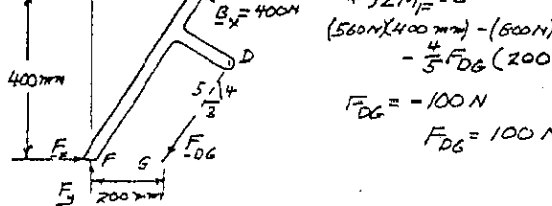


FREE BODY: MEMBER BDF
 $+\uparrow \Sigma M_F = 0$
 $(560 \text{ N})(400 \text{ mm}) - (800 \text{ N})(300 \text{ mm}) - \frac{4}{5} F_{DG}(200 \text{ mm}) = 0$
 $F_{DG} = -100 \text{ N}$
 $F_{DG} = 100 \text{ N C}$

6.140

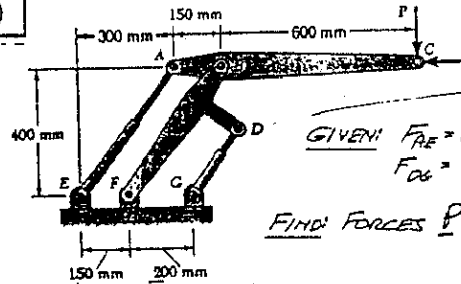


GIVEN: $F_{AE} = 600 \text{ N T}$
 $F_{DG} = 50 \text{ N T}$

FIND: FORCES P AND Q

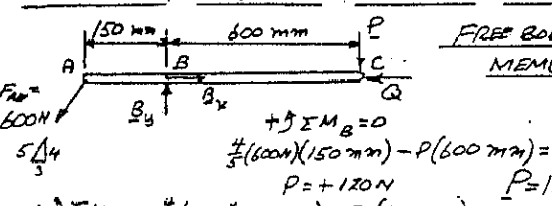


$+\uparrow \Sigma M_B = 0$
 $\frac{4}{5}(600 \text{ N})(150 \text{ mm}) - P(600 \text{ mm}) = 0$
 $P = +120 \text{ N} \quad P = 120 \text{ N} \uparrow$

$+\uparrow \Sigma M_C = 0$: $\frac{4}{5}(600 \text{ N})(750 \text{ mm}) - B_y(600 \text{ mm}) = 0$
 $B_y = +600 \text{ N}$





FREE BODY: MEMBER BDF
 $+\uparrow \Sigma M_F = 0$
 $B_x(400 \text{ mm}) - (600 \text{ N})(300 \text{ mm}) - \frac{4}{5}(50 \text{ N})(200 \text{ mm}) = 0$
 $B_x = +470 \text{ N}$

RETURN TO FREE BODY: MEMBER ABC
 $\pm \Sigma F_x = 0$
 $-\frac{3}{5}(600 \text{ N}) + 470 \text{ N} - Q = 0$
 $Q = +110 \text{ N}$
 $Q = 110 \text{ N} \leftarrow$

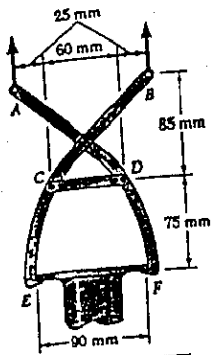

GIVEN: TONGS EXERT UPWARD FORCE OF 45 kN ON PIPE CAP.

FIND: FORCES EXERTED AT D AND F ON TONG ADF.



$A = \frac{45 \text{ kN}}{2} = 22.5 \text{ kN}$


FREE BODY: TONG ADF

$\uparrow \sum F_y = 0: 22.5 \text{ kN} - F_y = 0$
 $F_y = +22.5 \text{ kN}$

$\sum M_D = 0: D(75 \text{ mm}) - (22.5 \text{ kN})(100 \text{ mm}) = 0$
 $D = +30 \text{ kN}$


$\sum F_x = 0: -30 \text{ kN} + F_x = 0$
 $F_x = +30 \text{ kN}$

$F = 37.5 \text{ kN} \angle 36.9^\circ$



GIVEN: TOGGLE SHOWN IS ADDED TO TONGS OF PROB. 6.141

FIND: FORCES EXERTED AT D AND F ON TONG ADF




FREE BODY: TOGGLE

BY SYMMETRY $A_y = \frac{1}{2}(45 \text{ kN}) = 22.5 \text{ kN}$

AG IS A TWO-FORCE MEMBER

$\frac{22.5 \text{ kN}}{22 \text{ mm}} = \frac{A_x}{55 \text{ mm}}$
 $A_x = 56.25 \text{ kN}$

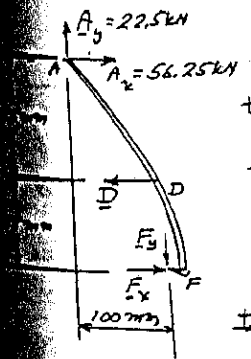

FREE BODY: TONG ADF


$\uparrow \sum F_y = 0: 22.5 \text{ kN} - F_y = 0$
 $F_y = +22.5 \text{ kN}$

$\sum M_D = 0: D(75 \text{ mm}) - (22.5 \text{ kN})(100 \text{ mm}) - (56.25 \text{ kN})(160 \text{ mm}) = 0$
 $D = +150 \text{ kN}$

$\sum F_x = 0: 56.25 \text{ kN} - 150 \text{ kN} + F_x = 0$
 $F_x = 93.75 \text{ kN}$


$F = 96.4 \text{ kN} \angle 13.5^\circ$

6.143

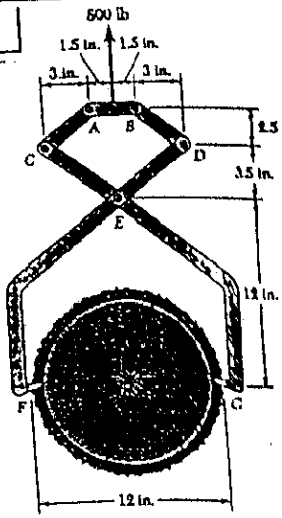

GIVEN: WEIGHT OF LOG IS 800 lb

FIND: FORCES EXERTED AT E AND F ON TONG DEF.




FREE BODY: MEMBERS CA, AB, BD

BY SYMMETRY

$D_y = \frac{1}{2}(800 \text{ lb}) = 400 \text{ lb}$

SINCE BD IS A TWO-FORCE MEMBER

$\frac{D_y}{2.5 \text{ in}} = \frac{D_x}{3 \text{ in}}; 400 \text{ lb} = \frac{D_x}{2.5 \text{ in}}; D_x = 480 \text{ lb}$



FREE BODY: TONG DEF

$\uparrow \sum F_y = 0: 400 \text{ lb} + E_y - 400 \text{ lb} = 0$
 $E_y = 0$


$\sum M_E = 0$

$(400 \text{ lb})(10.5 \text{ in}) + (480 \text{ lb})(15.5 \text{ in}) - E_x(12 \text{ in}) = 0$
 $E_x = 970 \text{ lb}$

$\sum F_x = 0: 970 \text{ lb} - 480 \text{ lb} - F_x = 0$
 $F_x = 490 \text{ lb}$

$F = 633 \text{ lb} \angle 39.2^\circ$


6.144



GIVEN: $\alpha = 5 \text{ in}$. WEIGHT OF BARREL = 60 lb

FIND: FORCES EXERTED AT B AND D ON TONG ABD

WE NOTE THAT BC IS A TWO-FORCE MEMBER.



FREE BODY: TONG ABD

$\frac{B_x}{15} = \frac{B_y}{5}; B_x = 3B_y$

$\sum M_D = 0$

$B_y(3 \text{ in}) + 3B_y(5 \text{ in}) - (60 \text{ lb})(9 \text{ in}) = 0$
 $B_y = 30 \text{ lb}$

$B_x = 3B_y = 90 \text{ lb}$


$\sum F_x = 0: -90 \text{ lb} + D_x = 0$
 $D_x = 90 \text{ lb}$

$\sum F_y = 0: 60 \text{ lb} - 30 \text{ lb} - D_y = 0$
 $D_y = 30 \text{ lb}$

$B = 94.9 \text{ lb} \angle 18.4^\circ$


$D = 94.9 \text{ lb} \angle 18.4^\circ$

6.145

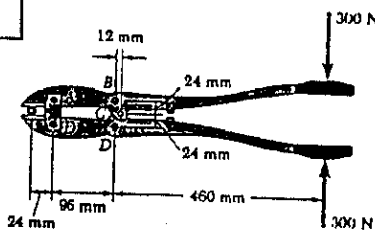


FIND: MAGNITUDE OF FORCES EXERTED ON BOLT

WE NOTE THAT AD IS A TWO-FORCE MEMBER



FREE BODY: JAW AB

$$\begin{aligned} \pm \Sigma F_x = 0: & B_x = 0 \\ + \Sigma M_A = 0 & B_y(96 \text{ mm}) - Q(24 \text{ mm}) = 0 \\ & B_y = 4Q \end{aligned} \quad (1)$$




FREE BODY: HANDLE


$$\begin{aligned} + \Sigma M_C = 0 & B_y(12 \text{ mm}) - (300 \text{ N})(448 \text{ mm}) = 0 \\ & B_y = 11.2 \times 10^3 \text{ N} = 11.2 \text{ kN} \end{aligned}$$

EQ(1): $Q = 4B_y = 4(11.2 \text{ kN}) = 44.8 \text{ kN}$ $Q = 44.8 \text{ kN}$

6.146

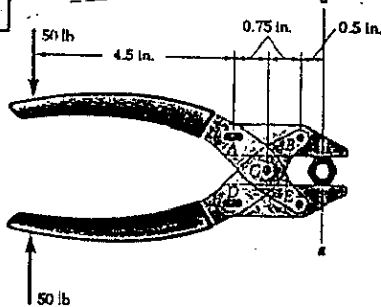


FIND: GRIPPING FORCES EXERTED ALONG LINE a-a ON THE NUT



FREE BODY: UPPER JAW

$$\begin{aligned} \pm \Sigma F_x = 0 & B_x = 0 \\ + \Sigma M_A = 0 & Q(0.5 \text{ in.}) - B_y(1.5 \text{ in.}) = 0 \\ & B_y = Q/3 \end{aligned}$$

$+ \Sigma M_B = 0: -B_y(1.5 \text{ in.}) + A(2 \text{ in.}) = 0$ $B_y = 4Q/3$




FREE BODY: LOWER JAW

$$\begin{aligned} \pm \Sigma F_x = 0: & E_x = 0 \\ + \Sigma M_D = 0: & E_y(1.5 \text{ in.}) - Q(0.5 \text{ in.}) = 0 \\ & E_y = 4Q/3 \end{aligned}$$

FREE BODY: HANDLE


FROM ABOVE:
 $A = Q/3$
 $E_y = 4Q/3$

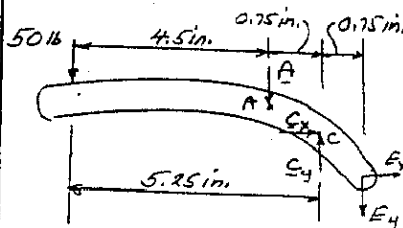


$$\begin{aligned} + \Sigma M_C = 0: & (50 \text{ lb})(5.25 \text{ in.}) + A(0.75 \text{ in.}) - E_y(0.75 \text{ in.}) = 0 \\ & 262.5 \text{ lb}\cdot\text{in.} + (Q/3)(0.75 \text{ in.}) - (4Q/3)(0.75 \text{ in.}) = 0 \\ & 262.5 \text{ lb}\cdot\text{in.} - Q(0.75 \text{ in.}) = 0 \\ & Q = 350 \text{ lb} \end{aligned}$$

$Q = 350 \text{ lb}$ $Q = 350 \text{ lb}$

6.147

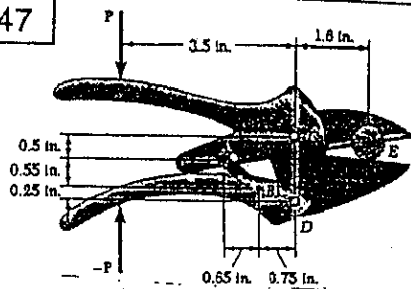


FIND: MAGNITUDE FOR 300-LB VERTICAL CUTTING FORCE ON BRANCH AT E.



FREE BODY: MEMBER AB

$$\begin{aligned} \frac{(F_{AB})_x}{0.65 \text{ in.}} &= \frac{(F_{AB})_y}{0.55 \text{ in.}} \\ (F_{AB})_x &= \frac{11}{13} (F_{AB})_y \end{aligned} \quad (1)$$

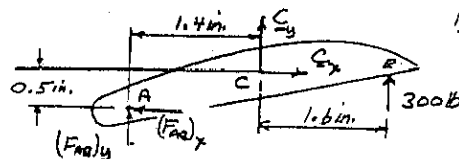


FREE BODY: BLADE ACB

$$\begin{aligned} + \Sigma M_E = 0: & (300 \text{ lb})(1.6 \text{ in.}) - (F_{AB})_x(0.5 \text{ in.}) - (F_{AB})_y(1.4 \text{ in.}) = 0 \\ \text{USE EQ(1):} & (F_{AB})_x(0.5 \text{ in.}) + \frac{11}{13} (F_{AB})_y(1.4 \text{ in.}) = 480 \text{ lb}\cdot\text{in.} \\ & 1.6846 (F_{AB})_x = 480 \quad (F_{AB})_x = 284.9 \text{ lb} \end{aligned}$$

$(F_{AB})_y = \frac{11}{13} (284.9 \text{ lb})$ $(F_{AB})_y = 241.1 \text{ lb}$


FREE BODY: LOWER HANDLE




$$+ \Sigma M_D = 0: (241.1 \text{ lb})(0.75 \text{ in.}) - (284.9 \text{ lb})(0.25 \text{ in.}) - P(3.5 \text{ in.}) = 0$$

$P = 313 \text{ lb}$

6.148

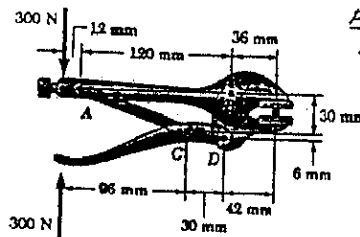


FIND: GRIPPING FORCES PRODUCED BY 300-LB FORCES



FREE BODY: MEMBER AC

$$\begin{aligned} \frac{(F_{AC})_x}{84 \text{ mm}} &= \frac{(F_{AC})_y}{30 \text{ mm}} \\ (F_{AC})_x &= 2.8 (F_{AC})_y \end{aligned}$$




FREE BODY: LOWER HANDLE

$$\begin{aligned} + \Sigma M_D = 0: & (F_{AC})_y(30 \text{ mm}) - (F_{AC})_x(6 \text{ mm}) - (300 \text{ N})(126 \text{ mm}) = 0 \\ & (F_{AC})_y(30) - 2.8(F_{AC})_y(6) - 300(126) = 0 \\ & (F_{AC})_y = 2884 \text{ N} \end{aligned}$$

(CONTINUED)


148 CONTINUED

FREE BODY: UPPER HANDLE

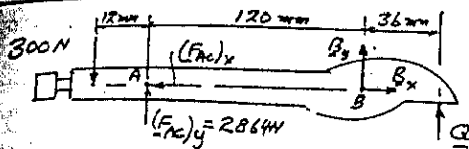


$\sum M_B = 0: (300N)(132mm) - (2864N)(120mm) + Q(36mm) = 0$
 $Q = 8450N$ $Q = 8.45kN$

6.149 and 6.150

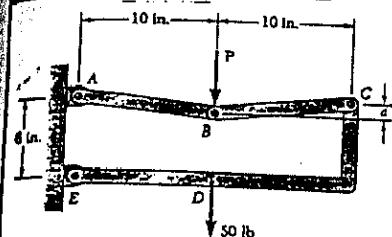


FIND FORCE P
 REQUIRED FOR
 EQUILIBRIUM
 PROB. 6.149
 WHEN $\alpha = 1in.$
 PROB. 6.150
 WHEN $\alpha = 0.5in.$

WE NOTE THAT AB AND BC ARE TWO-FORCE MEMBERS



FREE BODY: TRUSS
 BY SYMMETRY:
 $C_y = P/2$

$\frac{C_x}{10in.} = \frac{C_y}{a}$; $C_x = \frac{10}{a} C_y = \frac{10}{a} \frac{P}{2} = \frac{5P}{a}$



FREE BODY: MEMBER CDE
 $\sum M_E = 0:$
 $C_x(6in.) - C_y(20in.) - (50lb)(10in.) = 0$
 $\frac{5P}{a}(6) - \frac{P}{2}(20) = 500$
 $P(\frac{30}{a} - 10) = 500$ (1)


PROB. 6.149: $\alpha = 1in.$

Eqn: $P(\frac{30}{1} - 10) = 500$; $20P = 500$ $P = 25lb \downarrow$

PROB. 6.150: $\alpha = 0.5in.$

Eqn: $P(\frac{30}{0.5} - 10) = 500$; $50P = 500$ $P = 10lb \downarrow$

6.151

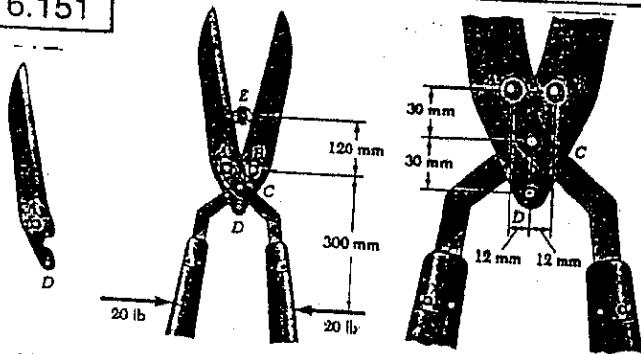


FIND: MAGNITUDE OF FORCES EXERTED AT E.


BY SYMMETRY VERTICAL COMPONENTS C_y, D_y, E_y ARE 0.
 THEN BY CONSIDERING $\sum F_y = 0$ ON THE
 BLADES OR HANDLES, WE FIND THAT A_y AND B_y ARE 0.
 THUS FORCES AT A, B, C, D, AND E ARE
 HORIZONTAL

(CONTINUED)

6.151 CONTINUED




FREE BODY: RIGHT HANDLE
 $\sum M_C = 0:$
 $A(30mm) - (80N)(270mm) = 0$
 $A = 720N$
 $\sum F_x = 0: C - 720N - 80N = 0$
 $C = +800N$




FREE BODY: LEFT BLADE
 $\sum M_D = 0$
 $E(180mm) - (720N)(60mm) = 0$
 $E = 240N$

6.152

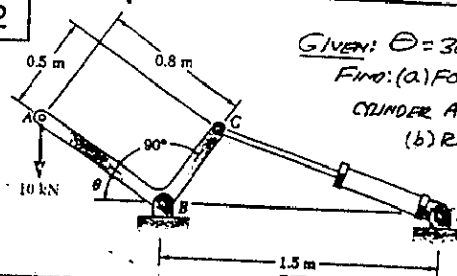


GIVEN: $\theta = 30^\circ$
 FIND: (a) FORCE OF
 CYLINDER AT C.
 (b) REACTION
 AT B.



GEOMETRY: IN $\triangle BCD$
 LAW OF COSINES
 $(CD)^2 = (0.5)^2 + (1.5)^2 - 2(0.5)(1.5)\cos 60^\circ$
 $CD = 1.3229m$

LAW OF SINES
 $\frac{\sin \beta}{0.5m} = \frac{\sin 60^\circ}{1.3229m}$; $\sin \beta = 0.3223$; $\beta = 19.107^\circ$

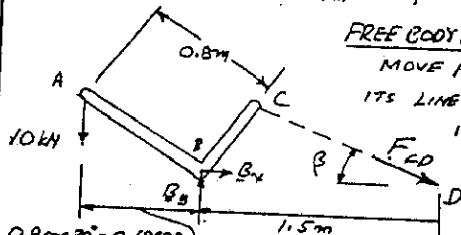


FREE BODY: ENTIRE SYSTEM
 MOVE FORCE FCD ALONG
 ITS LINE OF ACTION SO
 IT ACTS AT D.

$0.8 \cos 30^\circ = 0.69282m$
 (a) $\sum M_B = 0: (10kN)(0.69282m) - F_{CD} \sin \beta (1.5m) = 0$
 $6.9282 kN \cdot m - F_{CD} \sin 19.107^\circ (1.5m) = 0$
 $F_{CD} = 14.111 kN$


(b) $\sum F_x = 0: B_x + F_{CD} \cos \beta = 0$
 $B_x + (14.111 kN) \cos 19.107^\circ = 0$
 $B_x = -13.333 kN$ $B_x = 13.333 kN \leftarrow$

$\sum F_y = 0: B_y - 10kN - F_{CD} \sin 19.107^\circ = 0$
 $B_y - 10kN - (14.111 kN) \sin 19.107^\circ = 0$
 $B_y = +14.619 kN$ $B_y = 14.619 kN \uparrow$




$B_x = 13.333 kN$ $B = 19.79 kN \angle 47.6^\circ$


6.153

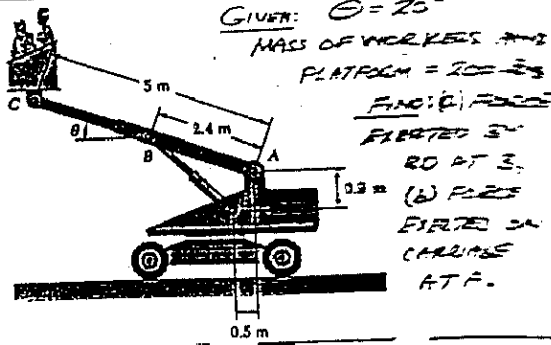

GIVEN: $\theta = 20^\circ$
 MASS OF WORKER AND PLATFORM = 200 lb
 FIND: (a) FORCE EXERTED BY RD AT B.
 (b) FORCE EXERTED ON CARRIAGE AT A.

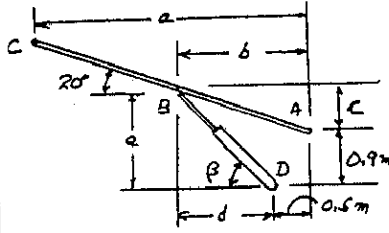

GEOMETRY:
 $a = (5m) \cos 20^\circ = 4.6985m$
 $b = (2.4m) \cos 20^\circ = 2.2553m$
 $c = (2.4m) \sin 20^\circ = 0.8208m$
 $d = b - 0.5 = 1.7553m$
 $e = c + 0.9 = 1.7208m$
 $\tan \beta = \frac{e}{d} = \frac{1.7208}{1.7553}; \beta = 44.43^\circ$

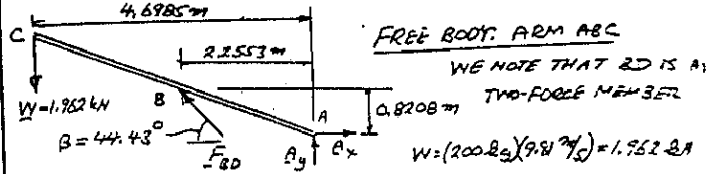


FREE BODY: ARM ABC

WE NOTE THAT RD IS A TWO-FORCE MEMBER


(a) $\sum M_A = 0: (1.962 \text{ kN})(4.6985 \text{ m}) - F_{BD} \sin 44.43^\circ (2.2553 \text{ m}) + F_{BD} \cos 44.43^\circ (0.8208 \text{ m}) = 0$
 $9.2185 - F_{BD}(0.9714) = 0; F_{BD} = 9.49 \text{ kN}$

(b) $\sum F_x = 0: A_x - F_{BD} \cos \beta = 0$
 $A_x = (9.49 \text{ kN}) \cos 44.43^\circ = 6.632 \text{ kN}$
 $\sum F_y = 0: A_y - 1.962 \text{ kN} + F_{BD} \sin \beta = 0$
 $A_y = 1.962 \text{ kN} - (9.49 \text{ kN}) \sin 44.43^\circ = 4.539 \text{ kN}$
 $A = 8.04 \text{ kN} \angle 34.4^\circ$

6.154

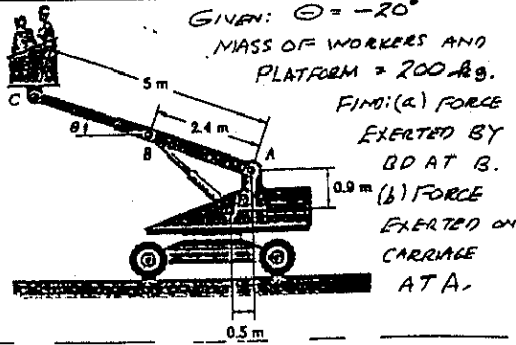

GIVEN: $\theta = -20^\circ$
 MASS OF WORKER AND PLATFORM = 200 lb
 FIND: (a) FORCE EXERTED BY BD AT B.
 (b) FORCE EXERTED ON CARRIAGE AT A.

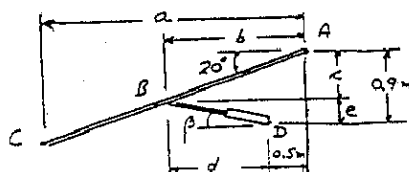

GEOMETRY:
 $a = (5m) \cos 20^\circ = 4.6985m$
 $b = (2.4m) \cos 20^\circ = 2.2552m$
 $c = (2.4m) \sin 20^\circ = 0.8208m$
 $d = b - 0.5 = 1.7553m$
 $e = 0.9 - c = 0.0792m$


$\tan \beta = \frac{e}{d} = \frac{0.0792}{1.7552}; \beta = 2.584^\circ$

(CONTINUED)

6.154 CONTINUED

FREE BODY: ARM ABC


WE NOTE THAT RD IS A TWO-FORCE MEMBER

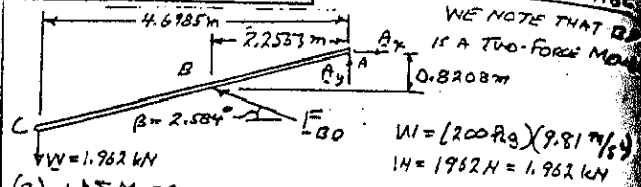

(a) $\sum M_A = 0$
 $(1.962 \text{ kN})(4.6985 \text{ m}) - F_{BD} \sin 2.584^\circ (2.2553 \text{ m}) - F_{BD} \cos 2.584^\circ (0.8208 \text{ m}) = 0$
 $9.2185 - F_{BD}(0.9714) = 0; F_{BD} = 10.003 \text{ kN}$


(b) $\sum F_x = 0: A_x - F_{BD} \cos \beta = 0$
 $A_x = (10.003 \text{ kN}) \cos 2.583^\circ = 9.993 \text{ kN}$
 $\sum F_y = 0: A_y - 1.962 \text{ kN} + F_{BD} \sin \beta = 0$
 $A_y = 1.962 \text{ kN} - (10.003 \text{ kN}) \sin 2.583^\circ = 1.5112 \text{ kN}$
 $A = 10.11 \text{ kN} \angle 8.6^\circ$

6.155

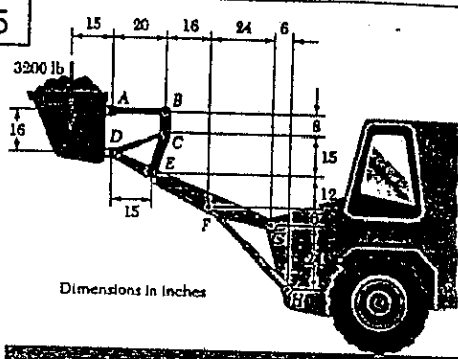

Dimensions in Inches

FIND: FORCE EXERTED BY CD AND FH.




FREE BODY: BUCKET (ONE MECHANISM)

$\sum M_D = 0: (1600 \text{ lb})(15 \text{ in}) - F_{AB}(16 \text{ in}) = 0$
 $F_{AB} = 1500 \text{ lb}$

NOTE: THERE ARE 2 IDENTICAL SUPPORT MECHANISMS


FREE BODY: ONE ARM BCE

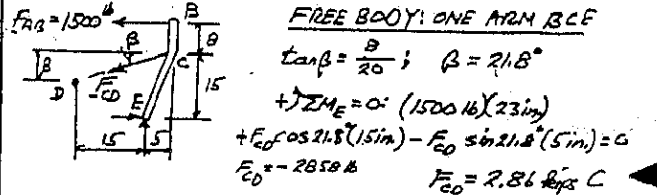

$\tan \beta = \frac{b}{20}; \beta = 21.8^\circ$


$\sum M_E = 0: (1500 \text{ lb})(23 \text{ in}) + F_{CD} \cos 21.8^\circ (15 \text{ in}) - F_{EH} \sin 21.8^\circ (5 \text{ in}) = 0$
 $F_{EH} = 2.86 \text{ kips C}$

FREE BODY: ARM DFE

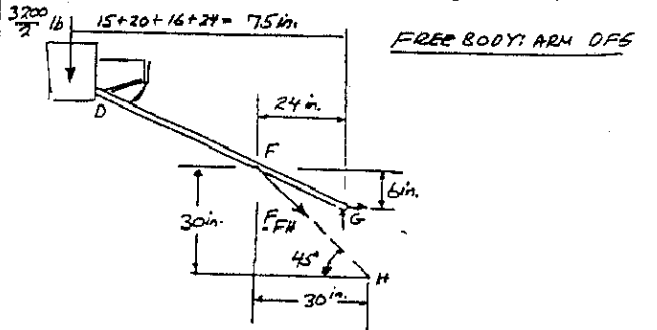


$\sum M_G = 0: (1600 \text{ lb})(75 \text{ in}) + F_{EH} \sin 45^\circ (24 \text{ in}) - F_{FH} \cos 45^\circ (6 \text{ in}) = 0$
 $F_{FH} = 9.43 \text{ kips C}$

6.156

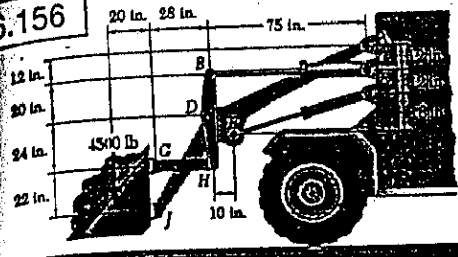

FIND: FORCE EXERTED BY
(a) CYLINDER BC
(b) CYLINDER EF




FREE BODY: BUCKET

$$+\rightarrow \Sigma M_J = 0$$

$$(4500 \text{ lb})(20 \text{ in.}) - F_{GH}(22 \text{ in.}) = 0$$

$$F_{GH} = 4091 \text{ lb}$$




FREE BODY: ARM BDH

$$+\rightarrow \Sigma M_D = 0$$

$$-(4091 \text{ lb})(24 \text{ in.}) - F_{BC}(20 \text{ in.}) = 0$$

$$F_{BC} = -4709 \text{ lb} \quad F_{BC} = 4.71 \text{ kips C}$$

FREE BODY: ENTIRE MECHANISM
(TWO ARMS AND CYLINDERS ARE E)

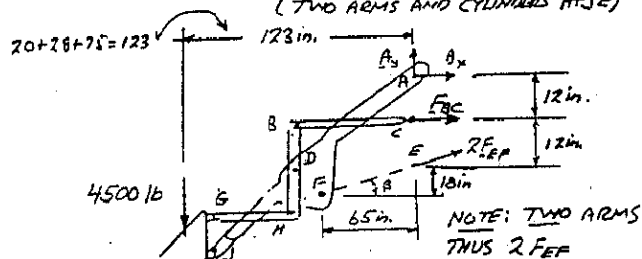

$$\tan \beta = \frac{18 \text{ in.}}{65 \text{ in.}}; \beta = 15.45^\circ$$


$$+\rightarrow \Sigma M_A = 0$$

$$(4500 \text{ lb})(123 \text{ in.}) + F_{BC}(12 \text{ in.}) + 2F_{EF} \cos \beta (24 \text{ in.}) = 0$$

$$(4500 \text{ lb})(123 \text{ in.}) - (4709 \text{ lb})(12 \text{ in.}) + 2F_{EF} \cos 15.45^\circ (24 \text{ in.}) = 0$$


$$F_{EF} = -10,690 \text{ lb} \quad F_{EF} = 10.69 \text{ kips C}$$

6.157 and 6.158

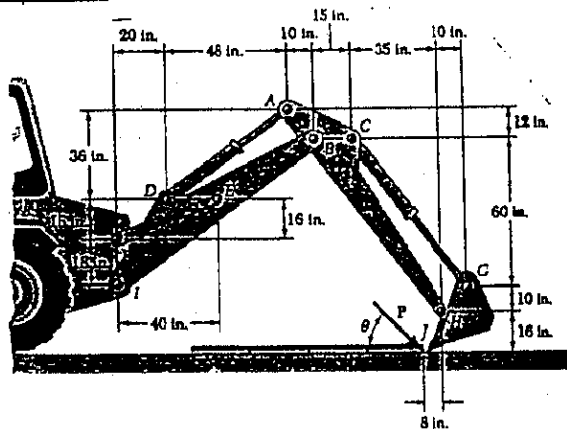

GIVEN: $P = 2 \text{ kips}$
FIND: FORCE EXERTED BY EACH CYLINDER
PROB. 6.157 WHEN $\theta = 45^\circ$
PROB. 6.158 WHEN $\theta = 0$

6.157 and 6.158 CONTINUED




FREE BODY: BUCKET

$$+\rightarrow \Sigma M_H = 0 \text{ (DIMENSIONS IN INCHES)}$$

$$\frac{4}{5}F_{CG}(10) + \frac{3}{5}F_{CG}(10) + P \cos \theta (16) + P \sin \theta (8) = 0$$

$$F_{CG} = -\frac{P}{14}(16 \cos \theta + 8 \sin \theta) \quad (1)$$

FREE BODY: ARM ABH AND BUCKET

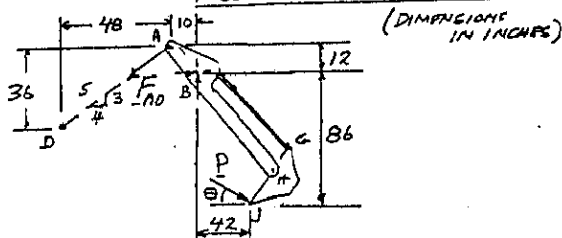


$$+\rightarrow \Sigma M_B = 0$$


$$\frac{4}{5}F_{AD}(12) + \frac{3}{5}F_{AD}(10) + P \cos \theta (86) - P \sin \theta (42) = 0$$

$$F_{AD} = -\frac{P}{15.6}(86 \cos \theta - 42 \sin \theta) \quad (2)$$

FREE BODY: BUCKET AND ARMS IEB + ABH



GEOMETRY OF CYLINDER EF
 $\tan \beta = \frac{16 \text{ in.}}{40 \text{ in.}} \quad \beta = 21.801^\circ$

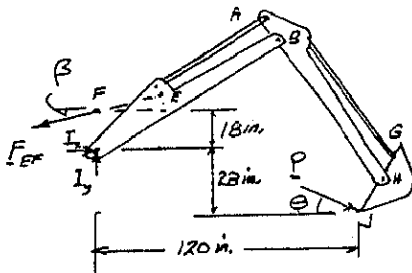

$$+\rightarrow \Sigma M_I = 0$$

$$F_{EF} \cos \beta (18 \text{ in.}) + P \cos \theta (28 \text{ in.}) - P \sin \theta (120 \text{ in.}) = 0$$

$$F_{EF} = \frac{P(120 \sin \theta - 28 \cos \theta)}{\cos 21.8^\circ (18)} = \frac{P}{16.7126}(120 \sin \theta - 28 \cos \theta) \quad (3)$$

PROB. 6.157 $P = 2 \text{ kips}, \theta = 45^\circ$

$$\text{EQ(1): } F_{CG} = -\frac{2}{14}(16 \cos 45^\circ + 8 \sin 45^\circ) = -2.42 \text{ kips}$$

$$F_{CG} = 2.42 \text{ kips C}$$

$$\text{EQ(2): } F_{AD} = -\frac{2}{15.6}(86 \cos 45^\circ - 42 \sin 45^\circ) = -3.99 \text{ kips}$$

$$F_{AD} = 3.99 \text{ kips C}$$

$$\text{EQ(3): } F_{EF} = \frac{2}{16.7126}(120 \sin 45^\circ - 28 \cos 45^\circ) = 7.79 \text{ kips}$$

$$F_{EF} = 7.79 \text{ kips T}$$

PROB. 6.158 $P = 2 \text{ kips}, \theta = 0$

$$\text{EQ(1): } F_{CG} = -\frac{2}{14}(16 \cos 0 + 8 \sin 0) = -2.29 \text{ kips}$$

$$F_{CG} = 2.29 \text{ kips C}$$


$$\text{EQ(2): } F_{AD} = -\frac{2}{15.6}(86 \cos 0 - 42 \sin 0) = -11.03 \text{ kips}$$

$$F_{AD} = 11.03 \text{ kips C}$$


$$\text{EQ(3): } F_{EF} = \frac{2}{16.7126}(120 \sin 0 - 28 \cos 0) = -3.35 \text{ kips}$$

$$F_{EF} = 3.35 \text{ kips C}$$


FIND: (a) MAGNITUDE M_A .
(b) REACTIONS AT B, D, AND E.

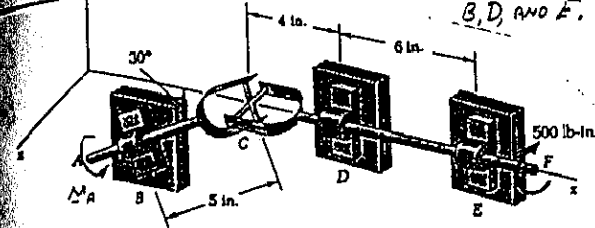

WE RECALL FROM FIG. 4.10, PAGE 187, THAT A UNIVERSAL JOINT EXERTS ON MEMBERS IT CONNECTS A FORCE OF UNKNOWN DIRECTION AND A COUPLE ABOUT AN AXIS PERPENDICULAR TO THE CROSS DISC.

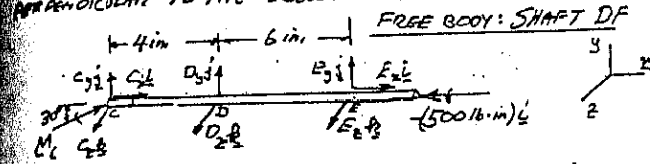

$\Sigma M_y = 0: M_C \cos 30^\circ - 500 \text{ lb} \cdot \text{in} = 0 \quad M_C = 577.35 \text{ lb} \cdot \text{in}$

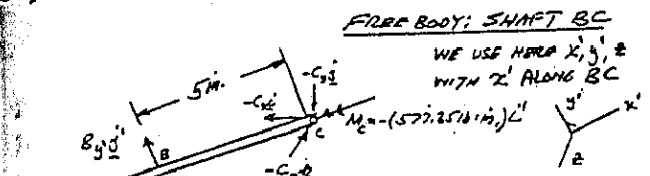

$\Sigma M_C = 0: -M_A i' - (57.35 \text{ lb} \cdot \text{in}) i' + (-5 \text{ in}) i' \times (B_y j' + B_z k) = 0$

EQUATE COEFFICIENTS OF UNIT VECTORS TO ZERO:

- (1) $M_A - 577.35 \text{ lb} \cdot \text{in} = 0 \quad M_A = 577.35 \text{ lb} \cdot \text{in}$
- (2) $B_z = 0$
- (3) $B_y = 0$

$\Sigma F = 0: B + C = 0$, SINCE $B = 0$, $C = 0$

RETURN TO FREE BODY OF SHAFT DF

$\Sigma M_D = 0$ (NOTE THAT $C = 0$ AND $M_C = 577.35 \text{ lb} \cdot \text{in}$)

$(577.35 \text{ lb} \cdot \text{in})(\cos 30^\circ i + \sin 30^\circ j) - (500 \text{ lb} \cdot \text{in}) k + (6 \text{ in}) i \times (E_x i + E_y j + E_z k) = 0$

$(500 \text{ lb} \cdot \text{in}) i + (250 \text{ lb} \cdot \text{in}) j - (500 \text{ lb} \cdot \text{in}) k + (6 \text{ in}) E_y j - (6 \text{ in}) E_z k = 0$

EQUATE COEFFICIENTS OF UNIT VECTORS TO ZERO:


- (1) $250.88 \text{ lb} \cdot \text{in} - (6 \text{ in}) E_z = 0 \quad E_z = 48.1 \text{ lb}$
- (2) $E_y = 0$

$\Sigma F = 0: C + D + E = 0$


$0 + D_y j + D_z k + E_x i + (48.1 \text{ lb}) k = 0$

- (1) $E_x = 0$
- (2) $D_y = 0$
- (3) $D_z + 48.1 \text{ lb} = 0 \quad D_z = -48.1 \text{ lb}$


REACTIONS ARE: $B = 0$, $D = (-48.1 \text{ lb}) k$, $E = (48.1 \text{ lb}) k$

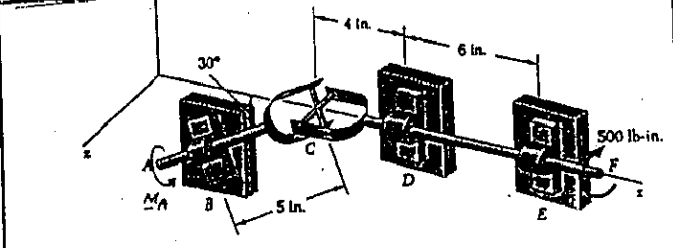

GIVEN: ROTATE SHAFT UNTIL CROSSPIECE ATTACHED TO SHAFT CF IS VERTICAL, THEN
FIND: (a) MAGNITUDE M_A . (b) REACTIONS AT B, D, AND E.

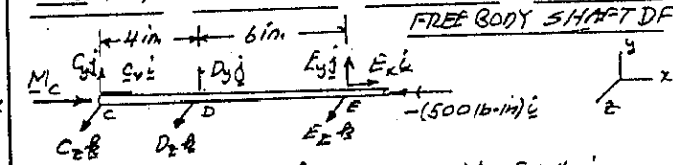

$\Sigma M_x = 0: M_C - 500 \text{ lb} \cdot \text{in} = 0 \quad M_C = 500 \text{ lb} \cdot \text{in}$

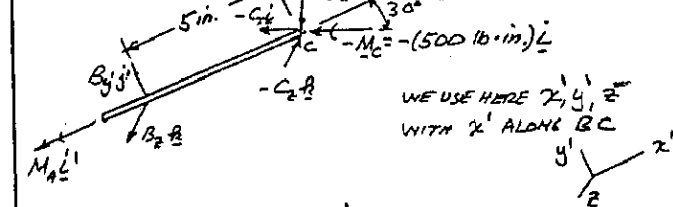

WE RESOLVE $-(500 \text{ lb} \cdot \text{in}) k$ INTO COMPONENTS ALONG x' AND y' AXES: $-M_C = -(500 \text{ lb} \cdot \text{in})(\cos 30^\circ i' + \sin 30^\circ j')$

$\Sigma M_C = 0: M_A i' - (500 \text{ lb} \cdot \text{in})(\cos 30^\circ i' + \sin 30^\circ j') + (5 \text{ in}) i' \times (B_y j' + B_z k) = 0$

$M_A i' - (433 \text{ lb} \cdot \text{in}) i' - (250 \text{ lb} \cdot \text{in}) j' + (5 \text{ in}) B_y j' - (5 \text{ in}) B_z k = 0$

EQUATE TO ZERO COEFFICIENTS OF UNIT VECTORS:

- (1) $M_A - 433 \text{ lb} \cdot \text{in} = 0 \quad M_A = 433 \text{ lb} \cdot \text{in}$
- (2) $-250 \text{ lb} \cdot \text{in} - (5 \text{ in}) B_z = 0 \quad B_z = -50 \text{ lb}$
- (3) $B_y = 0$

REACTION AT B: $B = -(50 \text{ lb}) k$

$\Sigma F = 0: B + C = 0$

$-(50 \text{ lb}) k - C = 0 \quad C = (50 \text{ lb}) k$

RETURN TO FREE BODY OF SHAFT DF:

$\Sigma M_D = 0: (6 \text{ in}) i \times (E_x i + E_y j + E_z k) - (4 \text{ in}) i \times (50 \text{ lb}) k - (500 \text{ lb} \cdot \text{in}) i + (500 \text{ lb} \cdot \text{in}) i = 0$

$(6 \text{ in}) E_y j - (6 \text{ in}) E_z k - (200 \text{ lb} \cdot \text{in}) j = 0$

- (1) $E_y = 0$
- (2) $-(6 \text{ in}) E_z - 200 \text{ lb} \cdot \text{in} = 0 \quad E_z = -33.3 \text{ lb}$


$\Sigma F = 0: C + D + E = 0$

$-(50 \text{ lb}) k + D_y j + D_z k + E_x i - (33.3 \text{ lb}) k = 0$


- (1) $E_x = 0$
- (2) $-50 \text{ lb} - 33.3 \text{ lb} + D_z = 0 \quad D_z = 83.3 \text{ lb}$

REACTIONS ARE: $B = -(50 \text{ lb}) k$, $D = (83.3 \text{ lb}) k$, $E = -(33.3 \text{ lb}) k$


6.159




GIVEN: RADIUS OF GEAR A IS $a = 18 \text{ mm}$, GEAR B IS b , $M_A = 10 \text{ N}\cdot\text{m}$ APPLIED TO GEAR A, $M_S = 50 \text{ N}\cdot\text{m}$ APPLIED TO BCD.
FIND: (a) VALUE OF b , (b) COUPLE M_E APPLIED TO GEAR E.



GEAR A: BY SYMMETRY $F_{AB} = F_{AC} = F_{AD}$
 $\rightarrow \sum M_A = 0: -M_A + 3F_{AC}a = 0$
 $F_{AC} = \frac{M_A}{3a}$



GEAR C: $\rightarrow \sum M_C = 0: F_{AC}b - F_{CB}b = 0$
 $F_{CB} = F_{AC} = \frac{M_A}{3a}$




SPIDER BCD: BY SYMMETRY: $B = C = D$
 $\rightarrow \sum M_A = 0$
 $-M_S + 3C(a+b) = 0$
 $-M_S + 3\left(\frac{M_A}{3a}\right)(a+b) = 0$
 $\frac{M_S}{M_A} = 2\frac{a+b}{a} = 2\left(1 + \frac{b}{a}\right)$

(a) GIVEN: $M_S = 50 \text{ N}\cdot\text{m}$ AND $M_A = 10 \text{ N}\cdot\text{m}$


$$\frac{50 \text{ N}\cdot\text{m}}{10 \text{ N}\cdot\text{m}} = 2\left(1 + \frac{b}{a}\right)$$

$$\frac{b}{a} = 1.5 \text{ FOR } a = 18 \text{ mm}, b = 1.5(18 \text{ mm}); b = 27 \text{ mm}$$



FREE BODY: ENTIRE SYSTEM
 $\rightarrow \sum M = 0$
 $10 \text{ N}\cdot\text{m} - 50 \text{ N}\cdot\text{m} + M_E = 0$
 $M_E = 40 \text{ N}\cdot\text{m}$

6.160

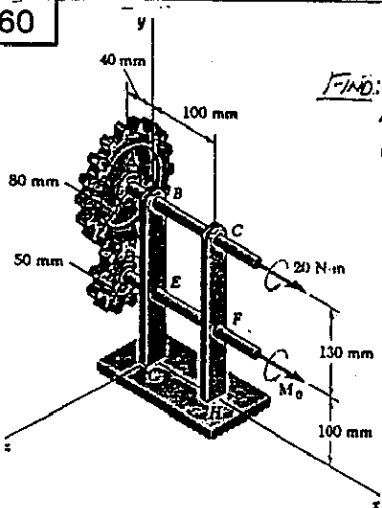


FIND: (a) COUPLE M_D FOR EQUILIBRIUM (b) REACTIONS AT G AND H.

(CONTINUED)

6.160 CONTINUED


PROJECTIONS ON yz PLANE




GEAR A: $\rightarrow \sum M_A = 0: 20 \text{ N}\cdot\text{m} - J(0.08 \text{ m}) = 0$
 $J = 250 \text{ N}$

GEAR D: $\rightarrow \sum M_D = 0: M_D - J(0.05 \text{ m}) = 0$
 $M_D = (250 \text{ N})(0.05 \text{ m}) = 0$
 $M_D = 12.5 \text{ N}\cdot\text{m}$ $M_D = (12.5 \text{ N}\cdot\text{m}) \hat{k}$

(b) PROJECTIONS ON xz PLANE GEAR A AND AXLE AC:




$\rightarrow \sum M_B = 0:$
 $(250 \text{ N})(40 \text{ mm}) - C(100 \text{ mm}) = 0$
 $C = 100 \text{ N}$
 $\rightarrow \sum M_C = 0:$
 $(250 \text{ N})(140 \text{ mm}) - B(100 \text{ mm}) = 0$
 $B = 350 \text{ N}$




GEAR D AND AXLE DF:
 $\rightarrow \sum M_E = 0:$
 $-(250 \text{ N})(40 \text{ mm}) + F(100 \text{ mm}) = 0$
 $F = 100 \text{ N}$
 $\rightarrow \sum M_F = 0:$
 $-(250 \text{ N})(140 \text{ mm}) + E(100 \text{ mm}) = 0$
 $E = 350 \text{ N}$

PROJECTIONS ON yz PLANE BRACKET BG:




$\sum F_x = 0:$
 $350 \text{ N} - 350 \text{ N} + G = 0$
 $G = 0$
 $\sum M_x = 0:$
 $(350 \text{ N})(130 \text{ mm}) + M_G = 0$
 $M_G = -45.500 \text{ N}\cdot\text{m}$
 $M_G = -(45.5 \text{ N}\cdot\text{m}) \hat{k}$

BRACKET CH:



$\sum F_z = 0:$
 $100 \text{ N} - 100 \text{ N} + H = 0$
 $H = 0$
 $\sum M_z = 0:$
 $-(100 \text{ N})(130 \text{ mm}) + M_H = 0$
 $M_H = 13000 \text{ N}\cdot\text{m}$
 $M_H = (13.3 \text{ N}\cdot\text{m}) \hat{k}$


*6.163

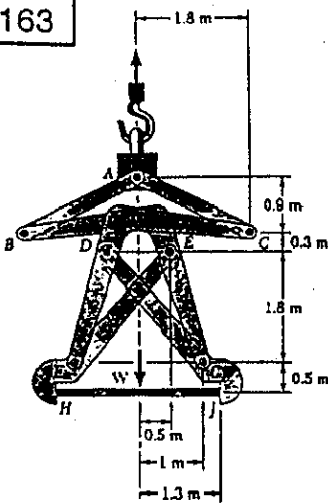

GIVEN: MASS OF SLAB HJ IS 7500 kg.

FIND: COMPONENTS OF FORCES ACTING ON MEMBER EFH.

FREE BODY: PIN A




$$T = W = mg = (7500 \text{ kg})(9.81 \text{ m/s}^2) = 73.575 \text{ kN}$$

$$\sum F_x = 0: (F_{AB})_x = (F_{AC})_x$$

$$\sum F_y = 0: (F_{AB})_y = (F_{AC})_y = \frac{1}{2}W$$

$$\text{ALSO: } (F_{AC})_x = 2(F_{AC})_y = W$$

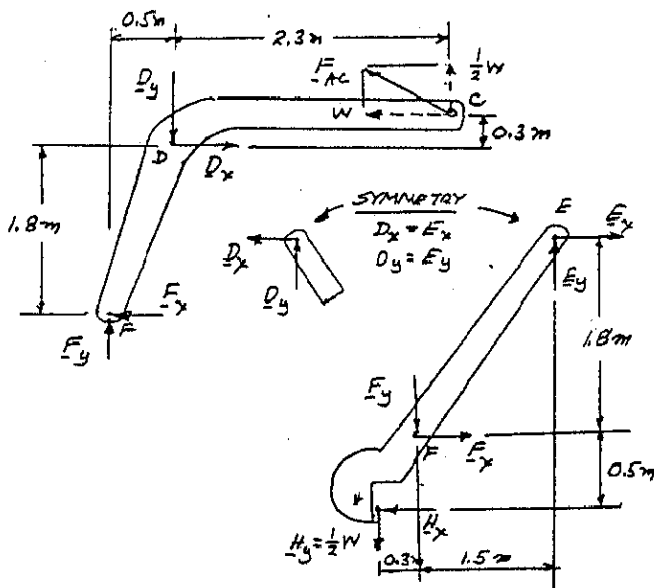

FREE BODY: MEMBER CDE

$$\sum \Sigma M_D = 0: W(0.3) + \frac{1}{2}W(2.3) - F_x(1.8) - F_y(0.5) = 0$$

$$\text{OR: } 1.8F_x + 0.5F_y = 1.45W \quad (1)$$

$$\sum \Sigma F_x = 0: D_x - F_x - W = 0; \text{ OR } E_x - F_x = W \quad (2)$$

$$\sum \Sigma F_y = 0: F_y - D_y + \frac{1}{2}W = 0; \text{ OR } E_y - F_y = \frac{1}{2}W \quad (3)$$

FREE BODY: MEMBER EFH

$$\sum \Sigma M_E = 0: F_x(1.8) + F_y(1.5) - H_x(2.3) + \frac{1}{2}W(1.8) = 0$$

$$\text{OR } 1.8F_x + 1.5F_y = 2.3H_x - 0.9W \quad (4)$$

$$\sum \Sigma F_x = 0: E_x + F_x - H_x = 0 \text{ OR } E_x + F_x = H_x \quad (5)$$

(CONTINUED)

* 6.163 CONTINUED

$$\text{SUBTRACT (2) FROM (4): } 2F_x = H_x - W \quad (6)$$

$$\text{SUBTRACT (4) FROM 3x(1): } 3.6F_x = 5.25W - 2.3H_x \quad (7)$$

$$\text{ADD (7) TO 2.3x(6): } 8.2F_x = 2.95W \quad (8)$$

$$F_x = 0.35976W \quad (9)$$

SUBSTITUTE FROM (9) INTO (1):

$$(1.8)(0.35976W) + 0.5F_y = 1.45W$$

$$0.5F_y = 1.45W - 0.647568W = 0.802431W$$

$$F_y = 1.60486W \quad (10)$$

SUBSTITUTE FROM (9) INTO (2):

$$E_x - 0.35976W = W; \quad E_x = 1.35976W$$

SUBSTITUTE FROM (9) INTO (3):

$$E_y - 1.60486W = \frac{1}{2}W \quad E_y = 2.1049W$$

$$\text{FROM (5): } H_x = E_x + F_x = 1.35976W + 0.35976W = 1.71952W$$

RECALL THAT:

$$H_y = \frac{1}{2}W$$

SINCE ALL EXPRESSIONS OBTAINED ARE POSITIVE, ALL FORCES ARE DIRECTED AS SHOWN ON THE FREE-BODY DIAGRAMS.


SUBSTITUTE $W = 73.575 \text{ kN}$:

$$E_x = 100.0 \text{ kN} \rightarrow \quad E_y = 154.9 \text{ kN} \uparrow$$

$$F_x = 26.5 \text{ kN} \rightarrow \quad F_y = 118.1 \text{ kN} \uparrow$$

$$H_x = 126.5 \text{ kN} \rightarrow \quad H_y = 36.8 \text{ kN} \downarrow$$

6.164



FIND: COUPLE M FOR EQUILIBRIUM

FREE BODY: MEMBER BE



$$BE = (15^2 + 36^2)^{1/2} = 39$$

$$39 \triangle 36 \Rightarrow 13 \triangle 12$$

$$\sum \Sigma M_E = 0: M - B(39 \text{ in.}) = 0 \quad (1)$$

FREE BODY:

MEMBER AD




$$\sum \Sigma M_D = 0: (40 \text{ lb})(45 \text{ in.}) + (80 \text{ lb})(15 \text{ in.}) - \frac{5}{13}B(30 \text{ in.}) = 0$$


$$B = 260 \text{ lb}$$

$$\text{EQ (1)} \quad M = B(39 \text{ in.}) = (260 \text{ lb})(39 \text{ in.}) = 10,140 \text{ lb}\cdot\text{in.}$$

$$M = 10.14 \text{ kip}\cdot\text{in.}$$




FIND: FORCE IN EACH MEMBER



FREE BODY ENTIRE TRUSS


$$\begin{aligned} \sum M_A = 0 & \\ (800N)(7.5m) + (800N)(3.75m) - A_y(2m) & \\ A_y = +2250N & \quad A_y = 2250N \uparrow \\ \sum F_y = 0: 2250N + F_y = 0 & \\ F_y = -2250N & \quad F_y = 2250N \downarrow \\ \sum F_x = 0: -800N - 800N + F_x = 0 & \\ F_x = +1600N & \quad F_x = 1600N \rightarrow \end{aligned}$$

JOINT D:




$$\begin{aligned} \frac{800N}{3} = \frac{F_{DE}}{15} = \frac{F_{BD}}{17} & \\ F_{BD} = 1700N \text{ C} & \\ F_{DE} = 1500N \text{ T} & \end{aligned}$$

JOINT A:




$$\begin{aligned} \frac{2250N}{15} = \frac{F_{AB}}{17} = \frac{F_{AC}}{17} & \\ F_{AB} = 2550N \text{ C} & \\ F_{AC} = 1200N \text{ T} & \end{aligned}$$

JOINT F:




$$\begin{aligned} \sum F_x = 0: 1600N - F_{CF} = 0 & \\ F_{CF} = +1600N & \quad F_{CF} = 1600N \text{ T} \\ \sum F_y = 0: F_{FE} - 2250N = 0 & \\ F_{FE} = +2250N & \quad F_{FE} = 2250N \text{ T} \end{aligned}$$

JOINT C:





$$\begin{aligned} \sum F_x = 0: \frac{15}{17} F_{CE} - 1200N + 1600N = 0 & \\ F_{CE} = -850N & \quad F_{CE} = 850N \text{ C} \\ \sum F_y = 0: F_{BC} + \frac{15}{17} F_{CE} = 0 & \\ F_{BC} = -\frac{15}{17} F_{CE} = -\frac{15}{17}(-850N) & \\ F_{BC} = +750N & \quad F_{BC} = 750N \text{ T} \end{aligned}$$

JOINT E:




$$\begin{aligned} \sum F_x = 0: & \\ -F_{BE} - 800N + \frac{15}{17}(850N) = 0 & \\ F_{BE} = -400N & \quad F_{BE} = 400N \text{ C} \\ \sum F_y = 0: & \\ 1500N - 2250N + \frac{15}{17}(850N) = 0 & \\ 0 = 0 & \quad \text{(check)} \end{aligned}$$

6.166

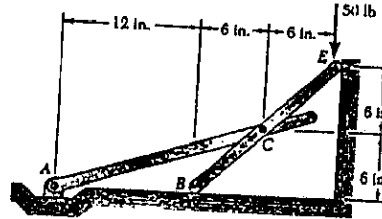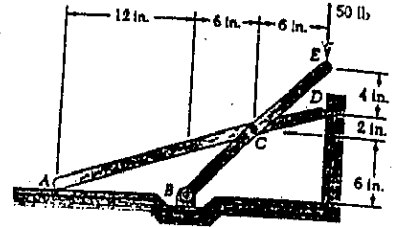

FIND: FOR EACH FRAME, THE FORCES EXERTED AT B AND C ON MEMBER BCE

(a)

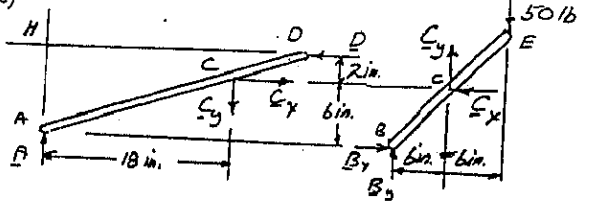

FREE BODY OF MEMBER AC

$$\sum M_A = 0: C_x(2in) - C_y(6in) = 0 \quad C_x = 3C_y \quad (1)$$

FREE BODY OF MEMBER BCE


$$\sum M_B = 0: C_x(6in) + C_y(6in) - (50lb)(12in) = 0$$

$$\text{SUBSTITUTE FROM (1): } 9C_y(6) + C_y(6) - 600 = 0$$

$$C_y = +101lb; \quad C_x = 9C_y = 909lb = +90lb$$

$$\begin{aligned} \sum F_x = 0: B_x - 90lb = 0 & \quad B_x = 90lb \\ \sum F_y = 0: B_y + 101lb - 50lb = 0 & \quad B_y = 40lb \end{aligned}$$

(b)

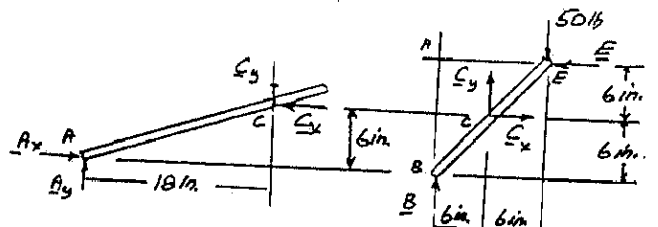

WE NOTE THAT AC IS A TWO-FORCE MEMBER

$$\frac{C_x}{18in} = \frac{C_y}{6in} \quad C_x = 3C_y \quad (1)$$

ON FREE BODY OF MEMBER BCE

$$\sum M_B = 0: C_x(6in) + C_y(6in) - (50lb)(12in) = 0$$


$$3C_y(6) + C_y(6) - 600 = 0$$

$$C_y = +25lb; \quad C_x = 3C_y = 3(25lb) = 75lb$$

$$25lb \quad C = 79.1lb \angle 18.4^\circ$$

$$\begin{aligned} \sum F_y = 0: B + C_y - 50lb = 0 & \\ B + 25lb - 50lb = 0 & \\ B = +25lb & \end{aligned}$$

6.167



FIND: THE FORCE IN EACH MEMBER

JOINT D:

$$\begin{aligned} \sum F_x = 0: & F_{ED} - 12.5 \text{ kN} = 0 \implies F_{ED} = 12.5 \text{ kN} \\ \sum F_y = 0: & F_{FD} - 12.5 \text{ kN} = 0 \implies F_{FD} = 12.5 \text{ kN} \\ \text{Member forces: } & F_{ED} = 30 \text{ kN T} \\ & F_{FD} = 32.5 \text{ kN C} \end{aligned}$$

JOINT G:

$$\begin{aligned} \sum F_x = 0: & F_{CG} = 0 \\ \sum F_y = 0: & F_{FG} = 32.5 \text{ kN C} \end{aligned}$$

JOINT C: $\beta = \tan^{-1}(2.5/2) = 51.1^\circ$; $\alpha = \angle BCF = \tan^{-1}(2.5/2) = 51.1^\circ$

$$\begin{aligned} \sum F_x = 0: & -12.5 \text{ kN} - F_{BC} \cos \alpha + F_{FC} \cos \beta = 0 \\ \sum F_y = 0: & -12.5 \text{ kN} - F_{BC} \sin \alpha + F_{FC} \sin \beta = 0 \end{aligned}$$

$$\begin{aligned} \sum F_x = 0: & 30 \text{ kN} - F_{BC} - F_{FC} \cos \beta = 0 \\ \sum F_y = 0: & 30 \text{ kN} - F_{BC} - (19.526 \text{ kN}) \cos 39.81^\circ = 0 \end{aligned}$$

JOINT F:

$$\begin{aligned} \sum F_x = 0: & -\frac{6}{2.5} F_{BF} - \frac{6}{2.5} (32.5 \text{ kN}) - F_{CF} \cos \beta = 0 \\ \sum F_y = 0: & F_{BF} - \frac{2.5}{6.5} F_{CF} - \frac{2.5}{6.5} (32.5 \text{ kN}) - (19.526 \text{ kN}) \sin 39.81^\circ = 0 \end{aligned}$$

$$\begin{aligned} \sum F_x = 0: & F_{BF} - \frac{2.5}{6.5} F_{CF} - \frac{2.5}{6.5} (32.5 \text{ kN}) - (19.526 \text{ kN}) \sin 39.81^\circ = 0 \\ \sum F_y = 0: & F_{BF} - \frac{2.5}{6.5} (-48.75 \text{ kN}) - 12.5 \text{ kN} - 12.5 \text{ kN} = 0 \end{aligned}$$

JOINT B:


$$\begin{aligned} \sum F_x = 0: & 12.5 \text{ kN} - F_{AB} + F_{BC} = 0 \\ \sum F_y = 0: & -12.5 \text{ kN} - 6.25 \text{ kN} - F_{BE} \sin 57.34^\circ = 0 \end{aligned}$$

$$\begin{aligned} \sum F_x = 0: & 45.0 \text{ kN} - F_{AB} - (240 \text{ kN}) \cos 57.34^\circ = 0 \\ \sum F_y = 0: & F_{AB} = 30 \text{ kN T} \end{aligned}$$


JOINT E:

$$\begin{aligned} \sum F_x = 0: & F_{AE} - (24 \text{ kN}) \sin 57.34^\circ - (48.75 \text{ kN}) \frac{2.5}{6.5} = 0 \\ \sum F_y = 0: & F_{AE} = 37.5 \text{ kN T} \end{aligned}$$

6.168




GIVEN: MASS OF SHELF IS 20 LBS.
FIND: FORCE P REQUIRED TO RELEASE BRACE




FREE BODY: SHELF

$$\begin{aligned} W &= (20 \text{ kg})(9.8 \text{ m/s}^2) = 196.2 \text{ N} \\ \sum M_A = 0: & B_y(200 \text{ mm}) - (196.2 \text{ N})(125 \text{ mm}) = 0 \\ B_y &= 122.63 \text{ N} \end{aligned}$$




FREE BODY: PORTION ACB

$$\begin{aligned} \sum M_A = 0: & -B_y(150 \text{ mm}) - P(125 \text{ mm}) - (122.63 \text{ N})(200 \text{ mm}) = 0 \\ B_x &= -163.5 - 0.8333P \end{aligned}$$

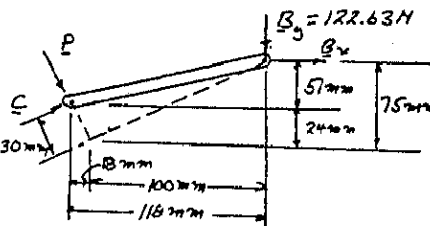


$$\begin{aligned} \sum M_B = 0: & + (122.63 \text{ N})(110 \text{ mm}) + B_x(57 \text{ mm}) = 0 \\ & + (122.63 \text{ N})(110 \text{ mm}) + (-163.5 - 0.8333P)(57 \text{ mm}) = 0 \\ P &= 144.28 \text{ N} \end{aligned}$$

6.169



FIND: (a) MAGNITUDE OF FORCES EXERTED ON ROD.

(b) FORCE EXERTED AT A ON PORTION AB OF PLIETS

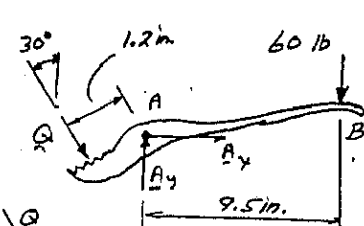


FREE BODY: PORTION AB

$$\begin{aligned} \sum M_B = 0: & Q(1.2 \text{ m}) - (60 \text{ lb})(9.5 \text{ m}) = 0 \\ Q &= 475 \text{ lb} \end{aligned}$$


$$\begin{aligned} \sum F_x = 0: & Q(\sin 30^\circ) + A_x = 0 \\ & (475 \text{ lb})(\sin 30^\circ) + A_x = 0 \\ A_x &= -237.5 \text{ lb} \quad A_x = 237.5 \text{ lb} \\ \sum F_y = 0: & -Q(\cos 30^\circ) + A_y - 60 \text{ lb} = 0 \\ & -(475 \text{ lb})(\cos 30^\circ) + A_y - 60 \text{ lb} = 0 \\ A_y &= 471.4 \text{ lb} \quad A_y = 471.4 \text{ lb} \\ A &= 528 \text{ lb} \angle 63.3^\circ \end{aligned}$$

170

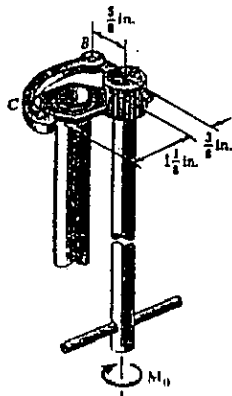

GIVEN: FORCES EXERTED ON THE NUT ARE EQUIVALENT TO A COUPLE OF MAGNITUDE 135 lb-in. Σ

FIND: (a) MAGNITUDE OF FORCE AT B ON JAW BC, (b) THE COUPLE M_0




FREE BODY: JAW BC

THIS IS A TWO-FORCE MEMBER

$$\frac{C_y}{1.5 \text{ in.}} = \frac{C_x}{1.5 \text{ in.}} \quad C_y = 2.4 C_x$$

$$\Sigma F_x = 0: B_x = C_x \quad (1)$$

$$\Sigma F_y = 0: B_y = C_y = 2.4 C_x \quad (2)$$



FREE BODY: NUT

$$\Sigma F_x = 0 \quad C_x = D_x$$

$$\Sigma M = 135 \text{ lb-in.}$$

$$C_x(1.125 \text{ in.}) = 135 \text{ lb-in.}$$


$$C_x = 120 \text{ lb}$$

Eq. (1): $B_x = C_x = 120 \text{ lb}$

Eq. (2): $B_y = C_y = 2.4(120 \text{ lb}) = 288 \text{ lb}$

$$B = \sqrt{B_x^2 + B_y^2} = \sqrt{120^2 + 288^2}; \quad B = 312 \text{ lb}$$

(1)



FREE BODY: ROD


$$\Sigma M_A = 0:$$

$$-M_0 + B_y(0.625 \text{ in.}) - B_x(0.375 \text{ in.}) = 0$$


$$-M_0 + (288)(0.625) - (120)(0.375) = 0$$

$$M_0 = 135 \text{ lb-in.}$$

6.171

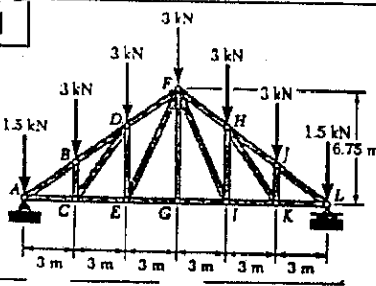

FIND: FORCE IN MEMBERS CE, DE, AND DF

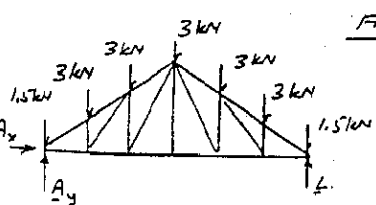

FREE BODY: ENTIRE TRUSS

$$\Sigma F_x = 0: A_x = 0$$

TOTAL LOAD = $5(3 \text{ kN}) + 2(1.5 \text{ kN}) = 18 \text{ kN}$

BY SYMMETRY:


$$A_y = L = \frac{1}{2}(18 \text{ kN})$$

$$A = L = 9 \text{ kN} \uparrow$$

(CONTINUED)

6.171 CONTINUED

FREE BODY: PORTION ACD



NOTE: SLOPE OF ABDE IS $\frac{6.75}{9.00} = \frac{3}{4}$

FORCE IN CE:

$$\Sigma M_D = 0: F_{CE}(\frac{3}{5} \times 6.75 \text{ m}) - (9 \text{ kN})(6 \text{ m}) + (1.5 \text{ kN})(6 \text{ m}) + (3 \text{ kN})(3 \text{ m}) = 0$$

$$F_{CE} = 36 \text{ kN} \quad F_{CE} = 36 \text{ kN} \text{ T}$$

FORCE IN DE:

$$\Sigma M_A = 0: F_{DE}(6 \text{ m}) + (3 \text{ kN})(6 \text{ m}) + (3 \text{ kN})(3 \text{ m}) = 0$$

$$F_{DE} = -4.5 \text{ kN} \quad F_{DE} = 4.5 \text{ kN} \text{ C}$$


FORCE IN DF:

SUM MOMENTS ABOUT E WHERE F_{CE} AND F_{DE} INTERSECT

$$\Sigma M_E = 0: (1.5 \text{ kN})(6 \text{ m}) - (9 \text{ kN})(6 \text{ m}) + (3 \text{ kN})(3 \text{ m}) + \frac{4}{5} F_{CE}(\frac{3}{5} \times 6.75 \text{ m}) = 0$$

$$F_{CE} = -10.00 \text{ kN} \quad F_{CE} = 10.00 \text{ kN} \text{ C}$$

6.172

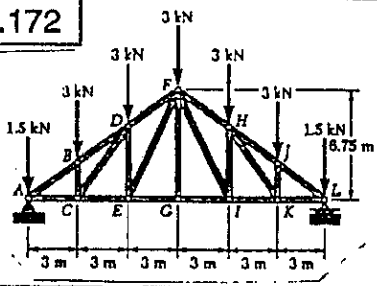

FIND: FORCE IN MEMBERS FH, FI, AND GI.

FREE BODY: ENTIRE TRUSS

$$\Sigma F_x = 0: A_x = 0$$

TOTAL LOAD = $5(3 \text{ kN}) + 2(1.5 \text{ kN}) = 18 \text{ kN}$

BY SYMMETRY

$$A_y = L = \frac{1}{2}(18) = 9 \text{ kN} \uparrow$$

FREE BODY: PORTION HIL

SLOPE OF FHIL

$$\frac{6.75}{9.00} = \frac{3}{4} \quad \frac{3}{4}$$

$$\tan \alpha = \frac{6.75}{9} = \frac{3}{4} \quad \alpha = 66.04^\circ$$

FORCE IN FH:

$$\Sigma M_I = 0: \frac{4}{5} F_{FH}(\frac{3}{5} \times 6.75 \text{ m}) + (9 \text{ kN})(6 \text{ m}) - (1.5 \text{ kN})(6 \text{ m}) - (3 \text{ kN})(3 \text{ m}) = 0$$

$$F_{FH} = -10.00 \text{ kN} \quad F_{FH} = 10.00 \text{ kN} \text{ C}$$

FORCE IN FI:

$$\Sigma M_L = 0: F_{FI} \sin \alpha (6 \text{ m}) - (3 \text{ kN})(6 \text{ m}) - (3 \text{ kN})(3 \text{ m}) = 0$$

$$F_{FI} \sin 66.04^\circ (6 \text{ m}) = 27 \text{ kN-m}$$

$$F_{FI} = 4.92 \text{ kN} \quad F_{FI} = 4.92 \text{ kN} \text{ T}$$


FORCE IN GI:

$$\Sigma M_H = 0: F_{GI}(6.75 \text{ m}) + (3 \text{ kN})(3 \text{ m}) + (3 \text{ kN})(6 \text{ m}) + (1.5 \text{ kN})(9 \text{ m}) - (9 \text{ kN})(9 \text{ m}) = 0$$


$$F_{GI}(6.75 \text{ m}) = +40.5 \text{ kN-m}$$

$$F_{GI} = +6.00 \text{ kN} \quad F_{GI} = 6.00 \text{ kN} \text{ T}$$


6.173

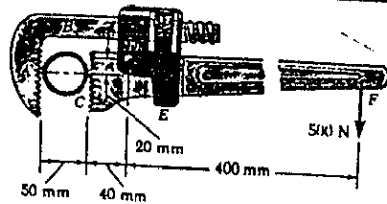

FIND: COMPONENTS OF FORCES ON PIPE AT A AND AT C.



FREE BODY: PORTION ABDE
THIS IS A TWO-FORCE MEMBER?
 $\frac{A_y}{20\text{mm}} = \frac{A_x}{90\text{mm}}; A_x = 4.5A_y$
 $D_y = A_y; D_x = A_x = 4.5D_y$ (1)



FREE BODY: PORTION CF

$+\uparrow \Sigma M_C = 0$
 $D_x(20\text{mm}) - D_y(40\text{mm}) - (500\text{N})(440\text{mm}) = 0$

SUBSTITUTE FROM (1)
 $4.5D_y(20) - D_y(40) - 220 \times 10^3 = 0$
 $D_y = 4400\text{N} = +4.4\text{kN}$
 $D_x = 4.5(D_y) = +19.8\text{kN}$

$+\uparrow \Sigma F_y = 0; C_y - 4.4\text{kN} - 0.5\text{kN} = 0; C_y = +4.9\text{kN}$
 $+\rightarrow \Sigma F_x = 0; C_x - 19.8\text{kN} = 0; C_x = +19.8\text{kN}$

FROM PORTION ABDE:


$A_x = D_x = +19.8\text{kN}$
 $A_y = D_y = +4.4\text{kN}$

WE NOTE THAT ALL COMPONENTS FOUND ABOVE ACT IN DIRECTIONS DRAWN. COMPONENTS ON THE PIPE ARE EQUAL AND OPPOSITE TO THOSE ON WRENCH.



$A_x = 19.8\text{kN} \rightarrow; A_y = 4.4\text{kN} \uparrow$
 $C_x = 19.8\text{kN} \leftarrow; C_y = 4.9\text{kN} \uparrow$
NOTE: FREE BODY OF PIPE ALSO INCLUDES REACTIONS P AND M , EXERTED BY GROUND.


6.174

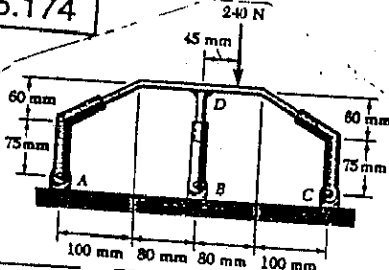

FIND: REACTIONS AT A, B, AND C.

NOTE:

EACH REACTION IS \perp TO SLOPE OF PIPE WHERE WELDMENT ENTERS PIPE.

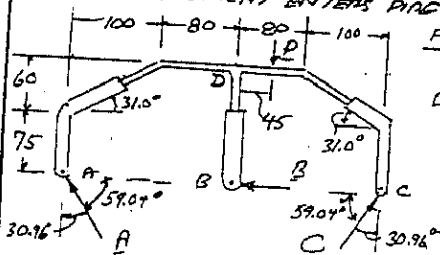

FREE BODY: ENTIRE FRAME


DIMENSIONS IN mm
 $P = 240\text{N}$
 $\tan^{-1} \frac{60}{100} = 30.96^\circ$

(CONTINUED)

6.174 CONTINUED

$+\uparrow \Sigma M_A = 0: C \cos 30.96^\circ (360\text{mm}) - (240\text{N})(225\text{mm}) = 0$
 $C = +174.92\text{N} \quad C = 174.9\text{N} \angle 59.0^\circ$
 $+\uparrow \Sigma M_C = 0: -A \cos 30.96^\circ (360\text{mm}) + (240\text{N})(135\text{mm}) = 0$
 $A = 104.95\text{N} \quad A = 105.0\text{N} \angle 59.0^\circ$
 $+\rightarrow \Sigma F_x = 0: -A \sin 30.96^\circ + C \sin 30.96^\circ - B = 0$
 $B = (C - A) \sin 30.96^\circ = (174.92\text{N} - 104.95\text{N}) \sin 30.96^\circ$
 $B = +36.0\text{N} \quad B = 36.0\text{N} \leftarrow$


6.175

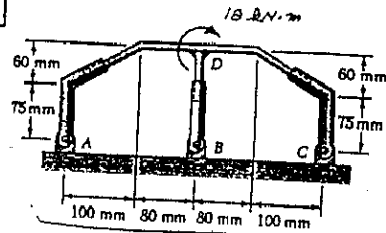

FIND: THE REACTIONS AT A, B, AND C.

NOTE: EACH REACTION IS \perp TO SLOPE OF PIPE WHERE WELDMENT ENTERS PIPE.

FREE BODY: ENTIRE FRAME

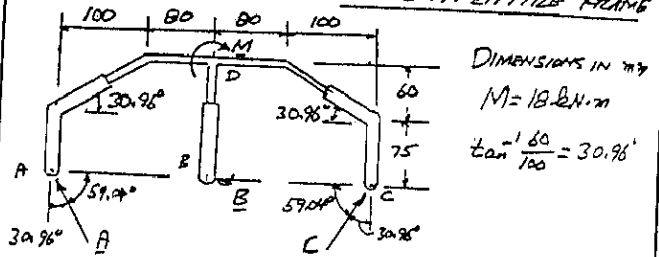

DIMENSIONS IN mm

$M = 18\text{kN}\cdot\text{m}$

$\tan^{-1} \frac{60}{100} = 30.96^\circ$


$+\uparrow \Sigma M_A = 0: M - C \cos 30.96^\circ (360\text{mm}) = 0$
 $18\text{kN}\cdot\text{m} - C \cos 30.96^\circ (0.36\text{m}) = 0$
 $C = +58.31\text{kN} \quad C = 58.3\text{kN} \angle 59.0^\circ$

$+\uparrow \Sigma M_C = 0: M + A \cos 30.96^\circ (360\text{mm}) = 0$
 $18\text{kN}\cdot\text{m} + A \cos 30.96^\circ (0.36\text{m}) = 0$
 $A = -58.31\text{kN} \quad A = 58.3\text{kN} \angle 59.0^\circ$

$+\rightarrow \Sigma F_x = 0: -A \sin 30.96^\circ - B + C \sin 30.96^\circ = 0$
 $B = (C - A) \sin 30.96^\circ$
 $B = (58.31\text{kN} - (-58.31\text{kN})) \sin 30.96^\circ$
 $B = +60.0\text{kN} \quad B = 60\text{kN} \leftarrow$

GIVEN: FRAME AND LOADING OF PROB. 6.75.
FIND: INTERNAL FORCES AT POINT J.

CUT MEMBER BCD AT POINT J AND CONSIDER THE FREE BODY JD:

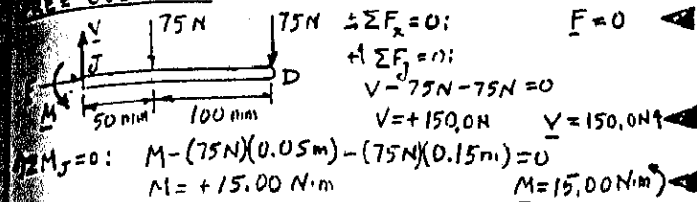


$$\begin{aligned} \pm \sum F_x = 0: & \quad F = 0 \\ + \sum F_y = 0: & \quad V - 75\text{N} - 75\text{N} = 0 \\ & \quad V = +150.0\text{N} \quad \underline{V = 150.0\text{N}} \\ + \sum M_J = 0: & \quad M - (75\text{N})(0.05\text{m}) - (75\text{N})(0.15\text{m}) = 0 \\ & \quad M = +15.00\text{N}\cdot\text{m} \quad \underline{M = 15.00\text{N}\cdot\text{m}} \end{aligned}$$

7.2

GIVEN: FRAME AND LOADING OF PROB. 6.76.
FIND: INTERNAL FORCES AT POINT J.

CUT MEMBER ABC AT POINT J AND CONSIDER THE FREE BODY JC. WE RECALL FROM THE SOLUTION OF PROB. 6.76 THAT THE REACTION AT C IS $C_x = 125\text{N}$ $\nearrow 36.9^\circ$ OR $C_x = 100\text{N}$ \rightarrow , $C_y = 75\text{N}$ \uparrow .

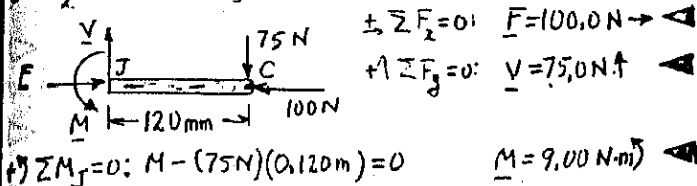


$$\begin{aligned} \pm \sum F_x = 0: & \quad F = 100.0\text{N} \rightarrow \\ + \sum F_y = 0: & \quad V - 75.0\text{N} = 0 \\ & \quad V = 75.0\text{N} \uparrow \\ + \sum M_J = 0: & \quad M - (75\text{N})(0.120\text{m}) = 0 \\ & \quad M = 9.00\text{N}\cdot\text{m} \end{aligned}$$

7.3

GIVEN: FRAME AND LOADING OF PROB. 6.81.
FIND: INTERNAL FORCES AT POINT J LOCATED HALFWAY BETWEEN A AND B.

WE CUT MEMBER ABC AT POINT J AND CONSIDER THE FREE BODY AJ. WE RECALL FROM THE SOLUTION OF PROB. 6.81 THAT THE COMPONENTS OF THE REACTION AT A ARE $A_x = 25\text{ kips}$ \leftarrow AND $A_y = 20\text{ kips}$ \uparrow .

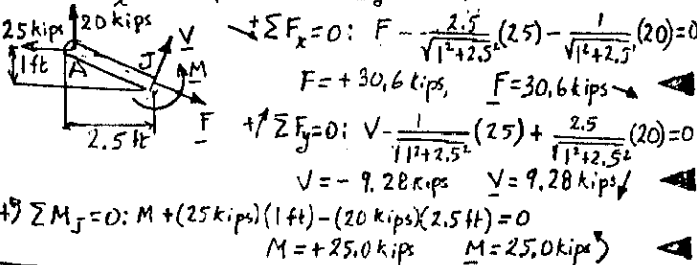


$$\begin{aligned} + \sum F_x = 0: & \quad F - \frac{2.5}{\sqrt{1^2+2.5^2}}(25) - \frac{1}{\sqrt{1^2+2.5^2}}(20) = 0 \\ & \quad F = +30.6\text{ kips}, \quad \underline{F = 30.6\text{ kips}} \\ + \sum F_y = 0: & \quad V - \frac{1}{\sqrt{1^2+2.5^2}}(25) + \frac{2.5}{\sqrt{1^2+2.5^2}}(20) = 0 \\ & \quad V = -9.28\text{ kips}, \quad \underline{V = 9.28\text{ kips}} \\ + \sum M_J = 0: & \quad M + (25\text{ kips})(1\text{ ft}) - (20\text{ kips})(2.5\text{ ft}) = 0 \\ & \quad M = +25.0\text{ kips}\cdot\text{ft}, \quad \underline{M = 25.0\text{ kips}\cdot\text{ft}} \end{aligned}$$

7.4


GIVEN: FRAME AND LOADING OF PROB. 6.81.
FIND: INTERNAL FORCES AT POINT K LOCATED HALFWAY BETWEEN B AND C.

WE DISCONNECT MEMBER ABC AND CUT IT AT POINT K. WE CONSIDER THE FREE BODY KC. WE RECALL FROM THE SOLUTION OF PROB. 6.81 THAT THE COMPONENTS OF THE FORCE EXERTED AT C ON KC ARE $C_x = 50\text{ kips}$ \rightarrow , $C_y = 10\text{ kips}$ \uparrow .

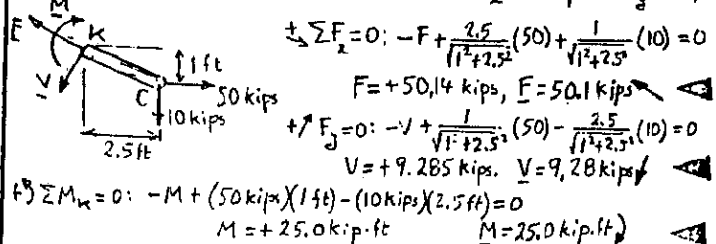

$$\begin{aligned} \pm \sum F_x = 0: & \quad -F + \frac{2.5}{\sqrt{1^2+2.5^2}}(50) + \frac{1}{\sqrt{1^2+2.5^2}}(10) = 0 \\ & \quad F = +50.14\text{ kips}, \quad \underline{F = 50.1\text{ kips}} \\ + \sum F_y = 0: & \quad -V + \frac{1}{\sqrt{1^2+2.5^2}}(50) - \frac{2.5}{\sqrt{1^2+2.5^2}}(10) = 0 \\ & \quad V = +9.285\text{ kips}, \quad \underline{V = 9.28\text{ kips}} \\ + \sum M_K = 0: & \quad -M + (50\text{ kips})(1\text{ ft}) - (10\text{ kips})(2.5\text{ ft}) = 0 \\ & \quad M = +25.0\text{ kip}\cdot\text{ft}, \quad \underline{M = 25.0\text{ kip}\cdot\text{ft}} \end{aligned}$$


7.5

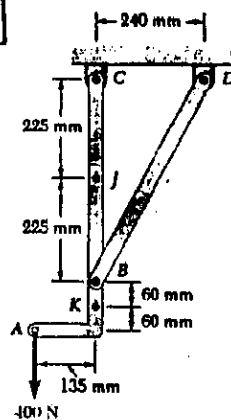

GIVEN: STRUCTURE AND LOADING SHOWN.


FIND: INTERNAL FORCES AT POINT J.

FREE BODY: MEMBER ABC

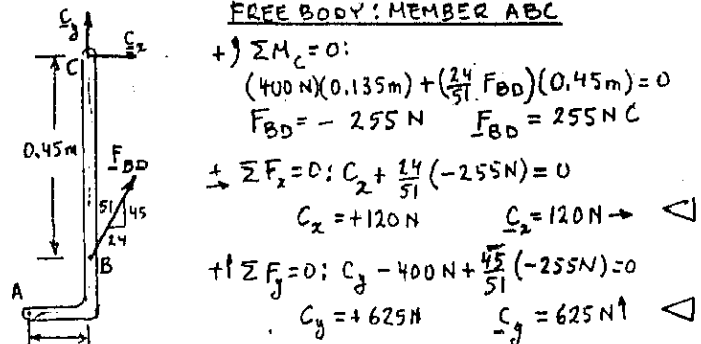


$$\begin{aligned} + \sum M_C = 0: & \quad (400\text{N})(0.135\text{m}) + \left(\frac{24}{51}F_{BD}\right)(0.45\text{m}) = 0 \\ & \quad F_{BD} = -255\text{N}, \quad \underline{F_{BD} = 255\text{N}} \\ \pm \sum F_x = 0: & \quad C_x + \frac{24}{51}(-255\text{N}) = 0 \\ & \quad C_x = +120\text{N}, \quad \underline{C_x = 120\text{N}} \\ + \sum F_y = 0: & \quad C_y - 400\text{N} + \frac{27}{51}(-255\text{N}) = 0 \\ & \quad C_y = +625\text{N}, \quad \underline{C_y = 625\text{N}} \end{aligned}$$

FREE BODY: CJ

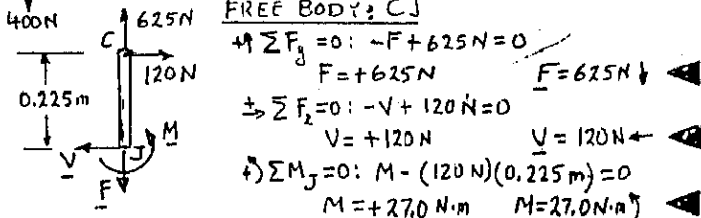

$$\begin{aligned} + \sum F_y = 0: & \quad -F + 625\text{N} = 0 \\ & \quad F = 625\text{N}, \quad \underline{F = 625\text{N}} \\ \pm \sum F_x = 0: & \quad -V + 120\text{N} = 0 \\ & \quad V = +120\text{N}, \quad \underline{V = 120\text{N}} \\ + \sum M_J = 0: & \quad M - (120\text{N})(0.225\text{m}) = 0 \\ & \quad M = +27.0\text{N}\cdot\text{m}, \quad \underline{M = 27.0\text{N}\cdot\text{m}} \end{aligned}$$


7.6

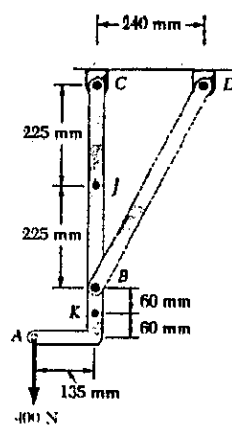

GIVEN: STRUCTURE AND LOADING SHOWN.


FIND: INTERNAL FORCES AT POINT K.

FREE BODY: AK

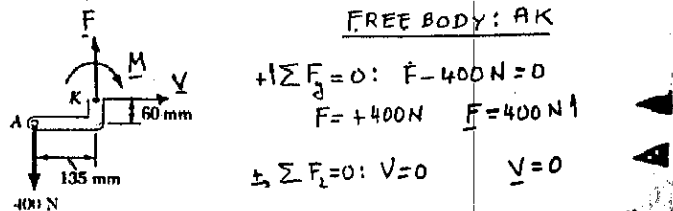

$$\begin{aligned} + \sum F_y = 0: & \quad F - 400\text{N} = 0 \\ & \quad F = 400\text{N}, \quad \underline{F = 400\text{N}} \\ \pm \sum F_x = 0: & \quad V = 0, \quad \underline{V = 0} \\ + \sum M_K = 0: & \quad (400\text{N})(0.135\text{m}) - M = 0 \\ & \quad M = +54.0\text{N}\cdot\text{m}, \quad \underline{M = 54.0\text{N}\cdot\text{m}} \end{aligned}$$

7.7



GIVEN:
SEMICIRCULAR ROD
LOADED AS SHOWN


FIND:
INTERNAL FORCES
AT POINT J

FREE BODY: ROD AB


$$\begin{aligned} \sum M_B = 0: & -A(360\text{mm}) = 0 \quad A = 0 \\ \sum F_x = 0: & B_x + A = 0 \quad B_x = -A = 0 \\ \sum F_y = 0: & B_y - 120\text{N} = 0 \quad B_y = 120\text{N}, \underline{B} = 120\text{N} \uparrow \end{aligned}$$

FREE BODY: AJ

$$\begin{aligned} \sum F_y = 0: & F - (120\text{N}) \sin 60^\circ = 0 \quad F = +103.9\text{N} \quad \underline{F} = 103.9\text{N} \swarrow \\ \sum F_x = 0: & V - (120\text{N}) \cos 60^\circ = 0 \quad V = +60.0\text{N} \quad \underline{V} = 60.0\text{N} \searrow \\ \sum M_J = 0: & M - (120\text{N})(0.18\text{m}) \sin 60^\circ = 0 \quad M = +18.71\text{N}\cdot\text{m} \quad \underline{M} = 18.71\text{N}\cdot\text{m} \end{aligned}$$

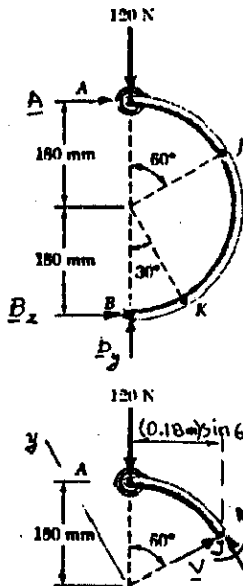

7.9

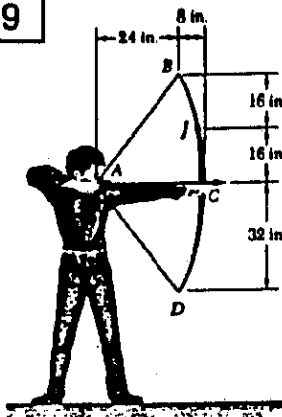

GIVEN:
ARCHER PULLING WITH
A 45-lb FORCE ON THE
BOWSTRING

FIND:
INTERNAL FORCES AT
POINT J.
(ASSUME THAT THE SHAPE
OF THE BOW IS A PARABOLA)

FREE BODY: POINT A

$$\sum F_x = 0: 2\left(\frac{3}{5}T\right) - 45\text{lb} = 0 \quad T = 37.5\text{lb}$$

FREE BODY: PORTION OF BOW BC

$$\begin{aligned} \sum F_y = 0: & F_c - 30\text{lb} = 0 \quad F_c = 30\text{lb} \uparrow \\ \sum F_x = 0: & V_c - 22.5\text{lb} = 0 \quad V_c = 22.5\text{lb} \rightarrow \\ \sum M_c = 0: & (22.5\text{lb})(32\text{in}) + (30\text{lb})(8\text{in}) - M_c = 0 \quad M_c = 960\text{lb}\cdot\text{in} \end{aligned}$$

EQUATION OF PARABOLA

$$\begin{aligned} z &= ky^2 \\ \text{AT B: } & \theta = k(32)^2 \quad k = \frac{1}{128} \\ \text{THEREFORE, EQUATION IS} & \quad z = \frac{y^2}{128} \end{aligned}$$

THE SLOPE AT J IS OBTAINED BY DIFFERENTIATING (1):

$$dz = \frac{2y}{128} dy, \quad \tan \theta = \frac{dz}{dy} = \frac{y}{64} \quad (2)$$


FREE BODY: PORTION OF BOW CJ

MAKING $y = 16\text{in.}$ IN EQS (1) AND (2):

$$\begin{aligned} x &= \frac{(16)^2}{128} = 2.00\text{in.} \\ \tan \theta &= \frac{16}{64} = 0.25 \quad \theta = 14.04^\circ \end{aligned}$$

$$\begin{aligned} \sum F_x = 0: & -F + (30\text{lb}) \cos 14.04^\circ - (22.5\text{lb}) \sin 14.04^\circ = 0 \quad F = +23.6\text{lb} \quad \underline{F} = 23.6\text{lb} \swarrow \\ \sum F_y = 0: & -V + (30\text{lb}) \sin 14.04^\circ + (22.5\text{lb}) \cos 14.04^\circ = 0 \quad V = +29.1\text{lb} \quad \underline{V} = 29.1\text{lb} \searrow \\ \sum M_J = 0: & -M - 960\text{lb}\cdot\text{in.} + (30\text{lb})(2\text{in.}) + (22.5\text{lb})(16\text{in.}) = 0 \quad M = -540\text{lb}\cdot\text{in.} \quad \underline{M} = 540\text{lb}\cdot\text{in.} \end{aligned}$$

7.8




GIVEN:
SEMICIRCULAR ROD
LOADED AS SHOWN

FIND:
INTERNAL FORCES
AT POINT K.

FREE BODY: BK


$$\begin{aligned} \sum F_x = 0: & -F + (120\text{N}) \sin 30^\circ = 0 \quad F = +60.0\text{N} \quad \underline{F} = 60.0\text{N} \swarrow \\ \sum F_y = 0: & -V + (120\text{N}) \cos 30^\circ = 0 \quad V = +103.9\text{N} \quad \underline{V} = 103.9\text{N} \searrow \\ \sum M_K = 0: & M - (120\text{N})(0.09\text{m}) = 0 \quad M = +10.80\text{N}\cdot\text{m} \quad \underline{M} = 10.80\text{N}\cdot\text{m} \end{aligned}$$

REACTION AT B: (SEE SOLUTION OF PROB. 7.7) $B = 120\text{N} \uparrow$



$$(180\text{mm}) \sin 30^\circ = 90\text{mm} = 0.09\text{m}$$

GIVEN: ARCHER AND BOW OF PROB. 7, 9, WITH ARCHER PULLING WITH A 45-LB FORCE ON EQUIDISTANT MAGNITUDE AND LOCATION IN THE BOW OF THE MAXIMUM AXIAL FORCE, (b) SHEARING FORCE, (c) BENDING MOMENT. FOLLOWING RESULTS WERE OBTAINED IN THE FIRST PART OF THE SOLUTION OF PROB. 7.1

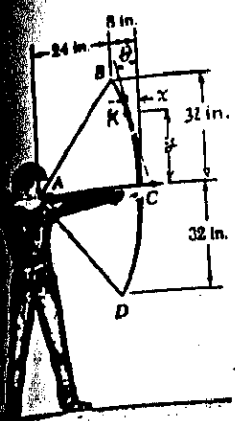

INTERNAL FORCES AT C (ON BC)
 $F_c = 30 \text{ lb} \uparrow, V_c = 22.5 \text{ lb} \rightarrow, M_c = 960 \text{ lb}\cdot\text{in.}$

EQUATION OF PARABOLA (BOW)
 $x = \frac{z^2}{128} \quad (1)$

SLOPE (ANGLE θ)
 $\tan \theta = \frac{dz}{dy} = \frac{z}{64} \quad (2)$

FREE BODY: PORTION OF BOW CK
(a) MAXIMUM AXIAL FORCE

$\sum F_x = 0: -F + (30 \text{ lb}) \cos \theta - (22.5 \text{ lb}) \sin \theta = 0$
 $F = 30 \cos \theta - 22.5 \sin \theta$
 F IS LARGEST AT C ($\theta = 0$)
 $F_m = 30.0 \text{ lb}$ AT C


(b) MAXIMUM SHEARING FORCE

$\sum F_y = 0: -V + (30 \text{ lb}) \sin \theta + (22.5 \text{ lb}) \cos \theta = 0$
 $V = 30 \sin \theta + 22.5 \cos \theta$
 V IS LARGEST AT B (AND D)
 WHERE $\theta = \theta_{\max} = \tan^{-1}(1/2) = 26.56^\circ$
 $V_m = 30 \sin 26.56^\circ + 22.5 \cos 26.56^\circ$
 $V_m = 33.5 \text{ lb}$ AT B AND D

MAXIMUM BENDING MOMENT
 $\sum M_A = 0: M - 960 \text{ lb}\cdot\text{in.} + (30 \text{ lb})x + (22.5 \text{ lb})y = 0$
 $M = 960 - 30x - 22.5y$
 M IS LARGEST AT C, WHERE $x = y = 0$.
 $M_m = 960 \text{ lb}\cdot\text{in.}$ AT C


7.11 CONTINUED

FREE BODY: AJ



$\sum F_y = 0: (320 \text{ N}) \sin 30^\circ + (40.0 \text{ N}) \cos 30^\circ - F = 0$
 $F = 194.6 \text{ N} \quad F = 194.6 \text{ N} \angle 60^\circ$
 $\sum F_x = 0: (40.0 \text{ N}) \sin 30^\circ - (320 \text{ N}) \cos 30^\circ + V = 0$
 $V = 257 \text{ N} \quad V = 257 \text{ N} \angle 30^\circ$
 $\sum M_J = 0: (320 \text{ N})(0.16 \text{ m}) \sin 30^\circ - (40.0 \text{ N})(0.16 \text{ m})(1 - \cos 30^\circ) - M = 0$
 $M = 24.7 \text{ N}\cdot\text{m} \quad M = 24.7 \text{ N}\cdot\text{m}$


7.12

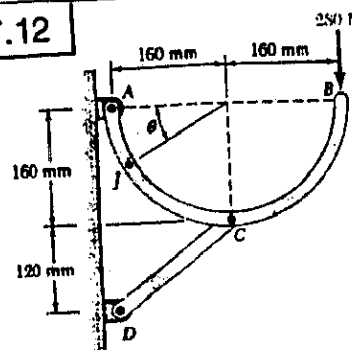

GIVEN: SEMICIRCULAR ROD LOADED AS SHOWN


FIND: MAGNITUDE AND LOCATION OF MAXIMUM BENDING MOMENT IN THE ROD.

FREE BODY: ROD ACB



$\sum M_A = 0:$
 $(\frac{4}{5} F_{CD})(0.16 \text{ m}) + (\frac{3}{5} F_{CD})(0.16 \text{ m}) - (250 \text{ N})(0.32 \text{ m}) = 0$
 $F_{CD} = 400 \text{ N}$
 $\sum F_x = 0: A_2 + \frac{4}{5}(400 \text{ N}) = 0$
 $A_2 = -320 \text{ N} \quad A_2 = 320 \text{ N} \leftarrow$
 $\sum F_y = 0: A_1 + \frac{3}{5}(400 \text{ N}) - 250 \text{ N} = 0$
 $A_1 = 40.0 \text{ N} \quad A_1 = 40.0 \text{ N} \uparrow$

FREE BODY: AJ (FOR $\theta < 90^\circ$)




$\sum M_J = 0: (320 \text{ N})(0.16 \text{ m}) \sin \theta - (40.0 \text{ N})(0.16 \text{ m})(1 - \cos \theta) - M = 0$
 $M = 51.2 \sin \theta + 6.4 \cos \theta - 6.4 \quad (1)$
 FOR MAXIMUM VALUE BETWEEN A AND C
 $\frac{dM}{d\theta} = 0: 51.2 \cos \theta - 6.4 \sin \theta = 0$
 $\tan \theta = \frac{51.2}{6.4} = 8 \quad \theta = 82.87^\circ$

CARRYING INTO (1):


$M = 51.2 \sin 82.87^\circ + 6.4 \cos 82.87^\circ - 6.4 = +45.20 \text{ N}\cdot\text{m}$

GIVEN: SEMICIRCULAR ROD LOADED AS SHOWN.

FIND: INTERNAL FORCES AT POINT J WHERE $\theta = 30^\circ$

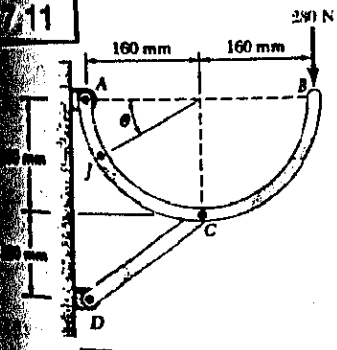


FREE BODY: ROD ACB

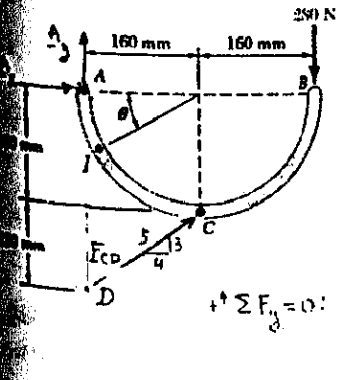

$\sum M_A = 0:$
 $(\frac{4}{5} F_{CD})(0.16 \text{ m}) + (\frac{3}{5} F_{CD})(0.16 \text{ m}) - (250 \text{ N})(0.32 \text{ m}) = 0$
 $F_{CD} = 400 \text{ N}$
 $\sum F_x = 0: A_2 + \frac{4}{5}(400 \text{ N}) = 0$
 $A_2 = -320 \text{ N} \quad A_2 = 320 \text{ N} \leftarrow$
 $\sum F_y = 0: A_1 + \frac{3}{5}(400 \text{ N}) - 250 \text{ N} = 0$
 $A_1 = 40.0 \text{ N} \quad A_1 = 40.0 \text{ N} \uparrow$

FREE BODY: BJ (FOR $\theta > 90^\circ$)




$\sum M_J = 0:$
 $M - (280 \text{ N})(0.16 \text{ m})(1 - \cos \theta) = 0$
 $M = (44.8 \text{ N}\cdot\text{m})(1 - \cos \theta)$
 LARGEST VALUE OCCURS FOR $\theta = 90^\circ$
 THAT IS, AT C, AND IS
 $M_c = 44.8 \text{ N}\cdot\text{m}$

WE CONCLUDE THAT


$M_{\max} = 45.2 \text{ N}\cdot\text{m}$ FOR $\theta = 82.9^\circ$

(CONTINUED)

7.13

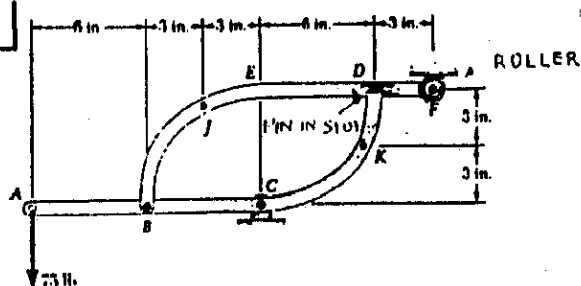

GIVEN: TWO MEMBERS, CONSISTING EACH OF A STRAIGHT AND A QUARTER-CIRCULAR ROD, SUPPORT A 75-LB LOAD.
FIND: INTERNAL FORCES AT POINT J.

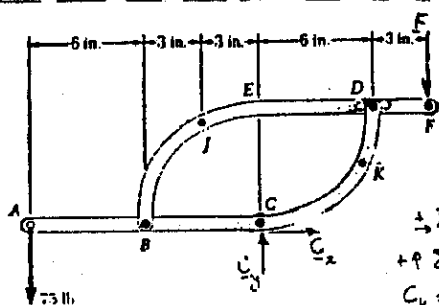**FREE BODY:**

ENTIRE FRAME

$$\sum M_C = 0;$$

$$(75 \text{ lb})(12 \text{ in.}) - F(9 \text{ in.}) = 0$$

$$F = 100 \text{ lb} \quad \blacktriangleleft$$

$$\sum F_x = 0; C_x = 0$$

$$+\uparrow \sum F_y = 0; C_y - 75 \text{ lb} - 100 \text{ lb} = 0$$

$$C_y = +175 \text{ lb}, C = 175 \text{ lb} \quad \blacktriangleleft$$

FREE BODY: MEMBER CBDEF

$$+\sum M_B = 0;$$

$$D(12 \text{ in.}) - (100 \text{ lb.})(15 \text{ in.}) = 0$$

$$D = 125 \text{ lb} \quad \blacktriangleleft$$

$$\sum F_x = 0; B_x = 0$$

$$+\uparrow \sum F_y = 0; B_y + 125 \text{ lb} - 100 \text{ lb} = 0$$

$$B_x = -25 \text{ lb}, B = 25 \text{ lb} \quad \blacktriangleleft$$

FREE BODY: BJ

$$+\rightarrow \sum F_x = 0; F - (25 \text{ lb}) \sin 30^\circ = 0$$


$$F = 12.50 \text{ lb} \angle 30^\circ \quad \blacktriangleleft$$

$$+\uparrow \sum F_y = 0; V - (25 \text{ lb}) \cos 30^\circ = 0$$


$$V = 21.7 \text{ lb} \angle 60^\circ \quad \blacktriangleleft$$

$$+\uparrow \sum M_J = 0; -M + (25 \text{ lb})(3 \text{ in.}) = 0$$

$$M = 75.0 \text{ lb}\cdot\text{in.} \quad \blacktriangleleft$$

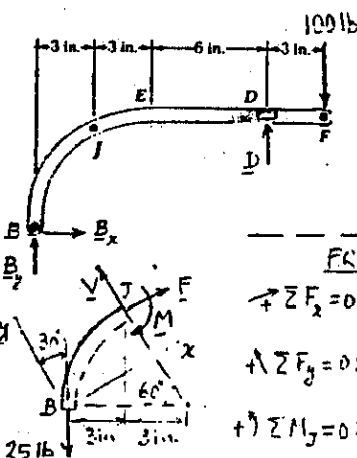


7.15

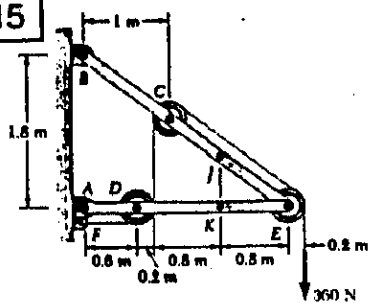**GIVEN:**

FRAME AND LOADING SHOWN. FOR EACH PULLEY $R = 200 \text{ mm}$

FIND:

INTERNAL FORCES AT POINT J.

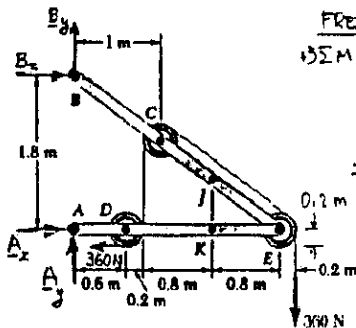**FREE BODY: FRAME AND PULLEY**

$$+\sum M_A = 0; -B_x(1.8 \text{ m}) - (360 \text{ N})(0.2 \text{ m}) - (360 \text{ N})(2.6 \text{ m}) = 0$$

$$B_x = -560 \text{ N}, B_x = 560 \text{ N} \quad \blacktriangleleft$$

$$+\sum F_x = 0; A_x - 560 \text{ N} - 360 \text{ N} = 0$$


$$A_x = +920 \text{ N}, A_x = 920 \text{ N} \quad \blacktriangleleft$$

$$+\uparrow \sum F_y = 0; A_y + B_y - 360 \text{ N} = 0$$

$$A_y + B_y = 360 \text{ N} \quad (1)$$

FREE BODY: MEMBER BE

WE RECALL FROM PROB. 6.40 THAT THE FORCES APPLIED TO A PULLEY MAY BE APPLIED DIRECTLY TO THE AXES OF THE PULLEY.



$$+\sum M_E = 0; -A_y(2.4 \text{ m}) - (360 \text{ N})(1.8 \text{ m}) = 0$$

$$A_y = -270 \text{ N}, A_y = 270 \text{ N} \quad \blacktriangleleft$$

$$\text{FROM (1): } B_y = 360 \text{ N} + 270 \text{ N}$$

$$B_y = 630 \text{ N}, B_y = 630 \text{ N} \quad \blacktriangleleft$$

FREE BODY: BJ

$$+\uparrow \sum F_y = 0; \frac{3}{5}(630 \text{ N}) + \frac{4}{5}(560 \text{ N})$$

$$- 360 \text{ N} - \frac{3}{5}(360 \text{ N}) - F = 0$$

$$F = +250 \text{ N}, F = 250 \text{ N} \quad \blacktriangleleft$$

$$+\rightarrow \sum F_x = 0; \frac{4}{5}(630 \text{ N}) - \frac{3}{5}(560 \text{ N})$$

$$- \frac{4}{5}(360 \text{ N}) + V = 0$$

$$V = 120.0 \text{ N}, V = 120.0 \text{ N} \quad \blacktriangleleft$$

$$+\uparrow \sum M_J = 0; (560 \text{ N})(1.2 \text{ m}) - (630 \text{ N})(1.6 \text{ m}) + (360 \text{ N})(0.6 \text{ m}) + M = 0$$


$$M = +120.0 \text{ N}\cdot\text{m}, M = 120.0 \text{ N}\cdot\text{m} \quad \blacktriangleleft$$

7.14

(SEE FIGURE OF PROB. 7.13)

GIVEN: TWO MEMBERS, CONSISTING EACH OF A STRAIGHT AND A QUARTER-CIRCULAR ROD, SUPPORT A 75-LB LOAD.
FIND: INTERNAL FORCES AT POINT K.

SEE SOLUTION OF PROB. 7.13 UP TO DASHED LINE.

**FREE BODY: DK**

WE FOUND IN PROB. 7.13 THAT

D = 125 lb ↑ ON BEDF, THUS

D = 125 lb ↓ ON DK. \blacktriangleleft

$$+\rightarrow \sum F_x = 0; F - (125 \text{ lb}) \cos 30^\circ = 0$$

$$F = 108.3 \text{ lb} \angle 60^\circ \quad \blacktriangleleft$$

$$+\uparrow \sum F_y = 0; V - (125 \text{ lb}) \sin 30^\circ = 0$$


$$V = 62.5 \text{ lb} \angle 30^\circ \quad \blacktriangleleft$$

$$+\uparrow \sum M_K = 0; M - (125 \text{ lb})d = 0$$

$$M = (125 \text{ lb})d = (125 \text{ lb})(0.8038 \text{ in.}) = 100.5 \text{ lb}\cdot\text{in.}$$

$$M = 100.5 \text{ lb}\cdot\text{in.} \quad \blacktriangleleft$$

7.16

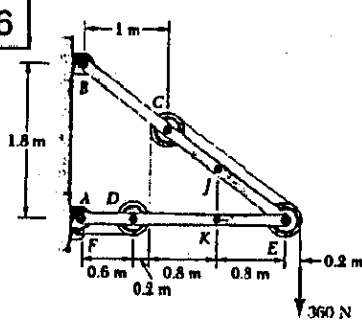**GIVEN:**

FRAME AND LOADING SHOWN. FOR EACH PULLEY $R = 200 \text{ mm}$.

FIND:

INTERNAL FORCES AT POINT K.

SEE SOLUTION OF PROB. 7.15 UP TO DASHED LINE, WE FOUND

$$A_x = 920 \text{ N} \rightarrow, A_y = 270 \text{ N} \downarrow \quad \blacktriangleleft$$

FREE BODY: AK

$$+\sum F_x = 0; 920 \text{ N} - 360 \text{ N} - F = 0$$


$$F = +560 \text{ N}, F = 560 \text{ N} \quad \blacktriangleleft$$


$$+\uparrow \sum F_y = 0; 360 \text{ N} - 270 \text{ N} - V = 0$$

$$V = +90.0 \text{ N}, V = 90.0 \text{ N} \quad \blacktriangleleft$$

$$+\uparrow \sum M_K = 0; (270 \text{ N})(1.6 \text{ m}) - (360 \text{ N})(1 \text{ m}) - M = 0$$

$$M = +72.0 \text{ N}\cdot\text{m}, M = 72.0 \text{ N}\cdot\text{m} \quad \blacktriangleleft$$



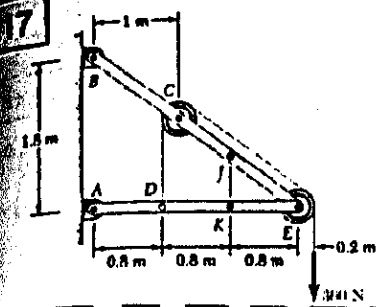

GIVEN:
FRAME AND LOADING SHOWN. FOR EACH PULLEY $R = 200\text{mm}$


FIND:
INTERNAL FORCES AT POINT J.

FREE BODY: FRAME AND PULLEYS

$\uparrow \sum M_A = 0: -B_2(1.8\text{m}) - (360\text{N})(2.6\text{m}) = 0$
 $B_2 = -520\text{N} \quad B_2 = 520\text{N} \leftarrow$

$\downarrow \sum F_x = 0: A_2 - 520\text{N} = 0$
 $A_2 = +520\text{N} \quad A_2 = 520\text{N} \rightarrow$


$\uparrow \sum F_y = 0: A_y + B_2 - 360\text{N} = 0$
 $A_y + B_2 = 360\text{N} \quad (1)$

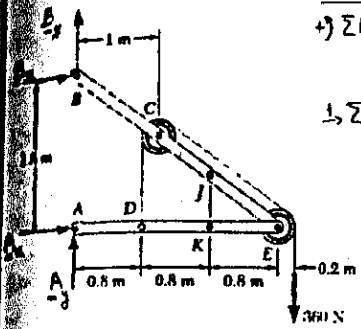

FREE BODY: MEMBER AE

$\uparrow \sum M_E = 0:$
 $-A_y(2.4\text{m}) - (360\text{N})(1.6\text{m}) = 0$
 $A_y = -240\text{N} \quad A_y = 240\text{N} \downarrow$

FROM (1): $B_y = 360\text{N} + 240\text{N}$
 $B_y = +600\text{N} \quad B_y = 600\text{N} \uparrow$





FREE BODY: BJ

WE RECALL FROM PROB. 6.70 THAT THE FORCES APPLIED TO A PULLEY MAY BE APPLIED DIRECTLY TO ITS AXLE.

$\uparrow \sum F_y = 0: \frac{2}{3}(600\text{N}) + \frac{4}{3}(520\text{N}) - 360\text{N} - \frac{2}{3}(360\text{N}) - F = 0$
 $F = +200\text{N} \quad F = 200\text{N} \leftarrow$

$\uparrow \sum F_x = 0: \frac{4}{3}(600\text{N}) - \frac{2}{3}(520\text{N}) - \frac{4}{3}(360\text{N}) + V = 0$
 $V = +120.0\text{N} \quad V = 120.0\text{N} \uparrow$

$\uparrow \sum M_J = 0: (520\text{N})(1.2\text{m}) - (600\text{N})(1.6\text{m}) + (360\text{N})(0.6\text{m}) + M = 0$
 $M = +120.0\text{N}\cdot\text{m} \quad M = 120.0\text{N}\cdot\text{m}$

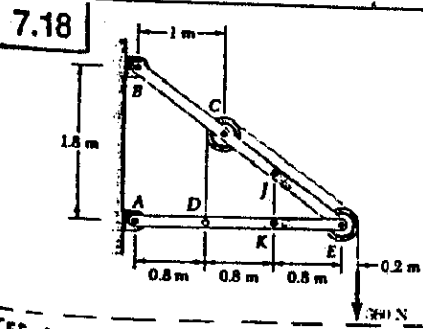

GIVEN:
FRAME AND LOADING SHOWN. FOR EACH PULLEY $R = 200\text{mm}$

FIND:
INTERNAL FORCES AT POINT K.



SEE SOLUTION OF PROB. 7.17 UP TO DASHED LINE. WE FOUND
 $A_x = 520\text{N} \rightarrow, \quad A_y = 240\text{N} \downarrow$

FREE BODY: AK

$\downarrow \sum F_x = 0: 520\text{N} - F = 0$
 $F = +520\text{N} \quad F = 520\text{N} \leftarrow$

$\uparrow \sum F_y = 0: 360\text{N} - 240\text{N} - V = 0$
 $V = +120.0\text{N} \quad V = 120.0\text{N} \uparrow$

$\uparrow \sum M_K = 0: (240\text{N})(1.6\text{m}) - (360\text{N})(0.8\text{m}) - M = 0$
 $M = +46.0\text{N}\cdot\text{m} \quad M = 46.0\text{N}\cdot\text{m}$

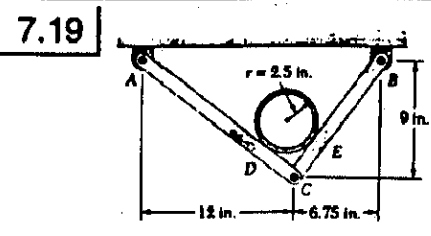

GIVEN:
PIPE SUPPORTED EVERY 9 FT BY FRAME SHOWN. PIPE AND CONTENTS WEIGH 10 lb/ft.

FIND: MAGNITUDE AND LOCATION OF M_{max} IN AC

FREE BODY: 10-FT SECTION OF PIPE

$\uparrow \sum F_x = 0: D - \frac{4}{5}(90\text{lb}) = 0 \quad D = 72\text{lb} \leftarrow$

$\uparrow \sum F_y = 0: E - \frac{3}{5}(90\text{lb}) = 0 \quad E = 54\text{lb} \leftarrow$




FREE BODY: FRAME

$\uparrow \sum M_B = 0: -A_2(18.75\text{m}) + (72\text{lb})(2.5\text{m}) + (54\text{lb})(8.75\text{m}) = 0$
 $A_y = +34.8\text{lb}, \quad A_y = 34.8\text{lb} \uparrow$

$\uparrow \sum F_y = 0:$
 $B_y + 34.8\text{lb} - \frac{4}{5}(72\text{lb}) - \frac{3}{5}(54\text{lb}) = 0$
 $B_y = +55.2\text{lb}, \quad B_y = 55.2\text{lb} \leftarrow$


$\downarrow \sum F_x = 0: A_2 + B_x - \frac{3}{5}(72\text{lb}) + \frac{4}{5}(54\text{lb}) = 0 \quad A_2 + B_x = 0 \quad (1)$

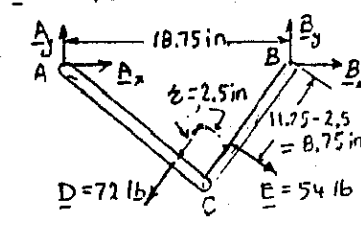

FREE BODY: MEMBER AC

$\uparrow \sum M_C = 0:$
 $(72\text{lb})(2.5\text{in}) - (34.8\text{lb})(12\text{in}) - A_x(9\text{in}) = 0$
 $A_x = -26.4\text{lb}, \quad A_x = 26.4\text{lb} \leftarrow$

FROM (1): $B_x = -A_x = +26.4\text{lb}$
 $B_x = 26.4\text{lb} \rightarrow$




FREE BODY: PORTION AJ

FOR $x \leq 12.5\text{in.} \quad (AJ \leq AD):$

$\uparrow \sum M_J = 0: (26.4\text{lb})\frac{2}{3}x - (34.8\text{lb})\frac{4}{3}x + M = 0$
 $M = 12x, \quad M_{max} = 150\text{lb}\cdot\text{in.} \text{ for } x = 12.5\text{in.}$
 $M_{max} = 150.0\text{lb}\cdot\text{in.} \text{ at } D$

FOR $x > 12.5\text{in.} \quad (AJ > AD)$

$\uparrow \sum M_J = 0: (26.4\text{lb})\frac{2}{3}x - (34.8\text{lb})\frac{4}{3}x + (72\text{lb})(x - 12.5) + M = 0$
 $M = 900 - 60x, \quad M_{max} = 150\text{lb}\cdot\text{in.} \text{ for } x = 12.5\text{in.}$
 THUS: $M_{max} = 150.0\text{lb}\cdot\text{in.} \text{ at } D.$



7.20 **GIVEN:** FRAME OF PROB. 7.19.

FIND: MAGNITUDE AND LOCATION OF M_{max} IN BC.

SEE SOLUTION OF PROB. 7.19 UP TO DASHED LINE. WE FOUND
 $B_x = 26.4\text{lb} \rightarrow, \quad B_y = 55.2\text{lb} \uparrow$


FREE BODY: PORTION BK

FOR $x \leq 8.75\text{in.} \quad (BK \leq BE)$

$\uparrow \sum M_K = 0: (55.2\text{lb})\frac{2}{3}x - (26.4\text{lb})\frac{4}{3}x - M = 0$
 $M = 12x, \quad M_{max} = 105.0\text{lb}\cdot\text{in.} \text{ for } x = 8.75\text{in.}$
 $M_{max} = 105.0\text{lb}\cdot\text{in.} \text{ at } E$

FOR $x > 8.75\text{in.} \quad (BK > BE)$

$\uparrow \sum M_K = 0: (55.2\text{lb})\frac{2}{3}x - (26.4\text{lb})\frac{4}{3}x - (54\text{lb})(x - 8.75\text{in.}) - M = 0$
 $M = 472.5 - 42x, \quad M_{max} = 105.0\text{lb}\cdot\text{in.} \text{ for } x = 8.75\text{in.}$
 THUS: $M_{max} = 105.0\text{lb}\cdot\text{in.} \text{ at } E$

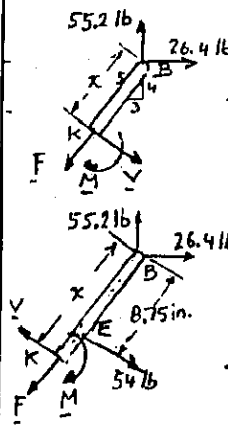

7.21 GIVEN: BENT ROD SUPPORTED AND LOADED AS SHOWN. FIND: FOR EACH CASE, THE INTERNAL FORCES AT J.

7.22 GIVEN: BENT ROD SUPPORTED AND LOADED AS SHOWN. FIND: FOR EACH CASE, THE INTERNAL FORCES AT J.

7.23 AN...

CASE (A) FREE-BODY DIAGRAM

$\sum M_D = 0: Pa - A(2a) = 0$

$A = \frac{P}{2}$

FREE BODY: AJ

$\sum F_y = 0: F = 0$

$\sum F_x = 0: V - \frac{P}{2} = 0 \Rightarrow V = \frac{P}{2}$

$\sum M_J = 0: M - \frac{P}{2}a = 0 \Rightarrow M = \frac{1}{2}Pa$

CASE (A) FREE-BODY DIAGRAM

$\sum M_D = 0: D(2a) - Pa = 0 \Rightarrow D = \frac{P}{2}$

$\sum F_x = 0: A_2 = 0$

$\sum F_y = 0: A_1 - P + \frac{P}{2} = 0 \Rightarrow A_1 = \frac{P}{2}$

FREE BODY: AJ

$\sum F_y = 0: F - \frac{P}{2} = 0 \Rightarrow F = \frac{P}{2}$

$\sum F_x = 0: V = 0$

$\sum M_J = 0: M = 0$

CASE (B) FREE-BODY DIAGRAM

$\sum M_D = 0: Pa - (\frac{4}{5}A)(2a) + (\frac{3}{5}A)(2a) = 0 \Rightarrow A = \frac{5}{2}P$

FREE BODY: AJ

$\sum F_y = 0: -F + \frac{4}{5}(\frac{5}{2}P) = 0 \Rightarrow F = 2P$

$\sum F_x = 0: -V + \frac{3}{5}(\frac{5}{2}P) = 0 \Rightarrow V = \frac{3}{2}P$

$\sum M_J = 0: -M + \frac{3}{5}(\frac{5}{2}P)a = 0 \Rightarrow M = \frac{3}{2}Pa$

CASE (B) FREE-BODY DIAGRAM

$\sum M_D = 0: (\frac{4}{5}D)(2a) + (\frac{3}{5}D)(2a) - Pa = 0 \Rightarrow D = \frac{5}{14}P$

$\sum F_x = 0: A_2 - \frac{4}{5}(\frac{5}{14}P) = 0 \Rightarrow A_2 = \frac{2}{7}P$

$\sum F_y = 0: A_1 + \frac{3}{5}(\frac{5}{14}P) - P = 0 \Rightarrow A_1 = \frac{11}{14}P$

FREE BODY: AJ

$\sum F_y = 0: -F + \frac{11}{14}P = 0 \Rightarrow F = \frac{11}{14}P$

$\sum F_x = 0: -V + \frac{2}{7}P = 0 \Rightarrow V = \frac{2}{7}P$

$\sum M_J = 0: -M + (\frac{2}{7}P)a = 0 \Rightarrow M = \frac{2}{7}Pa$

CASE (C) FREE-BODY DIAGRAM

$\sum M_D = 0: Pa - (\frac{4}{5}A)(2a) - (\frac{3}{5}A)(2a) = 0 \Rightarrow A = \frac{5}{14}P$

FREE BODY: AJ

$\sum F_y = 0: -F + \frac{4}{5}(\frac{5}{14}P) = 0 \Rightarrow F = \frac{2}{7}P$

$\sum F_x = 0: -V - \frac{3}{5}(\frac{5}{14}P) = 0 \Rightarrow V = \frac{3}{14}P$

$\sum M_J = 0: M - \frac{3}{5}(\frac{5}{14}P)a = 0 \Rightarrow M = \frac{3}{14}Pa$

CASE (C) FREE-BODY DIAGRAM

$\sum M_D = 0: (\frac{4}{5}D)(2a) - (\frac{3}{5}D)(2a) - Pa = 0 \Rightarrow D = \frac{5}{2}P$

$\sum F_x = 0: A_2 - \frac{4}{5}(\frac{5}{2}P) = 0 \Rightarrow A_2 = 2P$

$\sum F_y = 0: A_1 - \frac{3}{5}(\frac{5}{2}P) - P = 0 \Rightarrow A_1 = \frac{5}{2}P$

FREE BODY: AJ

$\sum F_y = 0: -F + \frac{5}{2}P = 0 \Rightarrow F = \frac{5}{2}P$

$\sum F_x = 0: -V + 2P = 0 \Rightarrow V = 2P$

$\sum M_J = 0: -M + (2P)a = 0 \Rightarrow M = 2Pa$

7.23

7.24


ALTERNATE

THUS: M = W...

MAKING

M = ...

7.23 AND 7.24



GIVEN:
SEMICIRCULAR ROD OF WEIGHT W AND UNIFORM CROSS SECTION SUPPORTED AS SHOWN.

FIND:
BENDING MOMENT AT J WHEN
 $\theta = 60^\circ$ (PROB. 7.23)
 $\theta = 150^\circ$ (PROB. 7.24)

FREE BODY: ROD

$$\rightarrow \sum M_A = 0: W\left(\frac{2\ell}{\pi}\right) - B(2\ell) = 0$$

$$B = \frac{W}{\pi} \rightarrow$$

$$\rightarrow \sum F_x = 0: \frac{W}{\pi} - A_2 = 0 \quad A_2 = \frac{W}{\pi} \leftarrow$$

$$\rightarrow \sum F_y = 0: A_3 - W = 0 \quad A_3 = W \uparrow$$

FREE BODY: PORTION BJ

$$\rightarrow \sum M_J = 0:$$

$$M - \frac{W}{\pi} \ell (1 - \cos \theta) - \frac{W\theta}{\pi} d = 0$$

$$M = \frac{W}{\pi} \ell (1 - \cos \theta) + \frac{W\theta}{\pi} d$$

$$\text{BUT } d = \ell \sin \theta - \frac{\ell}{\pi} \sin \frac{\theta}{2}$$

$$= \ell \sin \theta - \frac{\ell \sin \frac{\theta}{2}}{\frac{\theta}{2}} \sin \frac{\theta}{2}$$

$$= \ell \sin \theta - \frac{\ell}{\theta} 2 \sin^2 \frac{\theta}{2}$$

$$= \ell \sin \theta - \frac{2}{\theta} \ell (1 - \cos \theta)$$

$$\text{THUS: } M = \frac{W}{\pi} \ell (1 - \cos \theta) + \frac{W}{\pi} \ell \theta \sin \theta - \frac{W}{\pi} \ell (1 - \cos \theta)$$

$$M = \frac{W\ell}{\pi} \theta \sin \theta \quad (1)$$

7.23

MAKING $\theta = 60^\circ = \frac{\pi}{3}$ IN EQ. (1):

$$M = \frac{W\ell}{\pi} \frac{\pi}{3} \sin 60^\circ = W\ell \frac{\sin 60^\circ}{3} \quad M = 0.289 W\ell$$

7.24

MAKING $\theta = 150^\circ = \frac{5\pi}{6}$ IN EQ. (1):

$$M = \frac{W\ell}{\pi} \frac{5\pi}{6} \sin 150^\circ = \frac{5}{12} W\ell \quad M = 0.417 W\ell$$

(ON BJ)

ALTERNATIVE SOLUTION TO PROB. 7.24:

FREE BODY: AJ

$$\rightarrow \sum M_J = 0:$$

$$-M + W\ell \sin \phi - \frac{W}{\pi} \ell (1 - \cos \phi) - \frac{W\phi}{\pi} d = 0$$

$$M = W\ell \sin \phi - \frac{W}{\pi} \ell (1 - \cos \phi) - \frac{W\phi}{\pi} d$$

$$\text{BUT } d = \ell \sin \phi - \frac{\ell}{\pi} \sin \frac{\phi}{2}$$

$$= \ell \sin \phi - \frac{\ell \sin \frac{\phi}{2}}{\frac{\phi}{2}} \sin \frac{\phi}{2}$$

$$= \ell \sin \phi - \frac{\ell}{\phi} 2 \sin^2 \frac{\phi}{2}$$

$$= \ell \sin \phi - \frac{2}{\phi} \ell (1 - \cos \phi)$$

THUS:

$$M = W\ell \sin \phi - \frac{W}{\pi} \ell (1 - \cos \phi) - \frac{W}{\pi} \ell \phi \sin \phi + \frac{W}{\pi} \ell (1 - \cos \phi)$$


$$M = W\ell \left(1 - \frac{\phi}{\pi}\right) \sin \phi \quad (2)$$

MAKING $\phi = 180^\circ - 150^\circ = 30^\circ = \frac{\pi}{6}$ IN EQ. (2):

$$M = W\ell \left(1 - \frac{1}{6}\right) \sin 30^\circ = \frac{5}{12} W\ell \quad M = 0.417 W\ell$$

(ON AJ)

7.25



GIVEN:
QUARTER CIRCULAR ROD OF WEIGHT W AND UNIFORM CROSS SECTION SUPPORTED AS SHOWN
FIND:
BENDING MOMENT AT J WHEN $\theta = 30^\circ$.

FREE BODY: ROD

$$\rightarrow \sum F_x = 0: A_2 = 0$$

$$\rightarrow \sum M_B = 0:$$

$$W\left(\frac{2\ell}{\pi}\right) - A_3 \ell = 0$$

$$A_3 = \frac{2W}{\pi} \quad A = \frac{2W}{\pi} \leftarrow$$

FREE BODY: PORTION AJ

$$\rightarrow \sum M_J = 0:$$

$$M + W'd - \frac{2W}{\pi} \ell (1 - \cos \theta) = 0$$

$$M = \frac{2W}{\pi} \ell (1 - \cos \theta) - W'd \quad (1)$$

$$\text{BUT } W' = W \frac{\theta}{\pi/2} = \frac{2W\theta}{\pi} \quad (2)$$

AND

$$d = \ell \cos \frac{\theta}{2} - \ell \cos \theta$$

$$= \ell \sin \frac{\theta}{2} \cos \frac{\theta}{2} - \ell \cos \theta$$

$$= \ell \frac{2 \sin \frac{\theta}{2} \cos \frac{\theta}{2}}{2} - \ell \cos \theta$$

$$d = \ell \left(\frac{\sin \theta}{\theta} - \cos \theta \right) \quad (3)$$

SUBSTITUTING FROM (2) AND (3) INTO (1):

$$M = \frac{2W}{\pi} \ell (1 - \cos \theta) - \frac{2W\theta}{\pi} \ell \left(\frac{\sin \theta}{\theta} - \cos \theta \right)$$

$$M = \frac{2W\ell}{\pi} (1 - \cos \theta - \sin \theta + \theta \cos \theta) \quad (4)$$

MAKING $\theta = 30^\circ = \frac{\pi}{6}$ IN EQ. (4):

$$M = 2W\ell \left[\frac{1 - \cos 30^\circ - \sin 30^\circ + \frac{1}{6} \cos 30^\circ}{\pi} \right] \quad M = 0.0557 W\ell$$

THE SOLUTIONS OF PROBS. 7.26 AND 7.27 ARE GIVEN ON THE NEXT PAGE

7.28

GIVEN: ROD OF PROB. 7.25.

FIND: MAGNITUDE AND LOCATION OF MAXIMUM BENDING MOMENT.

WE RECALL EQ. (4) OF PROB. 7.25:

$$M = \frac{2W\ell}{\pi} (1 - \cos \theta - \sin \theta + \theta \cos \theta) \quad (4)$$

$$\frac{dM}{d\theta} = \frac{2W\ell}{\pi} (\sin \theta - \cos \theta + \cos \theta - \theta \sin \theta)$$

$$\text{SETTING } \frac{dM}{d\theta} = 0:$$

$$\sin \theta (1 - \theta) = 0$$

THE ROOTS OF THIS EQUATION FOR $0 \leq \theta \leq \frac{\pi}{2}$ ARE

$$\theta = 0 \quad \text{AND} \quad \theta = 1 \text{ RAD} = 57.3^\circ$$


FOR $\theta = 0$, $M = 0$. FOR $\theta = 1 \text{ RAD} = 57.3^\circ$, EQ. (4) YIELDS

$$M = \frac{2W\ell}{\pi} (1 - \cos 57.3^\circ - \sin 57.3^\circ + 1 \times \cos 57.3^\circ)$$

$$= \frac{2W\ell}{\pi} (1 - \sin 57.3^\circ) = 0.1009 W\ell$$

THUS: $M_{\max} = 0.1009 W\ell$ for $\theta = 57.3^\circ$

7.26



GIVEN:

QUARTER CIRCULAR ROD OF WEIGHT W AND UNIFORM CROSS SECTION SUPPORTED AS SHOWN.

FIND:


BENDING MOMENT AT J WHEN $\theta = 30^\circ$

FREE BODY: ROD

$$\uparrow \Sigma M_A = 0:$$

$$Bz - W\left(\frac{2r}{\pi}\right) = 0$$

$$B = \frac{2W}{\pi} \quad \triangleleft$$



FREE BODY: PORTION BJ

$$\uparrow \Sigma M_J = 0:$$

$$\frac{2W}{\pi} z \sin \theta - W'd - M = 0$$

$$M = \frac{2W}{\pi} z \sin \theta - W'd \quad (1)$$

$$\text{BUT } W' = W \frac{\theta}{\pi/2} = \frac{2W\theta}{\pi} \quad (2)$$

AND

$$d = \frac{2}{\pi} \cos \theta - z \cos \theta$$

$$= \frac{2}{\pi} \frac{\sin \theta/2 \cos \theta/2}{\theta/2} \cos \theta - z \cos \theta$$

$$= \frac{2}{\pi} \frac{\sin \theta/2 \cos \theta/2}{\theta} - z \cos \theta$$

$$d = \frac{2}{\pi} \left(\frac{\sin \theta}{\theta} - \cos \theta \right) \quad (3)$$

SUBSTITUTING FROM (2) AND (3) INTO (1):

$$M = \frac{2W}{\pi} z \sin \theta - \frac{2W\theta}{\pi} \frac{2}{\pi} \left(\frac{\sin \theta}{\theta} - \cos \theta \right)$$

$$M = \frac{2Wz}{\pi} \theta \cos \theta \quad (4) \quad \triangleleft$$

MAKING $\theta = 30^\circ = \frac{\pi}{6}$ IN EQ. (4):

$$M = \frac{2Wz}{\pi} \left(\frac{\pi}{6} \right) \cos 30^\circ = \frac{Wz}{3} \cos 30^\circ \quad M = 0.289 Wz \quad \triangleleft$$

7.27

GIVEN: ROD OF PROB. 7.26.

FIND: MAGNITUDE AND LOCATION OF MAXIMUM BENDING MOMENT.

WE RECALL EQ. (4) OF PROB. 7.26:

$$M = \frac{2Wz}{\pi} \theta \cos \theta \quad (4)$$

$$\frac{dM}{d\theta} = 0:$$

$$\cos \theta - \theta \sin \theta = 0$$

$$\tan \theta = \frac{1}{\theta}$$

SOLVING BY SUCCESSIVE APPROXIMATIONS:

$$\theta = 49.293^\circ = 0.86033 \text{ RAD}$$


SUBSTITUTING INTO EQ. (4):

$$M = \frac{2Wz}{\pi} (0.86033 \text{ RAD}) \cos 49.293^\circ = 0.3572 Wz$$

THUS: $M_{\max} = 0.357 Wz$ for $\theta = 49.3^\circ$ \triangleleft

THE SOLUTION OF PROB. 7.28 IS GIVEN ON THE PRECEDING PAGE

7.29



GIVEN:

BEAM AND LOADING

(a) DRAW V AND M DIAG.

(b) DETERMINE $|V|_{\max}$ $|M|_{\max}$.

FREE BODY: ENTIRE BEAM

$$\uparrow \Sigma M_D = 0:$$


$$P\left(\frac{2L}{3}\right) - P\left(\frac{L}{3}\right) - AL = 0$$

$$A = P/3 \quad \triangleleft$$

$$\Sigma F_x = 0: D_x = 0$$

$$\uparrow \Sigma F_y = 0: \frac{P}{3} - P + P + D_y = 0$$

$$D_y = -P/3 \quad D = P/3 \quad \triangleleft$$



(a) SHEAR AND BENDING MOMENT. SINCE THE LOADING CONSISTS OF CONCENTRATED LOADS, THE SHEAR DIAGRAM IS MADE OF HORIZONTAL STRAIGHT-LINE SEGMENTS AND THE B.M. DIAGRAM IS MADE OF OBLIQUE STRAIGHT-LINE SEGMENTS. WE SHALL DETERMINE V AND M JUST TO THE RIGHT OF A, B, AND C.

$$\uparrow \Sigma F_y = 0: -V_1 + \frac{P}{3} = 0 \quad V_1 = +P/3 \quad \triangleleft$$

$$\uparrow \Sigma M_1 = 0: M_1 - \frac{P}{3}(0) = 0 \quad M_1 = 0 \quad \triangleleft$$

$$\uparrow \Sigma F_y = 0: -V_2 + \frac{P}{3} - P = 0, \quad V_2 = -2P/3 \quad \triangleleft$$

$$\uparrow \Sigma M_2 = 0: M_2 - \frac{P}{3}\left(\frac{L}{3}\right) + P(0) = 0 \quad M_2 = +PL/9 \quad \triangleleft$$



$$\uparrow \Sigma F_y = 0: \frac{P}{3} - P + P - V_3 = 0 \quad V_3 = +P/3 \quad \triangleleft$$

$$\uparrow \Sigma M_3 = 0: M_3 - \frac{P}{3}\left(\frac{2L}{3}\right) + P\left(\frac{L}{3}\right) - P(0) = 0 \quad M_3 = -PL/9 \quad \triangleleft$$

$$\text{JUST TO THE LEFT OF D:}$$

$$\uparrow \Sigma F_y = 0: V_4 - \frac{P}{3} = 0 \quad V_4 = +P/3 \quad \triangleleft$$

$$\uparrow \Sigma M_4 = 0: -M_4 - \frac{P}{3}(0) = 0 \quad M_4 = 0 \quad \triangleleft$$

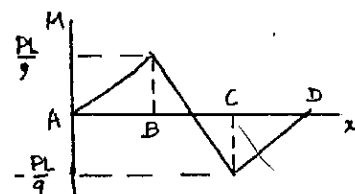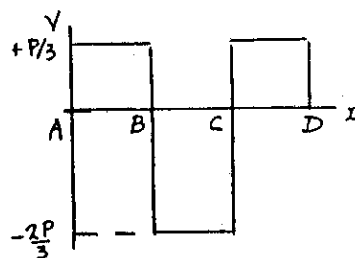

$$(b) |V|_{\max} = 2P/3; |M|_{\max} = PL/9$$

GIVEN:
BEAM AND LOADING SHOWN
(a) DRAW V AND M DIAGRAMS
(b) DETERMINE $|V|_{max}$ AND $|M|_{max}$.

SHEAR AND BENDING MOMENT. BECAUSE OF SYMMETRY OF

LOADING!
 $(D) = \frac{1}{2} (\omega \frac{L}{2})$ $A = D = \frac{1}{4} \omega L$

(a) **SHEAR AND BENDING MOMENT**

JUST TO THE RIGHT OF A:

$V_1 = +\frac{1}{4} \omega L$
 $M_1 = 0$

AT B: $+\uparrow \Sigma F_y = 0: \frac{1}{4} \omega L - V_2 = 0, V_2 = +\frac{1}{4} \omega L$

$+\circlearrowleft \Sigma M_B = 0: M_2 - (\frac{1}{4} \omega L)(\frac{L}{2}) = 0$
 $M_2 = +\omega L^2/16$

AT CENTER LINE:

$+\uparrow \Sigma F_y = 0: \frac{1}{4} \omega L - \frac{1}{4} \omega L - V_3 = 0, V_3 = 0$

$+\circlearrowleft \Sigma M_3 = 0:$

$M_3 - (\frac{1}{4} \omega L)(\frac{L}{2}) + (\frac{\omega L}{4})(\frac{L}{8}) = 0, M_3 = \frac{3}{32} \omega L^2$

THE REMAINDERS OF THE DIAGRAMS ARE OBTAINED FROM SYMMETRY.

(b) $|V|_{max} = \omega L/4$

$|M|_{max} = 3\omega L^2/32$

PARABOLA

GIVEN:
BEAM AND LOADING SHOWN
(a) DRAW V AND M DIAGRAMS
(b) DETERMINE $|V|_{max}$ AND $|M|_{max}$.

SHEAR AND BENDING MOMENT.

AT A: $V_A = M_A = 0$

$+\uparrow \Sigma F_y = 0: -V_B - \frac{\omega L}{2} = 0, V_B = -\frac{\omega L}{2}$

$+\circlearrowleft \Sigma M_B = 0: M_B + (\frac{\omega L}{2})(\frac{L}{4}) = 0$
 $M_B = -\omega L^2/8$

$+\uparrow \Sigma F_y = 0: V_C = -\frac{\omega L}{2}$

$+\circlearrowleft \Sigma M_C = 0:$
 $M_C + (\frac{\omega L}{2})(\frac{3L}{4}) = 0, M_C = -\frac{3\omega L^2}{8}$

(b) $|V|_{max} = \omega L/2$

$|M|_{max} = 3\omega L^2/8$

PARABOLA

STRAIGHT LINE

7.32



GIVEN:
BEAM AND LOADING SHOWN.
(a) DRAW V AND M DIAGRAMS.
(b) DETERMINE $|V|_{max}$ AND $|M|_{max}$.

(a) **SHEAR AND BENDING MOMENT**

JUST TO THE RIGHT OF A: $V_1 = +P, M_1 = 0$

JUST TO THE RIGHT OF B:

$+\uparrow \Sigma F_y = 0: P - P - V_2 = 0, V_2 = 0$


$+\circlearrowleft \Sigma M_2 = 0: M_2 - P(\frac{L}{2}) = 0, M_2 = +PL/2$

JUST TO THE LEFT OF C:

$+\uparrow \Sigma F_y = 0: P - P - V_3 = 0, V_3 = 0$

$+\circlearrowleft \Sigma M_3 = 0:$


$M_3 + P(\frac{L}{2}) - PL = 0, M_3 = +PL/2$



(b) $|V|_{max} = P$

$|M|_{max} = PL/2$

7.33



GIVEN:
BEAM AND LOADING SHOWN.
(a) DRAW V AND M DIAGRAMS
(b) DETERMINE $|V|_{max}$ AND $|M|_{max}$.

FREE BODY: ENTIRE BEAM

$+\circlearrowleft \Sigma M_A = 0: CL - M_0 = 0$

$C = M_0/L \uparrow$

$+\rightarrow \Sigma F_x = 0: A_x = 0$

$+\uparrow \Sigma F_y = 0: A_y + \frac{M_0}{L} = 0, A_y = -\frac{M_0}{L}$

$A = M_0/L \downarrow$

(a) **SHEAR AND BENDING MOMENT:**

JUST TO THE RIGHT OF A:

$V_1 = -M_0/L, M_1 = 0$

JUST TO THE LEFT OF B:


$V_2 = -M_0/L, M_2 = -\frac{M_0 L}{2} = -\frac{M_0}{2}$

JUST TO THE RIGHT OF B:

$V_3 = -M_0/L, M_3 = +\frac{M_0 L}{2} = +\frac{M_0}{2}$

JUST TO THE LEFT OF C:

$V_4 = -M_0/L, M_4 = 0$


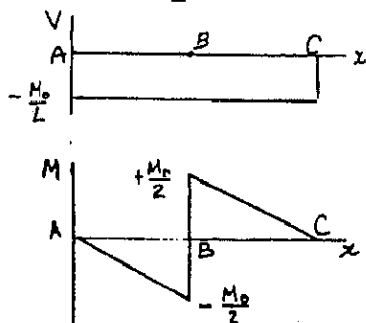


(b) $|V|_{max} = M_0/L$

$|M|_{max} = M_0/2$

7.34

GIVEN:
BEAM AND LOADING SHOWN.
(a) DRAW V AND M DIAGRAMS
(b) DETERMINE $|V|_{max}$ AND $|M|_{max}$.




FREE BODY: PORTION AJ

$$+\uparrow \Sigma F_y = 0: -P - V = 0, V = -P$$

$$+\circlearrowleft \Sigma M_x = 0: M + Px - PL = 0$$

$$M = P(L - x)$$


(a) THE V AND M DIAGRAMS ARE OBTAINED BY PLOTTING THE FUNCTIONS V AND M.



(b) $|V|_{max} = P$

$|M|_{max} = PL$

7.35



GIVEN:
BEAM AND LOADING SHOWN.
(a) DRAW V AND M DIAGRAMS
(b) DETERMINE $|V|_{max}$ AND $|M|_{max}$.

(a) JUST TO THE RIGHT OF A:

$$+\uparrow \Sigma F_y = 0: V_1 = -15 \text{ kN}, M_1 = 0$$

JUST TO THE RIGHT OF C:

$$V_2 = -40 \text{ kN}, M_2 = -15 \text{ kN}\cdot\text{m}$$

JUST TO THE RIGHT OF D:

$$V_3 = -10 \text{ kN}, M_3 = -27 \text{ kN}\cdot\text{m}$$


JUST TO THE RIGHT OF E:

$$V_4 = 30 \text{ kN} - 60 \text{ kN}, V_4 = -30 \text{ kN}$$

$$M_4 = 30 \times 0.4 - 15 \times 1.7 - 25 \times 0.7$$


$$M_4 = -31 \text{ kN}\cdot\text{m}$$

AT B: $M_B = 30 \times 1.2 - 15 \times 2.5 - 25 \times 1.5 - 20 \times 0.8, M_B = -55 \text{ kN}\cdot\text{m}$

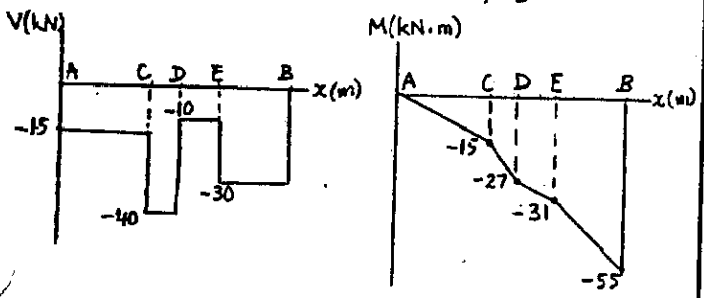


(b) $|V|_{max} = 40.0 \text{ kN}; |M|_{max} = 55.0 \text{ kN}\cdot\text{m}$

7.36



GIVEN:
BEAM AND LOADING SHOWN.
(a) DRAW V AND M DIAGRAMS
(b) DETERMINE $|V|_{max}$ AND $|M|_{max}$.

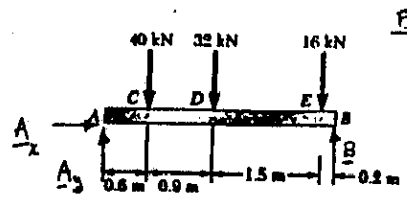

FREE BODY: ENTIRE BEAM

$$+\circlearrowleft \Sigma M_A = 0$$

$$B(3.2 \text{ m}) - (40 \text{ kN})(0.6 \text{ m}) - (32 \text{ kN})(1.5 \text{ m}) - (16 \text{ kN})(3.0 \text{ m}) = 0$$

$$B = 37.5 \text{ kN}$$

$$B_1 = 37.5 \text{ kN} \uparrow$$

$$\Sigma F_x = 0: A_x = 0$$

$$+\uparrow \Sigma F_y = 0: A_y + 37.5 \text{ kN} - 40 \text{ kN} - 32 \text{ kN} - 16 \text{ kN} = 0$$

$$A_y = 50.5 \text{ kN}$$

$$A_2 = 50.5 \text{ kN} \uparrow$$

(a) SHEAR AND BENDING MOMENT.

JUST TO THE RIGHT OF A:

$$V_1 = 50.5 \text{ kN}, M_1 = 0$$

JUST TO THE RIGHT OF C:

$$+\uparrow \Sigma F_y = 0: 50.5 \text{ kN} - 40 \text{ kN} - V_2 = 0$$

$$V_2 = 10.5 \text{ kN}$$

$$+\circlearrowleft \Sigma M_x = 0: M_2 - (50.5 \text{ kN})(0.6 \text{ m}) = 0$$

$$M_2 = 30.3 \text{ kN}\cdot\text{m}$$

JUST TO THE RIGHT OF D:

$$+\uparrow \Sigma F_y = 0: 50.5 - 40 - 32 - V_3 = 0$$

$$V_3 = -21.5 \text{ kN}$$

$$+\circlearrowleft \Sigma M_x = 0: M_3 - (50.5)(1.5) + (40)(0.9) = 0$$

$$M_3 = 39.8 \text{ kN}\cdot\text{m}$$


JUST TO THE RIGHT OF E:

$$+\uparrow \Sigma F_y = 0: V_4 + 37.5 = 0, V_4 = -37.5 \text{ kN}$$

$$+\circlearrowleft \Sigma M_x = 0: -M_4 + (37.5)(0.2) = 0$$

$$M_4 = 7.5 \text{ kN}\cdot\text{m}$$


AT B: $V_B = M_B = 0$

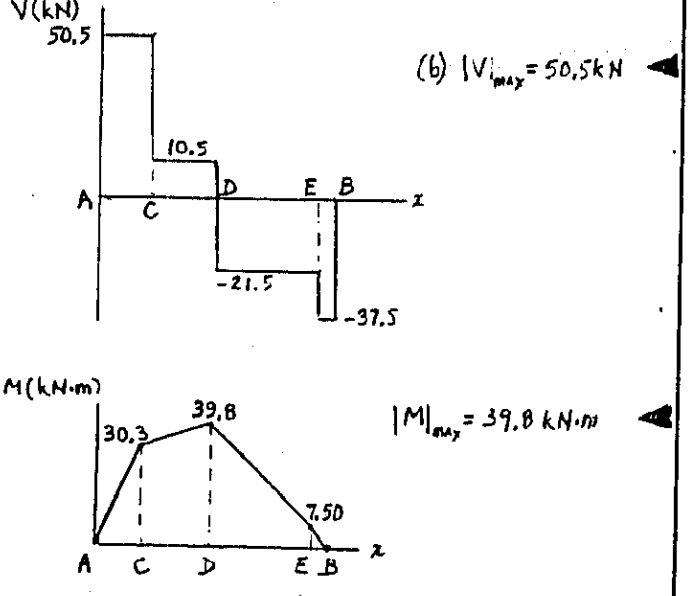

(b) $|V|_{max} = 50.5 \text{ kN}$

$|M|_{max} = 39.8 \text{ kN}\cdot\text{m}$

7.37



GIVEN:
BEAM AND LOADING SHOWN
(a) DRAW V AND M DIAGRAMS
(b) DETERMINE $|V|_{max}$ AND $|M|_{max}$

FREE BODY: ENTIRE BEAM

$$\begin{aligned} +\sum M_A = 0: & E(6ft) - (6kips)(2ft) - (12kips)(4ft) - (4.5kips)(8ft) = 0 \\ & E = +16kips \quad \underline{E = 16kips \uparrow} \\ +\sum F_x = 0: & A_x = 0 \\ +\sum F_y = 0: & A_y + 16kips - 6kips - 12kips - 4.5kips = 0 \\ & A_y = +6.50kips \quad \underline{A = 6.50kips \uparrow} \end{aligned}$$

(a) SHEAR AND BENDING MOMENT

JUST TO THE RIGHT OF A:

$$V_1 = +6.50kips, M_1 = 0$$

JUST TO THE RIGHT OF C:

$$\begin{aligned} +\sum F_y = 0: & 6.50kips - 6kips - V_2 = 0 \quad V_2 = +0.50kips \\ +\sum M_C = 0: & M_2 - (6.50kips)(2ft) = 0, M_2 = +13kip \cdot ft \end{aligned}$$


JUST TO THE RIGHT OF D:

$$\begin{aligned} +\sum F_y = 0: & 6.50 - 6 - 12 - V_3 = 0 \quad V_3 = +11.5kips \\ +\sum M_D = 0: & M_3 - (6.50)(4) - (6)(2) = 0, M_3 = +14kip \cdot ft \end{aligned}$$


JUST TO THE RIGHT OF E:

$$\begin{aligned} +\sum F_y = 0: & V_4 - 4.5 = 0 \quad V_4 = +4.5kips \\ +\sum M_E = 0: & -M_4 - (4.5)(2) = 0 \quad M_4 = -9kip \cdot ft \end{aligned}$$

AT B: $V_B = M_B = 0$

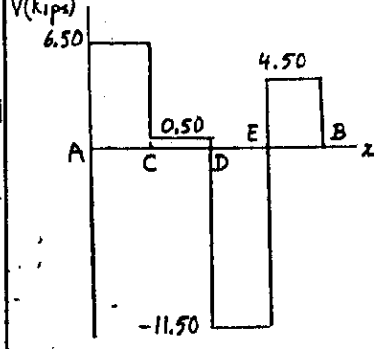


(b) $|V|_{max} = 11.50kips$

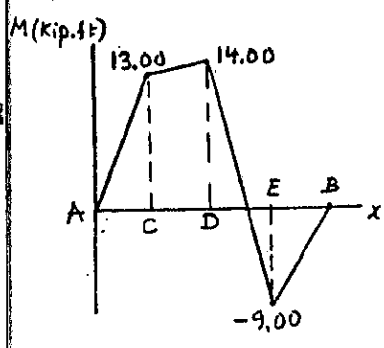

$|M|_{max} = 14.00kip \cdot ft$

7.38



GIVEN:
BEAM AND LOADING SHOWN
(a) DRAW V AND M DIAGRAMS
(b) DETERMINE $|V|_{max}$ AND $|M|_{max}$

FREE BODY: ENTIRE BEAM

$$\begin{aligned} +\sum M_C = 0: & (120lb)(10in) - (300lb)(25in) + E(45in) - (120lb)(60in) = 0 \\ & E = +300lb \quad \underline{E = 300lb \uparrow} \\ \sum F_x = 0: & C_x = 0 \\ +\sum F_y = 0: & C_y + 300lb - 120lb - 300lb - 120lb = 0 \quad C_y = +240lb \\ & \underline{C = 240lb \uparrow} \end{aligned}$$

(a) SHEAR AND BENDING MOMENT

JUST TO THE RIGHT OF A:

$$+ \sum F_y = 0: -120lb - V_1 = 0, V_1 = -120lb, M_1 = 0$$

JUST TO THE RIGHT OF C:

$$\begin{aligned} +\sum F_y = 0: & 240lb - 120lb - V_2 = 0, V_2 = +120lb \\ +\sum M_C = 0: & M_2 + (120lb)(10in) = 0 \quad M_2 = -1200lb \cdot in \end{aligned}$$


JUST TO THE RIGHT OF D:

$$\begin{aligned} +\sum F_y = 0: & 240 - 120 - 300 - V_3 = 0 \quad V_3 = -180lb \\ +\sum M_D = 0: & M_3 + (120)(35) - (240)(25) = 0, M_3 = +1800lb \cdot in \end{aligned}$$


JUST TO THE RIGHT OF E:

$$\begin{aligned} +\sum F_y = 0: & V_4 - 120lb = 0 \quad V_4 = +120lb \\ +\sum M_E = 0: & -M_4 - (120lb)(15in) = 0 \quad M_4 = -1800lb \cdot in \end{aligned}$$

AT B: $V_B = M_B = 0$

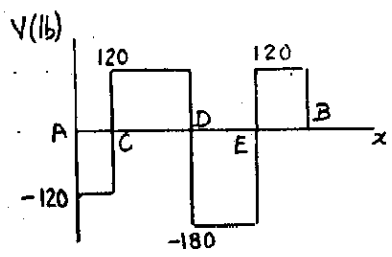


(b) $|V|_{max} = 180.0lb$

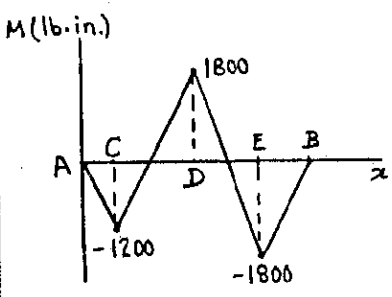


$|M|_{max} = 1800lb \cdot in$

7.39




GIVEN:
 BEAM AND LOADING SHOWN.
 (a) DRAW V AND M DIAGRAMS
 (b) DETERMINE $|V|_{max}$ AND $|M|_{max}$.




FREE BODY: ENTIRE BEAM
 $\sum M_A = 0:$
 $B(5m) - (60kN)(2m) - (50kN)(4m) = 0$
 $B = +64.0kN, B = 64.0kN \uparrow$
 $\sum F_x = 0: A_x = 0$
 $\sum F_y = 0: A_y + 64.0kN - 60kN - 50kN = 0, A_y = +46.0kN$
 $A = 46.0kN \uparrow$


(a) SHEAR AND BENDING-MOMENT DIAGRAMS.




FROM A TO C:
 $\sum F_y = 0: 46 - V = 0, V = +46kN$
 $\sum M_J = 0: M - 46x = 0, M = (46x)kN \cdot m$




FROM C TO D:
 $\sum F_y = 0: 46 - 60 - V = 0, V = -14kN$
 $\sum M_J = 0: M - 46z + 60(z-2) = 0$
 $M = (120 - 14z)kN \cdot m$



FROM D TO B:
 $\sum F_y = 0: V + 64 - 25u = 0, V = (25u - 64)kN$
 $\sum M_J = 0: 64u - (25u)(\frac{u}{2}) - M = 0$
 $M = (64u - 12.5u^2)kN \cdot m$
 FOR $u = 0: V_B = -64kN, M_B = 0$

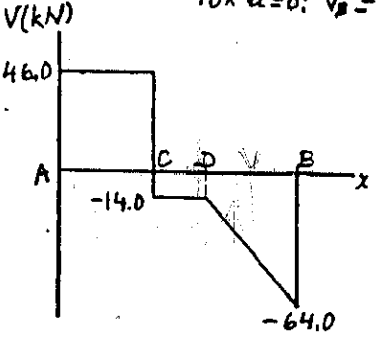


(b) $|V|_{max} = 64.0kN$

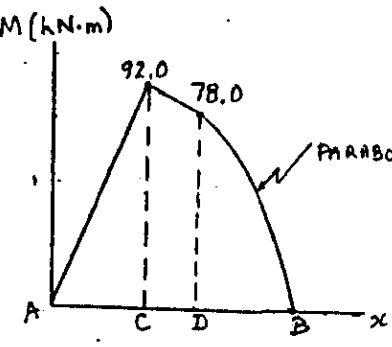


$|M|_{max} = 92.0kN \cdot m$

7.40




GIVEN:
 BEAM AND LOADING SHOWN.
 (a) DRAW V AND M DIAGRAMS
 (b) DETERMINE $|V|_{max}$ AND $|M|_{max}$.




FREE BODY: ENTIRE BEAM
 $\sum M_A = 0:$
 $D(4m) - (50kN)(2m) - (40kN)(6m) = 0$
 $D = +75.0kN, D = 75.0kN \uparrow$
 $\sum F_x = 0: A_x = 0$
 $\sum F_y = 0: A_y + 75.0kN - 50kN - 40kN = 0, A_y = +15.0kN$
 $A = 15.0kN \uparrow$


(a) SHEAR AND BENDING-MOMENT DIAGRAMS




FROM A TO C:
 $\sum F_y = 0: 15 - V = 0, V = +15.0kN$
 $\sum M_J = 0: M - 15x = 0, M = (15x)kN \cdot m$




FROM C TO D:
 $\sum F_y = 0: 15 - 50 - V = 0, V = -35.0kN$
 $\sum M_J = 0: M - 15z + 50(z-2) = 0$
 $M = (100 - 35z)kN \cdot m$

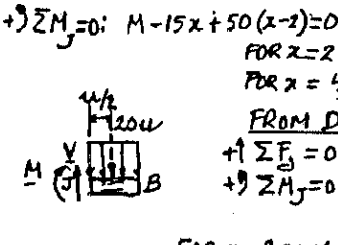

FROM D TO B:
 $\sum F_y = 0: V - 20u = 0, V = (20u)kN$
 $\sum M_J = 0: -M - (20u)(\frac{u}{2}) = 0$
 $M = (-10u^2)kN \cdot m$
 FOR $u = 2m: V_D = 40kN, M_D = -40kN \cdot m$
 FOR $u = 0: V_B = M_B = 0$

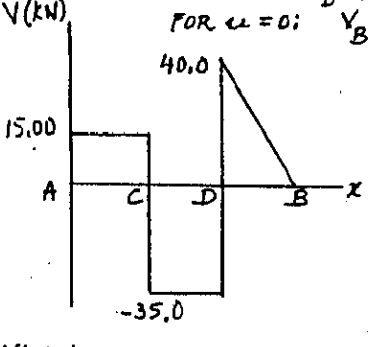


(b) $|V|_{max} = 40.0kN$

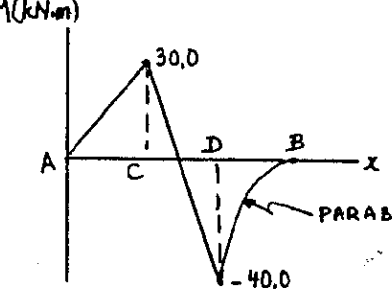


$|M|_{max} = 40.0kN \cdot m$

7.41



GIVEN:
BEAM AND LOADING SHOWN.
(a) DRAW V AND M DIAGRAMS.
(b) DETERMINE $|V|_{max}$ AND $|M|_{max}$.





FREE BODY: ENTIRE BEAM
BECAUSE OF SYMMETRY OF LOADING:
 $A = B = \frac{1}{2}$ (TOTAL LOAD)
 $= \frac{1}{2} (8+8+4 \times 5)$ kips
 $A = B = 18$ kips \uparrow

(a) SHEAR AND BENDING-MOMENT DIAGRAMS

FROM A TO C:
 $\uparrow \sum F_y = 0: 18 \text{ kips} - V = 0 \quad V = +18 \text{ kips}$
 $\uparrow \sum M_j = 0: M - 18x = 0 \quad M = + (18x) \text{ kip-ft}$

FROM C TO D:
 $\uparrow \sum F_y = 0: 18 - 8 - 4(x-2) - V = 0 \quad V = 18 - 4x$
 $\uparrow \sum M_j = 0: M + 8(x-2) + 4(x-2)\frac{x-2}{2} - 18x = 0$
 $M = 18x - 8(x-2) - 2(x-2)^2$
 FOR $x=2$: $V_C = +10 \text{ kips}$, $M_C = +36 \text{ kip-ft}$
 FOR $x=4.5$: $V_E = 0$, $M_E = +48.5 \text{ kip-ft}$
 FOR $x=7$: $V_D = -10 \text{ kips}$, $M_D = +36 \text{ kip-ft}$


FROM D TO B:
 $\uparrow \sum F_y = 0: V + 18 = 0 \quad V = -18 \text{ kips}$
 $\uparrow \sum M_j = 0: 18u - M = 0 \quad M = (18u) \text{ kip-ft}$
 FOR $u = 2 \text{ ft}$: $M_D = +36 \text{ kip-ft}$
 FOR $u = 0$: $M_B = 0$

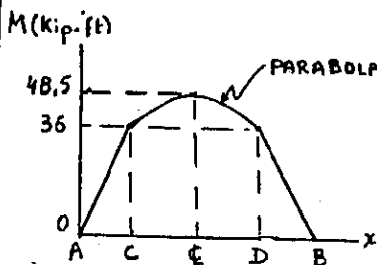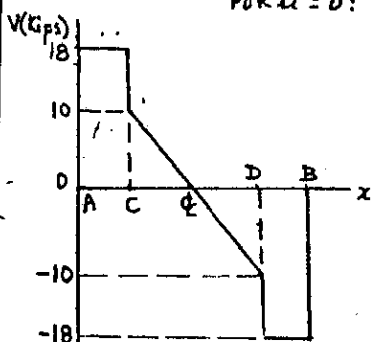


(b) $|V|_{max} = 18,00 \text{ kips}$

$|M|_{max} = 48.5 \text{ kip-ft}$

7.42



GIVEN:
BEAM AND LOADING SHOWN.
(a) DRAW V AND M DIAGRAMS.
(b) DETERMINE $|V|_{max}$ AND $|M|_{max}$.





FREE BODY: ENTIRE BEAM
 $\uparrow \sum M_A = 0: B(10 \text{ ft}) - (15 \text{ kips})(3 \text{ ft}) - (12 \text{ kips})(6 \text{ ft}) = 0$
 $B = +11.70 \text{ kips}$, $\underline{B} = 11.70 \text{ kips}$
 $\sum F_x = 0: A_x = 0$
 $\uparrow \sum F_y = 0: A_y - 15 - 12 + 11.70 = 0$
 $A_y = +15.30 \text{ kips}$, $\underline{A} = 15.30 \text{ kips}$

(a) SHEAR AND BENDING-MOMENT DIAGRAMS

FROM A TO C:
 $\uparrow \sum F_y = 0: 15.30 - 2.5x - V = 0 \quad V = (15.30 - 2.5x) \text{ kips}$
 $\uparrow \sum M_j = 0: M + (2.5x)(\frac{x}{2}) - 15.30x = 0$
 $M = 15.30x - 1.25x^2$
 FOR $x=0$: $V_A = +15.30 \text{ kips}$, $M_A = 0$
 FOR $x=6 \text{ ft}$: $V_C = +0.300 \text{ kip}$, $M_C = +46.8 \text{ kip-ft}$


FROM C TO B:
 $\uparrow \sum F_y = 0: V + 11.70 = 0 \quad V = -11.70 \text{ kips}$
 $\uparrow \sum M_j = 0: 11.70u - M = 0 \quad M = (11.70u) \text{ kip-ft}$
 FOR $u = 4 \text{ ft}$: $M_C = +46.8 \text{ kip-ft}$
 FOR $u = 0$: $M_B = 0$



(b) $|V|_{max} = 15,30 \text{ kips}$

$|M|_{max} = 46.8 \text{ kip-ft}$

7.43



GIVEN:

BEAM RESTING ON GROUND AND LOADED AS SHOWN ($a = 0.3\text{ m}$).

- (a) DRAW V AND M DIAGRAMS.
(b) DETERMINE $|V|_{\text{max}}$ AND $|M|_{\text{max}}$.

FREE BODY: ENTIRE BEAM

$$+\uparrow \Sigma F_y = 0: w_y(1.5\text{ m}) - 3\text{ kN} - 3\text{ kN} = 0$$

$$w_y = 4\text{ kN/m}$$

(a) SHEAR AND BENDING-MOMENT

FROM A TO C:


$$+\uparrow \Sigma F_y = 0: 4x - V = 0 \quad V = (4x)\text{ kN}$$

$$+\circlearrowleft \Sigma M_J = 0: M - (4x)\frac{x}{2} = 0$$

$$M = (2x^2)\text{ kN}\cdot\text{m}$$

FOR $x = 0: V_A = M_A = 0$

FOR $x = 0.3\text{ m}: V_C = 1.2\text{ kN}, M_C = 0.18\text{ kN}\cdot\text{m}$



FROM C TO D:

$$+\uparrow \Sigma F_y = 0: 4x - 3\text{ kN} - V = 0$$

$$V = (4x - 3)\text{ kN}$$

$$+\circlearrowleft \Sigma M_J = 0: M + (3\text{ kN})(x - 0.3) - (4x)\frac{x}{2} = 0$$

$$M = (2x^2 - 3x + 0.9)\text{ kN}\cdot\text{m}$$

FOR $x = 0.3\text{ m}: V_C = -1.8\text{ kN}, M_C = +0.18\text{ kN}\cdot\text{m}$

FOR $x = 0.75\text{ m}: V_E = 0, M_E = -0.225\text{ kN}\cdot\text{m}$

FOR $x = 1.2\text{ m}: V_D = +1.8\text{ kN}, M_D = +0.18\text{ kN}\cdot\text{m}$


FROM D TO B:

$$+\uparrow \Sigma F_y = 0: V + 4u = 0 \quad V = -(4u)\text{ kN}$$


$$+\circlearrowleft \Sigma M_J = 0: (4u)\frac{u}{2} - M = 0, M = 2u^2$$

FOR $u = 0: V_B = M_B = 0$

FOR $u = 0.3\text{ m}: V_D = -1.2\text{ kN}, M_D = +0.18\text{ kN}\cdot\text{m}$

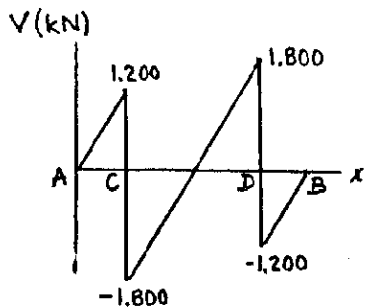


(b) $|V|_{\text{max}} = 1.800\text{ kN}$

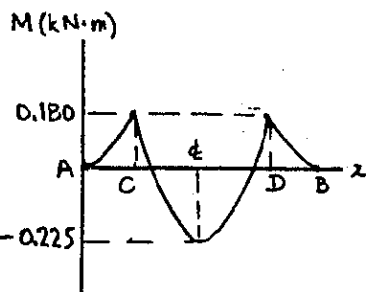

$|M|_{\text{max}} = 0.225\text{ kN}\cdot\text{m}$

7.44



GIVEN:

BEAM RESTING ON GROUND AND LOADED AS SHOWN ($a = 0.5\text{ m}$).

- (a) DRAW V AND M DIAGRAMS.
(b) DETERMINE $|V|_{\text{max}}$ AND $|M|_{\text{max}}$.

FREE BODY: ENTIRE BEAM

$$+\uparrow \Sigma F_y = 0: w_y(1.5\text{ m}) - 3\text{ kN} - 3\text{ kN} = 0$$

$$w_y = 4\text{ kN/m}$$

(a) SHEAR AND BENDING-MOMENT


FROM A TO C:

$$+\uparrow \Sigma F_y = 0: 4x - V = 0 \quad V = (4x)\text{ kN}$$

$$+\circlearrowleft \Sigma M_J = 0: M - (4x)\frac{x}{2} = 0, M = (2x^2)\text{ kN}\cdot\text{m}$$

FOR $x = 0: V_A = M_A = 0$

FOR $x = 0.5\text{ m}: V_C = 2\text{ kN}, M_C = 0.500\text{ kN}\cdot\text{m}$



FROM C TO D:

$$+\uparrow \Sigma F_y = 0: 4x - 3\text{ kN} - V = 0$$

$$V = (4x - 3)\text{ kN}$$

$$+\circlearrowleft \Sigma M_J = 0: M + (3\text{ kN})(x - 0.5) - (4x)\frac{x}{2} = 0$$

$$M = (2x^2 - 3x + 1.5)\text{ kN}\cdot\text{m}$$

FOR $x = 0.5\text{ m}: V_C = -1.00\text{ kN}, M_C = 0.500\text{ kN}\cdot\text{m}$

FOR $x = 0.75\text{ m}: V_E = 0, M_E = 0.375\text{ kN}\cdot\text{m}$

FOR $x = 1.0\text{ m}: V_D = 1.00\text{ kN}, M_D = 0.500\text{ kN}\cdot\text{m}$


FROM D TO B:

$$+\uparrow \Sigma F_y = 0: V + 4u = 0 \quad V = -(4u)\text{ kN}$$


$$+\circlearrowleft \Sigma M_J = 0: (4u)\frac{u}{2} - M = 0, M = 2u^2$$

FOR $u = 0: V_B = M_B = 0$

FOR $u = 0.5\text{ m}: V_D = -2\text{ kN}, M_D = 0.500\text{ kN}\cdot\text{m}$

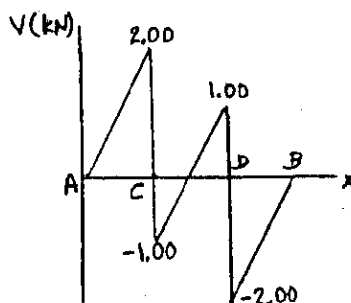


(b) $|V|_{\text{max}} = 2.00\text{ kN}$

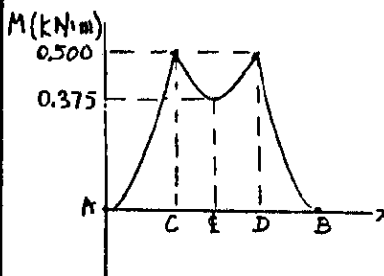


$|M|_{\text{max}} = 0.500\text{ kN}\cdot\text{m}$

7.47




GIVEN:
BEAM AND LOADING SHOWN WITH $P = wa$.
(A) DRAW V AND M DIAGRAMS.
(B) DETERMINE $|V|_{max}$ AND $|M|_{max}$.




FREE BODY: ENTIRE BEAM
 $\uparrow \sum F_y = 0:$
 $w_y(4a) - 2wa - wa = 0$
 $w_y = \frac{3}{4}w$

(a) SHEAR AND BENDING-MOMENT DIAGRAMS



FROM A TO C:
 $\uparrow \sum F_y = 0: \frac{3}{4}wx - wx - V = 0, V = -\frac{1}{4}wx$
 $\uparrow \sum M_J = 0: M + (wx)\frac{x}{2} - (\frac{3}{4}wx)\frac{x}{2} = 0$
 $M = -\frac{1}{8}wx^2$


FOR $x=0: V_A = M_A = 0$
FOR $x=a: V_C = -\frac{1}{4}wa, M_C = -\frac{1}{8}wa^2$



FROM C TO D:
 $\uparrow \sum F_y = 0: \frac{3}{4}wx - wa - V = 0$
 $V = (\frac{3}{4}x - a)w$
 $\uparrow \sum M_J = 0:$
 $M + wa(x - \frac{a}{2}) - \frac{3}{4}wx(\frac{x}{2}) = 0$
 $M = \frac{3}{8}wx^2 - wa(x - \frac{a}{2})$ (1)


FOR $x=a: V_C = -\frac{1}{4}wa, M_C = -\frac{1}{8}wa^2$
FOR $x=2a: V_D = +\frac{1}{2}wa, M_D = 0$

BECAUSE OF THE SYMMETRY OF THE LOADING, WE CAN DERIVE THE VALUES OF V AND M FOR THE RIGHT-HAND HALF OF THE BEAM FROM THE VALUES OBTAINED FOR ITS LEFT-HAND HALF.




(b) $|V|_{max} = \frac{1}{2}wa$

TO FIND $|M|_{max}$, WE DIFFERENTIATE EQ.(1) AND SET $\frac{dM}{dx} = 0:$
 $\frac{dM}{dx} = \frac{3}{4}wx - wa = 0, x = \frac{4}{3}a, M = \frac{3}{8}w(\frac{4}{3}a)^2 - wa(\frac{4}{3}a - \frac{a}{2}) = -\frac{wa^2}{6}$
 $|M|_{max} = \frac{1}{6}wa^2$

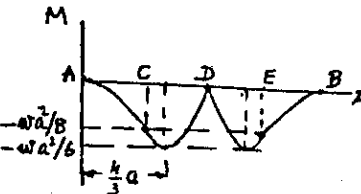


B.M. DIAGRAM CONSISTS OF FOUR DISTINCT ARCS OF PARABOLA.

7.48




GIVEN:
BEAM AND LOADING SHOWN WITH $P = 3wa$.
(A) DRAW V AND M DIAGRAMS.
(B) DETERMINE $|V|_{max}$ AND $|M|_{max}$.




FREE BODY: ENTIRE BEAM
 $\uparrow \sum F_y = 0:$
 $w_y(4a) - 2wa - 3wa = 0$
 $w_y = \frac{5}{4}w$

(a) SHEAR AND BENDING-MOMENT DIAGRAMS



FROM A TO C:
 $\uparrow \sum F_y = 0: \frac{5}{4}wx - wx - V = 0, V = +\frac{1}{4}wx$
 $\uparrow \sum M_J = 0: M + (wx)\frac{x}{2} - (\frac{5}{4}wx)\frac{x}{2} = 0$
 $M = +\frac{1}{8}wx^2$


FOR $x=0: V_A = M_A = 0$
FOR $x=a: V_C = +\frac{1}{4}wa, M_C = +\frac{1}{8}wa^2$



FROM C TO D:
 $\uparrow \sum F_y = 0: \frac{5}{4}wx - wa - V = 0$
 $V = (\frac{5}{4}x - a)w$
 $\uparrow \sum M_J = 0:$
 $M + wa(x - \frac{a}{2}) - \frac{5}{4}wx(\frac{x}{2}) = 0$
 $M = \frac{5}{8}wx^2 - wa(x - \frac{a}{2})$ (1)


FOR $x=a: V_C = +\frac{1}{4}wa, M_C = +\frac{1}{8}wa^2$
FOR $x=2a: V_D = +\frac{3}{2}wa, M_D = +wa^2$

BECAUSE OF THE SYMMETRY OF THE LOADING, WE CAN DERIVE THE VALUES OF V AND M FOR THE RIGHT-HAND HALF OF THE BEAM FROM THE VALUES OBTAINED FOR ITS LEFT-HAND HALF.

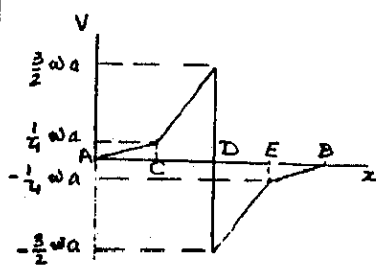


(b) $|V|_{max} = \frac{3}{2}wa$

TO FIND $|M|_{max}$, WE DIFFERENTIATE EQ.(1) AND SET $\frac{dM}{dx} = 0:$
 $\frac{dM}{dx} = \frac{5}{4}wx - wa = 0, x = \frac{4}{5}a < a$ (OUTSIDE PORTION CD)
THE MAX. VALUE OF $|M|$ OCCURS AT D;
 $|M|_{max} = wa^2$

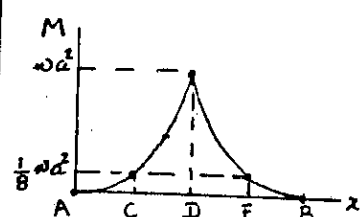

B.M. DIAGRAM CONSISTS OF FOUR DISTINCT ARCS OF PARABOLA.

7.45




GIVEN:
 BEAM RESTING ON GROUND AND LOADED AS SHOWN.
 (a) DRAW V AND M DIAGRAMS.
 (b) DETERMINE $|V|_{max}$ AND $|M|_{max}$.

FREE BODY: ENTIRE BEAM

$+\uparrow \Sigma F_y = 0:$
 $\frac{w}{2}(12 \text{ ft}) - (3 \text{ kips/ft})(6 \text{ ft}) = 0$
 $w = 1.5 \text{ kips/ft} \triangleleft$

(a) **SHEAR AND BM DIAGRAMS**
FROM A TO C:



$+\uparrow \Sigma F_y = 0: 1.5x - V = 0 \quad V = (1.5x) \text{ kips}$
 $+\circlearrowleft \Sigma M_J = 0: M - (1.5x)\frac{x}{2} \quad M = (0.75x^2) \text{ kip}\cdot\text{ft}$

$(1.5 \text{ kips/ft})x$

FOR $x = 0: V_A = M_A = 0$
 FOR $x = 3 \text{ ft}: V_C = 4.5 \text{ kips}, M_C = 6.75 \text{ kip}\cdot\text{ft} \triangleleft$


$(3 \text{ kips/ft})(x-3) = \frac{3(x-3)^2}{2}$

FROM C TO D:


$+\uparrow \Sigma F_y = 0: 1.5x - 3(x-3) - V = 0$
 $V = (9 - 1.5x) \text{ kips}$
 $+\circlearrowleft \Sigma M_J = 0:$
 $M + 3(x-3)\frac{x-3}{2} - (1.5x)\frac{x}{2} = 0$
 $M = [0.75x^2 - 1.5(x-3)^2] \text{ kip}\cdot\text{ft}$

FOR $x = 3 \text{ ft}: V_C = 4.5 \text{ kips}, M_C = 6.75 \text{ kip}\cdot\text{ft}$
 FOR $x = 6 \text{ ft}: V_D = 0, M_D = 13.50 \text{ kip}\cdot\text{ft}$
 FOR $x = 9 \text{ ft}: V_B = -4.5 \text{ kips}, M_B = 6.75 \text{ kip}\cdot\text{ft}$

AT B: $V_B = M_B = 0$

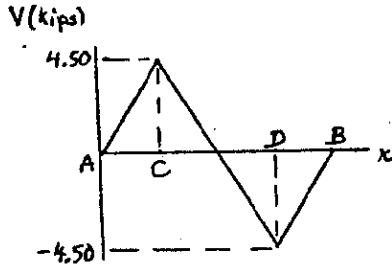

(b) $|V|_{max} = 4.50 \text{ kips} \triangleleft$

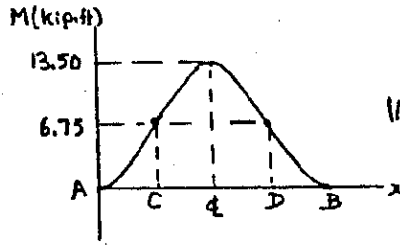


$|M|_{max} = 13.50 \text{ kip}\cdot\text{ft} \triangleleft$

B.M. DIAGRAM CONSISTS OF THREE DISTINCT ARCS OF PARABOLA, ALL LOCATED ABOVE THE X AXIS.

THUS: $M \geq 0$ EVERYWHERE \triangleleft


7.46




GIVEN:
 BEAM RESTING ON GROUND AND LOADED AS SHOWN.
 (a) DRAW V AND M DIAGRAMS.
 (b) DETERMINE $|V|_{max}$ AND $|M|_{max}$.

FREE BODY: ENTIRE BEAM

$+\uparrow \Sigma F_y = 0:$
 $\frac{w}{2}(12 \text{ ft}) - (3 \text{ kips/ft})(6 \text{ ft}) = 0$
 $w = 1.5 \text{ kips/ft} \triangleleft$




(a) **SHEAR AND BENDING-MOMENT DIAGRAMS:**
FROM A TO C:



$+\uparrow \Sigma F_y = 0: 1.5x - 3x - V = 0 \quad V = (-1.5x) \text{ kips}$
 $+\circlearrowleft \Sigma M_J = 0: M + (3x)\frac{x}{2} - (1.5x)\frac{x}{2} = 0$
 $M = (-0.75x^2) \text{ kip}\cdot\text{ft}$

FOR $x = 0: V_A = M_A = 0$
 FOR $x = 3 \text{ ft}: V_C = -4.5 \text{ kips}, M_C = -6.75 \text{ kip}\cdot\text{ft} \triangleleft$


FROM C TO D:



$+\uparrow \Sigma F_y = 0: 1.5x - 9 - V = 0, \quad V = (1.5x - 9) \text{ kips}$
 $+\circlearrowleft \Sigma M_J = 0:$
 $M + 9(x-1.5) - (1.5x)\frac{x}{2} = 0$
 $M = 0.75x^2 - 9x + 13.5$


FOR $x = 3 \text{ ft}: V_C = -4.5 \text{ kips}, M_C = -6.75 \text{ kip}\cdot\text{ft}$
 FOR $x = 6 \text{ ft}: V_D = 0, M_D = -13.50 \text{ kip}\cdot\text{ft}$
 FOR $x = 9 \text{ ft}: V_B = 4.5 \text{ kips}, M_B = -6.75 \text{ kip}\cdot\text{ft}$

AT B: $V_B = M_B = 0$



(b) $|V|_{max} = 4.50 \text{ kips} \triangleleft$

B.M. DIAGRAM CONSISTS OF THREE DISTINCT ARCS OF PARABOLA.

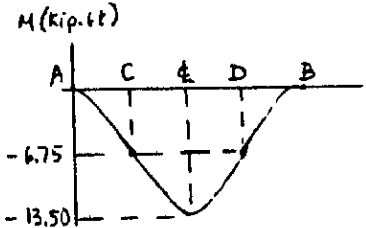


$|M|_{max} = 13.50 \text{ kip}\cdot\text{ft} \triangleleft$

SINCE ENTIRE DIAGRAM IS BELOW THE X AXIS:


$M \leq 0$ EVERYWHERE \triangleleft

ONDING SH...
 M DIAGRAM...
 ENTIRE BEAM...
 $2 - 3w_2 = 0$
 $w_2 = \frac{3}{4}w$
 $= \frac{1}{4}wx$
 $\frac{1}{2} = 0$
 wx^2
 a^2
 $= 0$
 $a) w$
 $= 0$
 $(2 - \frac{a}{2})$
 a^2
 WE CAN DETERM...
 LF OF THE...
 T-HAND HALF...
 $\frac{dM}{dx} = 0$
 (ON CD)




GIVEN:
 BEAM AND LOADING SHOWN.
 DRAW V AND M DIAGRAMS AND
 DETERMINE V AND M
 (a) JUST TO THE LEFT OF C.
 (b) JUST TO THE RIGHT OF C

FREE BODY: ENTIRE BEAM



$\sum M_A = 0:$
 $B(0.6\text{ m}) - (600\text{ N})(0.2\text{ m}) = 0$
 $B = 200\text{ N}$
 $\sum F_x = 0: A_x = 0$
 $\sum F_y = 0: A_y - 600\text{ N} + 200\text{ N} = 0$
 $A_y = 400\text{ N}$

WE REPLACE THE 600-N LOAD BY AN EQUIVALENT FORCE-COUPLE SYSTEM AT C



JUST TO THE RIGHT OF A:

$V_1 = +400\text{ N}, M_1 = 0$

(a) JUST TO THE LEFT OF C:


$V_2 = +400\text{ N}$
 $M_2 = (400\text{ N})(0.4\text{ m}) = 160.0\text{ N}\cdot\text{m}$

(b) JUST TO THE RIGHT OF C:

$V_3 = -200\text{ N}$
 $M_3 = (200\text{ N})(0.2\text{ m}) = 40.0\text{ N}\cdot\text{m}$


JUST TO THE LEFT OF B:

$V_4 = -200\text{ N}, M_4 = 0$

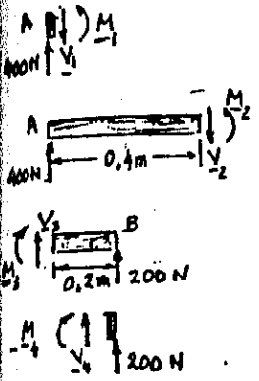

7.50 CONTINUED

WE REPLACE THE FORCES AT D AND E BY EQUIVALENT FORCE-COUPLE SYSTEMS AT F AND H, WHERE

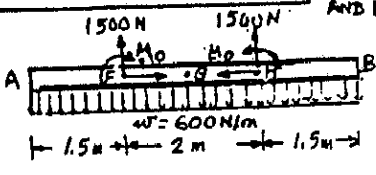


$M_0 = (1.5\text{ kN}\tan\theta)(0.5\text{ m}) = (750\text{ N/m})\tan\theta$


WE NOTE THAT THE WEIGHT OF THE BEAM PER UNIT LENGTH IS

$w = \frac{W}{L} = \frac{3\text{ kN}}{5\text{ m}} = 0.6\text{ kN/m} = 600\text{ N/m}$

(a) SHEAR AND BENDING-MOMENT DIAGRAMS




FROM A TO F:
 $\sum F_y = 0: -V - 600x = 0 \Rightarrow V = -(600x)\text{ N}$
 $\sum M_F = 0: M + (600x)\frac{x}{2} = 0 \Rightarrow M = (-300x^2)\text{ N}\cdot\text{m}$
 FOR $x = 0: V_A = M_A = 0$
 FOR $x = 1.5\text{ m}: V_F = -900\text{ N}, M_F = -675\text{ N}\cdot\text{m}$




FROM F TO H:
 $\sum F_y = 0: 1500 - 600x - V = 0 \Rightarrow V = (1500 - 600x)\text{ N}$
 $\sum M_H = 0: M + (600x)\frac{x}{2} - 1500(x - 1.5) - M_0 = 0$
 $M = M_0 - 300x^2 + 1500(x - 1.5)\text{ N}\cdot\text{m}$
 FOR $x = 1.5\text{ m}: V_F = +600\text{ N}, M_F = (M_0 - 675)\text{ N}\cdot\text{m}$
 FOR $x = 2.5\text{ m}: V_H = 0, M_H = (M_0 - 375)\text{ N}\cdot\text{m}$


FROM G TO B, THE V AND M DIAGRAMS WILL BE OBTAINED BY SYMMETRY,

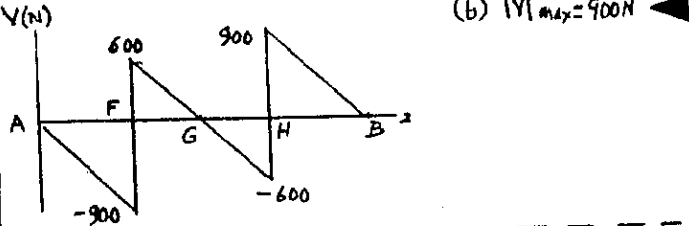

RECALLING THAT $\theta = 30^\circ$, EQ. (2) YIELDS $M_0 = 433\text{ N}\cdot\text{m}$
 THUS: JUST TO THE RIGHT OF F: $M = 433 - 675 = -242\text{ N}\cdot\text{m}$
 AND $M_G = 433 - 375 = +58.0\text{ N}\cdot\text{m}$




7.50

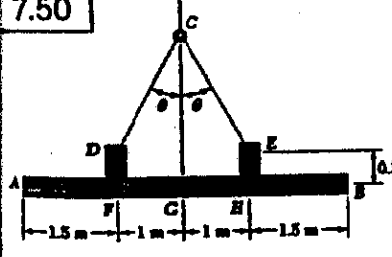

GIVEN:
 STRUCTURAL MEMBER CONSISTING OF 3-kN BEAM AB AND TWO CHANNELS OF NEGLIGIBLE WEIGHT IS LIFTED WITH $\theta = 30^\circ$.
 (a) DRAW V AND M DIAGRAMS
 (b) DETERMINE $|V|_{max}$ AND $|M|_{max}$

FREE BODY: BEAM AND CHANNELS

FROM SYMMETRY:
 $E_y = D_y$
 THUS:
 $E_x = D_x = D_y \tan\theta$ (1)

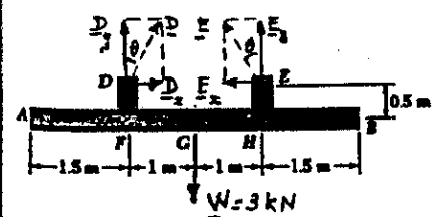


$\sum F_y = 0: D_y + E_y - 3\text{ kN} = 0$
 $D_y = E_y = 1.5\text{ kN}$
 FROM (1): $D_x = (1.5\text{ kN})\tan\theta \rightarrow, E_x = (1.5\text{ kN})\tan\theta \rightarrow$

(CONTINUED)


7.51

SOLVE PROB. 7.50 WHEN $\theta = 60^\circ$.

SEE SOLUTION OF PROB. 7.50 UP TO DASHED LINE (INCLUDING SHEAR DIAGRAM).
 MAKING $\theta = 60^\circ$ IN EQ. (2): $M_0 = 750 \tan 60^\circ = 1299\text{ N}\cdot\text{m}$
 THUS, JUST TO THE RIGHT OF F: $M = 1299 - 675 = 624\text{ N}\cdot\text{m}$
 AND $M_G = 1299 - 375 = 924\text{ N}\cdot\text{m}$

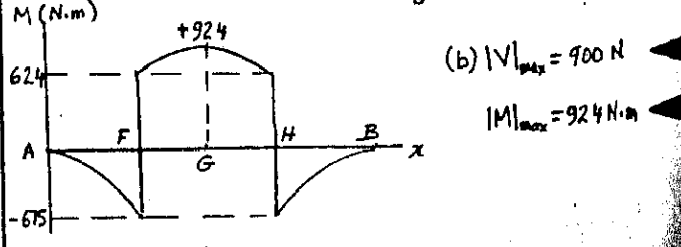

7.52




GIVEN:
BEAM AND LOADING SHOWN
DRAW V AND M DIAGRAMS
DETERMINE $|V|_{max}$ AND $|M|_{max}$



FREE BODY: ENTIRE BEAM

$$\begin{aligned} +) \sum M_A = 0: & B(0.9\text{ m}) - (400\text{ N})(0.3\text{ m}) \\ & - (400\text{ N})(0.6\text{ m}) - (400\text{ N})(0.9\text{ m}) = 0 \\ B = +800\text{ N} & \quad B = 800\text{ N} \uparrow \\ \sum F_x = 0: & A_x = 0 \\ +) \sum F_y = 0: & A_y + 800\text{ N} - 3(400\text{ N}) = 0 \\ A_y = +400\text{ N} & \quad A = 400\text{ N} \uparrow \end{aligned}$$


WE REPLACE THE LOADS BY EQUIVALENT FORCE-COUPLE SYSTEMS AT C, D, AND E.

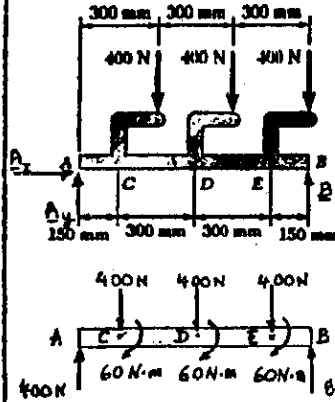

WE CONSIDER SUCCESSIVELY THE FOLLOWING F-B DIAGRAMS

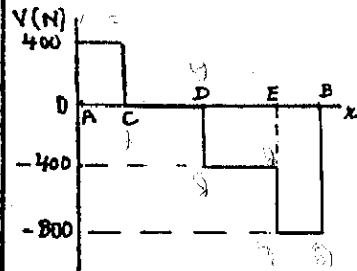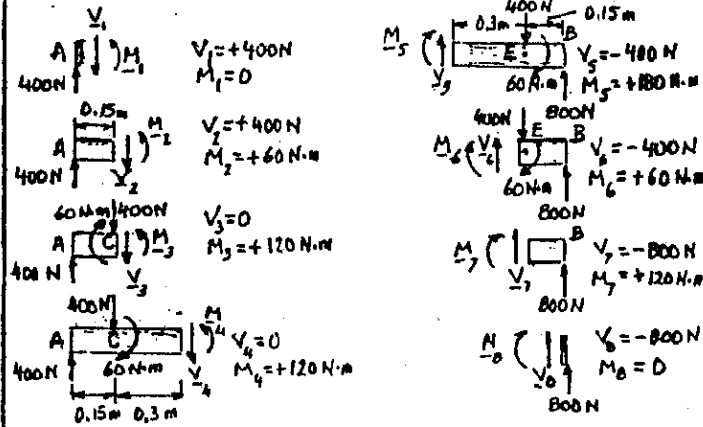


(b) $|V|_{max} = 800\text{ N}$

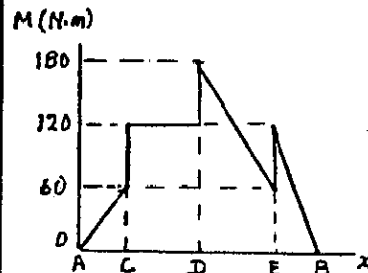

$|M|_{max} = 180.0\text{ N}\cdot\text{m}$

7.53

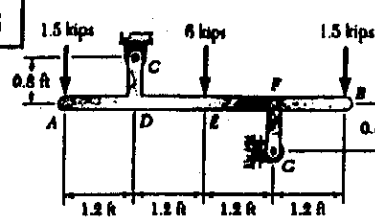


GIVEN: BEAM AND LOADING SHOWN
DRAW V AND M DIAGRAMS
DETERMINE $|V|_{max}$ AND $|M|_{max}$


FREE BODY: ENTIRE BEAM

$$\begin{aligned} +) \sum M_C = 0: & (1.5\text{ kips})(1.2\text{ ft}) \\ & - (6\text{ kips})(1.2\text{ ft}) + G(1.6\text{ ft}) \\ & - (1.5\text{ kips})(3.6\text{ ft}) = 0 \\ G = 6.75\text{ kips} & \rightarrow \\ \pm \sum F_x = 0: & C_x + 6.75\text{ kips} = 0 \\ C_x = 6.75\text{ kips} & \leftarrow \\ +) \sum F_y = 0: & C_y - 1.5 - 6 - 1.5 = 0 \\ C_y = 9.00\text{ kips} & \uparrow \end{aligned}$$


WE REPLACE THE REACTIONS BY EQUIVALENT FORCE-COUPLE SYSTEMS AT D AND F.

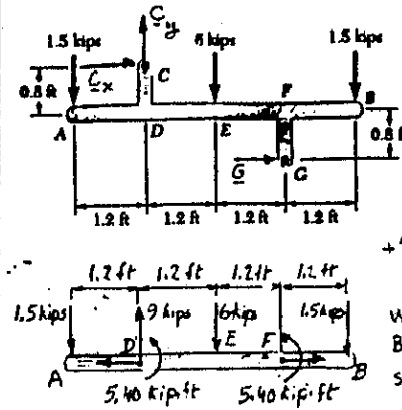


WE CONSIDER SUCCESSIVELY THE FOLLOWING F-B DIAGRAMS

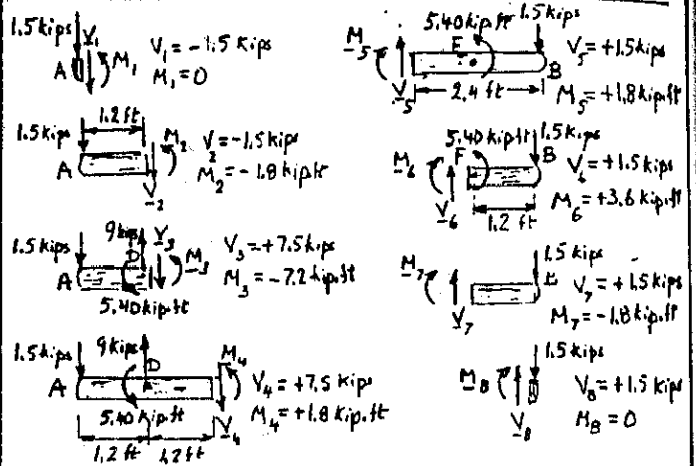

(AXIAL FORCES HAVE BEEN OMITTED FROM F-B DIAGRAM)

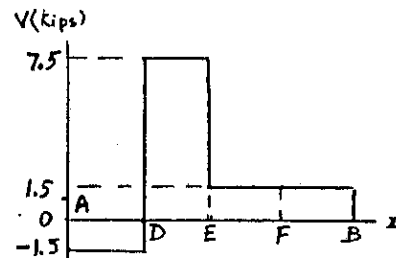


$|V|_{max} = 7.50\text{ kips}$

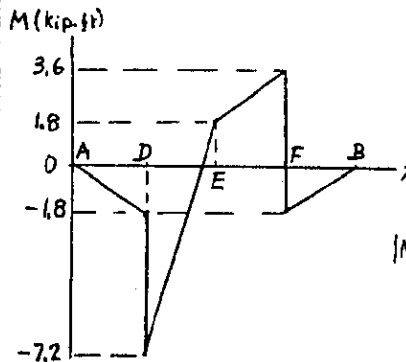


$|M|_{max} = 7.20\text{ kip}\cdot\text{ft}$


7.54

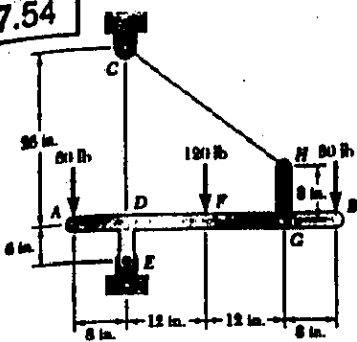

GIVEN:
BEAM AND LOADING SHOWN
DRAW V AND M DIAGRAMS
DETERMINE $|V|_{max}$ AND $|M|_{max}$.


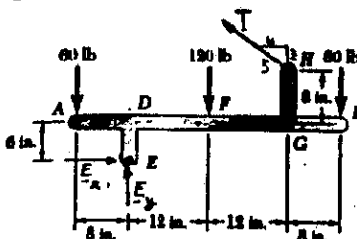


FREE BODY: ENTIRE BEAM
 $\rightarrow \sum M_E = 0: (60 \text{ lb})(8 \text{ in.}) - (120 \text{ lb})(12 \text{ in.}) - (60 \text{ lb})(32 \text{ in.}) + (\frac{4}{3}T)(14 \text{ in.}) + (\frac{2}{3}T)(24 \text{ in.}) = 0$
 $T = 112.5 \text{ lb}$
 $\pm \sum F_x = 0: E_2 - \frac{4}{3}(112.5 \text{ lb}) = 0$
 $E_2 = 90.0 \text{ lb}$




WE REPLACE THE REACTIONS AT E AND H BY EQUIVALENT FORCE-COUPLE SYSTEMS AT D AND G, RESPECTIVELY.

WE CONSIDER SUCCESSIVELY THE FOLLOWING F-B DIAGRAMS

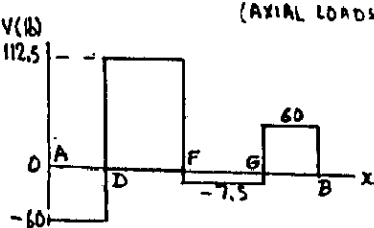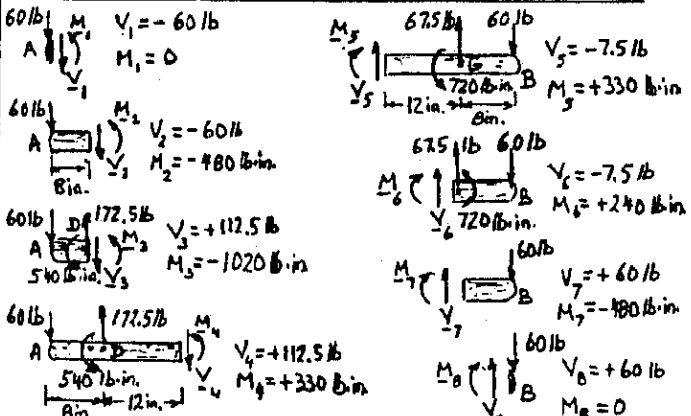

$|V|_{max} = 112.5 \text{ lb}$

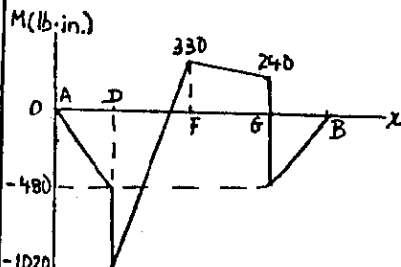


$|M|_{max} = 1020 \text{ lb-in.}$


7.55

GIVEN: STRUCTURAL MEMBER OF PROB. 7.50.
FIND: (a) ANGLE θ FOR WHICH $|M|_{max}$ IS AS SMALL AS POSSIBLE
(b) CORRESPONDING VALUE OF $|M|_{max}$.


SEE SOLUTION OF PROB. 7.50 FOR REDUCTION OF LOADING ON BEAM AB TO THE FOLLOWING:




WHERE
 $M_D = (750 \text{ N}\cdot\text{m}) \tan \theta$
 [EQUATION (2)]



THE LARGEST NEGATIVE B.M. OCCURS JUST TO THE LEFT OF F:

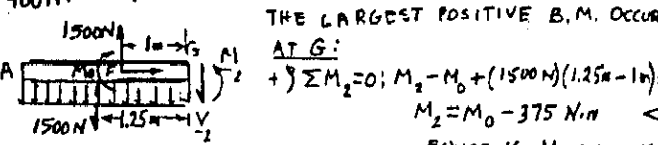


THE LARGEST POSITIVE B.M. OCCURS AT G:

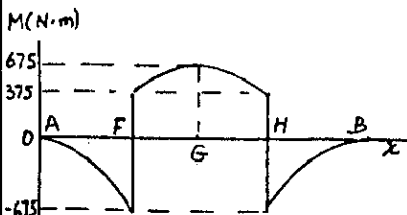

$\rightarrow \sum M_1 = 0: M_1 + (900 \text{ N})(\frac{1.5 \text{ m}}{2}) = 0, M_1 = -675 \text{ N}\cdot\text{m}$
 $\rightarrow \sum M_2 = 0: M_2 - M_D + (1500 \text{ N})(1.25 \text{ m} - 1 \text{ m}) = 0$
 $M_2 = M_D - 375 \text{ N}\cdot\text{m}$
 EQUATING M_2 AND $-M_1$:
 $M_D - 375 = +675$
 $M_D = 1050 \text{ N}\cdot\text{m}$
 FROM EQ. (2):
 $\tan \theta = \frac{1050}{750} = 1.400$
 (a) $\theta = 54.5^\circ$
 (b) $|M|_{max} = 675 \text{ N}\cdot\text{m}$


7.56




GIVEN: BEAM RESTING ON GROUND AND LOADED AS SHOWN.
FIND: (a) DISTANCE a FOR WHICH $|M|_{max}$ IS AS SMALL AS POSSIBLE
(b) CORRESPONDING VALUE OF $|M|_{max}$.

FORCE PER UNIT LENGTH EXERTED BY GROUND:

$w_g = \frac{6 \text{ kN}}{1.5 \text{ m}} = 4 \text{ kN/m}$




THE LARGEST POSITIVE B.M. OCCURS JUST TO THE LEFT OF C:




THE LARGEST NEGATIVE B.M. OCCURS AT THE CENTER LINE:

$\rightarrow \sum M_1 = 0: M_1 = (4a) \frac{a}{2}, M_1 = 2a^2$
 $\rightarrow \sum M_2 = 0: M_2 + 3(0.75 - a) - 3(0.375) = 0$
 $M_2 = -(1.125 - 3a)$
 EQUATING M_1 AND $-M_2$:
 $2a^2 = 1.125 - 3a$
 $a^2 + 1.5a - 0.5625 = 0$

(a) SOLVING THE QUADRATIC EQ.: $a = 0.31066, a = 0.311 \text{ m}$
 (b) SUBSTITUTING: $|M|_{max} = M_1 = 2(0.31066)^2, |M|_{max} = 193.0 \text{ N}\cdot\text{m}$

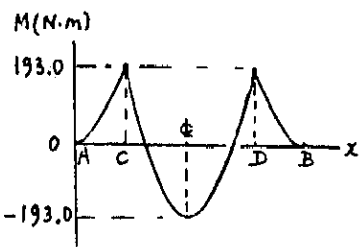

7.57



GIVEN:

BEAM AND LOADING SHOWN

FIND:

- (a) VALUE OF P FOR WHICH $|M|_{max}$ IS AS SMALL AS POSSIBLE
- (b) CORRESPONDING VALUE OF $|M|_{max}$.

FREE BODY: ENTIRE BEAM
BECAUSE OF SYMMETRY OF BEAM AND LOADING, WE HAVE

$$A = B = (60 \text{ kips} - P) \uparrow$$

LARGEST POSITIVE B.M. OCCURS AT C:

$$+\sum M_C = 0: M_C - (60 - P)(2.4) = 0$$

$$M_C = 120 - 2P \quad (1)$$

LARGEST NEGATIVE B.M. OCCURS AT CENTERLINE:

$$+\sum M_E = 0: M_E + (60)(3) - (60 - P)(5) - P(1) = 0$$

$$M_E = 120 - 4P$$

(a) EQUATING M_C AND $-M_E$:


$$120 - 2P = -(120 - 4P)$$

$$6P = 240, P = 40.0 \text{ kips}$$

(b) SUBSTITUTING INTO (1):

$$|M|_{max} = M_C = 120 - 2(40)$$

$$|M|_{max} = 40 \text{ kip}\cdot\text{ft}$$

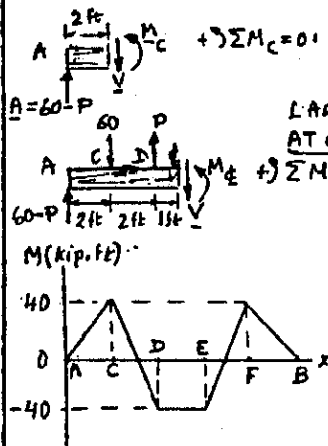

7.58 CONTINUED

MAXIMUM VALUE OF B.M. OCCURS AT D

$$+\sum M_D = 0: M_D + wa(\frac{3a}{2}) - (2\alpha wa)a = 0$$

$$M_{max} = M_D = wa^2(2\alpha - \frac{3}{2}) \quad (5)$$

EQUATING $-M_{min}$ AND M_{max} :

$$wa^2 \frac{1-\alpha}{2\alpha} = wa^2(2\alpha - \frac{3}{2})$$

$$4\alpha^2 - 2\alpha - 1 = 0$$

$$\alpha = \frac{2 + \sqrt{20}}{4} = 0.809$$

(a) SUBSTITUTE IN (2): $k = 4(0.809) - 2 \quad k = 1.236$

(b) SUBSTITUTE FOR α IN (5):

$$|M|_{max} = -M_{min} = wa^2 \frac{1-0.809}{2(0.809)}$$


$$|M|_{max} = 0.1180wa^2$$

SUBSTITUTE FOR x IN (4):

$$x_{min} = \frac{a}{0.809} = 1.236a$$

B.M. DIAGRAM CONSISTS OF 4 ARCS OF PARABOLA.
COMPARE THIS DIAGRAM WITH THOSE OF PROB. 7.47 AND 7.48

7.59

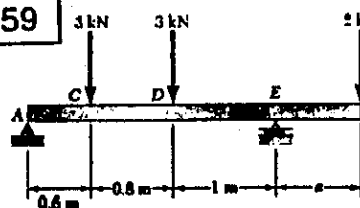

GIVEN: BEAM AND LOADING SHOWN.

FIND:

- (a) DISTANCE a FOR WHICH $|M|_{max}$ IS AS SMALL AS POSSIBLE
- (b) CORRESPONDING VALUE OF $|M|_{max}$.

FREE BODY: ENTIRE BEAM

$$\sum F_y = 0: A_y = 0$$

$$+\sum M_E = 0: A_y(L) + (3)(1.8) + 3(1) - (2)a = 0$$

$$A_y = 3.5 \text{ kN} - \frac{5}{6}a$$

$$A = 3.5 \text{ kN} - \frac{5}{6}a \uparrow$$

FREE BODY: AC

$$+\sum M_C = 0: M_C - (3.5 - \frac{5}{6}a)(0.6) = 0, M_C = 2.1 - \frac{a}{2}$$

FREE BODY: AD

$$+\sum M_D = 0: M_D - (3.5 - \frac{5}{6}a)(1.4) + (3 \text{ kN})(0.8) = 0$$

$$M_D = 2.5 - \frac{7}{6}a$$

FREE BODY: EB

$$+\sum M_E = 0: -M_E - (2 \text{ kN})a = 0$$

$$M_E = -2a$$

WE SHALL ASSUME THAT $M_C > M_D$ AND, THUS, THAT $M_{max} = M_C$.

WE SET $M_{max} = |M_{min}|$ OR $M_C = |M_E|$:

$$2.1 - \frac{a}{2} = 2a \quad a = 0.840 \text{ m}$$

$$|M|_{max} = M_C = |M_E| = 2a = 2(0.840)$$

$$|M|_{max} = 1.680 \text{ N}\cdot\text{m}$$

WE MUST CHECK OUR ASSUMPTION.


$$M_D = 2.5 - \frac{7}{6}(0.840) = 1.520 \text{ N}\cdot\text{m}$$

THUS, $M_C > M_D, 0, k$


THE ANSWERS ARE

(a) $a = 0.840 \text{ m}$

(b) $|M|_{max} = 1.680 \text{ N}\cdot\text{m}$

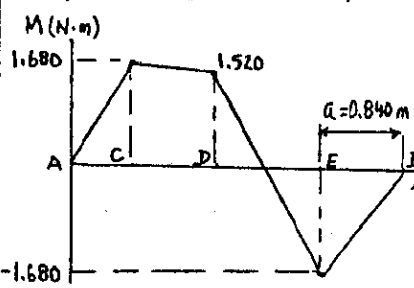

7.58



GIVEN:

BEAM AND LOADING SHOWN (SAME AS FOR PROBS 7.47 & 7.48)

FIND:

- (a) RATIO $k = P/wa$ FOR WHICH $|M|_{max}$ IS AS SMALL AS POSSIBLE
- (b) CORRESPONDING VALUE OF $|M|_{max}$.

FREE BODY: ENTIRE BEAM

$$+\sum F_y = 0: w(4a) - 2wa - kwa = 0$$

$$w_g = \frac{w}{4}(2+k)$$

SETTING $w_g/w = \alpha$ (1)

WE HAVE $k = 4\alpha - 2$ (2)

MINIMUM VALUE OF B.M. FOR M TO HAVE NEGATIVE VALUES, WE JUST HAVE $w_g < w$. WE VERIFY THAT M WILL THEN BE NEGATIVE AND KEEP DECREASING IN THE PORTION AC OF THE BEAM. THEREFORE, M_{min} WILL OCCUR BETWEEN C AND D.

FROM C TO D:

$$+\sum M_D = 0: M + wa(x - \frac{a}{2}) - \alpha w x(\frac{x}{2}) = 0$$

$$M = \frac{1}{2}w(\alpha x^2 - 2ax + a^2) \quad (3)$$

WE DIFFERENTIATE AND SET $\frac{dM}{dx} = 0$:


$$\alpha x - a = 0 \quad x_{min} = \frac{a}{\alpha} \quad (4)$$

SUBSTITUTING IN (3):


$$M_{min} = \frac{1}{2}wa^2(\frac{1}{\alpha} - \frac{2}{\alpha} + 1)$$

$$M_{min} = -\frac{1}{2}wa^2 \frac{1-\alpha}{2\alpha} \quad (5)$$


(CONTINUED)



7.60




GIVEN: BEAM SHOWN WITH $P = Q = 150 \text{ lb}$.
FIND: (a) DISTANCE a FOR WHICH $|M|_{\text{max}}$ IS AS SMALL AS POSSIBLE
 (b) CORRESPONDING VALUE OF $|M|_{\text{max}}$.

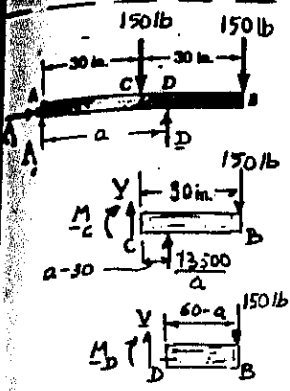


FREE BODY: ENTIRE BEAM
 $\sum M_A = 0; D \cdot a - (150)(30) - (150)(60) = 0$
 $D = \frac{13500}{a}$

FREE BODY: C B
 $\sum M_C = 0; -M_C - (150)(30) + \frac{13500}{a}(a-30) = 0$
 $M_C = 9000(1 - \frac{30}{a})$


FREE BODY: D B
 $\sum M_D = 0; -M_D - (150)(60-a) = 0$
 $M_D = -150(60-a)$

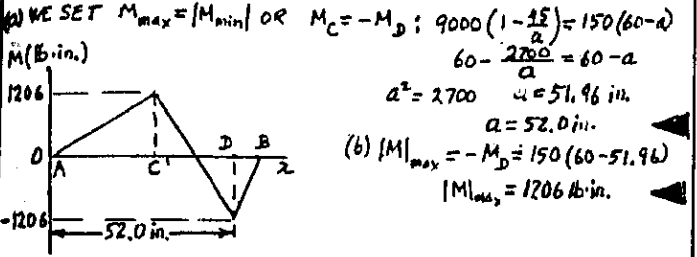

7.61




GIVEN: BEAM SHOWN WITH $P = 300 \text{ lb}$ AND $Q = 150 \text{ lb}$.
FIND: DISTANCE a FOR WHICH $|M|_{\text{max}}$ IS AS SMALL AS POSSIBLE
 (b) CORRESPONDING VALUE OF $|M|_{\text{max}}$.

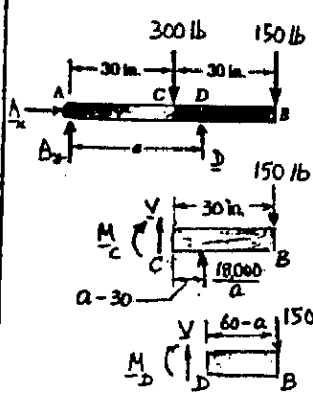


FREE BODY: ENTIRE BEAM
 $\sum M_A = 0; D \cdot a - (300)(30) - (150)(60) = 0$
 $D = \frac{18000}{a}$

FREE BODY: C B
 $\sum M_C = 0; -M_C - (150)(30) + \frac{18000}{a}(a-30) = 0$
 $M_C = 13,500(1 - \frac{30}{a})$


FREE BODY: D B
 $\sum M_D = 0; -M_D - (150)(60-a) = 0$
 $M_D = -150(60-a)$

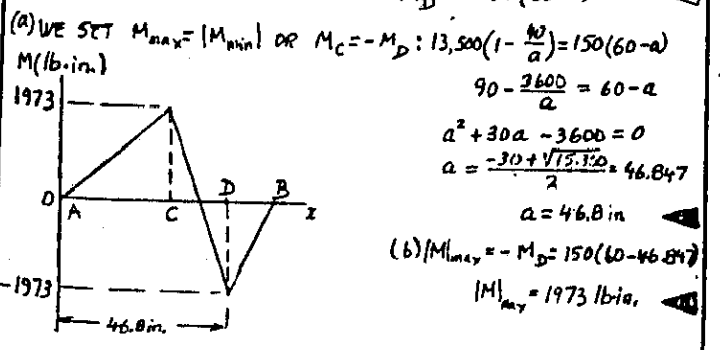

7.62

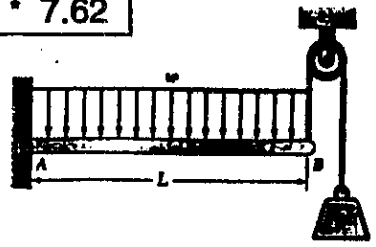

GIVEN: BEAM WITH COUNTERWEIGHT
FIND: W FOR WHICH $|M|_{\text{max}}$ IS AS SMALL AS POSSIBLE AND CORRESPONDING $|M|_{\text{max}}$.
CONSIDER FOLLOWING CASES:
 (a) LOAD w PERMANENTLY APPLIED TO BEAM
 (b) LOAD w MAY BE APPLIED OR REMOVED

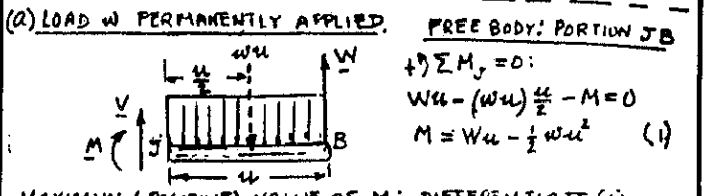

MAXIMUM (POSITIVE) VALUE OF M : DIFFERENTIATE (1) AND SET $dM/dL = 0$:
 $\frac{dM}{dL} = W - wL = 0 \quad L_m = \frac{W}{w}$ (2)

SUBSTITUTE INTO EQ. (1):
 $M_{\text{max}} = W(\frac{W}{w}) - \frac{1}{2} w(\frac{W}{w})^2 \quad M_{\text{max}} = \frac{1}{2} \frac{W^2}{w}$ (3)


LARGEST NEGATIVE VALUE OF M OCCURS AT A
 SETTING $L = L$ IN EQ. (1): $M_A = WL - \frac{1}{2} wL^2$ (4)

SETTING $M_{\text{max}} = |M_{\text{min}}|$, OR $M_{\text{max}} = -M_A$:
 $\frac{1}{2} \frac{W^2}{w} = -WL + \frac{1}{2} wL^2$
 $W^2 + 2wLW - w^2L^2 = 0 \quad W = \frac{-2wL + \sqrt{4w^2L^2 + 2w^2L^2}}{2} = (\sqrt{2}-1)wL$
 $W = 0.4142wL, \quad W = 0.414wL$

CARRYING INTO (2) AND (4): $L_m = 0.414L$ (FROM B)

$|M|_{\text{max}} = -M_A = -(0.4142wL^2 - 0.5wL^2)$
 $|M|_{\text{max}} = 0.0858wL^2$

(b) LOAD w MAY BE APPLIED OR REMOVED
 WITH NO LOAD w : M_{max} OCCURS AT A:
 $M_{\text{max}} = M_A = WL$ (5)



WE MUST CONSIDER THE FOLLOWING POSSIBILITIES:
 (SUB 'w' MEANS THAT LOAD w IS APPLIED; SUB 'NL', THAT IT IS NOT)

① $(M_{\text{max}})_{NL} = (M_{\text{max}})_w$ OR $WL = \frac{1}{2} \frac{W^2}{w} \quad W = 2wL$

WITH THIS VALUE OF W , WE HAVE
 $|M|_{\text{max}} = WL = (2wL)L = 2wL^2$

② $(M_{\text{max}})_{NL} = |M_{\text{min}}|_w$ OR $(M_A)_{NL} = -(M_A)_w$
 $WL = -(WL - \frac{1}{2} wL^2)$
 $2WL = \frac{1}{2} wL^2 \quad W = 0.250wL$


WITH THIS VALUE OF W , WE HAVE
 $|M|_{\text{max}} = WL = (0.250wL)L = 0.250wL^2$

THE COUNTERWEIGHT, THEREFORE, SHOULD BE

$W = 0.250wL$

WITH $|M|_{\text{max}} = 0.250wL^2$

7.63



GIVEN:
BEAM AND LOADING SHOWN.
(1) DRAW V AND M DIAGRAMS
(2) DETERMINE $|V|_{max}$ AND $|M|_{max}$.

FREE BODY: ENTIRE BEAM

$\sum M_D = 0:$
 $P(\frac{2L}{3}) - P(\frac{L}{3}) - AL = 0$
 $A = P/3$

SHEAR DIAGRAM


WE NOTE THAT
 $V_A = A = +P/3$

$|V|_{max} = 2P/3$


B.M. DIAGRAM

WE NOTE THAT $M_A = 0$

$|M|_{max} = PL/9$

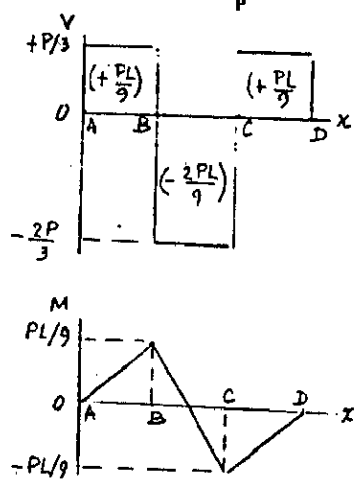

7.65



GIVEN:
BEAM AND LOADING SHOWN.
(1) DRAW V AND M DIAGRAMS
(2) DETERMINE $|V|_{max}$ AND $|M|_{max}$.

FREE BODY: ENTIRE BEAM

$\sum F_y = 0: C - w(\frac{L}{2}) = 0$
 $C = \frac{1}{2} wL$

$\sum M_C = 0:$
 $(\frac{1}{2} wL)(\frac{3L}{4}) - M_C = 0$
 $M_C = \frac{3}{8} wL^2$

SHEAR DIAGRAM

AT A: $V_A = 0$


$|V|_{max} = \frac{1}{2} wL$

B.M. DIAGRAM

AT A: $M = 0, \frac{dM}{dx} = V = 0$


$|M|_{max} = \frac{3}{8} wL^2$

FROM A TO B: ARC OF PARABOLA

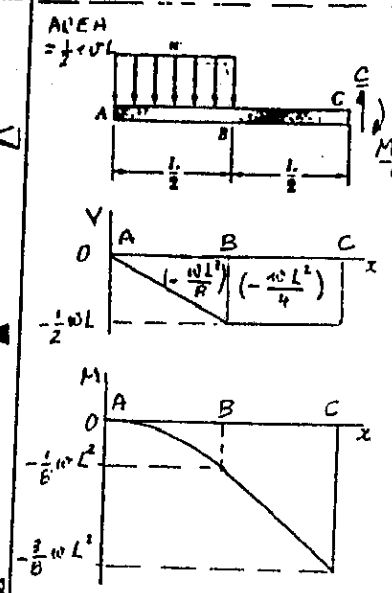

SINCE V HAS NO DISCONTINUITY AT B, THE SLOPE OF THE PARABOLA AT B IS EQUAL TO THE SLOPE OF THE STRAIGHT-LINE SEGMENT.

7.64



GIVEN:
BEAM AND LOADING SHOWN.
(a) DRAW V AND M DIAGRAMS
(b) DETERMINE $|V|_{max}$ AND $|M|_{max}$.

REACTIONS AT A AND D

BECAUSE OF THE SYMMETRY OF THE SUPPORTS AND LOADING,

$A = D = \frac{1}{2} (w \cdot \frac{L}{2}) = \frac{1}{4} wL$
 $A = D = \frac{1}{4} wL$

SHEAR DIAGRAM

AT A: $V_A = +\frac{1}{4} wL$

FROM B TO C:
 SLOPE STRAIGHT LINE


$|V|_{max} = \frac{1}{4} wL$

B.M. DIAGRAM

AT A: $M_A = 0$


FROM B TO C:
 ARC OF PARABOLA

$|M|_{max} = \frac{3}{32} wL^2$

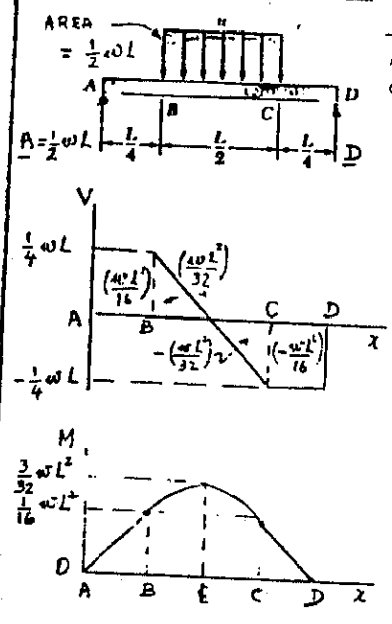

SINCE V HAS A DISCONTINUITY AT B AND C, THE SLOPE OF THE PARABOLA AT THESE POINTS IS THE SAME AS THE SLOPE OF THE ADJOINING STRAIGHT-LINE SEGMENT.

7.66



GIVEN:
BEAM AND LOADING SHOWN.
(a) DRAW V AND M DIAGRAMS
(b) DETERMINE $|V|_{max}$ AND $|M|_{max}$.

FREE BODY: ENTIRE BEAM

$\sum F_y = 0: C = 0$

$\sum M_C = 0: M_C = \frac{1}{2} PL$

SHEAR DIAGRAM


AT A: $V_A = +P$

$|V|_{max} = P$


B.M. DIAGRAM

AT A: $M_A = 0$


$|M|_{max} = \frac{1}{2} PL$

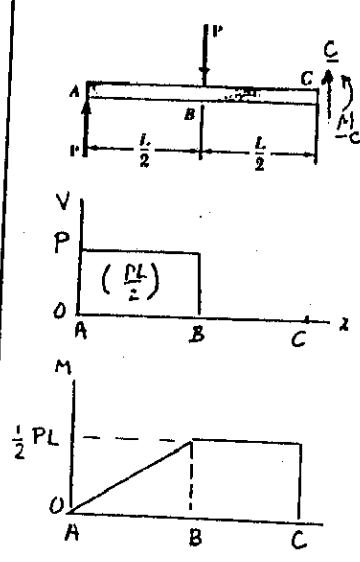


67




GIVEN:
 BEAM AND LOADING SHOWN
 (a) DRAW V AND M DIAGRAMS.
 (b) DETERMINE $|V|_{max}$ AND $|M|_{max}$



FREE BODY: ENTIRE BEAM
 $\sum F_y = 0: A = C$
 $\sum M_C = 0: Al - M_0 = 0$
 $A = C = \frac{M_0}{L}$




SHEAR DIAGRAM
 AT A: $V_A = -\frac{M_0}{L}$
 $|V|_{max} = \frac{M_0}{L}$




B.M. DIAGRAM
 AT A: $M_A = 0$
 AT B, M INCREASES BY M_0 ON ACCOUNT OF APPLIED COUPLE.
 $|M|_{max} = M_0/2$


7.69



GIVEN:
 BEAM AND LOADING SHOWN
 (a) DRAW V AND M DIAGRAMS
 (b) DETERMINE $|V|_{max}$ AND $|M|_{max}$

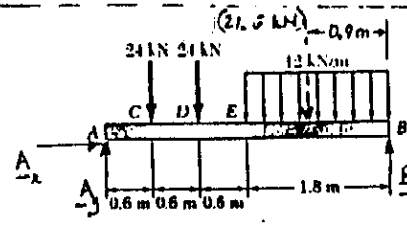


FREE BODY: ENTIRE BEAM
 $\sum M_B = 0: (24 \text{ kN})(3 \text{ m}) + (24 \text{ kN})(2.4 \text{ m}) + (21.6 \text{ kN})(0.9 \text{ m}) - A_y(3.6 \text{ m}) = 0$
 $A_y = +41.4 \text{ kN}$
 $\sum F_x = 0: A_x = 0$

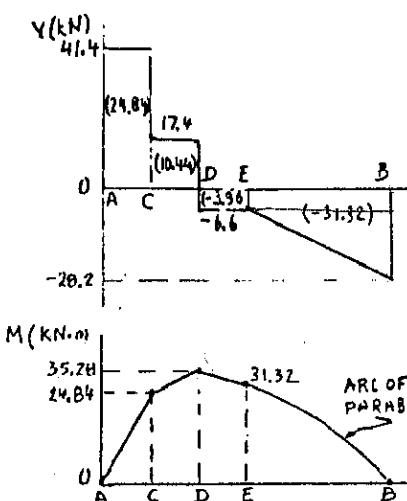


SHEAR DIAGRAM
 AT A: $V_A = A_y = +41.4 \text{ kN}$
 $|V|_{max} = 41.4 \text{ kN}$

B.M. DIAGRAM
 AT A: $M_A = 0$
 $|M|_{max} = 35.3 \text{ kN.m}$
 THE SLOPE OF THE PARABOLA AT E IS THE SAME AS THAT OF THE SEGMENT DE


7.68




GIVEN:
 BEAM AND LOADING SHOWN.
 (a) DRAW V AND M DIAGRAMS.
 (b) DETERMINE $|V|_{max}$ AND $|M|_{max}$



FREE BODY: ENTIRE BEAM
 $\sum F_y = 0: B - P = 0 \Rightarrow B = P$
 $\sum M_B = 0: M_B - PL + PL = 0 \Rightarrow M_B = 0$




SHEAR DIAGRAM
 AT A: $V_A = -P$
 $|V|_{max} = P$




B.M. DIAGRAM
 AT A: $M_A = M_B = PL$
 $|M|_{max} = PL$


7.70




GIVEN:
 BEAM AND LOADING SHOWN
 (a) DRAW V AND M DIAGRAMS
 (b) DETERMINE $|V|_{max}$ AND $|M|_{max}$

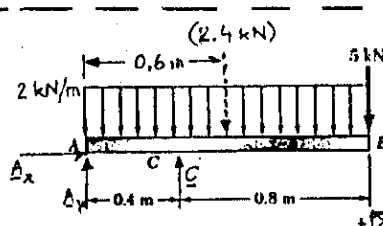

FREE BODY: BEAM
 $\sum M_A = 0: C(0.4 \text{ m}) - (2.4 \text{ kN})(0.6 \text{ m}) - (5 \text{ kN})(1.2 \text{ m}) = 0$
 $C = 18.6 \text{ kN}$
 $\sum F_x = 0: A_x = 0$
 $\sum F_y = 0: A_y + 18.6 - 2.4 - 5 = 0 \Rightarrow A_y = -11.2 \text{ kN}$

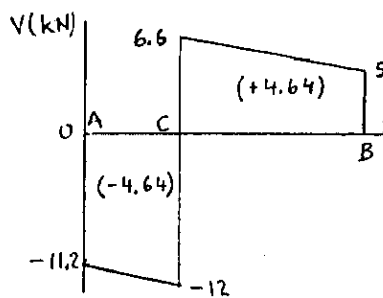


SHEAR DIAGRAM
 AT A: $V_A = A_y = -11.2 \text{ kN}$
 $|V|_{max} = 12.00 \text{ kN}$

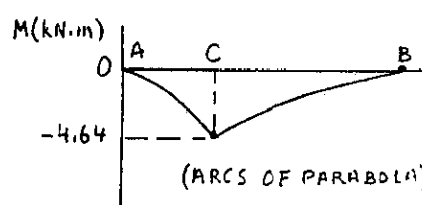




B.M. DIAGRAM
 AT A: $M_A = 0$
 $|M|_{max} = 4.64 \text{ kN.m}$

7.71



GIVEN:
BEAM AND LOADING SHOWN
(a) DRAW V AND M DIAGRAMS
(b) DETERMINE $|V|_{max}$ AND $|M|_{max}$


REACTIONS AT SUPPORTS
BECAUSE OF THE SYMMETRY:
 $A_x = B_x = \frac{1}{2}(B + B + 4 \times 5) \text{ kips}$
 $A_y = B_y = 18 \text{ kips} \uparrow$

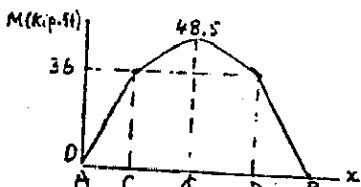

SHEAR DIAGRAM
AT A: $V_A = +18 \text{ kips}$
 $|V|_{max} = 18 \text{ kips}$




B.M. DIAGRAM
AT A: $M_A = 0$
 $|M|_{max} = 48.5 \text{ kip-ft}$
DISCONTINUITIES IN SLOPE AT C AND D, DUE TO THE DISCONTINUITIES OF V.

7.72



GIVEN:
BEAM AND LOADING SHOWN
(a) DRAW V AND M DIAGRAMS
(b) DETERMINE $|V|_{max}$ AND $|M|_{max}$


FREE BODY: BEAM
 $\sum F_x = 0: A_x = 0$
 $\sum M_B = 0: (2.5 \text{ kips})(4 \text{ ft}) + (2.5 \text{ kips})(7 \text{ ft}) - A_y(10 \text{ ft}) = 0$
 $A_y = +15.3 \text{ kips} \triangleleft$
 $\sum F_y = 0: B + 15.3 - 15 - 12 = 0$
 $B = +11.7 \text{ kips} \triangleleft$

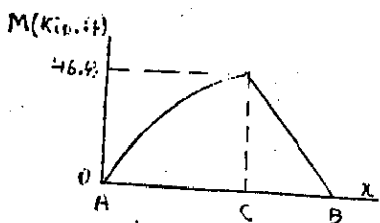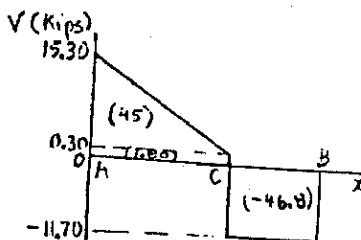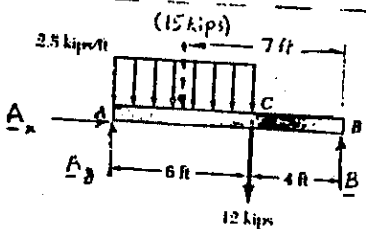


SHEAR DIAGRAM
AT A: $V_A = A_y = 15.3 \text{ kips}$
 $|V|_{max} = 15.3 \text{ kips}$

B.M. DIAGRAM
AT A: $M_A = 0$
 $|M|_{max} = 46.4 \text{ kip-ft}$



7.73



GIVEN:
BEAM AND LOADING SHOWN
(a) DRAW V AND M DIAGRAMS
(b) DETERMINE $|V|_{max}$ AND $|M|_{max}$

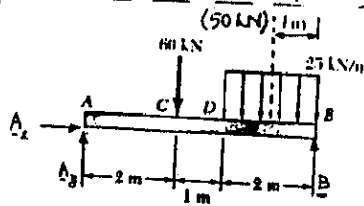


FREE BODY: BEAM
 $\sum F_x = 0: A_x = 0$
 $\sum M_B = 0: (60 \text{ kN})(3 \text{ m}) + (50 \text{ kN})(1 \text{ m}) - A_y(5 \text{ m}) = 0$
 $A_y = +46.0 \text{ kN}$
 $\sum F_y = 0: B + 46.0 \text{ kN} - 60 \text{ kN} - 50 \text{ kN} = 0$
 $B = +64.0 \text{ kN}$




SHEAR DIAGRAM
AT A: $V_A = A_y = +46.0 \text{ kN}$
 $|V|_{max} = 64.0 \text{ kN}$

B.M. DIAGRAM
AT A: $M_A = 0$
 $|M|_{max} = 92.0 \text{ kN-m}$
PARABOLA FROM D TO B, ITS SLOPE AT D IS SAME THAT OF STRAIGHT-LINE SEGMENT CD SINCE V HAS NO DISCONTINUITY AT D.



7.74



GIVEN:
BEAM AND LOADING SHOWN
(a) DRAW V AND M DIAGRAMS
(b) DETERMINE $|V|_{max}$ AND $|M|_{max}$

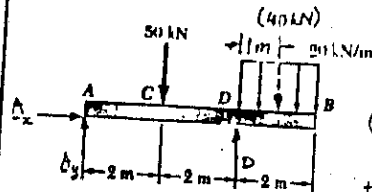





FREE BODY: BEAM
 $\sum F_x = 0: A_x = 0$
 $\sum M_B = 0: (50 \text{ kN})(2 \text{ m}) - (40 \text{ kN})(1 \text{ m}) - A_y(4 \text{ m}) = 0$
 $A_y = +15.00 \text{ kN} \triangleleft$
 $\sum F_y = 0: B + 15.00 - 50 - 40 = 0$
 $B = +75.0 \text{ kN} \triangleleft$

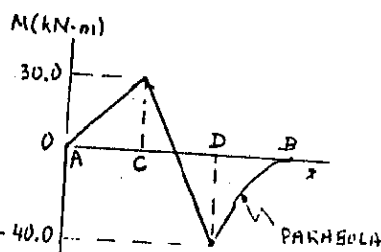

SHEAR DIAGRAM
AT A: $V_A = A_y = +15.00 \text{ kN}$
 $|V|_{max} = 70.0 \text{ kN}$

B.M. DIAGRAM
AT A: $M_A = 0$
 $|M|_{max} = 40.0 \text{ kN-m}$
AT B: SLOPE $= \frac{dM}{dx} = V_B = 0$

775







GIVEN:
BEAM AND LOADING SHOWN
(a) DRAW V AND M DIAGRAMS
(b) DETERMINE $|V|_{max}$ AND $|M|_{max}$.

FREE BODY: BEAM
 $\sum M_B = 0:$
 $5 \text{ kip}\cdot\text{ft} + (2 \text{ kips})(10 \text{ ft}) + (4 \text{ kips})(5 \text{ ft}) - A_y(15 \text{ ft}) = 0$
 $A_y = +3.00 \text{ kips}$
 $\sum F_x = 0: A_x = 0$

SHEAR DIAGRAM
 AT A: $V_A = A_y = +3.00 \text{ kips}$
 $|V|_{max} = 3.00 \text{ kips}$

B.M. DIAGRAM
 AT A: $M_A = -5 \text{ kip}\cdot\text{ft}$
 $|M|_{max} = 15.00 \text{ kip}\cdot\text{ft}$

7.77







GIVEN:
BEAM AND LOADING SHOWN
(a) DRAW V AND M DIAGRAMS
(b) DETERMINE MAGNITUDE AND LOCATION OF $|M|_{max}$.

FREE BODY: BEAM
 $\sum F_x = 0: A_x = 0$
 $\sum M_B = 0:$
 $(19.2 \text{ kN})(1.2 \text{ m}) - A_y(3.2 \text{ m}) = 0$
 $A_y = +7.20 \text{ kN}$

SHEAR DIAGRAM
 $V_A = V_C = A_y = +7.20 \text{ kN}$
 TO DETERMINE POINT D WHERE $V=0$, WE WRITE
 $V_D - V_C = -w \cdot u$
 $0 - 7.20 \text{ kN} = -(8 \text{ kN/m})u$
 $u = 0.9 \text{ m}$

B.M. DIAGRAM
 AT A: $M_A = 0$
 LARGEST VALUE OCCURS AT D WITH $AD = 0.8 + 0.9 = 1.700 \text{ m}$
 $|M|_{max} = 9.00 \text{ kN}\cdot\text{m}$, 1.700 m FROM A

7.76

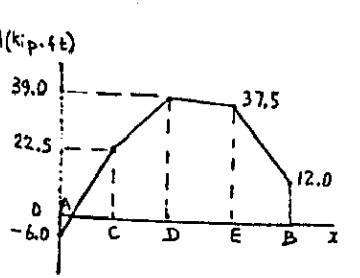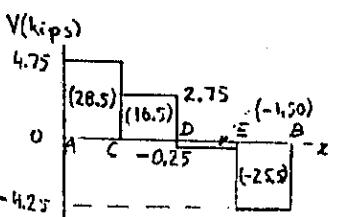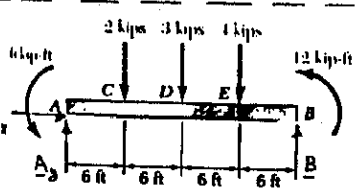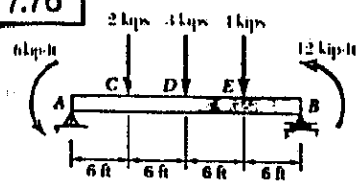





GIVEN:
BEAM AND LOADING SHOWN
(a) DRAW V AND M DIAGRAMS
(b) DETERMINE $|V|_{max}$ AND $|M|_{max}$.

FREE BODY: BEAM
 $\sum M_B = 0:$
 $6 \text{ kip}\cdot\text{ft} + 12 \text{ kip}\cdot\text{ft} + (2 \text{ kips})(18 \text{ ft}) + (3 \text{ kips})(12 \text{ ft}) + (4 \text{ kips})(6 \text{ ft}) - A_y(24 \text{ ft}) = 0$
 $A_y = +4.75 \text{ kips}$
 $\sum F_x = 0: A_x = 0$

SHEAR DIAGRAM
 AT A: $V_A = A_y = +4.75 \text{ kips}$
 $|V|_{max} = 4.75 \text{ kips}$

B.M. DIAGRAM
 AT A: $M_A = -6 \text{ kip}\cdot\text{ft}$
 $|M|_{max} = 39.0 \text{ kip}\cdot\text{ft}$

7.78





GIVEN:
BEAM AND LOADING SHOWN
(a) DRAW V AND M DIAGRAMS
(b) DETERMINE MAGNITUDE AND LOCATION OF $|M|_{max}$.

FREE BODY: BEAM
 $\sum F_x = 0: A_x = 0$
 $\sum M_B = 0:$
 $(40 \text{ kN})(1.5 \text{ m}) - A_y(3.75 \text{ m}) = 0$
 $A_y = +16.00 \text{ kN}$

SHEAR DIAGRAM
 $V_A = V_C = A_y = +16.00 \text{ kN}$
 TO DETERMINE POINT E WHERE $V=0$, WE WRITE
 $V_E - V_C = -w \cdot u$
 $0 - 16 \text{ kN} = -(20 \text{ kN/m})u$
 $u = 0.800 \text{ m}$
 WE NEXT COMPUTE ALL AREAS

B.M. DIAGRAM
 AT A: $M_A = 0$
 LARGEST VALUE OCCURS AT E WITH $AE = 1.25 + 0.8 = 2.05 \text{ m}$
 $|M|_{max} = 26.4 \text{ kN}\cdot\text{m}$, 2.05 m FROM A
 FROM A TO C AND D TO B: STRAIGHT-LINE SEGMENTS
 FROM C TO D: PARABOLA

7.79



GIVEN

BEAM AND LOADING SHOWN
DRAW V AND M DIAGRAMS AND
DETERMINE MAGNITUDE AND
LOCATION OF $|M|_{max}$ FOR
(a) $P = 6$ kips, (b) $P = 3$ kips.

FREE BODY: BEAM

$$\sum F_x = 0: A_x = 0$$

$$+\uparrow \sum M_A = 0:$$

$$C(6R) - (12 \text{ kips})(3 \text{ ft}) - P(8R) = 0$$




$$C = 6 \text{ kips} + \frac{4}{3}P \quad \triangleleft (1)$$

$$\sum F_y = 0:$$

$$A_y + (6 + \frac{4}{3}P) - 12 - P = 0$$

$$A_y = 6 \text{ kips} - \frac{1}{3}P \quad \triangleleft (2)$$

(a) $P = 6$ kips.

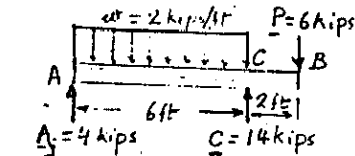

LOAD DIAGRAM
SUBSTITUTING FOR P IN
EQL. (2) AND (1):




$$A_y = 6 - \frac{1}{3}(6) = 4 \text{ kips}$$

$$C = 6 + \frac{4}{3}(6) = 14 \text{ kips}$$

SHEAR DIAGRAM
 $V_A = A_y = +4$ kips
TO DETERMINE POINT D
WHERE $V = 0$;
 $V_D - V_A = -wx$
 $0 - 4 \text{ kips} = (2 \text{ kips/ft})x$
 $x = 2 \text{ ft}$
WE COMPUTE ALL AREAS

B.M. DIAGRAM
AT A: $M_A = 0$
 $|M|_{max} = 12,000 \text{ kips-ft}$ AT C
PARABOLA FROM A TO C

(b) $P = 3$ kips



LOAD DIAGRAM
SUBSTITUTING FOR P IN
EQS. (2) AND (1):



$$A = 6 - \frac{1}{3}(3) = 5 \text{ kips}$$

$$C = 6 + \frac{4}{3}(3) = 10 \text{ kips}$$

SHEAR DIAGRAM
 $V_A = A_y = +5$ kips
TO DETERMINE D WHERE $V = 0$;
 $V_D - V_A = -wx$
 $0 - (5 \text{ kips}) = -(2 \text{ kips/ft})x$
 $x = 2.5 \text{ ft}$

WE COMPUTE ALL AREAS
B.M. DIAGRAM
AT A: $M_A = 0$
 $|M|_{max} = 6,250 \text{ kips-ft}$,
2.50 ft FROM A
PARABOLA FROM A TO C.

7.80

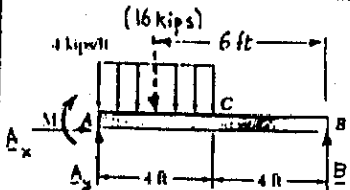

GIVEN:

BEAM AND LOADING
DRAW V AND M DIAGRAMS
DETERMINE MAGNITUDE
LOCATION OF $|M|_{max}$
(a) $M = 0$, (b) $M = 24$

FREE BODY: BEAM

$$\sum F_x = 0: A_x = 0$$

$$+\uparrow \sum M_B = 0:$$




$$(1 \text{ kips})(6 \text{ ft}) - A_y(8 \text{ ft}) = 0$$

$$A_y = 12 \text{ kips} - \frac{1}{8}M$$

$$+\uparrow \sum F_y = 0: B + 12 - \frac{1}{8}M = 0$$

$$B = 4 \text{ kips} + \frac{1}{8}M$$




(a) $M = 0$.



LOAD DIAGRAM
MAKING $M = 0$ IN (1)
 $A_y = +12$ kips, $B = 4$

SHEAR DIAGRAM
 $V_A = A_y = +12$ kips
TO DETERMINE POINT D
WHERE $V = 0$;
 $V_D - V_A = -wx$
 $0 - 12 \text{ kips} = -(4 \text{ kips/ft})x$
 $x = 3 \text{ ft}$
WE COMPUTE ALL AREAS
B.M. DIAGRAM
AT A: $M_A = 0$
 $|M|_{max} = 18,000 \text{ kips-ft}$,
3 ft FROM A
PARABOLA FROM A TO C.





(b) $M = 24 \text{ kip-ft}$



LOAD DIAGRAM
MAKING $M = 24 \text{ kip-ft}$ IN (1)
 $A_y = 12 - \frac{1}{8}(24) = 9$ kips
 $B = 4 + \frac{1}{8}(24) = 7$ kips

SHEAR DIAGRAM
 $V_A = A_y = +9$ kips
TO DETERMINE POINT D
WHERE $V = 0$;
 $V_D - V_A = -wx$
 $0 - 9 \text{ kips} = -(4 \text{ kips/ft})x$
 $x = 2.25 \text{ ft}$
B.M. DIAGRAM
AT A: $M_A = +24 \text{ kip-ft}$
 $|M|_{max} = 34.1 \text{ kip-ft}$,
2.25 ft FROM A
PARABOLA FROM A TO C.

81

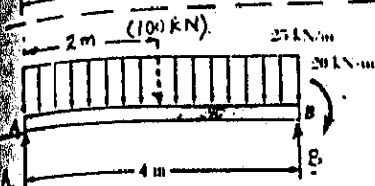

GIVEN:
BEAM AND LOADING SHOWN.
(a) DRAW V AND M DIAGRAMS
(b) DETERMINE MAGNITUDE AND LOCATION OF $|M|_{max}$.






FREE BODY: BEAM
 $\uparrow \sum M_A = 0: B(4m) - (100kN)(2m) - 20kN \cdot m = 0$
 $B = +55 kN$
 $\sum F_x = 0: A_x = 0$
 $\uparrow \sum F_y = 0: A_y + 55 - 100 = 0$
 $A_y = +45 kN$

SHEAR DIAGRAM
 AT A: $V_A = A_y = +45 kN$
 TO DETERMINE POINT C WHERE $V = 0$:
 $V_C - V_A = -wx$
 $0 - 45 kN = -(25 kN/m)x$
 $x = 1.8 m$

WE COMPUTE ALL AREAS
B.M. DIAGRAM
 AT A: $M_A = 0$
 AT B: $M_B = -20 kN \cdot m$
 $|M|_{max} = 40.5 kN \cdot m$, 1.800 m FROM A.

SINGLE ARC OF PARABOLA

7.83

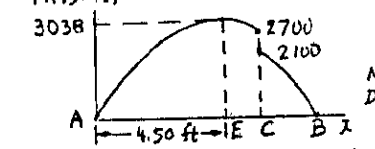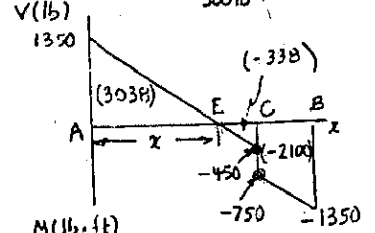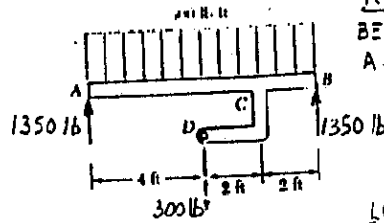

GIVEN:
STRUCTURE AND LOADING SHOWN
(a) DRAW V AND M DIAGRAMS FOR BEAM AB.
(b) DETERMINE MAGNITUDE AND LOCATION OF $|M|_{max}$.

REACTIONS AT SUPPORTS
 BECAUSE OF SYMMETRY OF LOAD:
 $A = B = \frac{1}{2}(300 \times 8 + 300)$
 $A = B = 1350 lb \uparrow$




LOAD DIAGRAM FOR AB
 THE 300-LB FORCE AT D IS REPLACED BY AN EQUIVALENT FORCE-COUPLE SYSTEM AT C.

SHEAR DIAGRAM
 AT A: $V_A = A = 1350 lb$
 TO DETERMINE POINT E WHERE $V = 0$:
 $V_E - V_A = -wx$
 $0 - 1350 lb = -(300 lb/ft)x$
 $x = 4.50 ft$

WE COMPUTE ALL AREAS
B.M. DIAGRAM
 AT A: $M_A = 0$
 NOTE 600-LB-FT DROP AT C DUE TO COUPLE
 $|M|_{max} = 3040 lb \cdot ft$, 4.50 ft FROM A.

7.82

SOLVE PROB. 7.81, ASSUMING THAT 20-KN·M COUPLE AT B IS COUNTERCLOCKWISE.

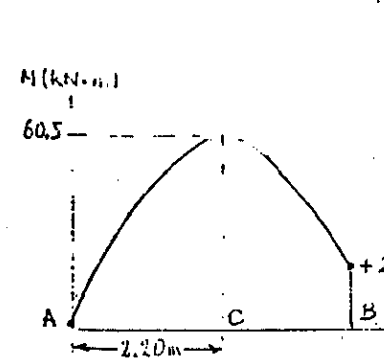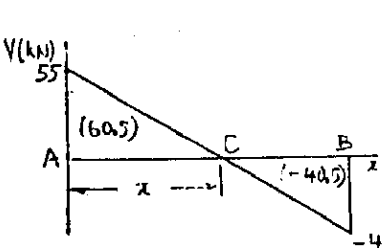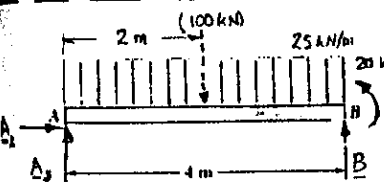

FREE BODY: BEAM
 $\uparrow \sum M_A = 0: B(4m) - (100kN)(2m) + 20kN \cdot m = 0$
 $B = +45 kN$
 $\sum F_x = 0: A_x = 0$
 $\uparrow \sum F_y = 0: A_y + 45 - 100 = 0$
 $A_y = +55 kN$





SHEAR DIAGRAM
 AT A: $V_A = A_y = +55 kN$
 TO DETERMINE POINT C WHERE $V = 0$:
 $V_C - V_A = -wx$
 $0 - 55 kN = -(25 kN/m)x$
 $x = 2.20 m$

WE COMPUTE ALL AREAS
B.M. DIAGRAM
 AT A: $M_A = 0$
 AT B: $M_B = +20 kN \cdot m$
 $|M|_{max} = 60.5 kN \cdot m$, 2.20 m FROM A.

SINGLE ARC OF PARABOLA

7.84

SOLVE PROB. 7.83, ASSUMING THAT 300-LB FORCE APPLIED AT D IS DIRECTED UPWARD.




REACTIONS AT SUPPORTS
 BECAUSE OF SYMMETRY OF LOAD:
 $A = B = \frac{1}{2}(300 \times 8 - 300)$
 $A = B = 1050 lb \uparrow$

LOAD DIAGRAM
 THE 300-LB FORCE AT D IS REPLACED BY AN EQUIVALENT FORCE-COUPLE SYSTEM AT C.


SHEAR DIAGRAM
 AT A: $V_A = A = 1050 lb$
 TO DETERMINE POINT E WHERE $V = 0$:
 $V_E - V_A = -wx$
 $0 - 1050 lb = -(300 lb/ft)x$
 $x = 3.50 ft$

WE COMPUTE ALL AREAS
B.M. DIAGRAM
 AT A: $M_A = 0$
 NOTE 600-LB INCREASE AT C DUE TO COUPLE
 $|M|_{max} = 1838 lb \cdot ft$, 3.50 ft FROM A.

7.85



GIVEN: BEAM AND LOADING SHOWN.
(a) WRITE EQUATIONS FOR $V(x)$ AND $M(x)$.
(b) DETERMINE MAGNITUDE AND LOCATION OF M_{max} .



(a) FREE BODY: BEAM
 $\sum F_x = 0: A_x = 0$
 $\sum M_A = 0: (\frac{1}{2}w_0L)(\frac{2L}{3}) - A_y L = 0$
 $A_y = \frac{1}{3}w_0L$
 THIS:
 $V_A = A_y = +\frac{1}{3}w_0L, M_A = 0$ (1)

LOAD: $w(x) = w_0(1 - \frac{x}{L})$

SHEAR: FROM EQ. (7.2): $V(x) - V_A = -\int_0^x w(x) dx = -w_0 \int_0^x (1 - \frac{x}{L}) dx$
 INTEGRATING AND RECALLING (1):

$$V(x) - \frac{1}{3}w_0L = -w_0(x - \frac{x^2}{2L})$$

$$V(x) = \frac{w_0}{6L}(3x^2 - 6Lx + 2L^2) \quad (2)$$

BENDING MOMENT: FROM EQ. (7.4) AND RECALLING THAT $M_A = 0$.

$$M(x) - M_A = \int_0^x V(x) dx \quad M(x) = \frac{w_0}{6L}(x^3 - 3Lx^2 + 2L^2x) \quad (3)$$


(b) MAXIMUM BENDING MOMENT

$$\frac{dM}{dx} = V = 0. \text{ EQ. (2); } 3x^2 - 6Lx + 2L^2 = 0$$

$$x = \frac{6 - \sqrt{36 - 24L^2}}{6} L = 0.42265L$$

CARRYING INTO (3): $M_{max} = 0.0642w_0L^2$, AT $x = 0.423L$

7.86



GIVEN: BEAM AND LOADING SHOWN.
(a) WRITE EQUATIONS FOR $V(x)$ AND $M(x)$.
(b) DETERMINE MAGNITUDE AND LOCATION OF M_{max} .

(a) WE NOTE THAT AT $B(x=L): V_B = 0, M_B = 0$ (1)

LOAD: $w(x) = w_0(1 - \frac{x}{L}) - \frac{1}{3}w_0(\frac{x}{L}) = w_0(1 - \frac{4x}{3L})$

SHEAR: WE USE EQ. (7.2) BETWEEN $C(x=x)$ AND $B(x=L)$:

$$V_B - V_C = -\int_x^L w(x) dx \quad 0 - V(x) = -\int_x^L w(x) dx$$

$$V(x) = w_0 \int_x^L (1 - \frac{4x}{3L}) dx = w_0 [x - \frac{2x^2}{3L}]_x^L = w_0(L - \frac{2L}{3} - x + \frac{2x^2}{3L})$$

$$V(x) = \frac{w_0}{3L}(2x^2 - 3Lx + L^2) \quad (2)$$

BENDING MOMENT: WE USE EQ. (7.4) BETWEEN $C(x=x)$ AND $B(x=L)$:

$$M_B - M_C = \int_x^L V(x) dx \quad 0 - M(x) = \int_x^L V(x) dx$$

$$M(x) = -\frac{w_0}{18L} [(\frac{4}{3}x^3 - 9Lx^2 + 6L^2x)]_x^L$$

$$M(x) = \frac{w_0}{18L}(4x^3 - 9Lx^2 + 6L^2x - L^3) \quad (3)$$

(b) MAXIMUM BENDING MOMENT


$$\frac{dM}{dx} = V = 0. \text{ EQ. (2); } 2x^2 - 3Lx + L^2 = 0$$

$$x = \frac{3 - \sqrt{9 - 8L^2}}{4} L = \frac{L}{2}$$

CARRYING INTO (3):

$$M_{max} = \frac{1}{72}w_0L^2, \text{ AT } x = L/2$$

7.87



GIVEN: BEAM AND LOADING SHOWN.
(a) WRITE EQUATIONS FOR $V(x)$ AND $M(x)$.
(b) DETERMINE MAGNITUDE AND LOCATION OF M_{max} .

(a) REACTIONS AT SUPPORTS: $A = B = \frac{1}{2}W$, WHERE $W = \int_0^L w dx$

$$W = \int_0^L w dx = w_0 \int_0^L (1 - \sin \frac{\pi x}{L}) dx = w_0 [x + \frac{L}{\pi} \cos \frac{\pi x}{L}]_0^L = w_0 L$$

$$\text{THUS } V_A = A = \frac{1}{2}W = \frac{1}{2}w_0L(1 - \frac{2}{\pi}), \quad M_A = 0$$

LOAD: $w(x) = w_0(1 - \sin \frac{\pi x}{L})$

SHEAR: FROM EQ. (7.2): $V(x) - V_A = -\int_0^x w(x) dx = -w_0 \int_0^x (1 - \sin \frac{\pi x}{L}) dx$

INTEGRATING AND RECALLING FIRST OF EQS. (1):

$$V(x) - \frac{1}{2}w_0L(1 - \frac{2}{\pi}) = -w_0[x + \frac{L}{\pi} \cos \frac{\pi x}{L}]_0^x$$

$$V(x) = \frac{1}{2}w_0L(1 - \frac{2}{\pi}) - w_0(x + \frac{L}{\pi} \cos \frac{\pi x}{L}) + w_0 \frac{L}{\pi}$$

$$V(x) = w_0(\frac{L}{2} - x - \frac{L}{\pi} \cos \frac{\pi x}{L}) \quad (2)$$

BENDING MOMENT: FROM EQ. (7.4) AND RECALLING THAT $M_A = 0$

$$M(x) - M_A = \int_0^x V(x) dx = w_0 [\frac{L}{2}x - \frac{1}{2}x^2 - (\frac{L}{\pi}) \sin \frac{\pi x}{L}]_0^x$$

$$M(x) = \frac{1}{2}w_0(Lx - x^2 - \frac{2L^2}{\pi^2} \sin \frac{\pi x}{L}) \quad (3)$$

(b) MAXIMUM BENDING MOMENT


$\frac{dM}{dx} = V = 0$. THIS OCCURS AT $x = \frac{L}{2}$ AS WE MAY CHECK FROM

$$V(\frac{L}{2}) = w_0(\frac{L}{2} - \frac{L}{2} - \frac{L}{\pi} \cos \frac{\pi}{2}) = 0$$

FROM (3): $M(\frac{L}{2}) = \frac{1}{2}w_0(L(\frac{L}{2}) - \frac{L^2}{4} - \frac{2L^2}{\pi^2} \sin \frac{\pi}{2}) = \frac{1}{8}w_0L^2(1 - \frac{8}{\pi^2}) = 0.0237w_0L^2$

$$M_{max} = 0.0237w_0L^2, \text{ AT } x = L/2$$

7.88



GIVEN: BEAM RESTING ON GROUND AND SUPPORTS PARABOLIC LOAD SHOWN.
(a) WRITE EQUATIONS FOR $V(x)$ AND $M(x)$.
(b) DETERMINE MAGNITUDE AND LOCATION OF M_{max} .

(a) FROM FIG. 5.8A: TOTAL LOAD = $W = \frac{2}{3}w_0L$

GROUND PRESSURE = $w_g = \frac{W}{L} = \frac{2}{3}w_0$.

WE ALSO NOTE THAT $V_A = M_A = 0$ (1)

NET LOAD: $w_N(x) = w - w_g = \frac{4w_0}{3L}(Lx - x^2 - \frac{L^2}{6})$

SHEAR: FROM EQ. (7.2): $V(x) - V_A = -\int_0^x w_N(x) dx$

RECALLING (1): $V(x) = -\frac{4w_0}{3L} \int_0^x (Lx - x^2 - \frac{L^2}{6}) dx$

$$V(x) = -\frac{4w_0}{3L}(-\frac{L^2}{6} + \frac{L}{2}x^2 - \frac{1}{3}x^3), \quad V(x) = \frac{2w_0}{3L}(L^2x - 3Lx^2 + 2x^3) \quad (2)$$

BENDING MOMENT: FROM EQ. (7.4), WITH $M_A = 0$

$$M(x) - 0 = \int_0^x V(x) dx = \frac{2w_0}{3L}(\frac{1}{2}L^2x^2 - Lx^3 + \frac{1}{2}x^4)$$

$$M(x) = \frac{w_0}{3L}(L^2x^2 - 2Lx^3 + x^4) \quad (3)$$

(b) MAXIMUM BENDING MOMENT

$\frac{dM}{dx} = V = 0$. THIS OCCURS AT $x = \frac{L}{2}$ AS WE MAY CHECK FROM (2)

$$V(\frac{L}{2}) = \frac{2w_0}{3L}(\frac{L^2}{2} - 3\frac{L^3}{2} + 2\frac{L^4}{8}) = 0$$

FROM (3): $M(\frac{L}{2}) = \frac{w_0}{3L}(\frac{L^4}{4} - 2\frac{L^4}{8} + \frac{L^4}{16}) = \frac{w_0L^3}{48}$

$$M_{max} = \frac{w_0L^3}{48}, \text{ AT } x = L/2$$


CHECK

$$\sum M_C = 0: M_{max} + \frac{w_0L}{3}(\frac{3L}{16}) - \frac{w_0L}{2}(\frac{L}{4}) = 0$$


RECALLING THAT $w_g = \frac{2}{3}w_0$.

$$M_{max} = (\frac{1}{3}w_0L)(\frac{L}{4}) - (\frac{w_0L}{3})(\frac{3L}{16}) = \frac{w_0L^3}{48} \quad (O.K.)$$


89




GIVEN:
 BEAM AND LOADING SHOWN.
 WE KNOW THAT $M_D = +800 \text{ N}\cdot\text{m}$
 AND $M_E = +1300 \text{ N}\cdot\text{m}$.
 (a) FIND P AND Q .
 (b) DRAW V AND M DIAGRAMS





(a) **FREE BODY: PORTION AD**
 $\sum F_x = 0: C_x = 0$
 $\sum M_D = 0:$
 $-C(0.3\text{m}) + 0.800 \text{ kN}\cdot\text{m} + (6 \text{ kN})(0.45\text{m}) = 0$
 $C_y = +11.667 \text{ kN} \quad C_x = 11.667 \text{ kN} \uparrow$




FREE BODY: PORTION EB
 $\sum M_E = 0: B(0.3\text{m}) - 1300 \text{ kN}\cdot\text{m} = 0$
 $B = 4.333 \text{ kN} \uparrow$



FREE BODY: ENTIRE BEAM
 $\sum M_D = 0: (6 \text{ kN})(0.45\text{m}) - (11.667 \text{ kN})(0.3\text{m}) - Q(0.3\text{m}) + (4.333 \text{ kN})(0.6\text{m}) = 0$
 $Q = 6.00 \text{ kN} \downarrow$
 $\sum F_x = 0: 11.667 \text{ kN} + 4.333 \text{ kN} - 6 \text{ kN} - P - 6 \text{ kN} = 0$
 $P = 4.00 \text{ kN} \downarrow$

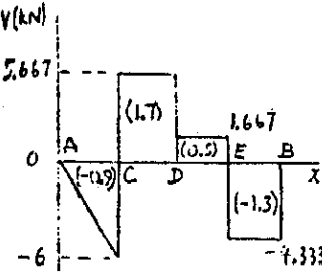


SHEAR FORCE DIAGRAM
 AT A: $V_A = 0$
 $|V|_{\text{max}} = 6 \text{ kN}$

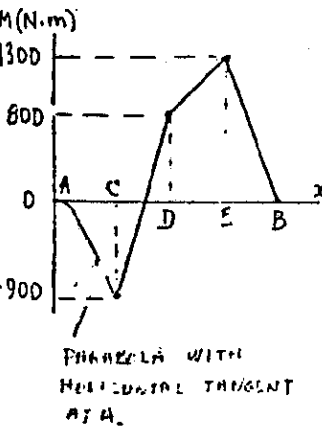


B.M. DIAGRAM
 AT A: $M_A = 0$
 $|M|_{\text{max}} = 1300 \text{ N}\cdot\text{m}$
 WE CHECK THAT $M_D = +800 \text{ N}\cdot\text{m}$ AND $M_E = +1300 \text{ N}\cdot\text{m}$ AS GIVEN.
 AT C: $M_C = -900 \text{ N}\cdot\text{m}$

PARABOLA WITH HORIZONTAL TANGENT AT A.


7.90




GIVEN:
 BEAM AND LOADING SHOWN!
 WE KNOW THAT $M_D = +650 \text{ N}\cdot\text{m}$
 AND $M_E = +1450 \text{ N}\cdot\text{m}$.
 (a) FIND P AND Q .
 (b) DRAW V AND M DIAGRAMS





(a) **FREE BODY: PORTION AD**
 $\sum F_x = 0: C_x = 0$
 $\sum M_D = 0:$
 $-C(0.3\text{m}) + 0.650 \text{ kN}\cdot\text{m} + (6 \text{ kN})(0.45\text{m}) = 0$
 $C_y = +11.167 \text{ kN} \quad C_x = 11.167 \text{ kN} \uparrow$




FREE BODY: PORTION EB
 $\sum M_E = 0: B(0.3\text{m}) - 1450 \text{ kN}\cdot\text{m} = 0$
 $B = 4.833 \text{ kN} \uparrow$



FREE BODY: ENTIRE BEAM
 $\sum M_D = 0: (6 \text{ kN})(0.45\text{m}) - (11.167 \text{ kN})(0.3\text{m}) - Q(0.3\text{m}) + (4.833 \text{ kN})(0.6\text{m}) = 0$
 $Q = 7.50 \text{ kN} \downarrow$
 $\sum F_x = 0: 11.167 \text{ kN} + 4.833 \text{ kN} - 6 \text{ kN} - P - 7.50 \text{ kN} = 0$
 $P = 2.50 \text{ kN} \downarrow$




SHEAR DIAGRAM
 AT A: $V_A = 0$
 $|V|_{\text{max}} = 6 \text{ kN}$

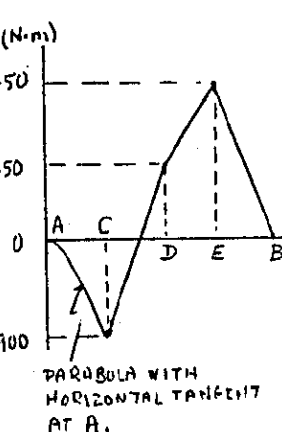


B.M. DIAGRAM
 AT A: $M_A = 0$
 $|M|_{\text{max}} = 1450 \text{ N}\cdot\text{m}$
 WE CHECK THAT $M_D = +650 \text{ N}\cdot\text{m}$ AND $M_E = +1450 \text{ N}\cdot\text{m}$ AS GIVEN.
 AT C: $M_C = -900 \text{ N}\cdot\text{m}$

PARABOLA WITH HORIZONTAL TANGENT AT A.


7.91




GIVEN:
 BEAM AND LOADING SHOWN.
 WE KNOW THAT $M_D = +6.10 \text{ kip}\cdot\text{ft}$
 AND $M_E = +5.50 \text{ kip}\cdot\text{ft}$
 (a) FIND P AND Q.
 (b) DRAW V AND M DIAGRAMS




(a) FREE BODY: PORTION DE
 $\sum M_E = 0: 5.50 \text{ kip}\cdot\text{ft} - 6.10 \text{ kip}\cdot\text{ft} + (1 \text{ kip})(2 \text{ ft}) - V_D(4 \text{ ft}) = 0$
 $V_D = +0.350 \text{ kip}$
 $\sum F_y = 0: 0.350 \text{ kip} - 1 \text{ kip} - V_E = 0$
 $V_E = -0.650 \text{ kip}$




FREE BODY: PORTION AD
 $\sum M_A = 0: 6.10 \text{ kip}\cdot\text{ft} - P(2 \text{ ft}) - (1 \text{ kip})(2 \text{ ft}) - (0.350 \text{ kip})(4 \text{ ft}) = 0$
 $P = 1.350 \text{ kips} \downarrow$
 $\sum F_x = 0: A_x = 0$
 $\sum F_y = 0: A_y - 1 \text{ kip} - 1.350 \text{ kip} - 0.350 \text{ kip} = 0$
 $A_y = +2.70 \text{ kips}$
 $A = 2.70 \text{ kips} \uparrow$




FREE BODY: PORTION EB
 $\sum M_B = 0: (0.650 \text{ kip})(4 \text{ ft}) + (1 \text{ kip})(2 \text{ ft}) + Q(2 \text{ ft}) - 5.50 \text{ kip}\cdot\text{ft} = 0$
 $Q = 0.450 \text{ kip} \uparrow$
 $\sum F_y = 0: B - 0.450 - 1 - 0.650 = 0$
 $B = 2.10 \text{ kips} \uparrow$

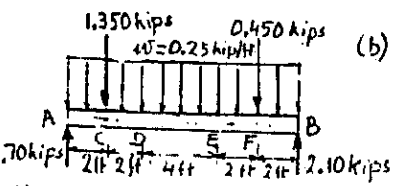

(b) LOAD DIAGRAM

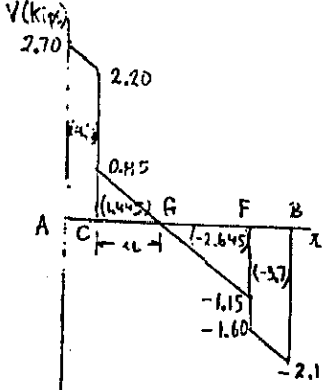


SHEAR DIAGRAM
 AT A: $V_A = A = +2.70 \text{ kips}$
 TO DETERMINE POINT G WHERE $V=0$, WE WRITE
 $V_G - V_C = -w\Delta x$
 $0 - (0.85 \text{ kips}) = -(2.5 \text{ kip/ft})\Delta x$
 $\Delta x = 0.340 \text{ ft}$
 WE NEXT COMPUTE ALL AREAS
 $|V|_{\text{max}} = 2.70 \text{ kips at A}$




B.M. DIAGRAM
 AT A: $M_A = 0$
 LARGEST VALUE OCCURS AT G WITH $AG = 2 + 3.40 = 5.40 \text{ ft}$
 $|M|_{\text{max}} = 6.345 \text{ kip}\cdot\text{ft}$
 5.40 ft FROM A

B.M. DIAGRAM CONSISTS OF 3 DISTINCT ARCS OF PARABOLAS.


7.92




GIVEN:
 BEAM AND LOADING SHOWN.
 WE KNOW THAT $M_D = +5.96 \text{ kip}\cdot\text{ft}$
 AND $M_E = +6.84 \text{ kip}\cdot\text{ft}$
 (a) FIND P AND Q.
 (b) DRAW V AND M DIAGRAMS




(a) FREE BODY: PORTION DE
 $\sum M_E = 0: 6.84 \text{ kip}\cdot\text{ft} - 5.96 \text{ kip}\cdot\text{ft} + (1 \text{ kip})(2 \text{ ft}) - V_D(4 \text{ ft}) = 0$
 $V_D = +0.720 \text{ kip}$
 $\sum F_y = 0: 0.720 \text{ kip} - 1 \text{ kip} - V_E = 0$
 $V_E = -0.280 \text{ kip}$




FREE BODY: PORTION AD
 $\sum M_A = 0: 5.96 \text{ kip}\cdot\text{ft} - P(2 \text{ ft}) - (1 \text{ kip})(2 \text{ ft}) - (0.720 \text{ kip})(4 \text{ ft}) = 0$
 $P = 0.540 \text{ kip} \downarrow$
 $\sum F_x = 0: A_x = 0$
 $\sum F_y = 0: A_y - 1 \text{ kip} - 0.540 \text{ kip} - 0.720 \text{ kip} = 0$
 $A_y = +2.26 \text{ kips}$
 $A = 2.26 \text{ kips} \uparrow$




FREE BODY: PORTION EB
 $\sum M_B = 0: (0.280 \text{ kip})(4 \text{ ft}) + (1 \text{ kip})(2 \text{ ft}) + Q(2 \text{ ft}) - 6.84 \text{ kip}\cdot\text{ft} = 0$
 $Q = 1.860 \text{ kips} \downarrow$
 $\sum F_y = 0: B - 1.860 - 1 - 0.280 = 0$
 $B = 3.14 \text{ kips} \uparrow$

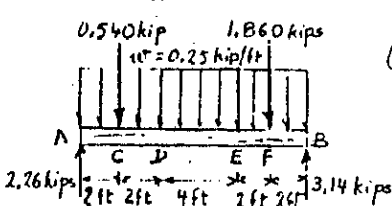

(b) LOAD DIAGRAM

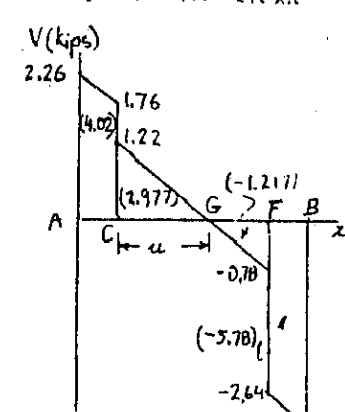


SHEAR DIAGRAM
 AT A: $V_A = A = +2.26 \text{ kips}$
 TO DETERMINE POINT G WHERE $V=0$, WE WRITE
 $V_G - V_C = -w\Delta x$
 $0 - (1.22 \text{ kips}) = -(0.25 \text{ kip/ft})\Delta x$
 $\Delta x = 4.88 \text{ ft}$
 WE NEXT COMPUTE ALL AREAS
 $|V|_{\text{max}} = 3.14 \text{ kips at B}$




B.M. DIAGRAM
 AT A: $M_A = 0$
 LARGEST VALUE OCCURS AT G WITH $AG = 2 + 4.88 = 6.88 \text{ ft}$
 $|M|_{\text{max}} = 6.997 \text{ kip}\cdot\text{ft}$
 6.88 ft FROM A

B.M. DIAGRAM CONSISTS OF 3 DISTINCT ARCS OF PARABOLAS.


10 kip
 20 kip
 720 kip
 4 ft
 6.84 kN
 0.280
 12 mm
 2.26 kN
 POINT
 WRIT
 (-0.25 kip
 3 ft
 TE AL
 at B
 M
 = OCCUR
 .88 = 6.8
 ip. ft,
 M A
 10L

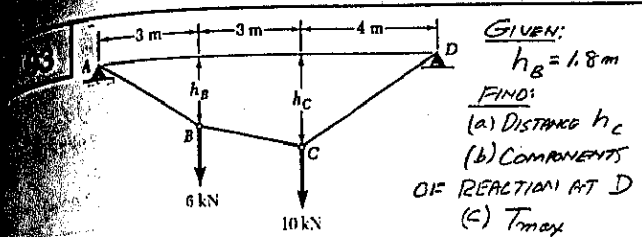


GIVEN:
 $h_B = 1.8 \text{ m}$
FIND:
 (a) DISTANCE h_C
 (b) COMPONENTS
 OF REACTION AT D
 (c) T_{max}

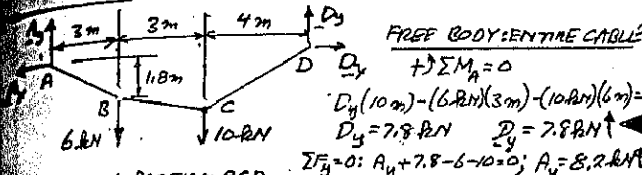

FREE BODY: ENTIRE CABLE
 $\sum M_A = 0$
 $D_y(10 \text{ m}) - (6 \text{ kN})(3 \text{ m}) - (10 \text{ kN})(6 \text{ m}) = 0$
 $D_y = 7.8 \text{ kN}$
 $\sum F_y = 0: A_y + 7.8 - 6 - 10 = 0; A_y = 8.2 \text{ kN}$

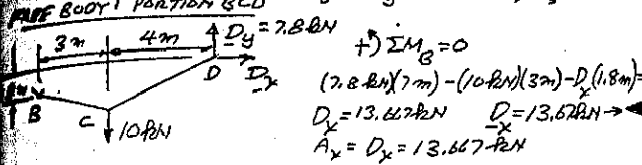


FREE BODY: PORTION BCD
 $\sum M_B = 0$
 $(7.8 \text{ kN})(7 \text{ m}) - (10 \text{ kN})(3 \text{ m}) - D_x(1.8 \text{ m}) = 0$
 $D_x = 13.667 \text{ kN}$
 $D_x = D_x = 13.667 \text{ kN}$
 $A_x = D_x = 13.667 \text{ kN}$

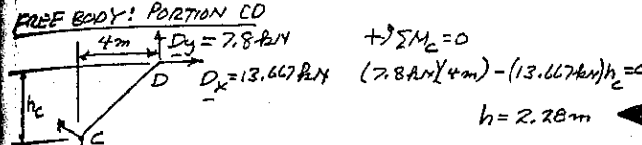


FREE BODY: PORTION CD
 $\sum M_C = 0$
 $(7.8 \text{ kN})(4 \text{ m}) - (13.667 \text{ kN})h_C = 0$
 $h_C = 2.28 \text{ m}$


MAX. TENSION OCCURS AT A (LARGEST SLOPE OF CABLE)
 $A_y = 8.2 \text{ kN}$
 $T_{max} = \sqrt{(8.2^2 + 13.667^2)} = 15.94 \text{ kN}$

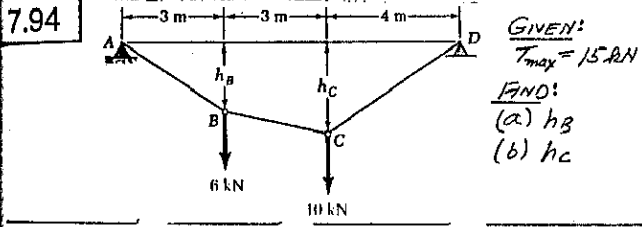

GIVEN:
 $T_{max} = 15 \text{ kN}$
FIND:
 (a) h_B
 (b) h_C

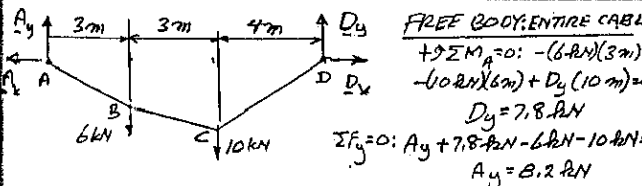


FREE BODY: ENTIRE CABLE
 $\sum M_A = 0: -(6 \text{ kN})(3 \text{ m}) - (10 \text{ kN})(6 \text{ m}) + D_y(10 \text{ m}) = 0$
 $D_y = 7.8 \text{ kN}$
 $\sum F_y = 0: A_y + 7.8 \text{ kN} - 6 \text{ kN} - 10 \text{ kN} = 0$
 $A_y = 8.2 \text{ kN}$

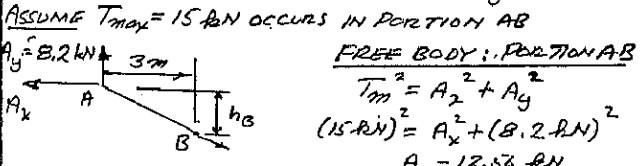


FREE BODY: PORTION AB
 $T_m^2 = A_x^2 + A_y^2$
 $(15 \text{ kN})^2 = A_x^2 + (8.2 \text{ kN})^2$
 $A_x = 12.58 \text{ kN}$

$\sum M_B = 0: (12.58 \text{ kN})h_B - (8.2 \text{ kN})(3 \text{ m}) = 0$
 $h_B = 1.959 \text{ m}$

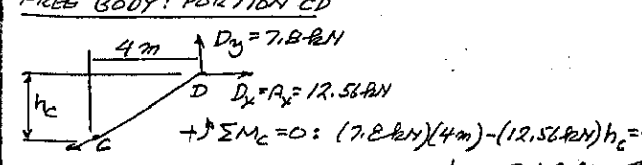


FREE BODY: PORTION CD
 $D_y = 7.8 \text{ kN}$
 $D_x = A_x = 12.58 \text{ kN}$
 $\sum M_C = 0: (7.8 \text{ kN})(4 \text{ m}) - (12.58 \text{ kN})h_C = 0$
 $h_C = 2.48 \text{ m}$


$T_{CD} = \sqrt{(7.8^2 + 12.58^2)} = 14.78 \text{ kN} < 15 \text{ kN}$
 OK T_{max} OCCURS AT A

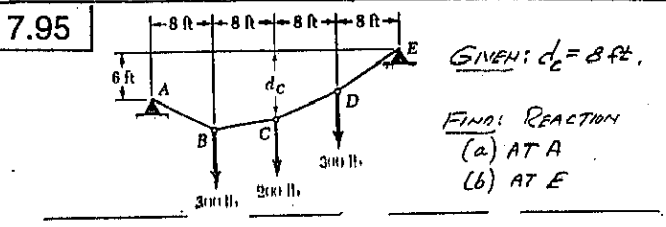

GIVEN: $d_C = 8 \text{ ft}$
FIND: REACTION
 (a) AT A
 (b) AT E

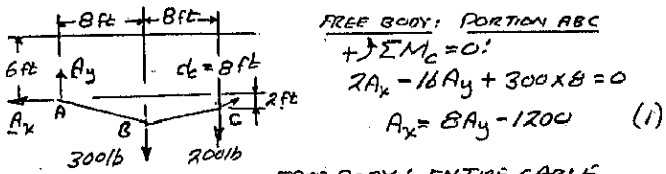


FREE BODY: PORTION ABC
 $\sum M_C = 0$
 $2A_x - 16A_y + 300 \times 8 = 0$
 $A_x = 8A_y - 1200$ (1)

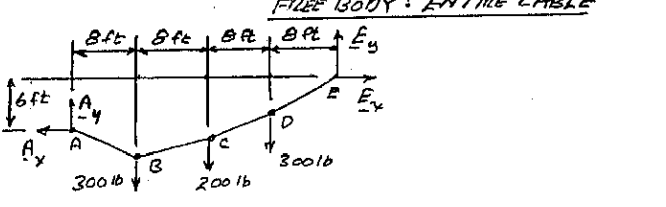


FREE BODY: ENTIRE CABLE
 $\sum M_E = 0: +6A_x + 32A_y - (300 \text{ lb} + 200 \text{ lb} + 300 \text{ lb})16 \text{ ft} = 0$
 $3A_x + 16A_y - 6400 = 0$


SUBSTITUTE FROM EQ.(1):
 $3(8A_y - 1200) + 16A_y - 6400 = 0$
 $A_y = 250 \text{ lb}$
 $A_x = 8(250) - 1200 = 800 \text{ lb}$
 $\sum F_x = 0: -A_x + E_x = 0; -800 \text{ lb} + E_x = 0; E_x = 800 \text{ lb}$
 $\sum F_y = 0: 250 + E_y - 300 - 200 - 300 = 0$
 $E_y = 550 \text{ lb}$
 $A = 838 \text{ lb} \angle 17.4^\circ$
 $E = 971 \text{ lb} \angle 34.5^\circ$

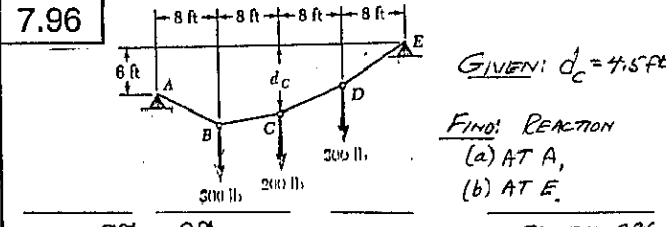

GIVEN: $d_C = 4.5 \text{ ft}$
FIND: REACTION
 (a) AT A,
 (b) AT E.

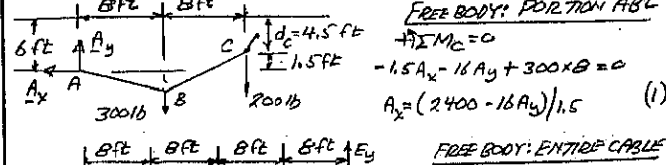


FREE BODY: PORTION ABC
 $\sum M_C = 0$
 $-1.5A_x - 16A_y + 300 \times 8 = 0$
 $A_x = (2400 - 16A_y)/1.5$ (1)

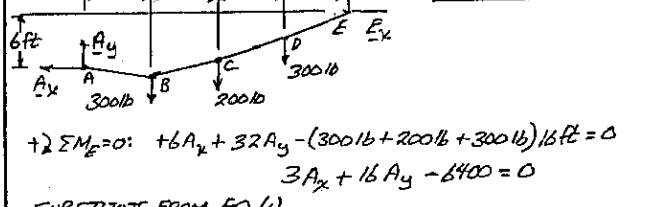

FREE BODY: ENTIRE CABLE
 $\sum M_E = 0: +6A_x + 32A_y - (300 \text{ lb} + 200 \text{ lb} + 300 \text{ lb})16 \text{ ft} = 0$
 $3A_x + 16A_y - 6400 = 0$


SUBSTITUTE FROM EQ.(1)
 $3(2400 - 16A_y)/1.5 + 16A_y - 6400 = 0$
 $A_y = -100 \text{ lb};$ THUS A_y ACTS DOWNWARD, $A_y = 100 \text{ lb}$
 $A_x = (2400 - 16(-100))/1.5 = 2667 \text{ lb}$
 $\sum F_x = 0: -A_x + E_x = 0; -2667 + E_x = 0; E_x = 2667 \text{ lb}$
 $\sum F_y = 0: A_y + E_y - 300 - 200 - 300 = 0$
 $-100 \text{ lb} + E_y - 800 \text{ lb} = 0$
 $E_y = 900 \text{ lb}$
 $A = 2810 \text{ lb} \angle 2.1^\circ$
 $E = 2810 \text{ lb} \angle 18.6^\circ$

7.97




GIVEN: $d_c = 3m$

FIND: (a) d_B and d_D
(b) REACTION AT E



FREE BODY: PORTION ABC


$\sum M_C = 0$
 $3A_x - 4A_y + (5kN)(2m) = 0$
 $A_x = \frac{4}{3}A_y - \frac{10}{3}$ (1)

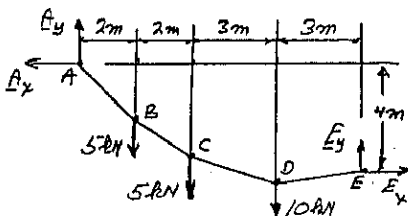

FREE BODY: ENTIRE CABLE


$\sum M_E = 0: 4A_x - 10A_y + (5kN)(8m) + (5kN)(6m) + (10kN)(3m) = 0$
 $4A_x - 10A_y + 100 = 0$

SUBSTITUTE FROM EQ.(1): $4(\frac{4}{3}A_y - \frac{10}{3}) - 10A_y + 100 = 0$
 $A_y = +18.571kN$; $A_y = 18.571kN \uparrow$
 EQ.(1) $A_x = \frac{4}{3}(18.571) - \frac{10}{3} = +21.429kN$; $A_x = 21.429kN \leftarrow$
 $\sum F_x = 0: -A_x + E_x = 0$; $-21.429 + E_x = 0$; $E_x = 21.429kN \rightarrow$
 $\sum F_y = 0: 18.571kN + E_y + 5kN + 5kN + 10kN = 0$; $E_y = -1.429kN \uparrow$
 $E_y = 1.429kN \uparrow$ $E = 21.5kN \angle 3.8^\circ$



PORTION AB


$\sum M_B = 0:$
 $(18.571kN)(2m) - (21.429kN)d_B = 0$
 $d_B = 1.733m$



PORTION DE


GEOMETRY
 $h = (3m) \tan 3.8^\circ = 0.199m$
 $d_D = 4m + 0.199m$
 $d_D = 4.20m$

7.98



GIVEN: PORTION DE IS HORIZONTAL


FIND: (a) d_c
(b) REACTION AT A AND E

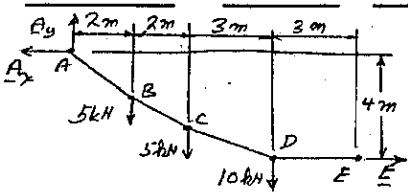

FREE BODY: ENTIRE CABLE

$\sum F_y = 0: A_y - 5kN - 5kN - 10kN = 0$ $A_y = 20kN \uparrow$
 $\sum M_A = 0: E(4m) - (5kN)(2m) - (5kN)(4m) - (10kN)(7m) = 0$
 $E = +25kN$ $E = 25kN \rightarrow$
 $\sum F_x = 0: -A_x + 25kN = 0$ $A_x = 25kN \leftarrow$
 $A = 32.0kN \angle 38.7^\circ$
 (CONTINUED)


7.98 CONTINUED



FREE BODY: PORTION ABC

$\sum M_C = 0: (25kN)d_c - (20kN)(4m) + (5kN)(2m) = 0$
 $25d_c - 70 = 0$
 $d_c = 2.80m$

7.99 and 7.100

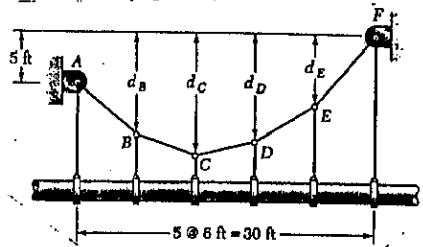


GIVEN: TENSION IN EACH HANGER = 400 lb

FIND: (a) MAXIMUM TENSION, (b) DISTANCE d_D


PROB. 7.99 FOR $d_c = 12ft$

PROB. 7.100 FOR $d_c = 9ft$

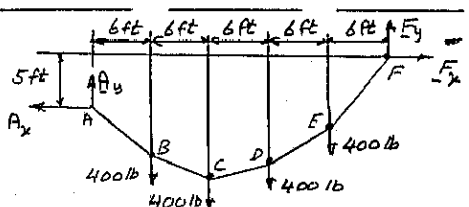

FREE BODY: ENTIRE CABLE


$\sum M_A = 0: 5F_x - 30F_y + 400 \times 6 + 400 \times 12 + 400 \times 18 + 400 \times 24 = 0$
 $5F_x - 30F_y + 24000 = 0$ (1)



FREE BODY: PORTION CDEF

$\sum M_C = 0$
 $d_c F_x - 18F_y + 400 \times 6 + 400 \times 12 = 0$
 $d_c F_x - 18F_y + 7200 = 0$ (2)
 EQ(1) $\times (-0.6): -3F_x + 18F_y - 14400 = 0$ (3)
 (2)+(3): $d_c F_x - 3F_y - 7200 = 0$
 $F_y = \frac{7200}{d_c - 3}$ (4)

FREE BODY: PORTION DEF



$\sum M_D = 0: d_D F_x - 12F_y + 400 \times 6 = 0$
 $d_D = (12F_y - 2400) / F_x$ (5)


PROB 7.99 FOR $d_c = 12ft$

EQ(4): $F_y = \frac{7200}{12-3} = 800lb$
 EQ(1): $5(800) - 30F_y + 24000 = 0$; $F_y = 933.3$
 EQ(5): $d_D = \frac{12(933.3) - 2400}{800}$ $d_D = 11.00ft$
 $F_y = 933.3$ $F = 1229.3lb$; $T_{max} = T_{EF} = F$
 $T_{max} = 1229lb$

PROB 7.100 FOR $d_c = 9ft$


EQ(4): $F_y = 7200 / (9-3) = 1200lb$
 EQ(1): $5(1200) - 30F_y + 24000 = 0$; $F_y = 1000lb$
 EQ(5): $d_D = \frac{12(1000) - 2400}{1200}$ $d_D = 8.00ft$
 $F_y = 1000lb$ $F = 1562lb$; $T_{max} = T_{EF} = F$
 $T_{max} = 1562lb$

7.101

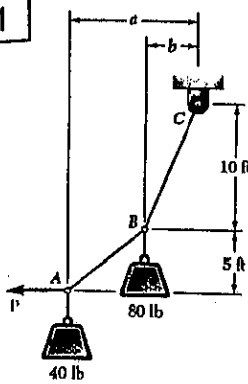


GIVEN: $b = 4 \text{ ft}$

FIND: (a) FORCE P ,
(b) DISTANCE a .



FREE BODY: ENTIRE CABLE

$$\begin{aligned} +) \sum M_C = 0 \\ (80 \text{ lb})(4 \text{ ft}) + (40 \text{ lb})a - P(15 \text{ ft}) = 0 \\ 15P - 320 - 40a = 0 \quad (1) \end{aligned}$$




FREE BODY: PORTION AB

$$\begin{aligned} +) \sum M_B = 0: P(5 \text{ ft}) - (40 \text{ lb})(a - 4 \text{ ft}) = 0 \\ a = 4 + \frac{P}{8} \quad (2) \end{aligned}$$

$$\begin{aligned} \text{EQ(1): } 15P - 320 - 4\left(4 + \frac{P}{8}\right) = 0 \\ 10P - 480 = 0 \quad P = 48 \text{ lb} \end{aligned}$$


$$\text{EQ(2): } a = 4 + \frac{48}{8} = 4 + 6 = 10 \text{ ft} \quad a = 10 \text{ ft}$$

7.102

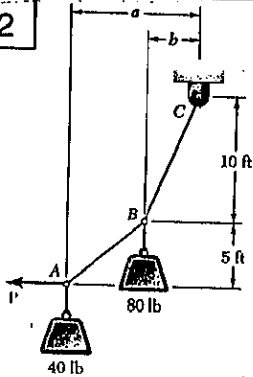


GIVEN: $P = 60 \text{ lb}$

FIND: DISTANCES
 a AND b .



FREE BODY: ENTIRE CABLE

$$\begin{aligned} +) \sum M_C = 0: \\ (60 \text{ lb})(15 \text{ ft}) - (40 \text{ lb})a - (80 \text{ lb})b = 0 \\ a = 22.5 - 2b \quad (1) \end{aligned}$$




FREE BODY: PORTION AB

$$\begin{aligned} +) \sum M_B = 0: (60 \text{ lb})(5 \text{ ft}) - (40 \text{ lb})(a - b) = 0 \\ b = a - 7.5 \text{ ft} \quad (2) \end{aligned}$$

$$\begin{aligned} \text{EQ(1): } a = 22.5 - 2(a - 7.5) \\ 3a = 37.5 \quad a = 12.5 \text{ ft} \end{aligned}$$

$$\text{EQ(2): } b = 12.5 \text{ ft} - 7.5 \text{ ft} \quad b = 5 \text{ ft}$$


7.103 and 7.104

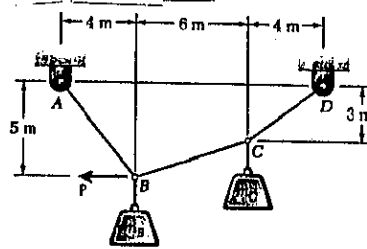

FIND: FORCE P
TO MAINTAIN
EQUILIBRIUM


PROB. 7.103:
 $m_B = 70 \text{ kg}$, $m_C = 25 \text{ kg}$

PROB. 7.104:
 $m_B = 18 \text{ kg}$, $m_C = 10 \text{ kg}$




FREE BODY: PORTION CD

$$\begin{aligned} +) \sum M_C = 0 \\ D_y(4 \text{ m}) - D_x(3 \text{ m}) = 0 \\ D_y = \frac{3}{4} D_x \end{aligned}$$

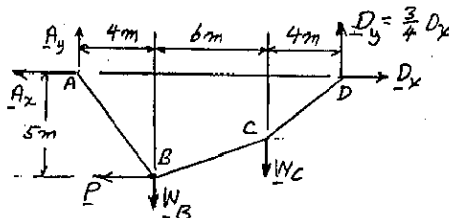

FREE BODY:
ENTIRE CABLE.

$$+ \sum M_A = 0: \frac{3}{4} D_x(14 \text{ m}) - W_B(4 \text{ m}) - W_C(10 \text{ m}) - P(5 \text{ m}) = 0 \quad (1)$$

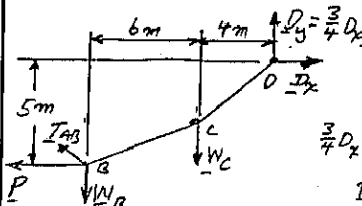

FREE BODY: PORTION BCD

$$\begin{aligned} +) \sum M_B = 0 \\ \frac{3}{4} D_x(10 \text{ m}) - D_x(5 \text{ m}) - W_C(6 \text{ m}) = 0 \\ D_x = 2.4 W_C \quad (2) \end{aligned}$$

PROB. 7.103: $m_B = 70 \text{ kg}$ $m_C = 25 \text{ kg}$
 $g = 9.81 \text{ m/s}^2$: $W_B = 70 \text{ g}$ $W_C = 25 \text{ g}$

$$\text{EQ(2): } D_x = 2.4 W_C = 2.4(25 \text{ g}) = 60 \text{ g}$$

$$\begin{aligned} \text{EQ(1): } \frac{3}{4} 60 \text{ g}(14) - 70 \text{ g}(4) - 25 \text{ g}(10) - 5P = 0 \\ 100 \text{ g} - 5P = 0; \quad P = 20 \text{ g} \\ P = 20(9.81) = 196.2 \text{ N} \end{aligned}$$


PROB. 7.104: $m_B = 18 \text{ kg}$ $m_C = 10 \text{ kg}$
 $g = 9.81 \text{ m/s}^2$: $W_B = 18 \text{ g}$ $W_C = 10 \text{ g}$

$$\text{EQ(2): } D_x = 2.4 W_C = 2.4(10 \text{ g}) = 24 \text{ g}$$

$$\begin{aligned} \text{EQ(1): } \frac{3}{4} 24 \text{ g}(14) - (18 \text{ g})(4) - (10 \text{ g})(10) - 5P = 0 \\ 80 \text{ g} = 5P: \quad P = 16 \text{ g} \\ P = 16(9.81) = 156.96 \text{ N} \end{aligned}$$


$$P = 157.0 \text{ N}$$

7.105

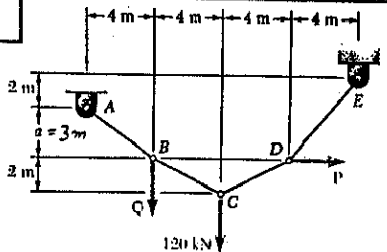

GIVEN:
 $a = 3\text{m}$

FIND:
MAGNITUDES
OF P AND Q




FREE BODY: PORTION DE

$$+\uparrow \Sigma M_D = 0$$

$$E_y(4\text{m}) - E_x(5\text{m}) = 0$$

$$E_y = \frac{5}{4} E_x$$




FREE BODY: PORTION CDE

$$+\uparrow \Sigma M_C = 0:$$

$$\frac{5}{4} E_x(8\text{m}) - E_x(7\text{m}) - P(2\text{m}) = 0$$

$$E_x = \frac{2}{3} P \quad (1)$$

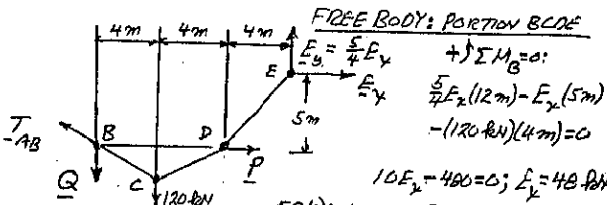

FREE BODY: PORTION BCDE


$$+\uparrow \Sigma M_B = 0:$$

$$\frac{5}{4} E_x(12\text{m}) - E_x(5\text{m}) - (120\text{ kN})(4\text{m}) = 0$$

$$10E_x - 480 = 0; E_x = 48\text{ kN}$$

$$\text{EQ(1): } 48\text{ kN} = \frac{2}{3} P$$

$$P = 72\text{ kN}$$

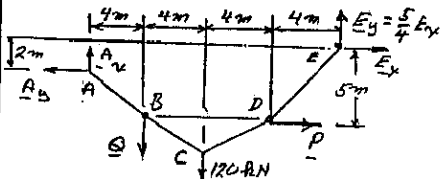

FREE BODY:
ENTIRE CABLE

$$+\uparrow \Sigma M_A = 0:$$


$$\frac{5}{4} E_x(16\text{m}) - E_x(2\text{m}) + P(3\text{m}) - Q(4\text{m}) - (120\text{ kN})(8\text{m}) = 0$$

$$(48\text{ kN})(20\text{m} - 2\text{m}) + (72\text{ kN})(3\text{m}) - Q(4\text{m}) - 960\text{ kN}\cdot\text{m} = 0$$

$$4Q = 170$$


$$Q = 30\text{ kN}$$

7.106

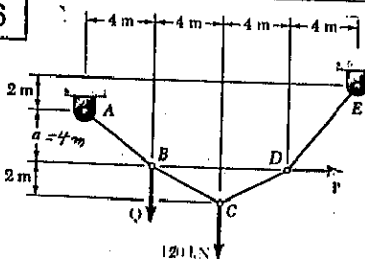

GIVEN:
 $a = 4\text{m}$

FIND:
MAGNITUDES
OF P AND Q



FREE BODY: PORTION DE

$$+\uparrow \Sigma M_D = 0$$


$$E_y(4\text{m}) - E_x(6\text{m}) = 0$$

$$E_y = \frac{3}{2} E_x$$

(CONTINUED)

7.106 CONTINUED

FREE BODY: PORTION CDE




$$+\uparrow \Sigma M_C = 0$$

$$\frac{3}{2} E_x(8\text{m}) - E_x(8\text{m}) - P(2\text{m}) = 0$$

$$E_x = \frac{1}{2} P \quad (1)$$

FREE BODY: PORTION BCDE

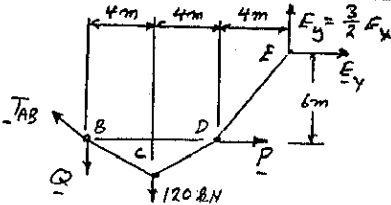

$$+\uparrow \Sigma M_B = 0:$$


$$\frac{3}{2} E_x(12\text{m}) - E_x(6\text{m}) + (120\text{ kN})(4\text{m}) = 0$$

$$12E_x = 480$$

$$E_x = 40\text{ kN}$$

$$\text{EQ(1): } E_x = \frac{1}{2} P; 40\text{ kN} = \frac{1}{2} P$$

$$P = 80\text{ kN}$$

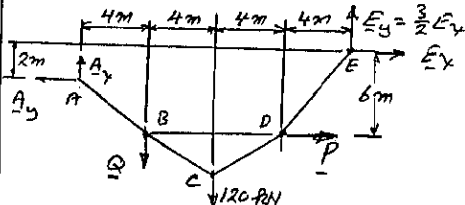

FREE BODY:
ENTIRE CABLE

$$+\uparrow \Sigma M_A = 0:$$


$$\frac{3}{2} E_x(16\text{m}) - E_x(2\text{m}) + P(4\text{m}) - Q(4\text{m}) - (120\text{ kN})(8\text{m}) = 0$$

$$(40\text{ kN})(24\text{m} - 2\text{m}) + (80\text{ kN})(4\text{m}) - Q(4\text{m}) - 960\text{ kN}\cdot\text{m} = 0$$

$$4Q = 240$$


$$Q = 60\text{ kN}$$

7.107



GIVEN:
MASS/METER = 0.8 kg/m

FIND: (a) T_{max}
(b) LENGTH OF CABLE



$$w = (0.8\text{ kg/m})(9.81\text{ m/s}^2)$$

$$= 7.848\text{ N/m}$$

$$W = (7.848\text{ N/m})(37.5\text{m})$$

$$W = 294.3\text{ N}$$

$$(a) +\uparrow \Sigma M_B = 0$$

$$T_A(2\text{m}) - W(\frac{1}{2} 37.5\text{m}) = 0$$

$$T_A(2\text{m}) - (294.3\text{N})(\frac{1}{2} 37.5\text{m}) = 0$$

$$T_A = 2759\text{ N}$$

$$T_m = \sqrt{W^2 + T_A^2}$$

$$T_m = \sqrt{(294.3\text{N})^2 + (2759\text{N})^2}$$

$$T_m = 2770\text{ N}$$


$$(b) S_B = \frac{4}{3} \left[1 + \frac{2}{3} \left(\frac{4B^2}{7B} \right) + \dots \right]$$

$$= 37.5 \left[1 + \frac{2}{3} \left(\frac{2\text{m}}{37.5\text{m}} \right) + \dots \right] = 37.57\text{m}$$

$$\text{LENGTH} = 2S_B = 2(37.57\text{m})$$

$$\text{LENGTH} = 75.14\text{m}$$

108

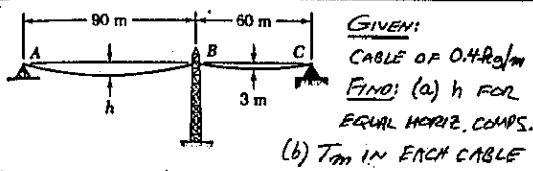

GIVEN:
CABLE OF 0.4 lb/ft
FIND: (a) h FOR
EQUAL HORIZ. COMPS.
(b) T_m IN EACH CABLE

$W = w x_B$
 $\sum M_B = 0$
 $T_0 y_B - (w x_B) \frac{x_B}{2} = 0$
HORIZ. COMP. $T_0 = \frac{w x_B^2}{2 y_B}$

CABLE AB $x_B = 45m$
 $T_0 = \frac{w(45m)^2}{2h}$

CABLE BC $x_B = 30m, y_B = 3m$
 $T_0 = \frac{w(30m)^2}{2(3m)}$

EQUATE $T_0 = T_0$
 $\frac{w(45m)^2}{2h} = \frac{w(30m)^2}{2(3m)}$; $h = 6.75m$

(b) $T_m^2 = T_0^2 + W^2$

CABLE AB: $w = (0.4 \text{ lb/ft}) \times (9.8 \text{ m/s}^2) = 3.924 \text{ N/m}$

$x_B = 45m, y_B = h = 6.75m$
 $T_0 = \frac{w x_B^2}{2 y_B} = \frac{(3.924 \text{ N/m})(45m)^2}{2(6.75m)} = 588.6 \text{ N}$

$W = w x_B = (3.924 \text{ N/m})(45m) = 176.58 \text{ N}$


$T_m^2 = (588.6 \text{ N})^2 + (176.58 \text{ N})^2$; **FOR AB, $T_m = 615 \text{ N}$**

CABLE BC $x_B = 30m, y_B = 3m$
 $T_0 = \frac{w x_B^2}{2 y_B} = \frac{(3.924 \text{ N/m})(30m)^2}{2(3m)} = 588.6 \text{ N (checks)}$

$W = w x_B = (3.924 \text{ N/m})(30m) = 117.72 \text{ N}$

$T_m^2 = (588.6 \text{ N})^2 + (117.72 \text{ N})^2$; **FOR BC, $T_m = 600 \text{ N}$**

7.109



GIVEN:
 $w = 9.75 \text{ kips/ft}$
FIND: (a) T_m
(b) LENGTH OF CABLE

$W = w x_B$
 $W = (9.75 \text{ kips/ft})(1750 \text{ ft})$
 $W = 17,063 \text{ kips}$


$\sum M_B = 0: T_0(316 \text{ ft}) - (17,063 \text{ kips})(875 \text{ ft}) = 0$
 $T_0 = 47,247 \text{ kips}$

(a) $T_m = \sqrt{T_0^2 + W^2} = \sqrt{(47,247 \text{ kips})^2 + (17,063 \text{ kips})^2}$
 $T_m = 50,230 \text{ kips}$

(b) $S_B = x_B \left[1 + \frac{2}{3} \left(\frac{y_B}{x_B} \right)^2 - \frac{2}{5} \left(\frac{y_B}{x_B} \right)^4 + \dots \right]$
 $\frac{y_B}{x_B} = \frac{316 \text{ ft}}{1750 \text{ ft}} = 0.18057$
 $S_B = (1750 \text{ ft}) \left[1 + \frac{2}{3} (0.18057)^2 - \frac{2}{5} (0.18057)^4 + \dots \right]$

$S_B = 1787.3 \text{ ft}$; **LENGTH = $2S_B = 3574.6 \text{ ft}$**
LENGTH = 3575 ft

7.110

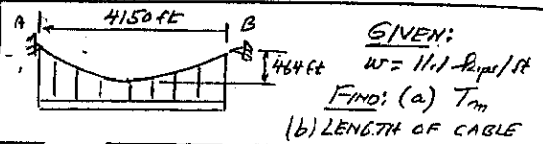


GIVEN:
 $w = 11.1 \text{ kips/ft}$
FIND: (a) T_m
(b) LENGTH OF CABLE

$x_B = 2075 \text{ ft}$
 $y_B = 464 \text{ ft}$
 $T_0 = \frac{w x_B^2}{2 y_B} = \frac{(11.1 \text{ kips/ft})(2075 \text{ ft})^2}{2(464 \text{ ft})}$
 $T_0 = 57,500 \text{ kips}$
 $W = w x_B = (11.1 \text{ kips/ft})(2075 \text{ ft}) = 23,033 \text{ kips}$

(a) $T_m = \sqrt{T_0^2 + W^2} = \sqrt{(57,500 \text{ kips})^2 + (23,033 \text{ kips})^2}$
 $T_m = 56,420 \text{ kips}$

(b) $S_B = x_B \left[1 + \frac{2}{3} \left(\frac{y_B}{x_B} \right)^2 - \frac{2}{5} \left(\frac{y_B}{x_B} \right)^4 + \dots \right]$
 $\frac{y_B}{x_B} = \frac{464 \text{ ft}}{2075 \text{ ft}} = 0.22361$
 $S_B = (2075 \text{ ft}) \left[1 + \frac{2}{3} (0.22361)^2 - \frac{2}{5} (0.22361)^4 + \dots \right] = 2142.1 \text{ ft}$
LENGTH = $2S_B = 2(2142.1 \text{ ft})$
LENGTH = 4284 ft

7.111

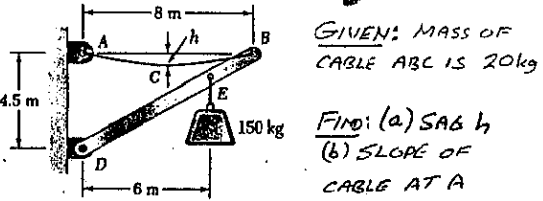

GIVEN: MASS OF
CABLE ABC IS 20 kg
FIND: (a) SAG h
(b) SLOPE OF
CABLE AT A

$(20 \text{ kg})(9.81 \text{ m/s}^2) = 196.2 \text{ N}$
FREE BODY: ENTIRE FRAME


$\sum M_D = 0: A_x(4.5m) - (196.2 \text{ N})(4m) - (1471.5 \text{ N})(6m) = 0$
 $A_x = 2136.4 \text{ N}$

FREE BODY: ENTIRE CABLE
 $\sum M_D = 0$
 $A_y(8m) - (196.2 \text{ N})(4m) = 0$
 $A_y = 98.1 \text{ N}$

(a) **FREE BODY: PORTION AC**
 $\sum F_x = 0: T_0 = A_x = 2136.4 \text{ N}$
 $\sum M_A = 0$
 $T_0 h - (98.1 \text{ N})(2m) = 0$
 $(2136.4 \text{ N})h - 196.2 \text{ N} \cdot m = 0$
 $h = 0.09183 \text{ m}$
 $h = 91.8 \text{ mm}$

(b) $\tan \theta_A = \frac{A_y}{A_x} = \frac{98.1 \text{ N}}{2136.4 \text{ N}}$
 $\tan \theta_A = 0.045918$
 $\theta_A = 2.62^\circ$
 $\theta_A = 2.63^\circ$

7.112

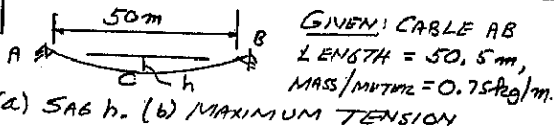

FIRST TWO TERMS OF EQ. 7.10, page 374


$$(a) S_B = \frac{1}{2}(50.5\text{ m}) = 25.25\text{ m}, \quad x_B = \frac{1}{2}(50\text{ m}) = 25\text{ m}$$

$$S_B = x_B \left[1 + \frac{2}{3} \left(\frac{y_B}{x_B} \right)^2 \right]$$

$$25.25\text{ m} = 25\text{ m} \left[1 - \frac{2}{3} \left(\frac{y_B}{x_B} \right)^2 \right]; \quad \left(\frac{y_B}{x_B} \right)^2 = 0.01 \left(\frac{3}{2} \right)^2 = \sqrt{0.015}$$

$$\frac{y_B}{x_B} = 0.12247; \quad \frac{h}{25\text{ m}} = 0.12247$$

$$h = 3.0619\text{ m} \quad h = 3.06\text{ m} \quad \blacktriangleleft$$



$$w = (0.75\text{ kg/m})(9.81\text{ m/s}^2) = 7.3575\text{ N/m}$$

$$W = S_B w = (25.25\text{ m})(7.3575\text{ N/m})$$

$$W = 185.78\text{ N}$$


$$+\sum \Sigma M_C = 0: T_0(3.0619\text{ m}) - (185.78\text{ N})(12.5\text{ m}) = 0$$

$$T_0 = 758.4\text{ N} \quad B_x = T_0 = 758.4\text{ N}$$

$$+\uparrow \Sigma F_y = 0: B_y - 185.78\text{ N} = 0 \quad B_y = 185.78\text{ N}$$

$$T_m = \sqrt{B_x^2 + B_y^2} = \sqrt{(758.4\text{ N})^2 + (185.78\text{ N})^2}; \quad T_m = 781\text{ N} \quad \blacktriangleleft$$

7.113



GIVEN: IN WINTER $h = 386\text{ ft}$, IN SUMMER $h = 394\text{ ft}$.
FIND: CHANGE IN LENGTH OF CABLE, WINTER TO SUMMER.

$$\text{EQ. 7.10, page 374: } S_B = x_B \left[1 + \frac{2}{3} \left(\frac{y_B}{x_B} \right)^2 - \frac{2}{5} \left(\frac{y_B}{x_B} \right)^4 + \dots \right]$$

$$\text{WINTER: } y_B = h = 386\text{ ft}, \quad x_B = \frac{1}{2}L = 2130\text{ ft}$$

$$S_B = (2130) \left[1 + \frac{2}{3} \left(\frac{386}{2130} \right)^2 - \frac{2}{5} \left(\frac{386}{2130} \right)^4 + \dots \right] = 2177.59\text{ ft}$$


$$\text{SUMMER: } y_B = h = 394\text{ ft}, \quad x_B = \frac{1}{2}L = 2130\text{ ft}$$

$$S_B = (2130) \left[1 + \frac{2}{3} \left(\frac{394}{2130} \right)^2 - \frac{2}{5} \left(\frac{394}{2130} \right)^4 + \dots \right] = 2175.715\text{ ft}$$

$$\Delta = 2(\Delta S_B) = 2(2177.59\text{ ft} - 2175.715\text{ ft}) = 2(1.875\text{ ft})$$

$$\text{CHANGE IN LENGTH} = 3.75\text{ ft} \quad \blacktriangleleft$$

7.114



GIVEN: CABLE LENGTH = L + A

FIND: APPROXIMATE SAG. (a) IN TERMS OF L AND A.
(b) FOR $L = 100\text{ ft}$, $A = 4\text{ ft}$

EQ. 7.10, page 374: (FIRST TWO TERMS)

$$(a) S_B = x_B \left[1 + \frac{2}{3} \left(\frac{y_B}{x_B} \right)^2 \right] \quad x_B = \frac{1}{2}L, \quad S_B = \frac{1}{2}(L+A)$$


$$y_B = h$$

$$\frac{1}{2}(L+A) = \frac{L}{2} \left[1 + \frac{2}{3} \left(\frac{h}{L/2} \right)^2 \right]$$


$$\frac{A}{2} = \frac{4}{3} \frac{h^2}{L}; \quad h^2 = \frac{3}{8} LA; \quad h = \sqrt{\frac{3}{8} LA}$$

$$(b) L = 100\text{ ft}, h = 4\text{ ft}. \quad h = \sqrt{\frac{3}{8}(100)(4)}; \quad h = 12.25\text{ ft} \quad \blacktriangleleft$$

7.115

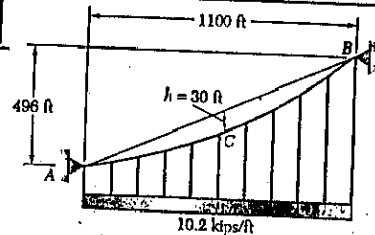

FIND:
(a) T_m .
(b) SLOPE AT B




FREE BODY: ENTIRE CABLE

$$+\sum \Sigma M_A = 0: B_y(1100\text{ ft})$$

$$- B_x(496\text{ ft}) - W(550\text{ ft}) = 0$$

$$1100 B_y - 496 B_x - 550W = 0 \quad (1)$$



FREE BODY: PORTION CB

$$+\sum \Sigma M_C = 0: -B_y(550\text{ ft})$$

$$+ B_x(278\text{ ft}) + \frac{W}{2}(275\text{ ft}) = 0$$

$$-550 B_y + 278 B_x + 137.5W = 0 \quad (2)$$

EQ.(1) X 0.5:

$$650 B_y - 248 B_x - 275W = 0 \quad (3)$$

ADD EOS. (2) AND (3)

$$30 B_x - 137.5W = 0 \quad (4)$$

$$W = wL = (10.2\text{ kips/ft})(1100\text{ ft}) = 11,220\text{ kips}$$

$$\text{EQ.(4): } 30 B_x - (137.5)(11,220) = 0 \quad B_x = 51,425\text{ kips}$$

$$\text{EQ.(1): } 1100 B_y - 496(51,425) - 550(11,220) = 0$$


$$B_y = 29,798\text{ kips}$$

$$T_m = \sqrt{B_x^2 + B_y^2} = \sqrt{(51,425\text{ kips})^2 + (29,798\text{ kips})^2}$$

$$T_m = 58,940\text{ kips} \quad \blacktriangleleft$$

$$\theta_B = \tan^{-1} \frac{B_y}{B_x}; \quad \theta_B = 29.2^\circ \quad \blacktriangleleft$$

7.116

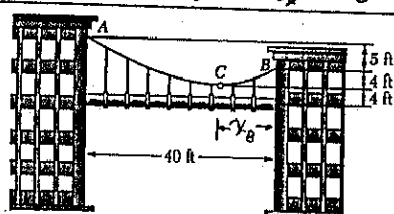


GIVEN:

$$W = (45+5)\text{ lb/ft}$$

$$W = 50\text{ lb/ft}$$

FIND: (a) x_B
(b) T_{max}

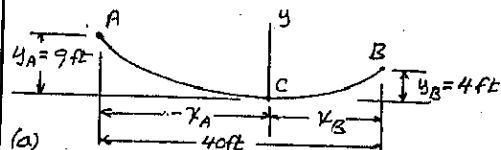

$$y_A = 9\text{ ft}$$

$$y_B = 4\text{ ft}$$

$$(a) \quad x_A = x_B - 40\text{ ft}$$

$$\text{USE EQ. 7.8 page 374:}$$

$$\text{POINT A: } y_A = \frac{w x_A^2}{2 T_0}; \quad 9 = \frac{w (x_B - 40)^2}{2 T_0} \quad (1)$$

$$\text{POINT B: } y_B = \frac{w x_B^2}{2 T_0}; \quad 4 = \frac{w x_B^2}{2 T_0} \quad (2)$$

$$\text{DIVIDING (1) BY (2): } \frac{9}{4} = \frac{(x_B - 40)^2}{x_B^2}; \quad x_B = 16\text{ ft}$$

POINT C IS 16 ft TO LEFT OF B

(b) MAXIMUM SLOPE AND THUS T_{max} IS AT A

$$x_A = x_B - 40 = 16 - 40 = -24\text{ ft}$$

$$y_A = \frac{w x_A^2}{2 T_0}; \quad 9\text{ ft} = \frac{(50\text{ lb/ft})(-24\text{ ft})^2}{2 T_0}; \quad T_0 = 1600\text{ lb}$$


$$W_{AC} = (50\text{ lb/ft})(24\text{ ft}) = 1200\text{ lb}$$

$$T_{max} = A \quad A_y = W_{AC} = 1200\text{ lb}$$

$$A_x = T_0 = 1600\text{ lb} \quad A$$


$$T_{max} = 2000\text{ lb} \quad \blacktriangleleft$$

7.117

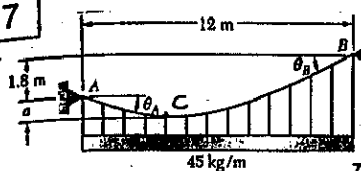

GIVEN: $\theta_B = 35^\circ$

FIND: (a) T_m
(b) VERTICAL DISTANCE TO LOWEST POINT.




FREE BODY: ENTIRE CABLE
 $B_y = B_x \tan 35^\circ$

$W = (45 \text{ kg/m})(12 \text{ m})(9.81 \text{ m/s}^2)$
 $W = 5297.4 \text{ N}$

$\sum M_A = 0: W(6 \text{ m}) + B_x(1.8 \text{ m}) - B_y(12 \text{ m}) = 0$
 $(5297.4)(6) + 1.8 B_x - B_x \tan 35^\circ (12) = 0$

$B_x = 4814 \text{ N}$ $B_y = (4814 \text{ N}) \tan 35^\circ = 3370.8 \text{ N}$

FREE BODY: PORTION CB




$\sum F_y = 0: B_y - W_{bc} = 0$
 $W_{bc} = B_y = 3370.8 \text{ N}$
 $W_{bc} = (45 \text{ kg/m})(9.81 \text{ m/s}^2) b$
 $3370.8 \text{ N} = (441.45 \text{ N/m}) b$
 $b = 7.6357 \text{ m}$

$\sum M_B = 0: T_0 d_c - W_{bc}(\frac{1}{2} b) = 0$
 $(4814 \text{ N}) d_c - (3370.8 \text{ N})(\frac{1}{2})(7.6357 \text{ m}) = 0$
 $d_c = 2.6733 \text{ m}$


(a) $d_c = 1.8 \text{ m} + a$; $2.6733 \text{ m} = 1.8 \text{ m} + a$; $a = 0.8733 \text{ m}$

(b) $T_m = B = \sqrt{B_x^2 + B_y^2} = \sqrt{(4814 \text{ N})^2 + (3370.8 \text{ N})^2}$
 $T_m = 5877 \text{ N}$ $T_m = 5880 \text{ N}$

7.118

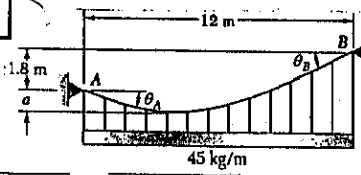

GIVEN: $a = 0.6 \text{ m}$
FIND: (a) T_m
(b) θ_B

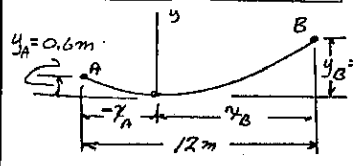


NOTE: $x_B - x_A = 12 \text{ m}$
OR: $x_A = x_B - 12 \text{ m}$

POINT A: $y_A = \frac{w x_A^2}{2 T_0}$; $0.6 = \frac{w (x_B - 12)^2}{2 T_0}$ (1)

POINT B: $y_B = \frac{w x_B^2}{2 T_0}$; $2.4 = \frac{w x_B^2}{2 T_0}$ (2)

DIVIDING (1) BY (2): $\frac{0.6}{2.4} = \frac{(x_B - 12)^2}{x_B^2}$; $x_B = 8 \text{ m}$

(a) EQ (2): $2.4 = \frac{w (8)^2}{2 T_0}$; $T_0 = 13.333 \text{ W}$

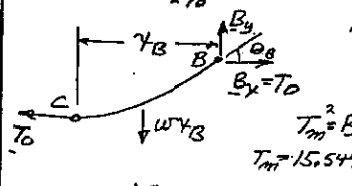


FREE BODY: PORTION CB
 $\sum F_y = 0$ $B_y = w x_B$
 $B_y = B W$


$T_m^2 = B_x^2 + B_y^2$; $T_m = \sqrt{(13.333 \text{ W})^2 + (8 \text{ W})^2}$
 $T_m = 15.549 \text{ W} = 15.549(45)(9.81)$
 $T_m = 6880 \text{ N}$

$\theta_B = \tan^{-1} B_y / B_x = \tan^{-1} 8 \text{ W} / 13.333 \text{ W}$
 $\theta_B = 31.0^\circ$

* 7.119



SHOW THAT M_C IN BEAM IS EQUAL TO $T_0 h$ WHERE T_0 IS HORIZ. COMPONENT OF CABLE TENSION




FREE BODY: ENTIRE CABLE

DENOTE BY $\sum M_B^L$

THE SUM OF THE MOMENTS OF ALL LOADS ABOUT B.

$\sum M_B = 0: -A_y L - T_0 a + \sum M_B^L = 0$
 $A_y = \frac{1}{L} \sum M_B^L - T_0 \frac{a}{L}$ (1)



FREE BODY: PORTION AC


DENOTE BY $\sum M_C^X$ THE SUM OF THE MOMENTS

ABOUT C OF LOADS BETWEEN A AND C.

$\sum M_C = 0: -A_y x + T_0 (h - a \frac{x}{L}) + \sum M_C^X = 0$ (2)

SUBSTITUTE FOR A_y FROM (1) AND SOLVE (2) FOR $T_0 h$:


$T_0 h = \frac{x}{L} \sum M_B^L - \sum M_C^X$ (3)



FREE BODY: ENTIRE BEAM

$\sum M_B = 0: -A' L + \sum M_B^L = 0$

$A' = \frac{1}{L} \sum M_B^L$ (4)



FREE BODY: PORTION AC

$\sum M_C = 0: M_C - A' x + \sum M_C^X = 0$

SUBSTITUTE FOR A' FROM (4):


$M_C = \frac{x}{L} \sum M_B^L - \sum M_C^X$ (5)

COMPARING (3) AND (5) AND NOTING THAT

$\sum M_B^L = \sum M_B^L$ $\sum M_C^X = \sum M_C^X$

WE HAVE: $M_C = T_0 h$ (Q.E.D)


7.120

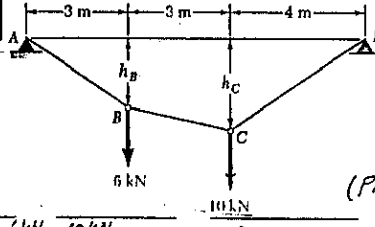

GIVEN: $T_m = 15 \text{ kN}$

FIND: DISTANCES h_B AND h_C


(PROB. 7.94 a)



$\sum M_B = 0: A(10 \text{ m}) - (6 \text{ kN})(7 \text{ m}) - (10 \text{ kN})(4 \text{ m}) = 0$
 $A = 8.2 \text{ kN}$

$\sum F_y = 0: B.2 \text{ kN} - 6 \text{ kN} - 10 \text{ kN} + B = 0$
 $B = 7.8 \text{ kN}$


AT A: $T_m^2 = T_0^2 + A^2$
 $15^2 = T_0^2 + 8.2^2$
 $T_0 = 12.56 \text{ kN}$



AT B: $M_B = T_0 h_B$; $24.6 \text{ kN}\cdot\text{m} = (12.56 \text{ kN}) h_B$; $h_B = 1.957 \text{ m}$

AT C: $M_C = T_0 h_C$; $31.2 \text{ kN}\cdot\text{m} = (12.56 \text{ kN}) h_C$; $h_C = 2.48 \text{ m}$


7.121



GIVEN: $d_C = 3\text{m}$

FIND: d_B AND d_D

(PROB. 7.97a)





$\sum M_B = 0:$


$A(10\text{m}) - (5\text{kN})(6\text{m})$

$- (5\text{kN})(6\text{m}) - (10\text{kN})(3\text{m}) = 0$

$A = 10\text{kN}$



GEOMETRY:



$d_C = 1.6\text{m} + h_C$

$3\text{m} = 1.6\text{m} + h_C$

$h_C = 1.4\text{m}$

SINCE $M = T_0 h$, h IS PROPORTIONAL TO M , THUS

$\frac{h_B}{M_B} = \frac{h_C}{M_C} = \frac{h_D}{M_D}; \frac{h_B}{20\text{kN}\cdot\text{m}} = \frac{1.4\text{m}}{30\text{kN}\cdot\text{m}} = \frac{h_D}{30\text{kN}\cdot\text{m}}$

$h_B = 1.4 \left(\frac{20}{30}\right) = 0.9333\text{m}$

$h_D = 1.4 \left(\frac{30}{30}\right) = 1.4\text{m}$


$d_B = 0.8\text{m} + 0.9333\text{m}$

$d_D = 2.8\text{m} + 1.4\text{m}$

$d_B = 1.733\text{m}$

$d_D = 4.2\text{m}$


7.122

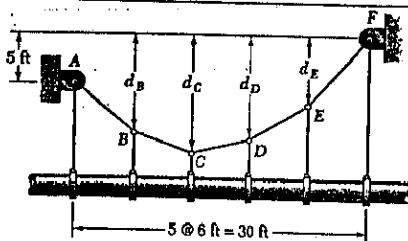

(PROB. 7.99b)

GIVEN: $d_C = 12\text{ft}$, TENSION IN HANGERS = 400 lb

FIND: d_D

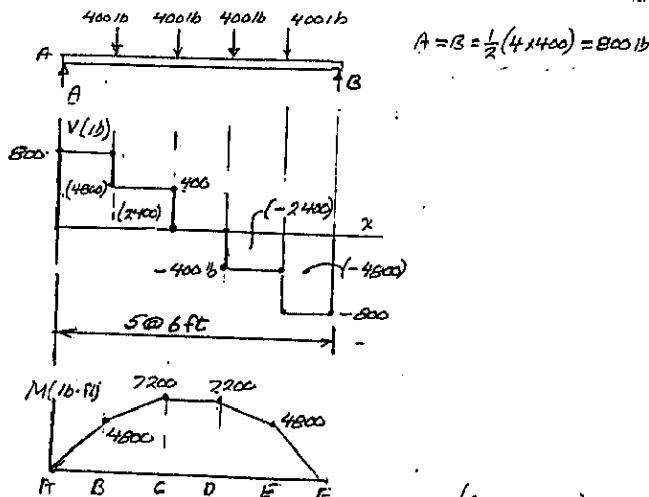

$A = B = \frac{1}{2}(4 \times 400) = 800\text{lb}$

(CONTINUED)

7.122 CONTINUED


GEOMETRY

$d_C = h_C + 3\text{ft}$

$12\text{ft} = h_C + 3\text{ft}$

$h_C = 9\text{ft}$

$d_D = h_D + 2\text{ft}$

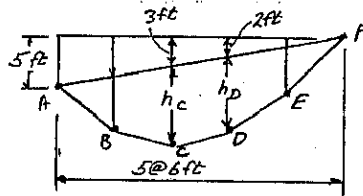

AT C: $M_C = T_0 h_C$

$7200\text{lb}\cdot\text{ft} = T_0(9\text{ft})$

$T_0 = 800\text{lb}$

AT D: $M_D = T_0 h_D$


$7200\text{lb}\cdot\text{ft} = (800\text{lb})h_D$

$h_D = 9\text{ft}$

EQ.(1): $d_D = 9\text{ft} + 2\text{ft}$

$d_D = 11\text{ft}$


7.123

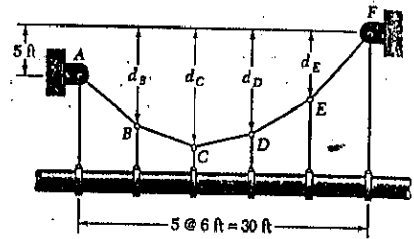

GIVEN: $d_C = 9\text{ft}$, TENSION IN HANGERS = 400 lb

FIND: d_D

(PROB. 7.100b)

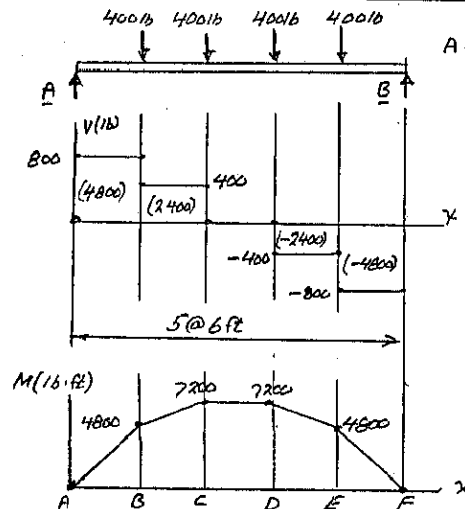

$A = B = \frac{1}{2}(4 \times 400)$

$A = B = 800\text{lb}$

AT ANY POINT: $M = T_0 h$

WE NOTE THAT SINCE $M_C = M_D$, WE HAVE $h_C = h_D$

GEOMETRY

$d_C = h_C + 3\text{ft}$

$9\text{ft} = h_C + 3\text{ft}$

$h_C = 6\text{ft}$

AND $h_D = 6\text{ft}$

$d_D = h_D + 2\text{ft} = 6\text{ft} + 2\text{ft}$


$d_D = 8\text{ft}$

7.124

FOR A CABLE PROVE THAT

$$\frac{d^2y}{dx^2} = \frac{w(x)}{T_0}$$

WHERE $w(x)$ IS THE DISTRIBUTED LOAD



FREE BODY: DIFFERENTIAL ELEMENT OF CABLE

$w = w(x) =$ LOAD AS FUNCTION OF x

$$A_y = T_0 \tan \theta_A \quad B_y = T_0 \tan \theta_B$$

$$\tan \theta_A = \frac{dy}{dx} \Big|_A = \frac{dy}{dx}$$

$$\tan \theta_B = \frac{dy}{dx} \Big|_B = \frac{dy}{dx} + \frac{d^2y}{dx^2} dx$$

OR $\tan \theta = \frac{dy}{dx} + \frac{d^2y}{dx^2} dx$

$$\uparrow \Sigma F_y = 0: -A_y + B_y - w dx - T_0 \tan \theta_A + T_0 \tan \theta_B - w dx = 0$$


$$-T_0 \frac{dy}{dx} + T_0 \left(\frac{dy}{dx} + \frac{d^2y}{dx^2} dx \right) - w dx = 0$$

$$T_0 \frac{d^2y}{dx^2} dx - w dx = 0 \quad \frac{d^2y}{dx^2} = \frac{w}{T_0} \text{ (Q.E.D.)}$$

7.125

GIVEN: $w = w_0 \cos(\pi x/L)$, $L = \text{SPAN}$
 $h = \text{SAG}$, ORIGIN AT MID-SPAN.

FIND: EQUATION OF CABLE SHAPE, AND T_0 AND T_m

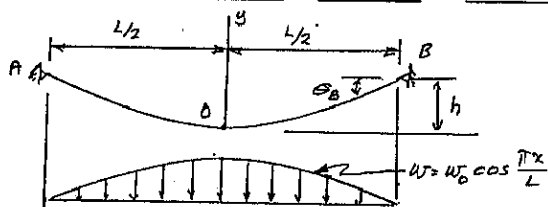

$$\frac{d^2y}{dx^2} = \frac{w}{T_0}$$

$$\frac{d^2y}{dx^2} = \frac{w_0}{T_0} \cos \frac{\pi x}{L}$$

$$\frac{dy}{dx} = \frac{w_0 L}{T_0 \pi} \sin \frac{\pi x}{L} + C_1$$

$$y = -\frac{w_0 L^2}{T_0 \pi^2} \cos \frac{\pi x}{L} + C_1 x + C_2$$

BOUNDARY CONDITIONS $x=0, \frac{dy}{dx} = 0, \therefore C_1 = 0$

$$x=0, y=0 = -\frac{w_0 L^2}{T_0 \pi^2} \cos 0 + C_2 \quad C_2 = +\frac{w_0 L^2}{T_0 \pi^2}$$

$$y = +\frac{w_0 L^2}{T_0 \pi^2} \left(1 - \cos \frac{\pi x}{L} \right) \quad (1)$$

$$x = \frac{L}{2}, y = h \quad h = \frac{w_0 L^2}{T_0 \pi^2} \left(1 - \cos \frac{\pi}{2} \right) \quad h = \frac{w_0 L^2}{T_0 \pi^2}$$

EQ(1) $y = h \left(1 - \cos \frac{\pi x}{L} \right)$

$$\frac{dy}{dx} = h \frac{\pi}{L} \sin \frac{\pi x}{L}; \quad \tan \theta_B = \frac{dy}{dx} \Big|_B = h \frac{\pi}{L} \sin \frac{\pi}{2} = h \frac{\pi}{L}$$


$$\cos \theta_B = \frac{T_0}{T_m} = \frac{1}{\sqrt{1 + \tan^2 \theta_B}} = \frac{1}{\sqrt{1 + \frac{h^2 \pi^2}{L^2}}}$$

$$T_m = \frac{T_0}{\cos \theta_B} = \left(\frac{w_0 L^2}{T_0 \pi^2} \right) \sqrt{1 + \frac{h^2 \pi^2}{L^2}}$$

OR: $T_{max} = \frac{w_0 L}{\pi} \sqrt{\frac{L^2}{h^2 \pi^2} + 1}$

7.126

IF $w = w_0 / \cos \theta$, PROVE CURVE FORMED BY A CABLE IS A CIRCULAR ARC.

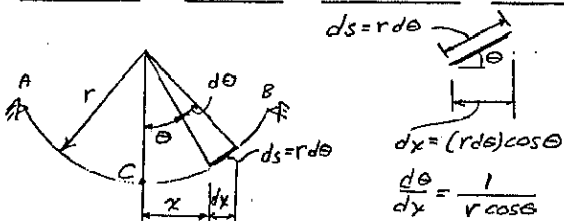

$$dx = (r d\theta) \cos \theta$$

$$\frac{d\theta}{dx} = \frac{1}{r \cos \theta} \quad (1)$$


$$\frac{dy}{dx} = \tan \theta; \quad \frac{d^2y}{dx^2} = + \sec^2 \theta \frac{d\theta}{dx} \quad (2)$$

SUBSTITUTE FROM (1): $\frac{d^2y}{dx^2} = \frac{\sec^2 \theta}{r \cos \theta} = \frac{1}{r \cos^3 \theta}$

FROM PROB 7.124:

$$\frac{d^2y}{dx^2} = \frac{w(x)}{T_0}; \quad \frac{1}{r \cos^3 \theta} = \frac{w(x)}{T_0}$$

$$w(x) = \frac{T_0}{r \cos^3 \theta} = \text{LOADING PER HORIZONTAL UNIT}$$




$$w ds = w(x) dx$$

$$w ds = \frac{T_0}{r \cos^3 \theta} \cos \theta ds \quad w = \frac{T_0}{r \cos^2 \theta}$$


WE NOTE THAT SMALLEST VALUE OF w OCCURS AT $\theta = 0$, DENOTING SMALLEST VALUE BY w_0 , WE FIND

$$w_0 = \frac{T_0}{r} \quad w = \frac{w_0}{\cos^2 \theta} \quad (Q.E.D.)$$

7.127

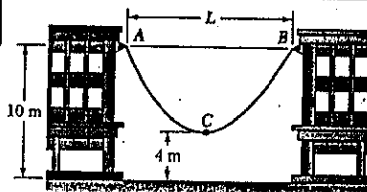

GIVEN: 30-m CABLE,
 $T_m = 500N$
 FIND: (a) L
 (b) MASS OF CABLE

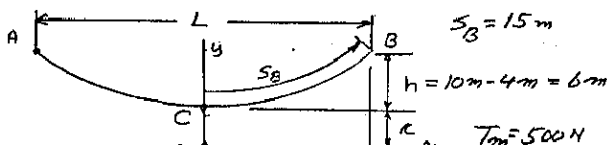

EQ. 7.17: $y_B^2 - s_B^2 = r^2; \quad (6+r)^2 - 15^2 = r^2$
 $36 + 12r + r^2 - 225 = r^2$
 $12r = 189 \quad r = 15.75m$

EQ. 7.15: $s_B = r \sinh \frac{y_B}{r}; \quad 15 = (15.75) \sinh \frac{y_B}{15.75}$
 $\sinh \frac{y_B}{15.75} = 0.95238 \quad \frac{y_B}{15.75} = 0.8473$

(a) $x_B = 0.8473(15.75) = 13.345m; \quad L = 2x_B \quad L = 26.7m$


(b) EQ. 7.18: $T_m = w y_B; \quad 500N = w(6 + 15.75)$

$$w = 22.99 N/m$$

$$W = 2S_B w = (30m)(22.99 N/m) = 689.7N$$

$$m = \frac{W}{g} = \frac{689.7N}{9.81 m/s^2} \quad \text{TOTAL MASS} = 70.3 kg$$


7.128



GIVEN: 20-m
CHAIN OF MASS 12 lb
FIND: (a) L, (b) T_m

$$\text{MASS/METER} = (12 \text{ lb}) / (20 \text{ m}) = 0.6 \text{ lb/m}$$

$$W = (0.6 \text{ lb/m})(9.81 \text{ m/s}^2) = 5.886 \text{ N/m}$$

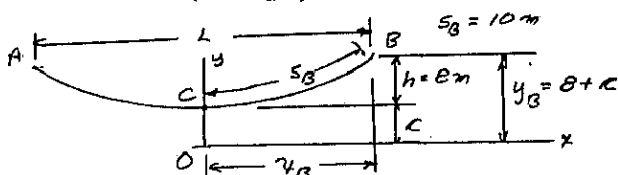

$$\text{EQ. 7.17: } y_B^2 - S_B^2 = c^2; (8+c)^2 - 10^2 = c^2$$

$$64 + 16c + c^2 - 100 = c^2$$

$$16c = 36 \quad c = 2.25 \text{ m}$$

$$\text{EQ. 7.18: } T_m = W y_B = (5.886 \text{ N/m})(8 \text{ m} + 2.25 \text{ m})$$

$$T_m = 60.33 \text{ N} \quad T_m = 60.3 \text{ N}$$


$$\text{EQ. 7.15: } S_B = c \sinh \frac{x_B}{c}; 10 \text{ m} = (2.25 \text{ m}) \sinh \frac{x_B}{2.25}$$

$$\sinh \frac{x_B}{2.25} = 4.444; \quad \frac{x_B}{2.25} = 2.197$$


$$x_B = 2.197(2.25 \text{ m}) = 4.944 \text{ m}; L = 2x_B = 2(4.944 \text{ m}) = 9.888 \text{ m}$$

$$L = 9.89 \text{ m}$$

7.129



GIVEN: 200-FT TAPE WEIGHS 4 lb, $T_m = 16 \text{ lb}$
FIND: SPAN L

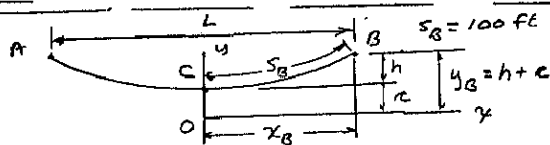

$$W = (4 \text{ lb}) / (200 \text{ ft}) = 0.02 \text{ lb/ft} \quad T_m = 16 \text{ m}$$

$$\text{EQ. 7.18: } T_m = W y_B; 16 \text{ lb} = (0.02 \text{ lb/ft}) y_B; y_B = 800 \text{ ft}$$


$$\text{EQ. 7.17: } y_B^2 - S_B^2 = c^2; (800)^2 - (100)^2 = c^2; c = 793.73 \text{ ft}$$

$$\text{EQ. 7.15: } S_B = c \sinh \frac{x_B}{c}; 100 = 793.73 \sinh \frac{x_B}{793.73}$$


$$\frac{x_B}{793.73} = 0.12586; x_B = 99.737 \text{ ft}$$

$$L = 2x_B = 2(99.737 \text{ ft}); L = 199.47 \text{ ft}$$

7.130



GIVEN: 400-FT CABLE,
 $h = 100 \text{ ft}$, $W = 2.5 \text{ lb/ft}$
FIND: SPAN L AND T_m

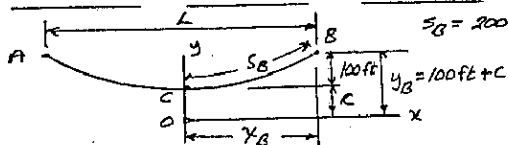

$$\text{EQ. 7.17: } y_B^2 - S_B^2 = c^2; (100+c)^2 - 200^2 = c^2$$

$$100c + 200c + c^2 - 40000 = c^2; c = 150 \text{ ft}$$

$$\text{EQ. 7.15: } S_B = c \sinh \frac{x_B}{c}; 200 = 150 \sinh \frac{x_B}{150}$$


$$\sinh \frac{x_B}{150} = \frac{4}{3}; \quad \frac{x_B}{150} = 1.0986; x_B = (150)(1.0986) = 164.79 \text{ ft}$$

$$L = 2x_B = 2(164.79 \text{ ft}) = 329.58 \text{ ft}; L = 330 \text{ ft}$$


$$\text{EQ. 7.18: } T_m = W y_B = (2.5 \text{ lb/ft})(100 \text{ ft} + 150 \text{ ft})$$

$$T_m = 625 \text{ lb}$$

7.131



GIVEN: 20-m
CABLE ACB OF
UNIT MASS =
 0.2 lb/m , $h = 8 \text{ m}$
FIND: (a) P, (b) L.

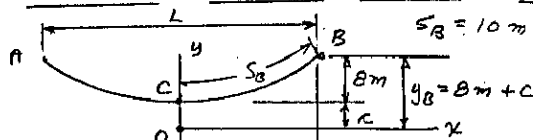

$$\text{EQ. 7.17: } y_B^2 - S_B^2 = c^2; (8+c)^2 - 10^2 = c^2$$

$$64 + 16c + c^2 - 100 = c^2$$

$$16c = 36 \quad c = 2.25 \text{ m}$$

$$\text{EQ. 7.15: } S_B = c \sinh \frac{x_B}{c}; 10 \text{ m} = (2.25 \text{ m}) \sinh \frac{x_B}{2.25}$$

$$\sinh \frac{x_B}{2.25} = 4.444; \quad \frac{x_B}{2.25} = 2.197; x_B = (2.197)(2.25 \text{ m}) = 4.944 \text{ m}$$


$$L = 2x_B = 2(4.944 \text{ m}) = 9.888 \text{ m}; L = 9.89 \text{ m}$$

NOTE THAT P = HORIZ. COMP. OF CABLE TENSION, $\therefore T_0 = P$


$$\text{EQ. 7.18: } T_0 = P = W c; P = (0.2 \text{ lb/m})(9.81 \text{ m/s}^2)(2.25 \text{ m})$$

$$P = 4.444 \text{ N} \quad P = 4.44 \text{ N}$$

7.132



GIVEN: 20-m
CABLE ACB OF
UNIT MASS =
 0.2 lb/m , $P = 20 \text{ N}$
FIND: (a) h, (b) L.

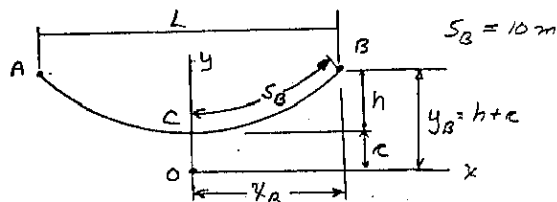

$$\text{TOTAL CABLE: } W = (0.2 \text{ lb/m})(9.81 \text{ m/s}^2)(20 \text{ m}) = 39.24 \text{ N}$$

$$\text{COLLAR AT B: } B_y = \frac{1}{2} W = 19.62 \text{ N}$$

$$T_m \leftarrow \quad P = 20 \text{ N} \quad T_m = \sqrt{(20 \text{ N})^2 + (19.62 \text{ N})^2}$$

$$T_m = 28.017 \text{ N}$$

$$\text{EQ. 7.18: } T_m = W y_B; 28.017 \text{ N} = (0.2 \text{ lb/m})(9.81 \text{ m/s}^2) y_B$$

$$y_B = 14.280 \text{ m}$$

$$\text{EQ. 7.17: } y_B^2 - S_B^2 = c^2; (14.280 \text{ m})^2 - (10 \text{ m})^2 = c^2$$

$$c^2 = 163.92 \quad c = 10.194 \text{ m}$$

$$y_B = h + c$$

$$14.280 \text{ m} = h + 10.194 \text{ m}$$

$$h = 4.086 \text{ m} \quad h = 4.09 \text{ m}$$

$$\text{EQ. 7.15: } S_B = c \sinh \frac{x_B}{c}$$


$$10 \text{ m} = (10.194 \text{ m}) \sinh \frac{x_B}{10.194}$$

$$\sinh \frac{x_B}{10.194} = 0.981 \quad \frac{x_B}{10.194} = 0.8678$$


$$x_B = 0.8678(10.194 \text{ m}) = 8.847 \text{ m}$$

$$L = 2x_B = 2(8.847 \text{ m}) = 17.694 \text{ m}$$

$$L = 17.69 \text{ m}$$

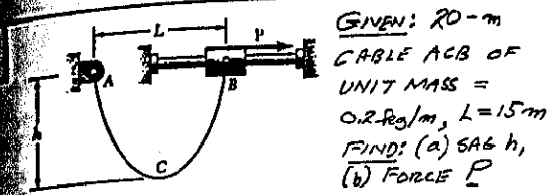

GIVEN: 20-m
CABLE ACB OF
UNIT MASS =
0.2 kg/m, L=15m
FIND: (a) SAG h,
(b) FORCE P

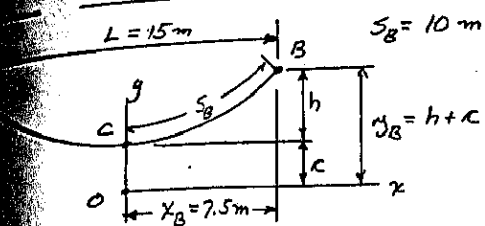

$$S_B = c \sinh \frac{x_B}{c}$$

$$10 = c \sinh \frac{7.5}{c} ; \quad c = 5.5504 \text{ m}$$

$$y_B = c \cosh \frac{x_B}{c} = (5.5504) \cosh \frac{7.5}{5.5504}$$

$$y_B = 11.437 \text{ m}; \quad y_B = h + c$$


$$11.437 = h + 5.5504; \quad h = 5.89 \text{ m}$$

$$T_0 = w c = (0.2 \text{ kg/m})(9.81 \text{ m/s}^2)(5.5504 \text{ m})$$

$$T_0 = 10.89 \text{ N}; \quad P = T_0 = \text{HORIZ. COMP. OF TENSION}$$

$$P = 10.89 \text{ N}$$

34 **GIVEN:** $T_m = 300 \text{ m}$,
90-m WIRE
FIND: (a) SAG h,
(b) TOTAL MASS OF CABLE

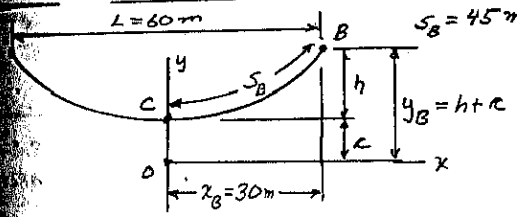

$$S_B = c \sinh \frac{x_B}{c}$$

$$45 = c \sinh \frac{30}{c} ; \quad c = 18.494 \text{ m}$$

$$y_B = c \cosh \frac{x_B}{c}$$

$$y_B = (18.494) \cosh \frac{30}{18.494} ; \quad y_B = 48.652 \text{ m}$$

$$y_B = h + c$$

$$48.652 = h + 18.494 ; \quad h = 30.158 \text{ m}$$

$$h = 30.2 \text{ m}$$

$$T_m = w y_B$$

$$300 \text{ N} = w (48.652 \text{ m}); \quad w = 6.166 \text{ N/m}$$

TOTAL WEIGHT OF CABLE


$$W = w (\text{LENGTH}) = (6.166 \text{ N/m})(90 \text{ m}) = 554.96 \text{ N}$$

TOTAL MASS OF CABLE

$$m = \frac{W}{g} = \frac{554.96 \text{ N}}{9.81 \text{ m/s}^2} = 56.57 \text{ kg}$$

$$m = 56.6 \text{ kg}$$

7.135 **GIVEN:** CABLE
OF LENGTH 20m.
FIND: SAG h

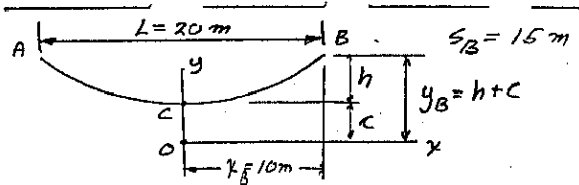

$$\text{EQ. 7.17: } S_B = c \sinh \frac{x_B}{c}$$

$$15 = c \sinh \frac{10}{c} ; \quad c = 6.1647 \text{ m}$$

$$\text{EQ. 7.16: } y_B = c \cosh \frac{x_B}{c}$$


$$y_B = (6.1647 \text{ m}) \cosh \frac{10}{6.1647} ; \quad y_B = 16.2174 \text{ m}$$

$$y_B = h + c$$

$$16.2174 \text{ m} = h + 6.1647 \text{ m}$$

$$h = 10.0527 \text{ m} \quad h = 10.05 \text{ m}$$

7.136 **GIVEN:** ROPE OF
LENGTH 10 ft WITH
SPAN L EQUAL TO
SAG h
FIND: (a) SPAN L,
(b) ANGLE θ_B .

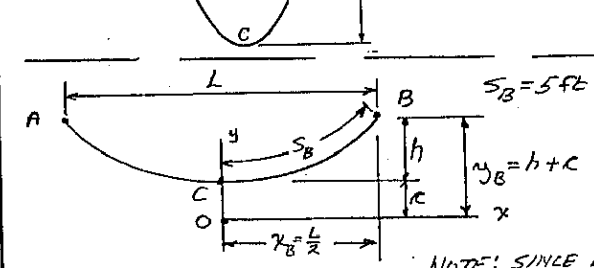

$$\text{EQ. 7.16: } y_B = c \cosh \frac{x_B}{c}$$

$$h + c = c \cosh \frac{h/2}{c}$$

$$\frac{h}{c} + 1 = \cosh \left(\frac{1}{2} \frac{h}{c} \right)$$

SOLVE FOR h/c: $\frac{h}{c} = 4.933$

$$\text{EQ. 7.16: } y = c \cosh \frac{x}{c}$$

$$\frac{dy}{dx} = \sinh \frac{x}{c}$$

AT B: $\tan \theta_B = \frac{dy}{dx} \Big|_B = \sinh \frac{x_B}{c}$

SUBSTITUTE $x_B = \frac{h}{2}$; $\tan \theta_B = \sinh \left(\frac{1}{2} \frac{h}{c} \right) = \sinh \left(\frac{1}{2} \times 4.933 \right)$

$$\tan \theta_B = 5.848 \quad \theta_B = 80.3^\circ$$

$$\text{EQ. 7.17: } S_B = c \sinh \frac{x_B}{c} = c \sinh \left(\frac{1}{2} \frac{h}{c} \right)$$

$$5 \text{ ft} = c \sinh \left(\frac{1}{2} \times 4.933 \right)$$

$$5 \text{ ft} = c (5.848)$$



$$c = 0.855$$

RECALL THAT $\frac{h}{c} = 4.933$

$$h = 4.933 (0.855) = 4.218$$

$$h = 4.22 \text{ ft}$$

7.137

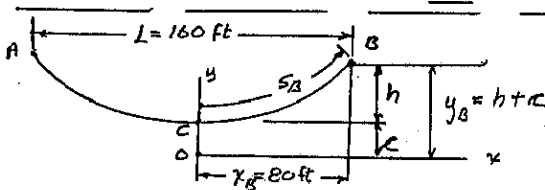

EQ. 7.18: $T_m = w y_B$; $400 \text{ lb} = (2.5 \text{ lb/ft}) y_B$; $y_B = 200 \text{ ft}$

EQ. 7.16: $y_B = c \cosh \frac{x_B}{c}$
 $200 \text{ ft} = c \cosh \frac{80 \text{ ft}}{c}$

SOLVE FOR c : $c = 182.148 \text{ ft}$ AND $L = 31.592 \text{ ft}$



$y_B = h + c$; $h = y_B - c$

FOR $c = 182.148 \text{ ft}$; $h = 200 - 182.148 = 17.852 \text{ ft} \triangleleft$

FOR $c = 31.592 \text{ ft}$; $h = 200 - 31.592 = 168.408 \text{ ft} \triangleleft$

FOR $T_m \leq 400 \text{ lb}$: SMALLEST $h = 17.85 \text{ ft} \triangleleft$

7.138

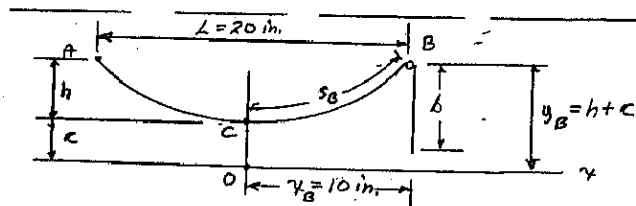

LENGTH OF OVER HANG: $b = 50 \text{ in.} - 2s_B$

WEIGHT OF OVER HANG EQUALS MAX. TENSION

$T_m = T_B = w b = w(50 \text{ in.} - 2s_B)$

EQ. 7.15: $s_B = c \sinh \frac{x_B}{c}$

EQ. 7.16: $y_B = c \cosh \frac{x_B}{c}$

EQ. 7.18: $T_m = w y_B$
 $w(50 \text{ in.} - 2s_B) = w y_B$
 $w(50 \text{ in.} - 2c \sinh \frac{x_B}{c}) = w c \cosh \frac{x_B}{c}$

$x_B = 10$: $50 - 2c \sinh \frac{10}{c} = c \cosh \frac{10}{c}$

SOLVE BY TRIAL + ERROR:

$c = 5.549 \text{ in.}$ AND $c = 27.742 \text{ in.}$

FOR $c = 5.549 \text{ in.}$

$y_B = (5.549 \text{ in.}) \cosh \frac{10 \text{ in.}}{5.549 \text{ in.}} = 17.277 \text{ in.}$

$y_B = h + c$; $17.277 \text{ in.} = h + 5.549 \text{ in.}$

$h = 11.728 \text{ in.}$ $h = 11.73 \text{ in.} \triangleleft$


FOR $c = 27.742 \text{ in.}$

$y_B = (27.742 \text{ in.}) \cosh \frac{10 \text{ in.}}{27.742 \text{ in.}} = 29.564 \text{ in.}$


$y_B = h + c$; $29.564 \text{ in.} = h + 27.742 \text{ in.}$

$h = 1.8219 \text{ in.}$ $h = 1.822 \text{ in.} \triangleleft$

7.139 and 7.140



GIVEN: UNIT
 CABLE = 0.4 kg/m
 FIND: MAX
 IN CABLE
 PROB. 7.139
 PROB. 7.140

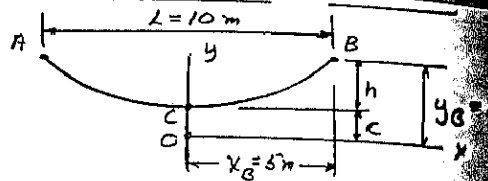

PROB. 7.139 $h = 5 \text{ m}$ $y_B = 5 \text{ m} + c$

EQ. 7.16: $y_B = c \cosh \frac{x_B}{c}$
 $5 \text{ m} + c = c \cosh \frac{5 \text{ m}}{c}$

SOLVE BY TRIAL: $c = 3.0938 \text{ m}$

EQ. 7.18: $T_m = w y_B = w(h + c)$
 $= (0.4 \text{ kg/m})(9.81 \text{ m/s}^2)(5 \text{ m} + 3.0938 \text{ m})$
 $T_m = 31.76 \text{ N}$ $T_m = 31.8 \text{ N}$


PROB. 7.140 $h = 3 \text{ m}$ $y_B = 3 \text{ m} + c$

EQ. 7.16: $y_B = c \cosh \frac{x_B}{c}$
 $3 \text{ m} + c = c \cosh \frac{10 \text{ m}}{c}$


SOLVE BY TRIAL: $c = 4.5945 \text{ m}$

EQ. 7.18: $T_m = w y_B = w(h + c)$
 $= (0.4 \text{ kg/m})(9.81 \text{ m/s}^2)(3 \text{ m} + 4.5945 \text{ m})$
 $T_m = 29.80 \text{ N}$ $T_m = 29.8 \text{ N}$

7.141



GIVEN: $w = 2 \text{ kg/m}$
 UNIT MASS OF
 CABLE
 FIND: FORCE

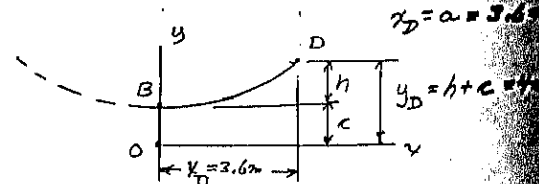


EQ. 7.16: $y_D = c \cosh \frac{x_D}{c}$
 $4 \text{ m} + c = c \cosh \frac{3.6 \text{ m}}{c}$


SOLVE BY TRIAL: $c = 2.0712 \text{ m}$

NOTE: $F = T_m$

EQ. 7.18: $F = T_m = w y_D = w(4 \text{ m} + c)$
 $F = (2 \text{ kg/m})(9.81 \text{ m/s}^2)(4 \text{ m} + 2.0712 \text{ m})$
 $F = 119.12 \text{ N}$ $F = 119.1 \text{ N} \rightarrow$



GIVEN: $a = 6m$,
UNIT MASS OF CABLE
 $= 2.82g/m$.
FIND: FORCE P

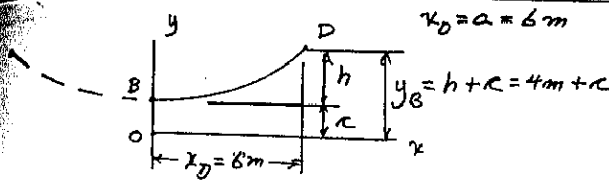


EQ. 7.16: $y_D = c \cosh \frac{x_D}{c}$
 $4m + c = c \cosh \frac{6m}{c}$

SOLVE BY TRIAL: $c = 5.054m$


NOTE: $F = T_m$

EQ. 7.18: $F = T_m = w y_D = w(4m + c)$
 $F = (2.82g/m)(9.81m/s^2)(4m + 5.054m)$
 $F = 177.64N$

7.143



GIVEN: $w = 3 lb/ft$,
 $\theta_A = 60^\circ$, $P = 180 lb$.
FIND: (a) DISTANCES
a AND b. (b)
LENGTH OF CABLE

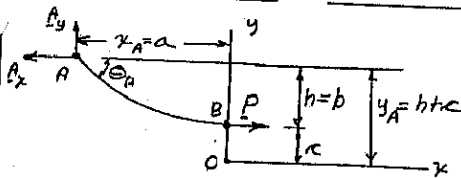

EQ. 7.18: $T_0 = P = c w$
 $c = \frac{P}{w} = \frac{180 lb}{3 lb/ft}$; $c = 60 ft$


AT A: $T_m = \frac{P}{\cos 60^\circ} = \frac{c w}{0.5} = 2 c w$

EQ. 7.18: $T_m = w(h + c)$
 $2 c w = w(h + c)$
 $2c = h + c$; $h = b = c$; $b = 60 ft$


EQ. 7.16: $y_A = c \cosh \frac{x_A}{c}$
 $h + c = c \cosh \frac{x_A}{c}$
 $(60 ft + 60 ft) = (60 ft) \cosh \frac{x_A}{60}$
 $\cosh \frac{x_A}{60} = 2$; $\frac{x_A}{60} = 1.3170$
 $x_A = 79.02 ft$ $a = 79.0 ft$

EQ. 7.15: $S_A = c \sinh \frac{x_A}{c} = (60 ft) \sinh \frac{79.02 ft}{60 ft}$
 $S_A = 103.92 ft$
LENGTH = S_A $S_A = 103.9 ft$

7.144



GIVEN: $w = 3 lb/ft$,
 $\theta_A = 60^\circ$, $P = 150 lb$
FIND: (a) DISTANCES
a AND b. (b)
LENGTH OF CABLE.

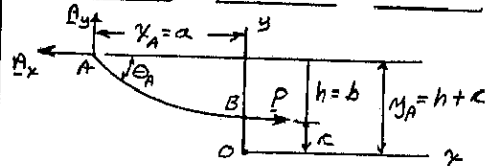

EQ. 7.18: $T_0 = P = c w$ $c = \frac{P}{w} = \frac{150 lb}{3 lb/ft} = 50 ft$


AT A: $T_m = \frac{P}{\cos 60^\circ} = \frac{c w}{0.5} = 2 c w$

EQ. 7.18: $T_m = w(h + c)$
 $2 c w = w(h + c)$
 $2c = h + c$; $h = c = b$; $b = 50 ft$


EQ. 7.16: $y_A = c \cosh \frac{x_A}{c}$
 $h + c = c \cosh \frac{x_A}{c}$
 $(50 ft + 50 ft) = (50 ft) \cosh \frac{x_A}{c}$
 $\cosh \frac{x_A}{c} = 2$; $\frac{x_A}{c} = 1.3170$
 $x_A = 1.3170(50 ft) = 65.85 ft$; $a = 65.8 ft$

EQ. 7.15: $S_A = c \sinh \frac{x_A}{c} = (50 ft) \sinh \frac{65.85 ft}{50 ft}$
 $S_A = 86.6 ft$; LENGTH = $S_A = 86.6 ft$

7.145

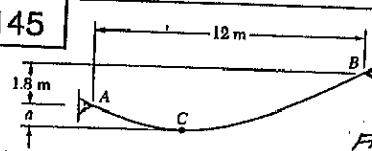

GIVEN: $a = 0.6m$
UNIT MASS OF
CABLE = $0.45 kg/m$.
FIND: (a) LOCATION OF C.
(b) T_m .

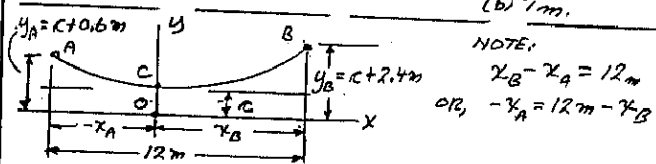

POINT A: $y_A = c \cosh \frac{x_A}{c}$; $c + 0.6 = c \cosh \frac{12 - x_C}{c}$ (1)

POINT B: $y_B = c \cosh \frac{x_B}{c}$; $c + 2.4 = c \cosh \frac{x_B}{c}$ (2)

FROM (1): $\frac{12 - x_C}{c} = \cosh^{-1} \left(\frac{c + 0.6}{c} \right)$ (3)

FROM (2): $\frac{x_B}{c} = \cosh^{-1} \left(\frac{c + 2.4}{c} \right)$ (4)

ADD (3)+(4): $\frac{12}{c} = \cosh^{-1} \left(\frac{c + 0.6}{c} \right) + \cosh^{-1} \left(\frac{c + 2.4}{c} \right)$

SOLVE BY TRIAL + ERROR: $c = 13.6214m$

EQ(2) $13.6214 + 2.4 = 13.6214 \cosh \frac{x_B}{c}$
 $\cosh \frac{x_B}{c} = 1.1762$; $x_B/c = 0.58523$


$x_B = 0.58523(13.6214m) = 7.9717m$

POINT C IS 7.97m TO LEFT OF B


$y_B = c + 2.4 = 13.6214 + 2.4 = 16.0214m$

EQ. 7.18: $T_m = w y_B = (0.45 kg/m)(9.81 m/s^2)(16.0214m)$
 $T_m = 70.726 N$ $T_m = 70.7 N$

7.146



GIVEN: $a = 2\text{m}$,
UNIT MASS OF
CABLE = 0.45 kg/m .
FIND: (a) LOCATION OF C,
(b) T_m

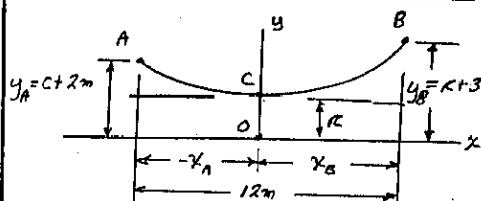

NOTE:
 $x_B - x_A = 12\text{m}$
OR
 $-x_A = 12\text{m} - x_B$

$$\text{POINT A: } y_A = c \cosh \frac{-x_A}{c}; \quad c + 2 = c \cosh \frac{12 - x_B}{c} \quad (1)$$

$$\text{POINT B: } y_B = c \cosh \frac{x_B}{c}; \quad c + 3.8 = c \cosh \frac{x_B}{c} \quad (2)$$

$$\text{FROM (1): } \frac{12}{c} - \frac{x_B}{c} = \cosh^{-1} \left(\frac{c+2}{c} \right) \quad (3)$$

$$\text{FROM (2): } \frac{x_B}{c} = \cosh^{-1} \left(\frac{c+3.8}{c} \right) \quad (4)$$

$$\text{ADD (3)+(4): } \frac{12}{c} = \cosh^{-1} \left(\frac{c+2}{c} \right) + \cosh^{-1} \left(\frac{c+3.8}{c} \right)$$

SOLVE BY TRIAL AND ERROR: $c = 6.8154\text{m}$

$$\text{EQ. (2): } 6.8154\text{m} + 3.8\text{m} = (6.8154\text{m}) \cosh \frac{x_B}{c}$$

$$\cosh \frac{x_B}{c} = 1.5576 \quad \frac{x_B}{c} = 1.0122$$

$$x_B = 1.0122(6.8154\text{m}) = 6.899\text{m}$$

POINT C IS 6.90m TO LEFT OF B


$$y_B = c + 3.8 = 6.8154 + 3.8 = 10.6154\text{m}$$

$$\text{EQ. (7.18): } T_m = W y_B = (0.45\text{ kg/m})(9.81\text{ m/s}^2)(10.6154\text{m})$$

$$T_m = 46.86\text{N}$$


$$T_m = 46.9\text{N}$$

*7.147 and 7.148



GIVEN: LENGTH OF
CABLE AB IS 10 ft.
FIND: DISTANCE a ;
PROB. 7.147: FOR $\theta = 30^\circ$;
PROB. 7.148: FOR $\theta = 45^\circ$.

COLLAR AT A: SINCE $\psi = 0$, CABLE \perp LOAD

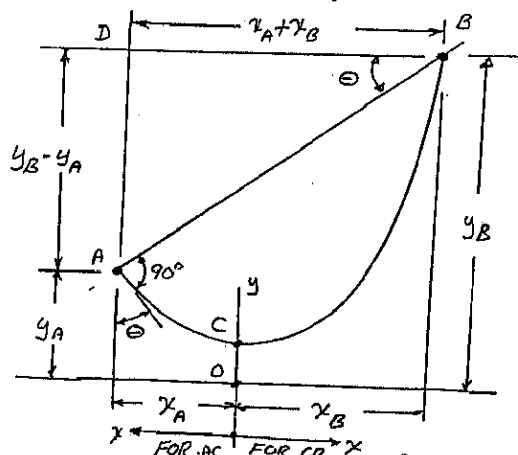

FOR AC FOR CB (CONTINUED)

*7.147 and 7.148 CONTINUED

$$\text{POINT A: } y = c \cosh \frac{x}{c}; \quad \frac{dy}{dx} = \sinh \frac{x}{c}$$

$$\tan \theta = \left. \frac{dy}{dx} \right|_A = \sinh \frac{x_A}{c}$$

$$\therefore \frac{x_A}{c} = \sinh^{-1}(\tan \theta); \quad x_A = c \sinh^{-1}(\tan \theta) \quad (1)$$

LENGTH OF CABLE = 10 ft

$$10\text{ft} = AC + CB$$

$$10 = c \sinh \frac{x_B}{c} + c \sinh \frac{x_A}{c}$$

$$\sinh \frac{x_B}{c} = \frac{10}{c} - \sinh \frac{x_A}{c}$$

$$x_B = c \sinh^{-1} \left[\frac{10}{c} - \sinh \frac{x_A}{c} \right] \quad (2)$$

$$y_A = c \cosh \frac{x_A}{c} \quad y_B = c \cosh \frac{x_B}{c} \quad (3)$$

$$\text{IN } \triangle ABD: \quad \tan \theta = \frac{y_B - y_A}{x_B + x_A} \quad (4)$$

METHOD OF SOLUTION:

FOR GIVEN VALUE OF θ , CHOOSE TRIAL
VALUE OF c AND CALCULATE:

FROM EQ.(1): x_A

USING VALUE OF x_A AND c , CALCULATE:

FROM EQ.(2): x_B

FROM EQ.(3): y_A AND y_B

SUBSTITUTE VALUES OBTAINED FOR x_A, x_B, y_A, y_B
INTO EQ.(4) AND CALCULATE θ

CHOOSE NEW TRIAL VALUE OF c AND
REPEAT ABOVE PROCEDURE UNTIL CALCULATED
VALUE OF θ IS EQUAL TO GIVEN VALUE OF θ .

PROB. 7.147: GIVEN VALUE: $\theta = 30^\circ$

RESULT OF TRIAL AND ERROR PROCEDURE

$$c = 1.803\text{m}$$

$$x_A = 2.3745\text{m}$$

$$x_B = 3.6937\text{m}$$

$$y_A = 3.606\text{m}$$

$$y_B = 7.109\text{m}$$

$$a = y_B - y_A = 7.109\text{m} - 3.606\text{m} = 3.503\text{m}$$

$$a = 3.50\text{m}$$

PROB. 7.148: GIVEN VALUE: $\theta = 45^\circ$

RESULT OF TRIAL AND ERROR PROCEDURE

$$c = 1.8652\text{m}$$

$$x_A = 1.644\text{m}$$


$$x_B = 4.064\text{m}$$

$$y_A = 2.638\text{m}$$

$$y_B = 8.346\text{m}$$

$$a = y_B - y_A = 8.346\text{m} - 2.638\text{m} = 5.708\text{m}$$

$$a = 5.71\text{m}$$



GIVEN: UNIFORM CABLE

PROVE: (a) $s = r \tan \theta$
(b) $y = r \sec \theta$

EQ. 7.16: $y = r \cosh \frac{x}{r}$

$\tan \theta = \frac{dy}{dx} = \sinh \frac{x}{r}$

EQ. 7.15: $s = r \sinh \frac{x}{r}$; $s = r \tan \theta$

EQ. 7.14: $\cosh^2 \frac{x}{r} - \sinh^2 \frac{x}{r} = 1$


$\cosh \frac{x}{r} = \sqrt{1 + \sinh^2 \frac{x}{r}} = \sqrt{1 + \tan^2 \theta}$ (1)




SUBSTITUTE (2) INTO (1): $\cosh \frac{x}{r} = \frac{1}{\cos \theta}$ (3)

EQ. 7.16: $y = r \cosh \frac{x}{r} = r \frac{1}{\cos \theta}$; $y = r \sec \theta$

* 7.150 GIVEN: UNIFORM CABLE, $w = 16 \text{ lb/ft}$



FIND: (a) MAXIMUM SPAN FOR GIVEN VALUE T_m
(b) MAXIMUM SPAN FOR $w = 0.25 \text{ lb/ft}$ AND $T_m = 8000 \text{ lb}$

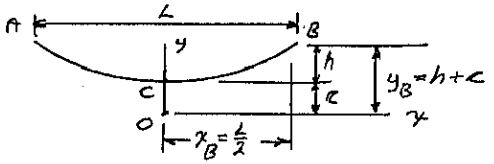

(a) $T_m = w y_B = w r \cosh \frac{x_B}{r} = w x_B \left(\frac{1}{x_B/r} \right) \cosh \frac{x_B}{r}$

WE SHALL FIND RATIO (x_B/r) FOR WHICH T_m IS MINIMUM

$\frac{dT_m}{d(x_B/r)} = w x_B \left[\frac{1}{x_B/r} \sinh \frac{x_B}{r} - \left(\frac{1}{x_B/r} \right)^2 \cosh \frac{x_B}{r} \right] = 0$

$\frac{\sinh \frac{x_B}{r}}{\cosh \frac{x_B}{r}} = \frac{1}{x_B/r}$; $\tanh \frac{x_B}{r} = \frac{r}{x_B}$

SOLVE BY TRIAL AND ERROR FOR: $\frac{x_B}{r} = 1.200$ (1)

$s_B = r \sinh \frac{x_B}{r} = r \sinh(1.200)$; $\frac{s_B}{r} = 1.509$

EQ. 7.12: $y_B^2 - s_B^2 = r^2$; $y_B^2 = r^2 \left[1 + \left(\frac{s_B}{r} \right)^2 \right] = r^2 (1 + 1.509^2)$
 $y_B = 1.810 r$


EQ. 7.18: $T_m = w y_B = 1.810 w r$
 $r = \frac{T_m}{1.810 w}$

EQ. (1): $x_B = 1.509 r = 1.509 T_m / 1.810 w = 0.833 \frac{T_m}{w}$


SPAN: $L = 2 x_B = 2(0.833) \frac{T_m}{w}$; $L = 1.666 \frac{T_m}{w}$

(b) FOR $w = 0.25 \text{ lb/ft}$ AND $T_m = 8000 \text{ lb}$
 $L = 1.666 \frac{8000 \text{ lb}}{0.25 \text{ lb/ft}} = 42,432 \text{ ft}$; $L = 8.04 \text{ miles}$

* 7.151



GIVEN: UNIT MASS = 3 kg/m , $L = 6 \text{ m}$
FIND: TWO VALUES OF h FOR WHICH $T_m = 350 \text{ N}$

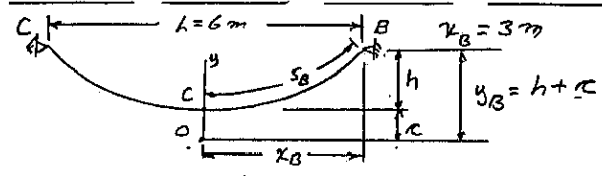

$w = (3 \text{ kg/m})(9.81 \text{ m/s}^2) = 29.43 \text{ N/m}$

EQ. 7.18: $T_m = w y_B$; $350 \text{ N} = (29.43 \text{ N/m}) y_B$; $y_B = 11.893 \text{ m}$


EQ. 7.16: $y_B = r \cosh \frac{x_B}{r}$
 $11.893 \text{ m} = r \cosh \frac{3 \text{ m}}{r}$

SOLVE BY TRIAL AND ERROR FOR TWO VALUES OF r


$r = 0.924 \text{ m}$; $r = 11.499 \text{ m}$

$h = y_B - r$
 $h = 11.893 \text{ m} - 0.924 \text{ m}$; $h = 10.97 \text{ m}$
 $h = 11.893 \text{ m} - 11.499 \text{ m}$; $h = 0.394 \text{ m}$

* 7.152



FIND THE h/L RATIO FOR TOTAL WEIGHT EQUAL TO T_m .

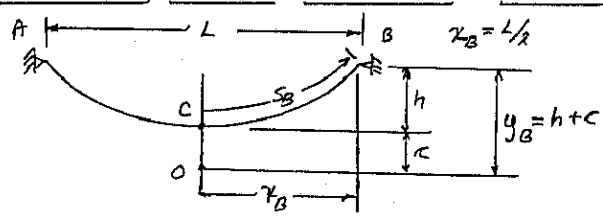

TOTAL WEIGHT: $W = (2 s_B) w$; $\therefore T_m = 2 s_B w$

EQ. 7.15: $s_B = r \sinh \frac{x_B}{r}$

EQ. 7.16: $y_B = r \cosh \frac{x_B}{r}$

EQ. 7.18: $T_m = w y_B$
 $2 s_B w = w y_B$
 $2 r \sinh \frac{x_B}{r} = r \cosh \frac{x_B}{r}$

$\tanh \frac{x_B}{r} = \frac{1}{2}$; $\frac{x_B}{r} = 0.5493$ (1)

$h = y_B - r = r \cosh \frac{x_B}{r} - r = r [\cosh(0.5493) - 1]$

$h = r(1.1547 - 1) = 0.1547 r$


FROM (1): $r = \frac{x_B}{0.5493}$

THUS: $h = (0.1547) \frac{x_B}{0.5493} = 0.2816 x_B$


RECALL: $L = 2 x_B$; $h = (0.2816) \frac{L}{2}$

$\frac{h}{L} = 0.1408$

7.159



WRITE EQUATIONS OF V AND M CURVES.
FIND: M_{max}

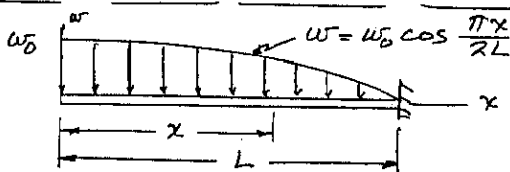

$$\frac{dV}{dx} = -w = -w_0 \cos \frac{\pi x}{2L}$$

$$V = -\int w dx = -w_0 \left(\frac{2L}{\pi}\right) \sin \frac{\pi x}{2L} + C_1 \quad (1)$$

$$\frac{dM}{dx} = V = -w_0 \left(\frac{2L}{\pi}\right) \sin \frac{\pi x}{2L} + C_1$$

$$M = \int V dx = +w_0 \left(\frac{2L}{\pi}\right)^2 \cos \frac{\pi x}{2L} + C_1 x + C_2 \quad (2)$$

BOUNDARY CONDITIONS

AT $x=0$: $V = C_1 = 0$ $C_1 = 0$

AT $x=L$: $M = +w_0 \left(\frac{2L}{\pi}\right)^2 \cos(\pi) + C_2 = 0$


$$C_2 = -w_0 \left(\frac{2L}{\pi}\right)^2$$

EQ (1) $V = -w_0 \left(\frac{2L}{\pi}\right) \sin \frac{\pi x}{2L}$

$M = w_0 \left(\frac{2L}{\pi}\right)^2 \left(-1 + \cos \frac{\pi x}{2L}\right)$


M_{max} at $x=L$: $|M_{max}| = w_0 \left(\frac{2L}{\pi}\right)^2 |-1+0| = \frac{4}{\pi^2} w_0 L^2$

7.160

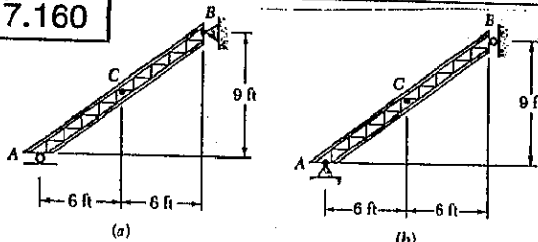

GIVEN: CHANNEL WEIGHS 20 lb/ft
FIND: INTERNAL FORCES AT C FOR EACH SUPPORT

(a)



FREE BODY: AB

$AB = \sqrt{9^2 + 12^2} = 15 \text{ ft}$
 $W = (20 \text{ lb/ft})(15 \text{ ft}) = 300 \text{ lb}$

$\sum M_B = 0$:
 $A(12 \text{ ft}) - (300 \text{ lb})(6 \text{ ft}) = 0$
 $A = +150 \text{ lb}$ $A = 150 \text{ lb} \uparrow$

FREE BODY: AC

(150-lb FORCES FORM A COUPLE)
 $\sum F = 0$ $F = 0$
 $\sum F = 0$ $V = 0$


$\sum M_C = 0$: $M - (150 \text{ lb})(3 \text{ ft}) = 0$
 $M = +450 \text{ lb}\cdot\text{ft}$

$M = 450 \text{ lb}\cdot\text{ft}$

(CONTINUED)


7.160 CONTINUED

(b) FREE BODY: AB



$\sum M_A = 0$:
 $B(9 \text{ ft}) - (300 \text{ lb})(6 \text{ ft}) = 0$
 $B = +200 \text{ lb}$
 $B = 200 \text{ lb} \leftarrow$

FREE BODY: CB



$\sum M_C = 0$: $(200 \text{ lb})(4.5 \text{ ft}) - (150 \text{ lb})(3 \text{ ft}) - M = 0$
 $M = +450 \text{ lb}\cdot\text{ft}$
 $M = 450 \text{ lb}\cdot\text{ft}$

$\tan \theta = \frac{9}{12} = \frac{3}{4}$; $\sin \theta = \frac{3}{5}$; $\cos \theta = \frac{4}{5}$

$\sum F = 0$: $F - \frac{3}{5}(150 \text{ lb}) - \frac{4}{5}(200 \text{ lb}) = 0$


$F = +250 \text{ lb}$ $F = 250 \text{ lb} \nearrow$

$\sum F = 0$: $V - \frac{3}{5}(150 \text{ lb}) + \frac{3}{5}(200 \text{ lb}) = 0$
 $V = 0$ $V = 0$


ON PORTION AC INTERNAL FORCES ARE

$M = 450 \text{ lb}\cdot\text{ft}$, $F = 250 \text{ lb}$, $V = 0$


7.161




GIVEN: $M_K = 300 \text{ N}\cdot\text{m}$
FIND: (a) TENSION IN RODS
(b) INTERNAL FORCES AT J



FREE BODY: ABK



$\sum M_K = 0$
 $300 \text{ N}\cdot\text{m} - \frac{8}{17} T (0.2 \text{ m}) - \frac{15}{17} T (0.12 \text{ m}) = 0$
 $T = 1500 \text{ N}$

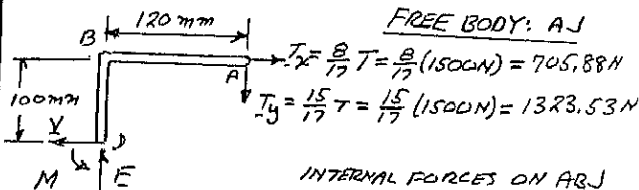


FREE BODY: AJ

$\sum F_x = 0$: $705.88 \text{ N} - V = 0$
 $V = +705.88 \text{ N}$ $V = 706 \text{ N} \leftarrow$

$\sum F_y = 0$: $F - 1323.53 \text{ N} = 0$
 $F = +1323.53 \text{ N}$ $F = 1324 \text{ N} \uparrow$


$\sum M_J = 0$:
 $M - (705.88 \text{ N})(0.1 \text{ m}) - (1323.53 \text{ N})(0.12 \text{ m}) = 0$
 $M = +229.4 \text{ N}\cdot\text{m}$ $M = 229 \text{ N}\cdot\text{m}$

7.162




FIND:
 (a) DISTANCE a
 (b) LENGTH ACB
 (c) COMPONENTS OF REACTION AT A.

FREE BODY: PORTION AC




$$\begin{aligned} \uparrow \sum F_y = 0: & A_y - 9w = 0 \\ & A_y = 9w \uparrow \\ \rightarrow \sum M_A = 0: & T_0 a - (9w)(4.5m) = 0 \quad (1) \end{aligned}$$

FREE BODY: PORTION CB



$$\begin{aligned} \uparrow \sum F_y = 0: & B_y - 6w = 0 \\ & B_y = 6w \uparrow \\ \rightarrow \sum M_B = 0: & T_0 a - 6w(3m) = 0 \quad (2) \end{aligned}$$

FREE BODY: ENTIRE CABLE

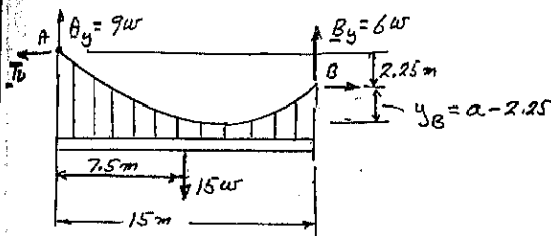

$$\rightarrow \sum M_A = 0: 15w(7.5m) - 6w(15m) - T_0(2.25m) = 0$$

$$T_0 = 10w$$

(a)

Eq(1): $T_0 a - (9w)(4.5m) = 0$
 $10w a = (9w)(4.5) = 0 \quad a = 4.05m$

(b) LENGTH = AC + CB

PORTION AC: $x_A = 9m, y_A = a = 4.05m; \frac{y_A}{x_A} = \frac{4.05}{9} = 0.45$

$$S_{AC} = x_B \left[1 + \frac{2}{3} \left(\frac{y_A}{x_A} \right)^2 - \frac{2}{5} \left(\frac{y_A}{x_A} \right)^4 + \dots \right]$$

$$S_{AC} = 9m \left(1 + \frac{2}{3} (0.45)^2 - \frac{2}{5} (0.45)^4 + \dots \right) = 10.067m$$

PORTION CB: $x_B = 6m, y_B = 4.05 - 2.25 = 1.8m; \frac{y_B}{x_B} = 0.3$

$$S_{CB} = 6m \left(1 + \frac{2}{3} (0.3)^2 - \frac{2}{5} (0.3)^4 + \dots \right) = 6.341m$$

TOTAL LENGTH = 10.067m + 6.341m

TOTAL LENGTH = 16.45m

(c) COMPONENTS OF REACTION AT A.


T_m $A_y = 9w = 9(10.067m)(9.81m/s^2) = 5297.4N$

$A_x = T_0 = 10w = 10(10.067m)(9.81m/s^2) = 5886N$


$A_x = 5890N \leftarrow$

$A_y = 5300N \uparrow$

7.163



(a) DRAW V + M DIAGRAMS
 (b) FIND M_{max}





FREE BODY: ENTIRE BEAM

$$\begin{aligned} \rightarrow \sum M_A = 0: & (6kips)(10ft) - (9kips)(7ft) + B(4ft) = 0 \\ & B = +0.75 kips \\ & B = 0.75 kips \uparrow \end{aligned}$$


$$\uparrow \sum F = 0: A + 0.75 kips - 9 kips + 6 kips = 0$$

$$A = +2.25 kips \quad A = 2.25 kips \uparrow$$

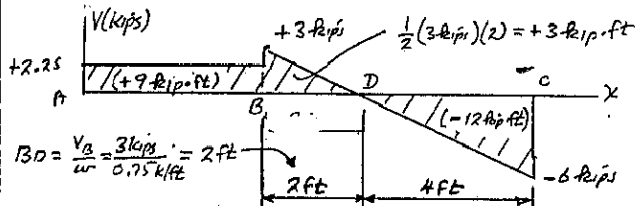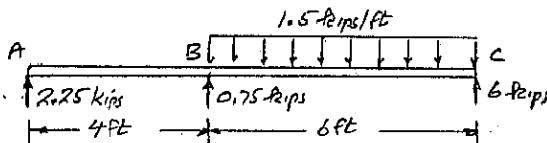


$M_{max} = 12 \text{ kip} \cdot \text{ft}$

7.164

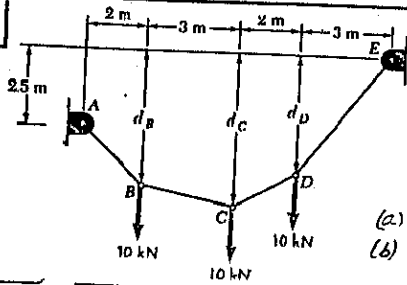


GIVEN:
 $d_C = 5m$
 FIND:
 (a) d_B and d_D
 (b) T_m

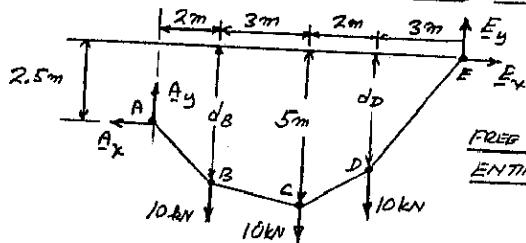

FREE BODY:
 ENTIRE CABLE

$$+\uparrow \Sigma M_A = 0: (10kN)(2m) + (10kN)(5m) + (10kN)(7m) + E_x(2.5m) - E_y(10m) = 0$$

$$2.5E_x - 10E_y + 140 = 0 \quad (1)$$



FREE BODY: PORTION CDE

$$+\uparrow \Sigma M_C = 0: (10kN)(2m) + E_x(5m) - E_y(5m) = 0$$

$$5E_x - 5E_y + 20 = 0 \quad (2)$$

$$EQ(1) \times \frac{1}{2}: 1.25E_x - 5E_y + 70 = 0 \quad (3)$$


$$(2) - (3): 3.75E_x - 50 = 0$$

$$E_x = 13.333 \text{ kN}$$

$$EQ(1): 2.5(13.333) - 10E_y + 140 = 0$$

$$E_y = 17.333 \text{ kN}$$

$$T_m = \sqrt{E_x^2 + E_y^2} = \sqrt{(13.333)^2 + (17.333)^2} \quad T_m = 21.9 \text{ kN}$$



FREE BODY: PORTION DE

$$+\uparrow \Sigma M_D = 0: E_x d_D - E_y(3m) = 0$$

$$d_D = 3 \frac{E_y}{E_x} = 3 \frac{17.333 \text{ kN}}{13.333 \text{ kN}}$$

$$d_D = 3.90 \text{ m}$$

RETURN TO FREE BODY OF ENTIRE CABLE AND WRITE

$$+\uparrow \Sigma F_y = 0: A_y - 3(10 \text{ kN}) + E_y = 0$$

$$A_y - 30 \text{ kN} + 17.333 \text{ kN} = 0$$

$$A_y = 12.667 \text{ kN}$$

$$A_x = 13.333 \text{ kN}$$

$$\pm \Sigma F_x = 0: -A_x + E_x = 0$$

FREE BODY: PORTION AB


$$+\uparrow \Sigma M_B = 0$$

$$A_x(d_B - 2.5) - A_y(2m) = 0$$


$$d_B - 2.5 = 2 \frac{A_y}{A_x} = 2 \frac{12.667 \text{ kN}}{13.333 \text{ kN}}$$

$$d_B - 2.5 = 1.90$$


$$d_B = 4.40 \text{ m}$$



7.165

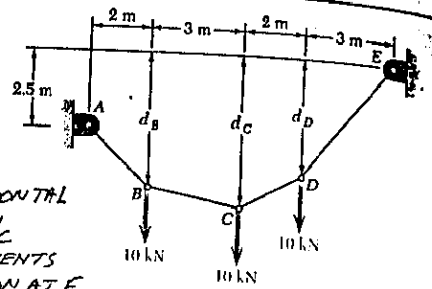

GIVEN:
 BC IS HORIZONTAL
 FIND: (a) d_C
 (b) COMPONENTS
 OF REACTION AT E



FREE BODY: PORTION BC

$$+\uparrow \Sigma F_y = 0: E_y - 10kN - 10kN = 0$$

$$E_y = 20 \text{ kN}$$


$$+\uparrow \Sigma M_C = 0$$

$$E_x d_C - E_y(5m) + (10 \text{ kN})(2m) = 0$$

$$E_x d_C - (20 \text{ kN})(5m) + (10 \text{ kN})(2m) = 0$$

$$E_x d_C = 80 \text{ kN} \cdot \text{m} \quad (1)$$

FREE BODY: ENTIRE CABLE

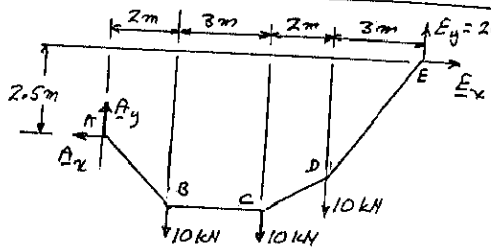

$$+\uparrow \Sigma M_A = 0:$$

$$(10 \text{ kN})(2m) + (10 \text{ kN})(5m) + (10 \text{ kN})(7m) + E_x(2.5m) - (20 \text{ kN})(10m) = 0$$

$$E_x = 24 \text{ kN}$$


$$EQ(1): E_x d_C = 80 \text{ kN} \cdot \text{m}$$

$$(24 \text{ kN} \cdot \text{m}) d_C = 80 \text{ kN} \cdot \text{m}$$

$$d_C = 3.333 \text{ m}$$

$$d_C = 3.33 \text{ m}$$

AT E:




$$E_x = 24 \text{ kN} \rightarrow$$

$$E_y = 20 \text{ kN} \uparrow$$

$$\mu_s = 0.30$$

$$\mu_k = 0.20$$



GIVEN: $\theta = 30^\circ$
 $P = 50 \text{ lb}$

FIND: FRICTION FORCE ACTING ON BLOCK.

ASSUME EQUILIBRIUM

$$+\uparrow \Sigma F_y = 0: N - (250 \text{ lb}) \cos 30^\circ - (50 \text{ lb}) \sin 30^\circ = 0$$

$$N = 241.5 \text{ lb} \quad N = 241.5 \text{ lb} \uparrow$$

$$+\rightarrow \Sigma F_x = 0: F - (250 \text{ lb}) \sin 30^\circ + (50 \text{ lb}) \cos 30^\circ = 0$$

$$F = 81.7 \text{ lb} \quad F = 81.7 \text{ lb} \rightarrow$$


MAXIMUM FRICTION FORCE: $F_m = \mu_s N = 0.3(241.5 \text{ lb}) = 72.5 \text{ lb}$
SINCE $F > F_m$, BLOCK MOVES DOWN

FRICTION FORCE: $F = \mu_k N = (0.20)(241.5 \text{ lb}) = 48.3 \text{ lb}$
 $F = 48.3 \text{ lb} \leftarrow$

8.2

$$\mu_s = 0.30$$

$$\mu_k = 0.20$$



GIVEN: $\theta = 35^\circ$
 $P = 100 \text{ lb}$

FIND: FRICTION FORCE ACTING ON BLOCK.

ASSUME EQUILIBRIUM

$$+\uparrow \Sigma F_y = 0: N - (250 \text{ lb}) \cos 35^\circ - (100 \text{ lb}) \sin 35^\circ = 0$$

$$N = 262.15 \text{ lb} \quad N = 262.15 \text{ lb} \uparrow$$


$$+\rightarrow \Sigma F_x = 0: F - (250 \text{ lb}) \sin 35^\circ + (100 \text{ lb}) \cos 35^\circ = 0$$

$$F = 61.48 \text{ lb} \quad F = 61.48 \text{ lb} \rightarrow$$

MAXIMUM FRICTION FORCE: $F_m = \mu_s N = 0.3(262.15 \text{ lb}) = 78.64 \text{ lb}$
SINCE $F < F_m$, BLOCK IS IN EQUILIBRIUM

FRICTION FORCE: $F = 61.5 \text{ lb} \rightarrow$

8.3



$$\mu_s = 0.20$$

$$\mu_k = 0.15$$

GIVEN: $\theta = 40^\circ$
 $P = 400 \text{ N}$

FIND: FRICTION FORCE ACTING ON BLOCK.

ASSUME EQUILIBRIUM

$$+\uparrow \Sigma F_y = 0: N - (800 \text{ N}) \cos 25^\circ - (400 \text{ N}) \sin 15^\circ = 0$$

$$N = 621.5 \text{ N} \quad N = 621.5 \text{ N} \uparrow$$

$$+\rightarrow \Sigma F_x = 0: -F + (800 \text{ N}) \sin 25^\circ - (400 \text{ N}) \cos 15^\circ = 0$$


$$F = 48.28 \text{ N} \quad F = 48.28 \text{ N} \leftarrow$$

MAXIMUM FRICTION FORCE:
 $F_m = \mu_s N = 0.20(621.5 \text{ N}) = 124.3 \text{ N}$

SINCE $F < F_m$, BLOCK IS IN EQUILIBRIUM

$F = 48.3 \text{ N} \leftarrow$

8.4



$$\mu_s = 0.20$$

$$\mu_k = 0.15$$

GIVEN: $\theta = 35^\circ$
 $P = 200 \text{ N}$

FIND: FRICTION FORCE ACTING ON BLOCK.

ASSUME EQUILIBRIUM

$$+\uparrow \Sigma F_y = 0: N - (800 \text{ N}) \cos 25^\circ + (200 \text{ N}) \sin 10^\circ = 0$$

$$N = 690.3 \text{ N} \quad N = 690.3 \text{ N} \uparrow$$

$$+\rightarrow \Sigma F_x = 0: -F + (800 \text{ N}) \sin 25^\circ - (200 \text{ N}) \cos 10^\circ = 0$$

$$F = 141.13 \text{ N} \quad F = 141.13 \text{ N} \leftarrow$$


MAXIMUM FRICTION FORCE:

$$F_m = \mu_s N = (0.20)(690.3 \text{ N}) = 138.06 \text{ N}$$

SINCE $F > F_m$, BLOCK MOVES DOWN

FRICTION FORCE: $F = \mu_k N = (0.15)(690.3 \text{ N}) = 103.54 \text{ N}$
 $F = 103.5 \text{ N} \leftarrow$

8.5



$$\mu_s = 0.20$$

$$\mu_k = 0.15$$


GIVEN: $\theta = 45^\circ$

FIND: RANGE OF VALUES OF P FOR EQUILIBRIUM

TO START BLOCK UP THE INCLINE

$$\mu_s = 0.20$$

$$\phi_s = \tan^{-1} 0.20 = 11.31^\circ$$

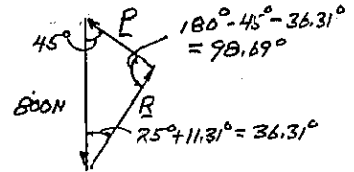


FROM FORCE TRIANGLE

$$\frac{P}{\sin 36.31^\circ} = \frac{800 \text{ N}}{\sin 98.69^\circ}$$

$$P = 479.2 \text{ N}$$

TO PREVENT BLOCK FROM MOVING DOWN



FROM FORCE TRIANGLE


$$\frac{P}{\sin 13.69^\circ} = \frac{800 \text{ N}}{\sin 121.31^\circ}$$

$$P = 221.61 \text{ N}$$

EQUILIBRIUM IS MAINTAINED FOR

$$222 \text{ N} \leq P \leq 479 \text{ N}$$

8.6





FIND: RANGE OF VALUES OF P FOR WHICH EQUILIBRIUM IS MAINTAINED.

TO START BLOCK UP THE SLOPE



$$\mu_s = 0.25$$

$$\phi_s = \tan^{-1} 0.25 = 14.04^\circ$$



FROM FORCE TRIANGLE:
 $P = (500\text{ N}) \tan 44.04^\circ$; $P = 493\text{ lb}$


TO PREVENT BLOCK FROM MOVING DOWN



FROM FORCE TRIANGLE:
 $P = (500\text{ N}) \tan 15.96^\circ$; $P = 143.0\text{ lb}$

EQUILIBRIUM MAINTAINED FOR: $143.0\text{ lb} \leq P \leq 493\text{ lb}$


8.7



GIVEN: $\mu_s = 0.25$


FIND: (a) SMALLEST VALUE OF P TO START BLOCK UP THE INCLINE.
 (b) CORRESPONDING VALUE OF β

TO START BLOCK MOVING UP THE INCLINE
 $W = (25\text{ kg})(9.81\text{ m/s}^2) = 245.25\text{ N}$



$$\mu_s = 0.25$$

$$\phi_s = \tan^{-1} 0.25 = 14.04^\circ$$



FORCE TRIANGLE FOR SMALLEST P WE CHOOSE $P \perp N$,
 $30^\circ + \phi_s = 30^\circ + \beta$
 $\therefore \beta = \phi_s = 14.04^\circ$


$$P = W \sin(30^\circ + \phi_s)$$

$$= (245.25\text{ N}) \sin 44.04^\circ$$

$$= 170.5\text{ N}$$

$$P = 170.5\text{ N}$$

8.8




GIVEN: $\mu_s = 0.25$

FIND: (a) SMALLEST VALUE OF P FOR EQUILIBRIUM,
 (b) CORRESPONDING VALUE OF β .


TO PREVENT BLOCK FROM MOVING DOWN THE INCLINE

$$\mu_s = 0.25; \phi_s = \tan^{-1} 0.25 = 14.04^\circ$$

$$W = (15\text{ kg})(9.81\text{ m/s}^2) = 147.15\text{ N}$$



FORCE TRIANGLE FOR SMALLEST P WE CHOOSE $P \perp R$.




$$\beta = 45.96^\circ, \beta = 46.0^\circ$$


$$P = (147.15\text{ N}) \sin 45.96^\circ = 105.78\text{ N}$$

$$P = 105.8\text{ N}$$

8.9



FIND: For $\theta < 90^\circ$, THE VALUE OF θ REQUIRED TO START BLOCK MOVING TO RIGHT WHEN (a) $W = 75\text{ lb}$
 (b) $W = 100\text{ lb}$



$$\mu_s = 0.25$$

$$\phi_s = \tan^{-1} 0.25$$

$$\tan \phi_s = 0.25$$

$$\phi_s = 14.04^\circ$$

FORCE TRIANGLE

$$\tan \phi_s = \frac{P \sin \theta}{W + P \cos \theta}$$

$$0.25(W + P \cos \theta) = P \sin \theta$$

$$\frac{W}{P} + \cos \theta = 4 \sin \theta$$

(a) For $W = 75\text{ lb}$, $P = 30\text{ lb}$; $\frac{W}{P} = 2.5$
 $2.5 + \cos \theta = 4 \sin \theta$

SOLVE BY TRIAL & ERROR


$$\theta = 57.36^\circ, \theta = 57.4^\circ$$

(b) For $W = 100\text{ lb}$, $P = 30\text{ lb}$; $\frac{W}{P} = 3.333$
 $3.333 + \cos \theta = 4 \sin \theta$

$$\theta = 67.28^\circ$$

$$\theta = 68.0^\circ$$


8.17



GIVEN: MASS OF CRATE = 30 kg.
 FIND: (a) LARGEST μ_s FOR WHICH CRATE CAN BE STARTED UP WITH NO TIPPING. (b) CORRESPONDING MAGNITUDE OF HORIZONTAL FORCE P.

FOR TIPPING TO BE IMPENDING REACTION IS AT C.
 FREE BODY: CRATE THREE-FORCE BODY. REACTION S MUST PASS THROUGH E WHERE $P+W$ INTERSECT.

(a) $\theta = 15^\circ$

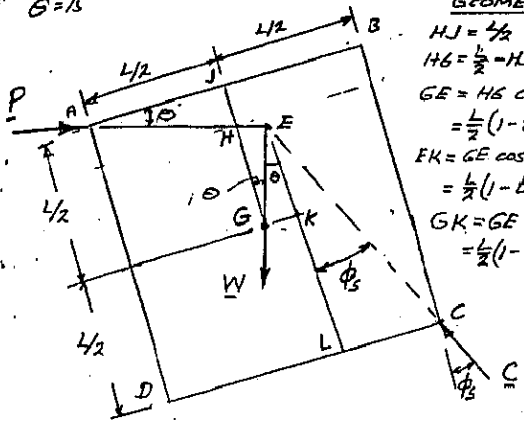


GEOMETRY
 $HJ = \frac{L}{2} \tan \theta$
 $HG = \frac{L}{2} - HJ = \frac{L}{2}(1 - \tan \theta)$
 $GE = HG \cos \theta = \frac{L}{2}(1 - \tan \theta) \cos \theta$
 $EK = GE \cos \theta = \frac{L}{2}(1 - \tan \theta) \cos^2 \theta$
 $GK = GE \sin \theta = \frac{L}{2}(1 - \tan \theta) \cos \theta \sin \theta$

$EL = \frac{L}{2} + EK = \frac{L}{2} + \frac{L}{2}(1 - \tan \theta) \cos^2 \theta = \frac{L}{2} + \frac{L}{2}(\cos^2 \theta - \frac{\sin \theta \cos^2 \theta}{\cos \theta})$
 $= \frac{L}{2}(1 + \cos^2 \theta - \sin \theta \cos \theta)$
 $EL = \frac{L}{2}(1 + \cos^2 15^\circ - \sin 15^\circ \cos 15^\circ) = 0.84151 L$
 $LC = \frac{L}{2} - GK = \frac{L}{2} - \frac{L}{2}(1 - \tan \theta) \cos \theta \sin \theta$
 $= \frac{L}{2} - \frac{L}{2}(\cos \theta \sin \theta - \frac{\sin \theta \cos \theta \sin \theta}{\cos \theta})$
 $= \frac{L}{2}(1 - \cos \theta \sin \theta + \sin^2 \theta)$
 $LC = \frac{L}{2}(1 - \cos 15^\circ \sin 15^\circ + \sin^2 15^\circ) = 0.40849 L$


$\tan \phi_s = \frac{LC}{EL} = \frac{0.40849 L}{0.84151 L} = 0.48543$; $\phi_s = 26.89^\circ$
 $\mu_s = \tan \phi_s = 0.485$

(b) FORCE TRIANGLE




$W = mg = (30 \text{ kg})(9.81 \text{ m/s}^2) = 294.3 \text{ N}$
 $P = W \tan(\theta + \phi_s) = (294.3 \text{ N}) \tan 41.89^\circ = 254.8 \text{ N}$
 $P = 255 \text{ N}$

8.18




GIVEN: MASS OF CRATE = 50 kg
 FOR $\theta = 0.2 \text{ m}$ TIPPING IMPENDS
 FIND (a) μ_s
 (b) MAGNITUDE OF P

FREE BODY: CRATE THREE-FORCE BODY. REACTION E MUST PASS THROUGH K WHERE P AND W INTERSECT

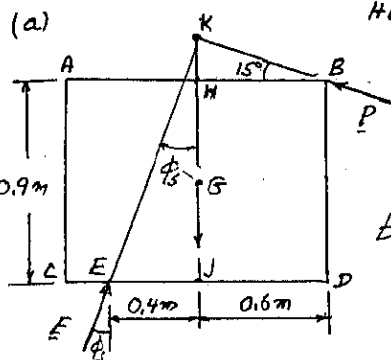


GEOMETRY
 $HK = (0.6 \text{ m}) \tan 15^\circ = 0.16077 \text{ m}$
 $JK = 0.9 \text{ m} + HK = 1.06077 \text{ m}$
 $\tan \phi_s = \frac{0.4 \text{ m}}{1.06077 \text{ m}} = 0.37705$
 $\mu_s = \tan \phi_s = 0.377$
 $\phi_s = 20.66^\circ$

FORCE TRIANGLE




$W = (50 \text{ kg})(9.81 \text{ m/s}^2) = 490.5 \text{ N}$
 $P = \frac{490.5 \text{ N}}{\sin 35.66^\circ} = 173.91 \text{ N}$
 $P = 173.9 \text{ N}$

8.19



GIVEN: 120-16 CABINET
 $h = 32 \text{ in}$, $\mu_s = 0.30$
 FIND: FORCE P REQUIRED TO MOVE CABINET, WHEN
 (a) ALL CASTERS ARE LOCKED
 (b) CASTERS B ARE LOCKED AND CASTERS A ARE FREE
 (c) CASTERS A ARE LOCKED AND CASTER B ARE FREE

(a) ALL CASTERS LOCKED

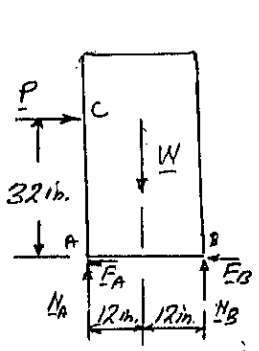


$\uparrow \Sigma F_y = 0: N_A + N_B - W = 0$
 $N_A + N_B = W = 120 \text{ lb}$
 $F_A + F_B = \mu_s N_A + \mu_s N_B = \mu_s (N_A + N_B) = 0.30(120 \text{ lb}) = 36 \text{ lb}$
 $\rightarrow \Sigma F_x = 0: P - F_A - F_B = 0$
 $P = F_A + F_B = 36 \text{ lb}$

CHECK FOR TIPPING
 $\rightarrow \Sigma M_B = 0$
 $(120 \text{ lb})(12 \text{ in}) - (36 \text{ lb})(32 \text{ in}) - N_A(24 \text{ in}) = 0$
 $N_A = 12 \text{ lb} > 0$ OK

(CONTINUED)

8.19 CONTINUED

W = 120 lb



(b) CASTERS LOCKED AT B AND FREE AT A

$$F_B = \mu_s N_B = 0.3 N_B$$

$$\sum F_x = 0: P = F_B = 0.3 N_B \quad (1)$$

$$+\uparrow \sum M_A = 0$$

$$-P(32 \text{ in}) - (120 \text{ lb})(12 \text{ in}) + N_B(24 \text{ in}) = 0$$

$$-0.3 N_B(32 \text{ in}) + N_B(24 \text{ in}) = (120 \text{ lb})(12 \text{ in}) = 0$$


$$14.4 N_B = (120 \text{ lb})(12 \text{ in})$$

$$N_B = 100 \text{ lb}$$

$$\text{EQ. (1)} \quad P = 0.3(100 \text{ lb}) = 30 \text{ lb}$$

$$P = 30 \text{ lb} \rightarrow$$

(c) CASTERS LOCKED AT A AND FREE AT B



$$F_A = \mu_s N_A = 0.3 N_A$$

$$\sum F_x = 0: P = F_A = 0.3 N_A \quad (2)$$

$$+\uparrow \sum M_B = 0$$

$$-P(32 \text{ in}) + (120 \text{ lb})(12 \text{ in}) - N_A(24 \text{ in}) = 0$$

$$-0.3 N_A(32 \text{ in}) - N_A(24 \text{ in}) + (120 \text{ lb})(12 \text{ in}) = 0$$


$$33.6 N_A = (120 \text{ lb})(12 \text{ in})$$

$$N_A = 42.857 \text{ lb}$$

$$\text{EQ. (2)}: P = 0.3(42.857 \text{ lb}) = 12.86 \text{ lb}$$


$$P = 12.86 \text{ lb} \rightarrow$$

8.20



GIVEN: 120-lb CABINET
 $\mu_s = 0.30$
ALL CASTERS ARE LOCKED.

FIND: (a) FORCE P TO MOVE CABINET
(b) MAXIMUM h IF CABINET IS NOT TO TIP



(a) W = 120 lb

$$+\uparrow \sum F_y = 0: N_A + N_B - W = 0$$

$$N_A + N_B = 120 \text{ lb}$$

$$F_A + F_B = \mu_s N_A + \mu_s N_B = \mu_s (N_A + N_B)$$


$$F_A + F_B = 0.3(120 \text{ lb}) = 36 \text{ lb}$$

$$+\rightarrow \sum F_x = 0: P - F_A - F_B = 0$$

$$P = F_A + F_B \quad P = 36 \text{ lb} \rightarrow$$

(b) LARGEST ALLOWABLE VALUE OF h.

WHEN TIPPING IMPENDS THERE IS NO REACTION AT A. $N_A = 0$



$$+\uparrow \sum M_B = 0:$$


$$W(12 \text{ in}) - Ph = 0$$

$$h = \frac{W}{P}(12 \text{ in})$$

$$= \frac{120 \text{ lb}}{36 \text{ lb}}(12 \text{ in}) = 40 \text{ in}$$


$$h = 40 \text{ in}$$

8.21



GIVEN: r = RADIUS,
W = WEIGHT,
 μ_s IS SAME AT A AND B.

FIND: LARGEST M IF CYLINDER IS NOT TO ROTATE



SINCE MOTION WILL IMPEND,
 $F_A = \mu_s N_A$ $F_B = \mu_s N_B$

$$+\uparrow \sum M_B = 0: M - rF_A - rN_A = 0$$

$$M = rN_A + rF_A = rN_A + r\mu_s N_A$$

$$M = rN_A(1 + \mu_s) \quad (1)$$

$$+\rightarrow \sum F_x = 0: N_A - F_B = 0; \quad N_A = \mu_s N_B \quad (2)$$

$$+\uparrow \sum F_y = 0: N_B + F_A - W = 0; \quad N_B = W - \mu_s N_A \quad (3)$$

SUBSTITUTE FOR N_B FROM (3) INTO (2):


$$N_A = \mu_s (W - \mu_s N_A)$$

$$N_A(1 + \mu_s^2) = \mu_s W \quad N_A = \frac{\mu_s W}{1 + \mu_s^2}$$

SUBSTITUTE FOR N_A INTO (1):

$$M = r \frac{\mu_s W}{(1 + \mu_s^2)} (1 + \mu_s) \quad M = W r \mu_s \frac{(1 + \mu_s)}{1 + \mu_s^2}$$


8.22



GIVEN: r = RADIUS
W = WEIGHT

FIND: LARGEST M IF CYLINDER IS NOT TO ROTATE

(a) FOR $\mu_A = 0, \mu_B = 0.30$,
(b) FOR $\mu_A = 0.25, \mu_B = 0.30$.



SINCE MOTION WILL IMPEND
 $F_A = \mu_A N_A$ $F_B = \mu_B N_B$

$$+\uparrow \sum M_B = 0:$$

$$M - rF_A - rN_A = 0$$

$$M = rN_A + rF_A = rN_A + r\mu_A N_A$$

$$M = rN_A(1 + \mu_A) \quad (1)$$

$$+\rightarrow \sum F_x = 0: N_A - F_B = 0 \quad N_A = \mu_B N_B \quad (2)$$

$$+\uparrow \sum F_y = 0: N_B + F_A - W = 0 \quad N_B = W - \mu_A N_A \quad (3)$$

SUBSTITUTE FOR N_B FROM (3) INTO (2)

$$N_A = \mu_B (W - \mu_A N_A)$$

$$N_A(1 + \mu_A \mu_B) = \mu_B W \quad N_A = \frac{\mu_B W}{1 + \mu_A \mu_B}$$

$$\text{EQ. (1)}: M = r \frac{\mu_B W}{1 + \mu_A \mu_B} (1 + \mu_A) \quad M = W r \frac{\mu_B (1 + \mu_A)}{1 + \mu_A \mu_B}$$


(a) FOR $\mu_A = 0$ AND $\mu_B = 0.30$:

$$M = W r \frac{0.30}{1} \quad M = 0.300 W r$$

(b) FOR $\mu_A = 0.25$ AND $\mu_B = 0.30$:

$$M = W r \frac{(0.30)(1 + 0.25)}{1 + (0.25)(0.30)} = W r \frac{(0.30)(1.25)}{1.075}$$

$$M = 0.3488 W r \quad M = 0.349 W r$$



GIVEN: $W = 20 \text{ lb}$
 AT A AND B,
 $\mu_s = 0.40, \mu_k = 0.30$

FIND: MAGNITUDE OF P
 TO DRAW WIRE AT A
 CONSTANT RATE.

SINCE SPOOL IS ROTATING
 $F_A = \mu_k N_A$ $F_B = \mu_k N_B$

$+2 \sum M_G = 0:$
 $P(3 \text{ in}) - F_A(6 \text{ in}) - F_B(6 \text{ in}) = 0$
 $3P - 6\mu_k(N_A + N_B) = 0$ (1)

$\pm \sum F_x = 0: F_A - N_B = 0$ (2)
 $N_B = \mu_k N_A$

$\uparrow \sum F_y = 0: P + N_A + F_B - 20 \text{ lb} = 0$
 $P + N_A + \mu_k N_B - 20 = 0$
 $P + N_A + \mu_k^2 N_A - 20 = 0$

$N_A = \frac{20 - P}{1 + \mu_k^2}$ (3)

SUBSTITUTE FOR N_B FROM (2):

SUBSTITUTE FROM (2) INTO (1): $3P - 6\mu_k(N_A + \mu_k N_A) = 0$
 $N_A = \frac{1}{2} \frac{P}{\mu_k(1 + \mu_k)}$ (4)


(4): $\frac{20 - P}{1 + \mu_k^2} = \frac{P}{2(\mu_k + \mu_k^2)}$

SUBSTITUTE $\mu_k = 0.30:$

$\frac{20 - P}{1 + (0.3)^2} = \frac{P}{2(0.3)(1.03)}$

$20 - P = 1.3974P; 2.3974P = 20; P = 8.34 \text{ lb}$

8.25

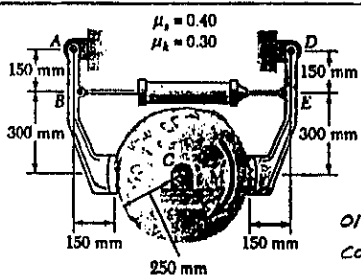

GIVEN:
 CYLINDER
 EXERTS 3-RN
 ON B AND ON E.

FIND: MAGNITUDE
 OF M (REQUIRED FOR
 CONSTANT ROTATION)

FREE BODY: DRUM

$+2 \sum M_C = 0: M - (0.25 \text{ m})(F_L + F_R) = 0$
 $M = (0.25 \text{ m})(F_L + F_R)$ (1)

SINCE DRUM IS ROTATING,

$F_L = \mu_k N_L = 0.3 N_L$ $F_R = \mu_k N_R = 0.3 N_R$

FREE BODY: LEFT ARM ABL

$\uparrow \sum M_A = 0$
 $(3 \text{ kN})(0.15 \text{ m}) + F_L(0.15 \text{ m}) - N_L(0.45 \text{ m}) = 0$

$0.45(3 \text{ kN}) + (0.3 N_L)(0.15 \text{ m}) - N_L(0.45 \text{ m}) = 0$
 $0.405 N_L = 0.45$

$N_L = 1.111 \text{ kN}$

$F_L = 0.3 N_L = 0.3(1.111 \text{ kN}) = 0.3333 \text{ kN}$ (2)

FREE BODY: RIGHT ARM DER

$+2 \sum M_D = 0: (3 \text{ kN})(0.15 \text{ m}) - F_R(0.15 \text{ m}) - N_R(0.45 \text{ m}) = 0$
 $0.45(3 \text{ kN}) - (0.3 N_R)(0.15 \text{ m}) - N_R(0.45 \text{ m}) = 0$


$0.495 N_R = 0.45$

$N_R = 0.9091 \text{ kN}$

$F_R = \mu_k N_R = 0.3(0.9091 \text{ kN}) = 0.2727 \text{ kN}$ (3)

SUBSTITUTE FOR F_L AND F_R INTO (1): $M = (0.25 \text{ m})(0.3333 \text{ kN} + 0.2727 \text{ kN})$
 $M = 0.1515 \text{ kN}\cdot\text{m}$ $M = 151.5 \text{ N}\cdot\text{m}$

8.26

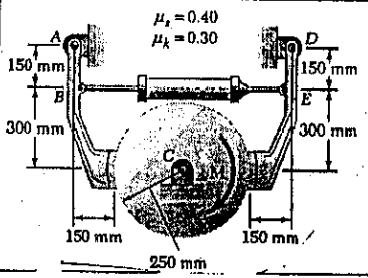

GIVEN:
 $M = 100 \text{ N}\cdot\text{m}$
FIND: SMALLEST
 FORCE EXERTED
 BY CYLINDER FOR
 NO ROTATION OF
 DRUM.

FREE BODY: DRUM

$+2 \sum M_C = 0: 100 \text{ N}\cdot\text{m} - (0.25 \text{ m})(F_L + F_R) = 0$
 $F_L + F_R = 400 \text{ N}$ (1)

SINCE MOTION IMPENDS

$F_L = \mu_s N_L = 0.4 N_L$ $F_R = \mu_s N_R = 0.4 N_R$

FREE BODY: LEFT ARM ABL

$\uparrow \sum M_A = 0: T(0.15 \text{ m}) + F_L(0.15 \text{ m}) - N_L(0.45 \text{ m}) = 0$
 $0.15 T + (0.4 N_L)(0.15 \text{ m}) - N_L(0.45 \text{ m}) = 0$

$0.39 N_L = 0.15 T; N_L = 0.38462 T$

$F_L = 0.4 N_L = 0.4(0.38462 T); F_L = 0.15385 T$ (2)

FREE BODY: RIGHT ARM DER

$\uparrow \sum M_D = 0: T(0.15 \text{ m}) - F_R(0.15 \text{ m}) - N_R(0.45 \text{ m}) = 0$
 $0.15 T - (0.4 N_R)(0.15 \text{ m}) - N_R(0.45 \text{ m}) = 0$


$0.51 N_R = 0.15 T; N_R = 0.29412 T$

$F_R = 0.4 N_R = 0.4(0.29412 T); F_R = 0.11765 T$ (3)

SUBSTITUTE FOR F_L AND F_R INTO (1):

$0.15385 T + 0.11765 T = 400$
 $T = 1473.3 \text{ N}$ $T = 1473 \text{ N}$

24



GIVEN: $W = 20 \text{ lb}$
 AT A: $\mu_s = 0.40, \mu_k = 0.30$
 AT B: $\mu_s = \mu_k = 0$

FIND: MAGNITUDE OF P
 TO DRAW WIRE AT A
 CONSTANT RATE

SINCE SPOOL IS ROTATING
 $F_A = \mu_k N_A$

$+2 \sum M_G = 0$
 $P(3 \text{ in}) - F_A(6 \text{ in}) = 0$
 $P = 2F_A = 2\mu_k N_A$ (1)

$\uparrow \sum F_y = 0: P - 20 \text{ lb} + N_A = 0$
 $N_A = 20 - P$ (2)

SUBSTITUTE FOR N_A FROM (2) INTO (1):

$P = 2\mu_k(20 - P)$

SUBSTITUTE $\mu_k = 0.30:$


$P = 2(0.3)(20 - P)$
 $6.667P = 20 - P$

$7.667P = 20$

$P = 2.609 \text{ lb}$


$P = 2.61 \text{ lb}$

*8.27




GIVEN: $\mu_s = 0.25$ AT A AND AT B, CYLINDER C WEIGHS W .

FIND: LARGEST COUNTERCLOCKWISE M IF CYLINDER D IS NOT TO ROTATE.




GEOMETRY
 $CE = a/2$
 $CD = 3a/2$
 $\sin \beta = \frac{CE}{CD} = \frac{a/2}{3a/2} = \frac{1}{3}$
 $\beta = 19.47^\circ$

FREE BODY: CYLINDER C




$+\sum M_C = 0: F_B \frac{a}{2} - F_A \frac{a}{2} = 0$
 $F_A = F_B = F$

ASSUME MOTION, IMPENDS AT A: $\tan \phi_s = 0.25$; $\phi_s = 14.04^\circ$



FORCE POLYGON

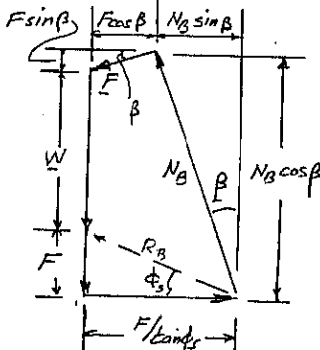

ASSUME NO SLIPPING AT B, THAT IS $\delta < \phi_s$. SEE BELOW FOR VALUE OF γ

VERTICAL COMPONENTS: $N_B \cos \beta = W + F \sin \beta + F$
 $N_B = \frac{W + F(1 + \sin \beta)}{\cos \beta}$ (1)

HORIZONTAL COMPONENTS: $\frac{F}{\tan \phi_s} = F \cos \beta + N_B \sin \beta$ (2)


(1) -> (2): $\frac{F}{\tan \phi_s} = F \cos \beta + [W + F(1 + \sin \beta)] \frac{\sin \beta}{\cos \beta}$
 $\frac{F}{\tan \phi_s} = F \cos \beta + W \tan \beta + F(1 + \sin \beta) \tan \beta$

$F \left[\frac{1}{\tan \phi_s} - \cos \beta - \tan \beta (1 + \sin \beta) \right] = W \tan \beta$

RECALL: $\beta = 19.47^\circ$, $\tan \phi_s = 0.25$

$F \left[\frac{1}{0.25} - \cos 19.47^\circ - \tan 19.47^\circ (1 + \sin 19.47^\circ) \right] = W \tan 19.47^\circ$
 $F(2.5857) = 0.35355W$ $F = 0.13673W$

FREE BODY: CYLINDER D




$+\sum M_D = 0: M - Fa = 0$
 $M = Fa = 0.13673Wa$
 $M = 0.1367Wa$

VALUE OF γ : EQ. (1) $N_B = \frac{W + 0.13673W(1 + \sin 19.47^\circ)}{\cos 19.47^\circ} = 1.254W$

$\tan \gamma = \frac{F}{N_B} = \frac{0.1367W}{1.254W} = 0.10902$; $\gamma = 6.22^\circ < \phi_s$

WE FIND NO SLIPPING AT B. OK

*8.28




GIVEN: $\mu_s = 0.25$ AND AT B, CYLINDER C WEIGHS W .

FIND: LARGEST CLOCKWISE M IF CYLINDER D IS NOT TO ROTATE

FREE BODY: CYLINDER C




GEOMETRY
 $CE = a/2$
 $CD = 3a/2$
 $\sin \beta = \frac{CE}{CD} = \frac{a/2}{3a/2} = \frac{1}{3}$
 $\beta = 19.47^\circ$




$+\sum M_C = 0: F_B \frac{a}{2} - F_A \frac{a}{2} = 0$
 $F_A = F_B = F$

ASSUME MOTION IMPENDS AT A: $\tan \phi_s = 0.25$; $\phi_s = 14.04^\circ$



FORCE POLYGON

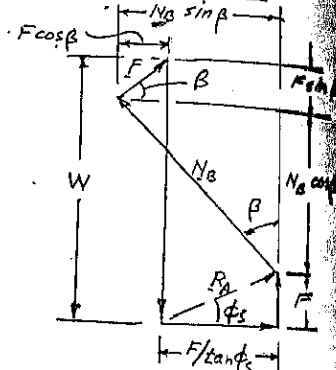

VERTICAL COMPONENTS: $N_B \cos \beta + F + F \sin \beta = W$
 $N_B = \frac{W - F(1 + \sin \beta)}{\cos \beta}$ (1)


HORIZONTAL COMPONENTS: $\frac{F}{\tan \phi_s} = N_B \sin \beta - F \cos \beta$ (2)

(1) -> (2): $\frac{1}{\tan \phi_s} = \frac{W - F(1 + \sin \beta)}{\cos \beta} \frac{\sin \beta}{\cos \beta} - F \cos \beta$
 $\frac{F}{\tan \phi_s} = W \tan \beta - F(1 + \sin \beta) \tan \beta - F \cos \beta$
 $F \left[\frac{1}{\tan \phi_s} + \cos \beta + \tan \beta (1 + \sin \beta) \right] = W \tan \beta$

RECALL: $\beta = 19.47^\circ$, $\tan \phi_s = 0.25$

$F \left[\frac{1}{0.25} + \cos 19.47^\circ + \tan 19.47^\circ (1 + \sin 19.47^\circ) \right] = W \tan 19.47^\circ$
 $F(5.4121) = 0.35355W$ $F = 0.0653W$

FREE BODY: CYLINDER D




$+\sum M_D = 0: M - Fa = 0$
 $M = Fa = 0.0653Wa$
 $M = 0.0653Wa$

VALUE OF γ : EQ. (1): $N_B = \frac{W - 0.0653W(1 + \sin 19.47^\circ)}{\cos 19.47^\circ} = 0.9683W$


$\tan \gamma = \frac{F}{N_B} = \frac{0.0653W}{0.9683W} = 0.0674$; $\gamma = 3.86^\circ < \phi_s$

WE FIND NO SLIPPING AT B. OK

0.25 AT
P ?
W
ST
M IF
NO7
CYLINDER

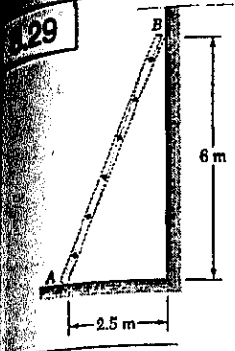


8.29
 GIVEN: $\mu_s = 0$ AT B
 FIND: SMALLEST μ_s AT A
 FOR WHICH EQUILIBRIUM
 IS MAINTAINED




FREE BODY: LADDER
 THREE-FORCE BODY. LINE
 OF ACTION OF A MUST PASS
 THROUGH D, WHERE W AND
 B INTERSECT

AT A: $\mu_s = \tan \phi_s = \frac{1.25\text{m}}{6\text{m}} = 0.2083$
 $\mu_s = 0.208$



8.30
 GIVEN: SAME VALUE
 OF μ_s AT A AND AT B.
 FIND: SMALLEST VALUE
 OF μ_s FOR WHICH
 EQUILIBRIUM IS
 MAINTAINED

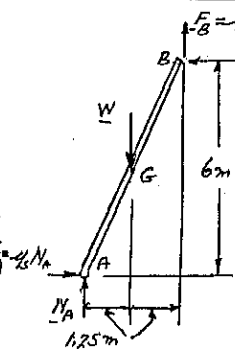


FREE BODY: LADDER
 MOTION IMPENDING
 $F_A = \mu_s N_A$ $F_B = \mu_s N_B$
 $+\sum M_A = 0:$
 $W(1.25\text{m}) - N_B(6\text{m}) - \mu_s N_B(2.5\text{m}) = 0$
 $N_B = \frac{1.25W}{6 + 2.5\mu_s}$ (1)


$+\sum F_y = 0: N_A + \mu_s N_B - W = 0$
 $N_A = W - \mu_s N_B$
 $N_A = W - \frac{1.25\mu_s W}{6 + 2.5\mu_s}$ (2)

$+\sum F_x = 0: \mu_s N_A - N_B = 0$
 SUBSTITUTE FOR N_A AND N_B FROM EQS. (1) AND (2).

$\mu_s W - \frac{1.25\mu_s^2 W}{6 + 2.5\mu_s} = \frac{1.25W}{6 + 2.5\mu_s}$
 $6\mu_s + 2.5\mu_s^2 - 1.25\mu_s = 1.25$
 $1.25\mu_s^2 + 6\mu_s - 1.25 = 0$
 $\mu_s = 0.2$
 AND $\mu_s = -5$ (DISCARD)
 $\mu_s = 0.200$

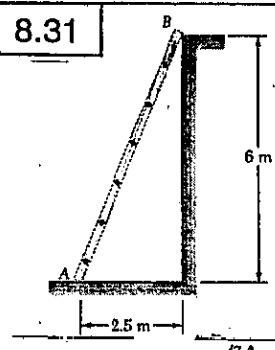


8.31
 GIVEN: SAME VALUE
 OF μ_s AT A AND AT B.
 FIND: SMALLEST VALUE
 OF μ_s FOR WHICH
 EQUILIBRIUM IS
 MAINTAINED

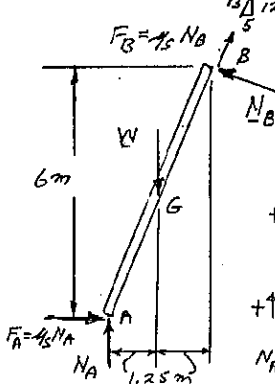


$AB = 6.5\text{m}$ $6.5 \triangle 6 \Rightarrow \frac{13}{5} \triangle 12$
 FREE BODY: LADDER
 MOTION IMPENDING
 $F_A = \mu_s N_A$ $F_B = \mu_s N_B$

$+\sum M_A = 0: W(1.25\text{m}) - N_B(6.5\text{m}) = 0$
 $N_B = \frac{1.25W}{6.5}$ (1)
 $+\sum F_y = 0: N_A + \frac{5}{13}N_B + \frac{12}{13}\mu_s N_B - W = 0$
 $N_A + \frac{5(1.25W)}{13(6.5)} + \frac{12}{13}\mu_s \left(\frac{1.25W}{6.5}\right) - W = 0$
 $N_A = W \left(1 - \frac{6.25}{84.5} - \frac{15}{84.5}\mu_s\right)$ (2)

$+\sum F_x = 0: \mu_s N_A - \frac{12}{13}N_B + \frac{5}{13}\mu_s N_B = 0$
 SUBSTITUTE FOR N_A AND N_B FROM EQS. (1) AND (2):
 $\mu_s \left(\frac{78.25 - 15\mu_s}{84.5}\right) = \left(\frac{12 - 5\mu_s}{13}\right) \left(\frac{1.25W}{6.5}\right)$
 $84.5\mu_s - 15\mu_s^2 - 15 = 0$
 $\mu_s = 0.18349$ AND $\mu_s = -5.45$ (DISCARD)
 $\mu_s = 0.1835$




8.32
 GIVEN: $\mu_s = 0.40$
 $\mu_k = 0.30$
 FIND: (a) VALUE OF θ
 FOR IMPENDING MOTION.
 (b) CORRESPONDING
 TENSION IN CORD BC




FREE-BODY DIAGRAM
 THREE-FORCE BODY. LINE OF
 ACTION OF R MUST PASS
 THROUGH D, WHERE T AND
 R INTERSECT
 MOTION IMPENDING
 $\tan \phi_s = 0.4$ $\phi_s = 21.8^\circ$

(a) SINCE $BG = 6\text{m}$, IT FOLLOWS
 THAT $BD = DC$ AND AD BISECTS $\angle BAC$
 $\therefore \theta/2 + \phi_s = 90^\circ$ $\theta/2 + 21.8^\circ = 90^\circ$ $\theta = 136.4^\circ$
 (b) FORCE TRIANGLE (RIGHT TRIANGLE)
 $T = W \cos 21.8^\circ$
 $T = 0.928W$

8.33




GIVEN: $\mu_s = 0.40$
 $\mu_k = 0.30$
 FIND: (a) VALUE OF θ
 FOR IMPENDING MOTION
 (b) CORRESPONDING
 TENSION IN CORD BC



FREE-BODY DIAGRAM
 ROD AB IS A THREE-FORCE
 BODY. THUS, LINE OF ACTION
 OF R MUST PASS THROUGH D,
 WHERE W AND T INTERSECT.
 SINCE $AG = GB$, $CD = DB$
 AND THE MEDIAN AD OF THE
 ISOSCELES TRIANGLE ABC
 BISECTS THE ANGLE θ ,
 THUS $\phi_s = \frac{1}{2}\theta$


SINCE MOTION IMPENDS $\phi_s = \tan^{-1} 0.40 = 21.80^\circ$
 $\theta = 2\phi_s = 2(21.8^\circ) \quad \theta = 43.6^\circ$

(b)




FORCE TRIANGLE
 THIS IS A RIGHT TRIANGLE
 $T = W \sin \phi_s = W \sin 21.8^\circ$
 $T = 0.371 W$

8.34



GIVEN: BETWEEN PIN C AND ROD;
 $\mu_s = 0.15$

FIND: RANGE OF VALUES
 OF a/L FOR WHICH
 EQUILIBRIUM IS MAINTAINED.



FREE-BODY DIAGRAM: FOR
 MOTION OF B IMPENDING UPWARD.

$$+\sum M_B = 0$$

$$PL \sin \theta - N_C \left(\frac{a}{\sin \theta} \right) = 0$$

$$N_C = \frac{PL}{a} \sin^2 \theta \quad (1)$$

$$+\sum F_y = 0: N_C \sin \theta - \mu_s N_C \cos \theta - P = 0$$

$$N_C (\sin \theta - \mu_s \cos \theta) = P$$

SUBSTITUTE FOR N_C FROM (1), AND SOLVE FOR a/L

$$a/L = \sin^2 \theta (\sin \theta - \mu_s \cos \theta) \quad (2)$$

FOR $\theta = 30^\circ$ AND $\mu_s = 0.15$:

$$a/L = \sin^2 30^\circ (\sin 30^\circ - 0.15 \cos 30^\circ)$$

$$a/L = 0.092524 \quad a/L = 10.808$$


FOR MOTION OF B IMPENDING DOWNWARD, REVERSE
 SENSE OF FRICTION FORCE F_C . TO DO THIS
 WE MAKE $\mu_s = -0.15$ IN EQ.(2).

$$\text{EQ.(2): } a/L = \sin^2 30^\circ (\sin 30^\circ - (-0.15) \cos 30^\circ)$$


$$a/L = 0.15748 \quad a/L = 6.350$$

RANGE OF VALUES OF a/L FOR EQUILIBRIUM:
 $6.35 \leq \frac{a}{L} \leq 10.81$

8.35



GIVEN: BETWEEN PIN C
 AND ROD: $\mu_s = 0.60$
 FIND: RANGE OF VALUES
 OF a/L FOR WHICH
 EQUILIBRIUM IS
 MAINTAINED.



FREE-BODY DIAGRAM: FOR
 MOTION OF B IMPENDING UPWARD

$$+\sum M_B = 0$$

$$PL \sin \theta - N_C \left(\frac{a}{\sin \theta} \right) = 0$$

$$N_C = \frac{PL}{a} \sin^2 \theta \quad (1)$$

$$+\sum F_y = 0: N_C \sin \theta - \mu_s N_C \cos \theta - P = 0$$

$$N_C (\sin \theta - \mu_s \cos \theta) = P$$

SUBSTITUTE FOR N_C FROM (1), AND SOLVE FOR a/L

$$a/L = \sin^2 \theta (\sin \theta - \mu_s \cos \theta)$$

FOR $\theta = 30^\circ$ AND $\mu_s = 0.60$:

$$a/L = \sin^2 30^\circ (\sin 30^\circ - 0.60 \cos 30^\circ)$$

$$a/L = -0.0049 < 0$$


THUS, SLIPPING OF B UPWARD DOES NOT OCCUR
 FOR MOTION OF B IMPENDING DOWNWARD,
 REVERSE SENSE OF FRICTION FORCE F_C . TO DO
 THIS WE MAKE $\mu_s = -0.60$ IN EQ.(2).

$$a/L = \sin^2 30^\circ (\sin 30^\circ - (-0.60) \cos 30^\circ)$$

$$a/L = 0.2459 \quad a/L = 3.923$$


RANGE OF a/L FOR EQUILIBRIUM: $a/L \geq 3.92$

8.36

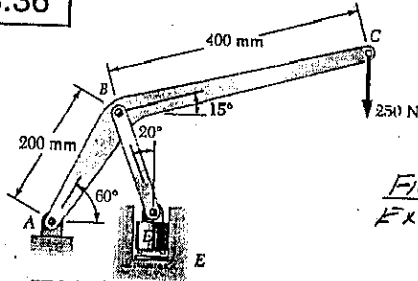

GIVEN: BETWEEN
 DIE D AND
 GUIDE E:
 $\mu_s = 0.30$

FIND: FORCE
 EXERTED ON SEAL

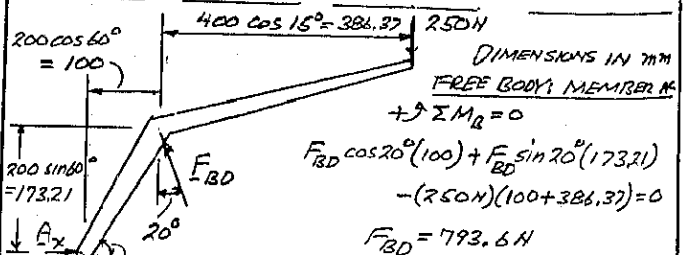

DIMENSIONS IN mm
 FREE BODY: MEMBER BC

$$+\sum M_B = 0$$

$$F_{BD} \cos 20^\circ (100) + F_{BD} \sin 20^\circ (173.21)$$

$$- (250)(100 + 386.37) = 0$$

$$F_{BD} = 793.6 \text{ N}$$


FREE BODY: DIE D

$$\phi_s = \tan^{-1} 0.30 = 16.70^\circ$$


FORCE TRIANGLE

$$\frac{D}{\sin 53.3^\circ} = \frac{793.6 \text{ N}}{\sin 106.7^\circ}$$

$$D = 664.3 \text{ N}$$

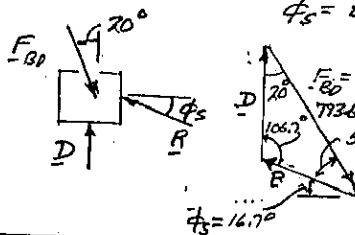


ON SEAL:
 $D = 664 \text{ N} \downarrow$



GIVEN:
10-16 WINDOW SASH
5-16 SASH WEIGHT

FIND: SMALLEST
VALUE OF μ_s FOR
WHICH WINDOW
WILL STAY OPEN.




FREE BODY: SASH
MOTION IMPENDS
 $F_A = \mu_s N_A$ $F_D = \mu_s N_D$


$$\begin{aligned} \sum F_x = 0: & N_A = N_D \\ +\uparrow \sum F_y = 0: & F_A + F_D - 10 \text{ lb} + 5 \text{ lb} = 0 \\ & F_A + F_D - 10 \text{ lb} + 5 \text{ lb} = 0 \\ & \mu_s N_A + \mu_s N_D = 5 \text{ lb} \\ & 2\mu_s N_A = 5 \text{ lb} \\ & F_A = \mu_s N_A = 2.5 \text{ lb} \end{aligned}$$

$$\begin{aligned} +\sum M_D = 0: & -N_A(27 \text{ in}) - F_A(36 \text{ in}) + (10 \text{ lb})(18 \text{ in}) = 0 \\ & -N_A(27 \text{ in}) - (2.5 \text{ lb})(36 \text{ in}) + (10 \text{ lb})(18 \text{ in}) = 0 \\ & 27 N_A = 90 \quad N_A = 3.333 \text{ lb} \\ \mu_s = \frac{F_A}{N_A} = \frac{2.5 \text{ lb}}{3.333 \text{ lb}} = 0.75 \quad \mu_s = 0.75 \end{aligned}$$

8.38

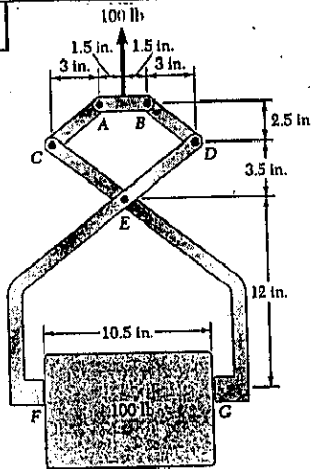

FIND: SMALLEST
 μ_s FOR BLOCK
TO BE SUPPORTED.



FREE BODY:
MEMBERS CA, AB, BD

BY SYMMETRY: $C_y = D_y = \frac{1}{2}(100 \text{ lb}) = 50 \text{ lb}$

SINCE CA IS A TWO-FORCE MEMBER


$$\frac{C_x}{3 \text{ in.}} = \frac{C_y}{2.5 \text{ in.}}; \quad \frac{C_x}{3 \text{ in.}} = \frac{50 \text{ lb.}}{2.5 \text{ in.}}; \quad C_x = 60 \text{ lb}$$

$$\sum F_x = 0: D_x = C_x \quad D_x = 60 \text{ lb}$$

(CONTINUED)


8.38 CONTINUED

FREE BODY: TONG DEF

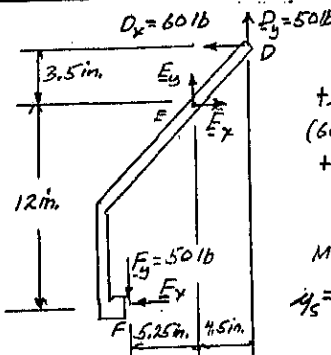


$$\begin{aligned} +\sum M_E = 0: & (60 \text{ lb})(3.5 \text{ in.}) + (50 \text{ lb})(4.5 \text{ in.}) \\ & + (50 \text{ lb})(5.25 \text{ in.}) - F_x(12 \text{ in.}) = 0 \\ & F_x = 58.125 \text{ lb} \\ \text{MINIMUM VALUE OF } \mu_s: & \\ \mu_s = \frac{F_y}{F_x} = \frac{50 \text{ lb}}{58.125 \text{ lb}}; \mu_s = 0.8602 \\ \mu_s = 0.86 \end{aligned}$$

8.39

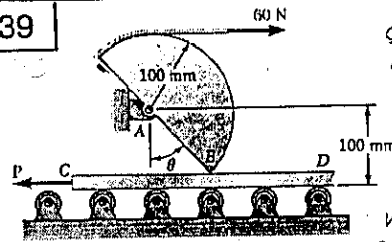

GIVEN: AT B, $\mu_s = 0.45$
 $d =$ PLATE THICKNESS
FIND: (a) FORCE
P TO MOVE PLATE
IF $d = 20 \text{ mm}$
(b) LARGEST d FOR
WHICH PLATE CANNOT
BE MOVED IF $P \rightarrow \infty$.

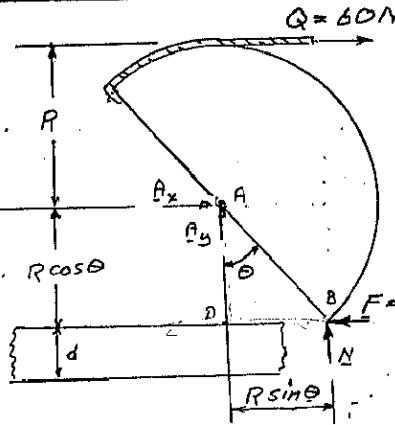


FREE BODY: CAM

FOR IMPENDING
MOTION
 $F = \mu_s N$

$$\begin{aligned} +\sum M_A = 0: & QR - NR \sin \theta + (\mu_s N) R \cos \theta = 0 \\ & N = \frac{Q}{\sin \theta - \mu_s \cos \theta} \quad (1) \end{aligned}$$

FREE BODY: PLATE $\sum F_x = 0$ $P = \mu_s N$ (2)

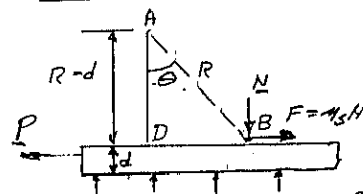

GEOMETRY
IN ΔABD

WITH $R = 100 \text{ mm}$
AND $d = 20 \text{ mm}$

$$\cos \theta = \frac{R-d}{R} = \frac{80 \text{ mm}}{100 \text{ mm}} = 0.8$$


$$(a) \quad \sin \theta = \sqrt{1 - \cos^2 \theta} = 0.6$$

EQ.(1) USING $Q = 60 \text{ N}$ AND $\mu_s = 0.45$


$$N = \frac{60 \text{ N}}{0.6 - (0.45)(0.8)} = \frac{60}{0.24} = 250 \text{ N}$$

$$\begin{aligned} \text{EQ.(2)} \quad P = \mu_s N = (0.45)(250 \text{ N}); \quad P = 112.5 \text{ N} \\ (b) \text{ FOR } P = \infty, N = \infty. \text{ DENOMINATOR IS ZERO IN EQ.(1)} \\ \sin \theta - \mu_s \cos \theta = 0; \quad \tan \theta = \mu_s = 0.45; \quad \theta = 24.23^\circ \\ \cos \theta = \frac{R-d}{R}; \quad \cos 24.23^\circ = \frac{100-d}{100}; \quad d = 2.81 \text{ mm} \end{aligned}$$

8.40



GIVEN: MASS = 75 kg,
 $P = 500\text{ N}$, $\mu_s = 0.30$.
 FIND: RANGE OF
 VALUES OF θ FOR
 BASE TO MOVE



FREE BODY: MACHINE BASE
 $m = (75 \text{ kg})(9.81 \text{ m/s}^2) = 735.75 \text{ N}$
 ASSUME SLIDING IMPENDS
 $F_A = \mu_s N_A$ $F_B = \mu_s N_B$
 $\uparrow \Sigma F_y = 0$
 $N_A + N_B - W - P \sin \theta = 0$
 $(N_A + N_B) = W + P \sin \theta$ (1)
 $\rightarrow \Sigma F_x = 0: F_A + F_B - P \cos \theta = 0$
 $\mu_s (N_A + N_B) = P \cos \theta = 0$ (2)


EQ. (2): $\mu_s = \frac{P \cos \theta}{W + P \sin \theta}$

$\mu_s W + \mu_s P \sin \theta = P \cos \theta$
 $0.30(735.75 \text{ N}) + 0.30(500 \text{ N}) \sin \theta = 1500 \cos \theta$
 $500 \cos \theta - 150 \sin \theta = 220.73$
 SOLVE FOR θ : $\theta = 48.78^\circ$


ASSUME TIPPING ABOUT B IMPENDS: $\therefore N_A = 0$
 $\rightarrow \Sigma M_B = 0: P \sin \theta (0.4 \text{ m}) - P \cos \theta (0.5 \text{ m}) - W(0.2 \text{ m}) = 0$
 $500 \sin \theta (0.4) - 500 \cos \theta (0.5) - 735.75 (0.2 \text{ m}) = 0$
 $200 \sin \theta - 250 \cos \theta = 147.15$
 SOLVE FOR θ : $\theta = 78.03^\circ$

RANGE FOR NO MOTION: $48.3^\circ \leq \theta \leq 78.0^\circ$


8.41

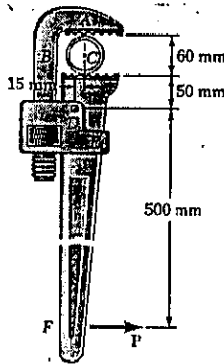

FIND: SMALLEST
 VALUE OF μ_s
 AT A AND C FOR
 WRENCH TO SELF
 LOCK ON THE PIPE




FREE BODY: PORTION ABDE
 $\Sigma F_x = 0: D_x = F_A$ (1)
 $\rightarrow \Sigma M_D = 0: N(15 \text{ mm}) - F_A(110 \text{ mm}) = 0$
 $F_A = 0.1363 N$
 $\mu_s = F_A/N = 0.1363$
 AT A: $\mu_s = 0.136$




FREE BODY: PORTION CF
 $\rightarrow \Sigma M_D = 0$
 $P(500 \text{ mm}) - N(15 \text{ mm}) + F_C(50 \text{ mm}) = 0$
 $500P - 15N + 50\mu_s N = 0$
 $P = 0.03N - 0.1\mu_s N$ (2)
 $\uparrow \Sigma F_x = 0: P - \mu_s N + D_x = 0$
 USE EQ. (1) $P = \mu_s N - F_A$ (3)
 EQUATE (2) + (3):
 $0.03N - 0.1\mu_s N = \mu_s N - F_A$

FROM EQ. (1) SUBSTITUTE $F_A = 0.1363N$:
 $0.03N - 0.1\mu_s N = \mu_s N - 0.1363N$
 SOLVE FOR μ_s : $\mu_s = 0.1512$; AT C: $\mu_s = 0.151$

8.42

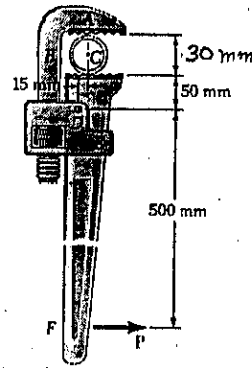


FIND: SMALLEST
 VALUES OF μ_s
 AT A AND C FOR
 WRENCH TO SELF
 LOCK ON THE PIPE



FREE BODY: PORTION ABDE
 $\Sigma F_x = 0: D_x = F_A$ (1)
 $\rightarrow \Sigma M_D = 0: N(15 \text{ mm}) - F_A(80 \text{ mm}) = 0$
 $F_A = 0.1875 N$
 $\mu_s = F_A/N = 0.1875$


AT A: $\mu_s = 0.188$
 FREE BODY PORTION CF



$\rightarrow \Sigma M_D = 0$
 $P(500 \text{ mm}) - N(15 \text{ mm}) + F_C(50 \text{ mm}) = 0$
 $500P - 15N + 50\mu_s N = 0$
 $P = 0.03N - 0.1\mu_s N$ (2)
 $\uparrow \Sigma F_x = 0: P - \mu_s N + D_x = 0$
 USE EQ. (1) $P = \mu_s N - F_A$ (3)
 EQUATE (2) + (3):
 $0.03N - 0.1\mu_s N = \mu_s N - F_A$
 FROM EQ. (1) SUBSTITUTE $F_A = 0.1875N$:
 $0.03N - 0.1\mu_s N = \mu_s N - 0.1875N$


SOLVE FOR μ_s : $\mu_s = 0.1977$; AT B: $\mu_s = 0.198$

8.43



GIVEN: AT A AND
 AT B $\mu_s = 0.40$

FIND: WHETHER
 PLATE IS IN
 EQUILIBRIUM IF
 (a) $P = 0$,
 (b) $P = 20 \text{ lb}$.



(a) $P = 0$
 $\rightarrow \Sigma M_D = 0$
 $N_A(2 \text{ ft}) - (50 \text{ lb})(3 \text{ ft}) = 0$
 $N_A = 75 \text{ lb}$
 $\Sigma F_x = 0: N_D = N_A = 75 \text{ lb}$
 $\uparrow \Sigma F_y = 0: F_A + F_D - 50 \text{ lb} = 0$
 $F_A + F_D = 50 \text{ lb}$

BUT: $(F_A)_m = \mu_s N_A = 0.40(75 \text{ lb}) = 30 \text{ lb}$
 $(F_D)_m = \mu_s N_D = 0.40(75 \text{ lb}) = 30 \text{ lb}$


THUS: $(F_A)_m + (F_D)_m = 60 \text{ lb}$

AND $(F_A)_m + (F_D)_m > F_A + F_D$

PLATE IS IN EQUILIBRIUM

(CONTINUED)


8.43 CONTINUED



(b) $P = 20 \text{ lb}$
 $\uparrow \sum M_D = 0$
 $N_A(2\text{ft}) - (50\text{lb})(3\text{ft}) + (20\text{lb})(5\text{ft}) = 0$
 $N_A = 25 \text{ lb}$
 $\sum F_x = 0: N_D = N_A = 25 \text{ lb}$
 $\uparrow \sum F_y = 0: F_A + F_D - 50\text{lb} + 20\text{lb} = 0$
 $F_A + F_D = 30 \text{ lb}$

BUT: $(F_A)_{\text{max}} = \mu_s N_A = 0.4(25\text{lb}) = 10 \text{ lb}$
 $(F_D)_{\text{max}} = \mu_s N_D = 0.4(25\text{lb}) = 10 \text{ lb}$
 THUS: $(F_A)_{\text{max}} + (F_D)_{\text{max}} = 20 \text{ lb}$, AND $F_A + F_D > (F_A)_{\text{max}} + (F_D)_{\text{max}}$
 PLATE MOVES DOWNWARD


8.44



GIVEN: AT A
 AND AT B: $\mu_s = 0.40$

FIND: RANGE
 OF VALUES OF P
 FOR WHICH
 PLATE WILL
 MOVE DOWNWARD.

WE SHALL CONSIDER THE FOLLOWING TWO CASES
 (1) $0 < P < 30 \text{ lb}$




$\uparrow \sum M_D = 0:$
 $N_A(2\text{ft}) - (50\text{lb})(3\text{ft}) + P(5\text{ft}) = 0$
 $N_A = 75\text{lb} - 2.5P$

(NOTE: $N_A \geq 0$ AND
 DIRECTED \leftarrow FOR $P \leq 30 \text{ lb}$
 AS ASSUMED HERE)

$\sum F_x = 0: N_A = N_D$
 $\uparrow \sum F_y = 0: F_A + F_D + P - 50 = 0; F_A + F_D = 50 - P$
 BUT: $(F_A)_{\text{max}} = (F_D)_{\text{max}} = \mu_s N_A = 0.40(75 - 2.5P) = 30 - P$

PLATE MOVES \downarrow IF $F_A + F_D > (F_A)_{\text{max}} + (F_D)_{\text{max}}$
 OR $50 - P > (30 - P) + (30 - P)$
 $P > 10 \text{ lb}$

(2) $30 \text{ lb} < P < 50 \text{ lb}$



$\uparrow \sum M_D = 0$
 $-N_B(2\text{ft}) - (50\text{lb})(3\text{ft}) + P(5\text{ft}) = 0$
 $N_B = 2.5P - 75$

(NOTE: $N_B > 0$ AND DIRECTED \rightarrow
 FOR $P > 30 \text{ lb}$ AS ASSUMED)


$\sum F_x = 0: N_A = N_D$
 $\uparrow \sum F_y = 0: F_A + F_D + P - 50 = 0; F_A + F_D = 50 - P$
 BUT: $(F_A)_{\text{max}} = (F_D)_{\text{max}} = \mu_s N_A = 0.40(2.5P - 75) = P - 30 \text{ lb}$

PLATE MOVES \downarrow IF $F_A + F_D > (F_A)_{\text{max}} + (F_D)_{\text{max}}$
 $50 - P > (P - 30) + (P - 30)$
 $P < \frac{110}{3} = 36.7 \text{ lb}$

THUS: PLATE MOVE DOWNWARD FOR:
 $10 \text{ lb} < P < 36.7 \text{ lb}$


NOTE: FOR $P > 50 \text{ lb}$, PLATE IS IN EQUILIBRIUM

8.45



GIVEN: $\mu_s = 0.35$,
 $\theta = 50^\circ$, $M = 20 \text{ N}\cdot\text{m}$

FIND: RANGE OF
 VALUES OF P FOR
 EQUILIBRIUM



FREE BODY: MEMBER AB

BC IS A TWO-FORCE MEMBER

$\uparrow \sum M_A = 0: 20 \text{ N}\cdot\text{m} - F_{BC} \cos 50^\circ (0.1 \text{ m}) = 0$
 $F_{BC} = 311.145 \text{ N}$

NOTION OF C IMPENDING UPWARD

$\downarrow \sum F_x = 0: (311.145 \text{ N}) \cos 50^\circ - N = 0$
 $N = 200 \text{ N}$

$\uparrow \sum F_y = 0: (311.145 \text{ N}) \sin 50^\circ - P - (0.35)(200 \text{ N}) = 0$
 $P = 168.351 \text{ N}$


MOTION OF C IMPENDING DOWNWARD

$\downarrow \sum F_x = 0: (311.145 \text{ N}) \cos 50^\circ - N = 0$
 $N = 200 \text{ N}$

$\uparrow \sum F_y = 0: (311.145 \text{ N}) \sin 50^\circ - P - (0.35)(200 \text{ N}) = 0$
 $P = 308.35 \text{ N}$


RANGE OF P: $168.4 \text{ N} \leq P \leq 308 \text{ N}$

8.46



GIVEN: $\mu_s = 0.40$,
 $\theta = 60^\circ$, $P = 200 \text{ N}$

FIND: RANGE OF
 VALUES OF M FOR
 EQUILIBRIUM



FREE BODY: MEMBER AB

BC IS A TWO-FORCE MEMBER

$\uparrow \sum M_A = 0: M - F_{BC} \cos 60^\circ (0.1 \text{ m}) = 0$
 $M = 0.05 F_{BC}$ (1)

MOTION OF C IMPENDING UPWARD

$\downarrow \sum F_x = 0: F_{BC} \cos 60^\circ - N = 0$
 $N = 0.5 F_{BC}$

$\uparrow \sum F_y = 0: F_{BC} \sin 60^\circ - 200 \text{ N} - (0.40)(0.5 F_{BC}) = 0$
 $F_{BC} = 300.29 \text{ N}$

EQ.(1): $M = 0.05(300.29)$
 $M = 15.014 \text{ N}\cdot\text{m}$

MOTION OF C IMPENDING DOWNWARD


$\downarrow \sum F_x = 0: F_{BC} \cos 60^\circ - N = 0$
 $N = 0.5 F_{BC}$

$\uparrow \sum F_y = 0: F_{BC} \sin 60^\circ - 200 \text{ N} + (0.40)(0.5 F_{BC}) = 0$
 $F_{BC} = 187.613 \text{ N}$

EQ.(1): $M = 0.05(187.613)$
 $M = 9.381 \text{ N}\cdot\text{m}$

RANGE OF M: $9.38 \text{ N}\cdot\text{m} \leq M \leq 15.01 \text{ N}\cdot\text{m}$

8.47




GIVEN: $k = 15 \text{ lb/in.}$
 $T = 0$ WHEN $\theta = 0$.

$\mu_s = 0.40$.

FIND: RANGE OF W FOR EQUILIBRIUM WHEN

(a) $\theta = 20^\circ$, (b) $\theta = 30^\circ$.



TENSION IN SPRING: $AB = \frac{a}{\cos \theta}$

$T = k\Delta = k(AB - a) = k\left(\frac{a}{\cos \theta} - a\right)$

FOR MOTION IMPENDING DOWNWARD

$\sum F_x = 0: N - T \cos \theta = 0$

$N = T \cos \theta$

$\uparrow \sum F_y = 0: T \sin \theta - W + \mu_s N = 0$

$T \sin \theta - W + \mu_s T \cos \theta = 0$

$W = T(\sin \theta + \mu_s \cos \theta)$

$W = ka\left(\frac{1}{\cos \theta} - 1\right)(\sin \theta + \mu_s \cos \theta)$ (1)

FOR MOTION IMPENDING UPWARD, $F = \mu_s N$ ACTS DOWNWARD

\therefore IN EQ.(1): $\mu_s \rightarrow -\mu_s$

$W = ka\left(\frac{1}{\cos \theta} - 1\right)(\sin \theta - \mu_s \cos \theta)$ (2)

(a) $\theta = 20^\circ$, $k = 15 \text{ lb/in.}$, $\mu_s = 0.40$

MOTION \downarrow , WE USE EQ.(1):

$W = (15 \text{ lb/in.})(20 \text{ in.})\left(\frac{1}{\cos 20^\circ} - 1\right)(\sin 20^\circ + 0.40 \cos 20^\circ)$

$W = (300 \text{ lb})(0.064178)(0.34202 + 0.40 \times 0.93969)$

$W = 13.82 \text{ lb}$

MOTION \uparrow , WE USE EQ.(2):

$W = (300 \text{ lb})(0.064178)(0.34202 - 0.40 \times 0.93969)$

$W = -0.652 \text{ lb}$: NEGATIVE WEIGHT, IMPOSSIBLE

RANGE WHEN $\theta = 20^\circ$: $W \leq 13.82 \text{ lb}$

(b) $\theta = 30^\circ$, $k = 15 \text{ lb/in.}$, $\mu_s = 0.40$

MOTION \downarrow , WE USE EQ.(1)

$W = (15 \text{ lb/in.})(20 \text{ in.})\left(\frac{1}{\cos 30^\circ} - 1\right)(\sin 30^\circ + 0.40 \cos 30^\circ)$

$W = (300 \text{ lb})(0.15470)(0.5 + 0.40 \times 0.86603)$

$W = 39.28 \text{ lb}$


MOTION \uparrow , WE USE EQ.(2):

$W = (300 \text{ lb})(0.15470)(0.5 - 0.4 \times 0.86603)$

$W = 7.128 \text{ lb}$


RANGE WHEN $\theta = 30^\circ$: $7.13 \text{ lb} \leq W \leq 39.3 \text{ lb}$

8.48



GIVEN: $k = 15 \text{ lb/in.}$, $\mu_s = 0.40$
 $T = 0$ WHEN $\theta = 0$.

FIND: RANGE OF W FOR EQUILIBRIUM WHEN
 (a) $\theta = 20^\circ$, (b) $\theta = 30^\circ$



TENSION IN SPRING
 $AB = \frac{a}{\cos \theta}$

ELONGATION OF SPRING
 $\Delta = \frac{a}{\cos \theta} - a$

$T = k\Delta = ka\left(\frac{1}{\cos \theta} - 1\right)$ (1)


(CONTINUED)

8.48 CONTINUED

NOTE: ONLY POSSIBLE MOTION IS \rightarrow ; BUT N CAN BE \uparrow OR \downarrow .

$\pm \sum F_x = 0: T \sin \theta - \mu_s N = 0$

$N = (T \sin \theta) / \mu_s$ (2)



$\uparrow \sum F_y = 0: N + T \cos \theta - W = 0$

$W = T \cos \theta + \mu_s N$ (3)

(a) $\theta = 20^\circ$, $k = 15 \text{ lb/in.}$, $\mu_s = 0.40$

EQ.(1): $T = (15 \text{ lb/in.})(20 \text{ in.})\left(\frac{1}{\cos 20^\circ} - 1\right) = 19.2533 \text{ lb}$

EQ.(2): $N = (19.2533 \text{ lb})(\sin 20^\circ) / 0.40 = 16.4626 \text{ lb}$

IF N ACTS \uparrow : THAT IS, $N = +16.4626 \text{ lb}$

EQ.(3): $W = (19.2533 \text{ lb}) \cos 20^\circ + 16.4626 \text{ lb} = 34.555 \text{ lb}$

COLLAR IN EQUILIBRIUM WHEN: $W \geq 35.6 \text{ lb}$

IF N ACTS \downarrow : THAT IS, $N = -16.4626 \text{ lb}$

$W = (19.2533 \text{ lb}) \cos 20^\circ - 16.4626 \text{ lb} = 1.6296 \text{ lb}$

COLLAR IN EQUILIBRIUM WHEN: $W \geq 1.630 \text{ lb}$

(b) $\theta = 30^\circ$, $k = 15 \text{ lb/in.}$, $\mu_s = 0.40$

EQ.(1): $T = (15 \text{ lb/in.})(20 \text{ in.})\left(\frac{1}{\cos 30^\circ} - 1\right) = 46.41 \text{ lb}$

EQ.(2): $N = (46.41 \text{ lb}) \sin 30^\circ / 0.40 = 58.01 \text{ lb}$

IF N ACTS \uparrow : THAT IS, $N = 58.01 \text{ lb}$

EQ.(3): $W = (46.41 \text{ lb}) \cos 30^\circ + 58.01 \text{ lb} = 98.21 \text{ lb}$


COLLAR IN EQUILIBRIUM WHEN: $W \geq 98.2 \text{ lb}$

IF N ACTS \downarrow : THAT IS, $N = -58.01 \text{ lb}$

$W = (46.41 \text{ lb}) \cos 30^\circ - 58.01 \text{ lb} = -17.81 \text{ lb}$

NEGATIVE WEIGHT, IMPOSSIBLE

8.49

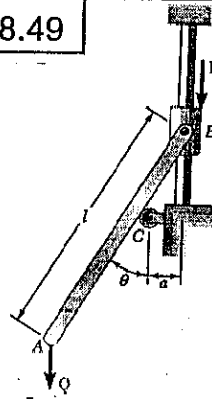

GIVEN: $l = 600 \text{ mm}$


$a = 80 \text{ mm}$

$\mu_s = 0.25$

$Q = 100 \text{ N}$

$\theta = 30^\circ$

FIND: RANGE OF VALUES OF P FOR EQUILIBRIUM



FOR MOTION OF COLLAR AT B IMPENDING UPWARD, $F = \mu_s N$.

$\uparrow \sum M_B = 0: Q l \sin \theta - C a / \sin \theta = 0$

$C = Q(l/a) \sin^2 \theta$

$\sum F_x = 0: N = C \cos \theta = Q(l/a) \sin^2 \theta \cos \theta$

$\uparrow \sum F_y = 0: P + Q - C \sin \theta - \mu_s N = 0$

$P + Q - Q(l/a) \sin^3 \theta - \mu_s Q(l/a) \sin^2 \theta \cos \theta = 0$

$P = Q \left[\frac{l}{a} \sin^2 \theta (\sin \theta - \mu_s \cos \theta) - 1 \right]$ (1)

SUBSTITUTE DATA:

$P = (100 \text{ N}) \left[\frac{600 \text{ mm}}{80 \text{ mm}} \sin^2 30^\circ (\sin 30^\circ - 0.25 \cos 30^\circ) - 1 \right]$

$P = -46.84 \text{ N}$ (P IS DIRECTED \uparrow)

$P = -46.8 \text{ N}$

FOR MOTION OF COLLAR IMPENDING DOWNWARD $F = \mu_s N$

IN EQ.(1) WE SUBSTITUTE $-\mu_s$ FOR μ_s .


$P = Q \left[\frac{l}{a} \sin^2 \theta (\sin \theta + \mu_s \cos \theta) - 1 \right]$

$P = (100 \text{ N}) \left[\frac{600 \text{ mm}}{80 \text{ mm}} \sin^2 30^\circ (\sin 30^\circ + 0.25 \cos 30^\circ) - 1 \right]$

$P = +34.34 \text{ N}$


FOR EQUILIBRIUM: $-46.8 \text{ N} \leq P \leq 34.3 \text{ N}$

8.50




GIVEN: AT ALL SURFACES $\mu_s = 0.30$
 $\theta = 30^\circ$
 (a) CONFIRM EQUILIBRIUM WHEN $P = 0$
 (b) FIND LARGEST P FOR EQUILIBRIUM.

FOR MOTION: BLOCK A MOVES \downarrow AND BLOCK B MOVES \leftarrow .
 ASSUME MOTION IMPENDS: $\phi_s = \tan^{-1} 0.30 = 16.7^\circ$
 FREE BODY: BLOCK B FREE BODY: BLOCK A

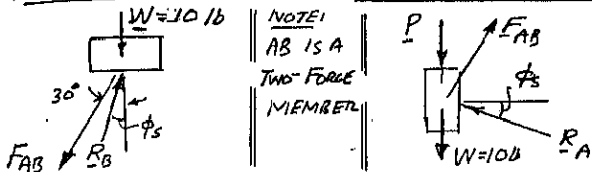

NOTE: AB IS A TWO-FORCE MEMBER.

FORCE TRIANGLES

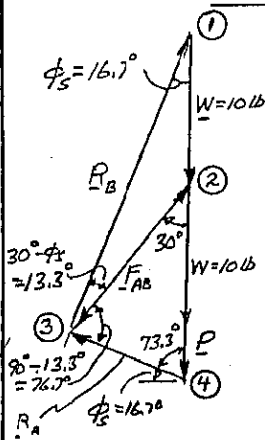


BLOCK B: $\Delta 1, 2, 3$
 $\frac{F_{AB}}{\sin 16.7^\circ} = \frac{10 \text{ lb}}{\sin 13.3^\circ}$
 $F_{AB} = 12.491 \text{ lb}$

BLOCK A: $\Delta 2, 4, 3$
 $\frac{W+P}{\sin 76.7^\circ} = \frac{F_{AB}}{\sin 73.3^\circ}$
 $\frac{10 \text{ lb} + P}{\sin 76.7^\circ} = \frac{12.491 \text{ lb}}{\sin 73.3^\circ}$
 $10 \text{ lb} + P = 12.69 \text{ lb}$

(b) $P = 2.69 \text{ lb}$
 (a) EQUILIBRIUM FOR $P < 2.69 \text{ lb}$
 (b) EQUILIBRIUM FOR $P = 0$

8.52



DERIVE: EXPRESSION IN μ_s FOR SMALLEST VALUE OF a/L FOR EQUILIBRIUM

FREE BODY: ROD AB

$+\sum M_A = 0$
 $(N_B - \mu_s N_B) \frac{L}{\sqrt{2}} - Wa = 0$
 $N_B = \frac{\sqrt{2} W a}{(1 - \mu_s) L}$ (1)

$+\sum F_x = 0: (N_B + \mu_s N_B) \frac{L}{\sqrt{2}} - (N_A - \mu_s N_A) \frac{L}{\sqrt{2}} = 0$
 $N_A = \frac{1 + \mu_s}{1 - \mu_s} N_B$ (2)

$+\sum F_y = 0: (N_A + \mu_s N_A) \frac{L}{\sqrt{2}} + (N_B - \mu_s N_B) \frac{L}{\sqrt{2}} - W = 0$
 $N_A = \frac{\sqrt{2} W - N_B (1 - \mu_s)}{1 + \mu_s}$ (3)

EQUATE (2) AND (3): $\frac{1 + \mu_s}{1 - \mu_s} N_B = \frac{\sqrt{2} W - N_B (1 - \mu_s)}{1 + \mu_s}$
 $N_B \left[\frac{1 + \mu_s}{1 - \mu_s} + \frac{1 - \mu_s}{1 + \mu_s} \right] = \frac{\sqrt{2} W}{1 + \mu_s}$ (4)


SUBSTITUTE FROM (1):

$\frac{\sqrt{2} W a}{(1 - \mu_s) L} \left[\frac{(1 + \mu_s)^2 + (1 - \mu_s)^2}{(1 - \mu_s)(1 + \mu_s)} \right] = \frac{\sqrt{2} W}{1 + \mu_s}$

$\frac{a}{L} \left[\frac{1 + 2\mu_s + \mu_s^2 + 1 - 2\mu_s + \mu_s^2}{1 - \mu_s^2} \right] = \frac{1 - \mu_s}{1 + \mu_s}$


$\frac{a}{L} \left[\frac{2(1 + \mu_s^2)}{1 - \mu_s^2} \right] = \frac{1 - \mu_s}{1 + \mu_s}$; $\frac{a}{L} = \frac{1(1 - \mu_s)(1 - \mu_s^2)}{2(1 + \mu_s)(1 + \mu_s^2)}$

8.51



GIVEN: $\mu_s = 0.30$
 FIND: SMALLEST VALUE OF a/L FOR EQUILIBRIUM

FREE BODY: ROD AB MOTION IMPENDS

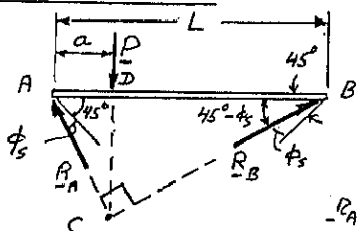


$\phi_s = \tan^{-1} 0.30$
 $\phi_s = 16.7^\circ$

THREE-FORCE BODY
 P MUST PASS THROUGH E WHERE R_A AND R_B INTERSECT

IN RIGHT TRIANGLE ABC:
 $AC = L \sin(45 - \phi_s)$
 IN RIGHT TRIANGLE ADC:
 $a = AC \cos(45 + \phi_s) = L \sin(45 - \phi_s) \cos(45 + \phi_s)$
 $\frac{a}{L} = \sin(45 - 16.7^\circ) \cos(45 + 16.7^\circ) = 0.2248$
 $\frac{a}{L} = 0.225$

8.53



GIVEN: $\mu_s = 0.40$, EACH BOARD WEIGHS 40 lb.
 FIND: (a) LARGEST P FOR EQUILIBRIUM,
 (b) WHERE MOTION IMPENDS

FREE BODY: ENTIRE FRAME

$\sum M_C = 0$ YIELDS: $N_A = 40 + \frac{3}{4}P$
 $\sum M_A = 0$ YIELDS: $N_C = 40 + \frac{1}{4}P$
 $\sum F_x = 0$ YIELDS: $F_C = F_A$

FREE BODY: BOARD AB


$+\sum F_y = 0: 40 + \frac{3}{4}P - P - 40 + F_B = 0$
 $F_B = \frac{P}{4}$
 $+\sum M_B = 0: (P + 40)(3 \text{ ft}) - (40 + \frac{3}{4}P)(6 \text{ ft}) + F_A(8 \text{ ft}) = 0$
 $\sum F_x = 0: N_B = F_A$
 $F_A = 15 + \frac{3}{8}P$

AT POINTS A, B, AND C WE EXPRESS THAT FOR IMPEND MOTION $\mu_s = F/N$.


AT POINT A: $\mu_s = \frac{F_A}{N_A} = 0.40 = \frac{15 + \frac{3P}{8}}{40 + \frac{3P}{4}}$
 $P = -8.889 \text{ lb}$
 AT POINT B: $\mu_s = \frac{F_B}{N_B} = 0.40 = \frac{P/4}{15 + \frac{3P}{8}}$
 $P = 34.79 \text{ lb}$
 AT POINT C: $\mu_s = \frac{F_C}{N_C} = 0.40 = \frac{15 + \frac{3P}{8}}{40 + P/4}$
 $P = 11.429 \text{ lb}$

(a) $P_{max} = 11.43 \text{ lb}$ (b) MOTION IMPENDS AT C.

8.54

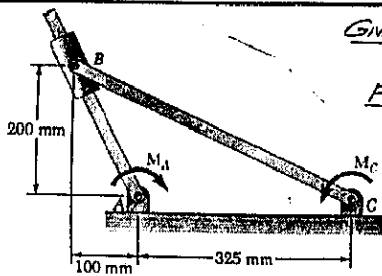


GIVEN: $M_A = 15 \text{ N}\cdot\text{m}$
 $\mu_s = 0.30$
 FIND: LARGEST M_C FOR WHICH EQUILIBRIUM IS MAINTAINED

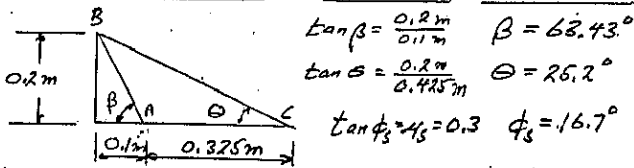


$\tan \beta = \frac{0.2 \text{ m}}{0.325 \text{ m}} \quad \beta = 63.43^\circ$
 $\tan \theta = \frac{0.2 \text{ m}}{0.445 \text{ m}} \quad \theta = 25.2^\circ$
 $\tan \phi_s = \mu_s = 0.3 \quad \phi_s = 16.7^\circ$

FOR LARGEST M_C , MOTION OF B IMPENDS

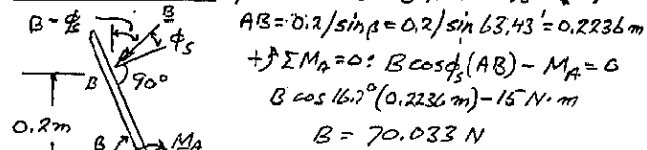


$AB = 0.2 / \sin \beta = 0.2 / \sin 63.43^\circ = 0.2236 \text{ m}$
 $\sum M_A = 0: B \cos \phi_s (AB) - M_A = 0$
 $B \cos 16.7^\circ (0.2236 \text{ m}) - 15 \text{ N}\cdot\text{m} = 0$
 $B = 70.033 \text{ N}$

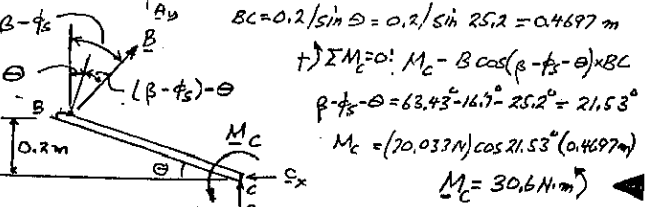


$BC = 0.2 / \sin \theta = 0.2 / \sin 25.2^\circ = 0.4697 \text{ m}$
 $\sum M_C = 0: M_C - B \cos (\beta + \phi_s - \theta) \times BC$
 $\beta + \phi_s - \theta = 63.43^\circ + 16.7^\circ - 25.2^\circ = 21.53^\circ$
 $M_C = (70.033 \text{ N}) \cos 21.53^\circ (0.4697 \text{ m})$
 $M_C = 30.6 \text{ N}\cdot\text{m}$

8.55

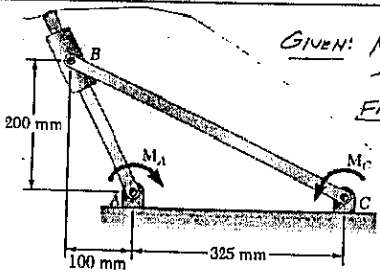


GIVEN: $M_A = 15 \text{ N}\cdot\text{m}$
 $\mu_s = 0.30$
 FIND: SMALLEST M_C FOR WHICH EQUILIBRIUM IS MAINTAINED

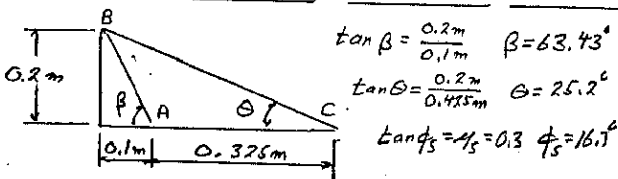


$\tan \beta = \frac{0.2 \text{ m}}{0.325 \text{ m}} \quad \beta = 63.43^\circ$
 $\tan \theta = \frac{0.2 \text{ m}}{0.445 \text{ m}} \quad \theta = 25.2^\circ$
 $\tan \phi_s = \mu_s = 0.3 \quad \phi_s = 16.7^\circ$

FOR SMALLEST M_C , MOTION OF B IMPENDS

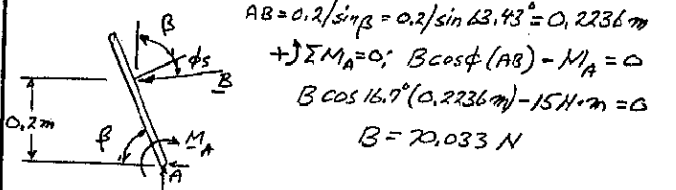


$AB = 0.2 / \sin \beta = 0.2 / \sin 63.43^\circ = 0.2236 \text{ m}$
 $\sum M_A = 0: B \cos \phi_s (AB) - M_A = 0$
 $B \cos 16.7^\circ (0.2236 \text{ m}) - 15 \text{ N}\cdot\text{m} = 0$
 $B = 70.033 \text{ N}$

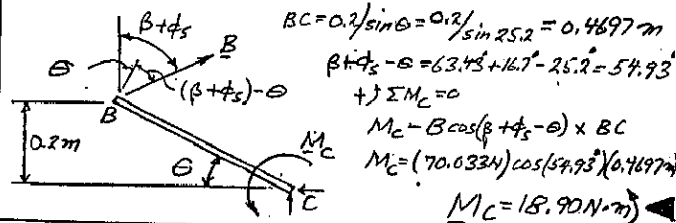


$BC = 0.2 / \sin \theta = 0.2 / \sin 25.2^\circ = 0.4697 \text{ m}$
 $\beta + \phi_s - \theta = 63.43^\circ + 16.7^\circ - 25.2^\circ = 54.93^\circ$
 $\sum M_C = 0$
 $M_C - B \cos (\beta + \phi_s - \theta) \times BC$
 $M_C = (70.033 \text{ N}) \cos 54.93^\circ (0.4697 \text{ m})$
 $M_C = 18.90 \text{ N}\cdot\text{m}$

8.56




FIND: VALUE OF P FOR WHICH MOTION OCCURS AND WHAT MOTION IS FOR (a) $\mu_s = 0.40$ (b) $\mu_s = 0.50$

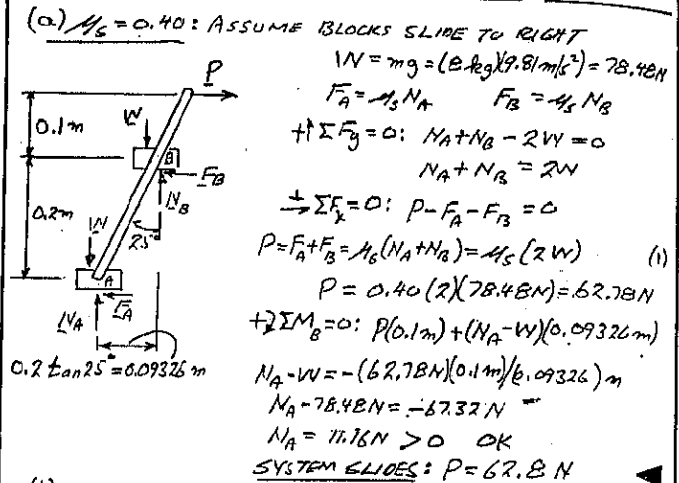


(a) $\mu_s = 0.40$: ASSUME BLOCKS SLIDE TO RIGHT
 $W = mg = (8 \text{ kg})(9.81 \text{ m/s}^2) = 78.48 \text{ N}$
 $F_A = \mu_s N_A \quad F_B = \mu_s N_B$
 $\sum F_y = 0: N_A + N_B - 2W = 0 \quad N_A + N_B = 2W$
 $\sum F_x = 0: P - F_A - F_B = 0$
 $P = F_A + F_B = \mu_s (N_A + N_B) = \mu_s (2W) \quad (1)$
 $P = 0.40 (2)(78.48 \text{ N}) = 62.78 \text{ N}$
 $\sum M_B = 0: P(0.1 \text{ m}) + (N_A - W)(0.09326 \text{ m})$
 $0.2 \tan 25^\circ = 0.09326 \text{ m}$
 $N_A - W = -(62.78 \text{ N})(0.1 \text{ m}) / (0.09326 \text{ m})$
 $N_A - 78.48 \text{ N} = -67.32 \text{ N}$
 $N_A = 11.16 \text{ N} > 0 \text{ OK}$
 SYSTEM SLIDES: $P = 62.8 \text{ N}$

(b) $\mu_s = 0.50$: SEE PART (a).
 Eq. (1) $P = 0.5 (2)(78.48 \text{ N}) = 78.48 \text{ N}$
 $\sum M_B = 0: P(0.1 \text{ m}) + (N_A - W)(0.09326 \text{ m}) = 0$
 $N_A - W = -(78.48 \text{ N})(0.1 \text{ m}) / (0.09326 \text{ m})$
 $N_A - 78.48 \text{ N} = -84.15 \text{ N}$
 $N_A = -5.67 \text{ N} < 0$ UPLIFT, ROTATION ABOUT B
 FOR $N_A = 0$: $\sum M_B = 0: P(0.1 \text{ m}) - W(0.09326 \text{ m}) = 0$
 $P = (78.48 \text{ N})(0.09326 \text{ m}) / (0.1) = 73.19$
 SYSTEM ROTATES ABOUT B: $P = 73.2 \text{ N}$

8.57




GIVEN: μ_s AT A, B, AND C
 FIND: SMALLEST μ_s FOR EQUILIBRIUM

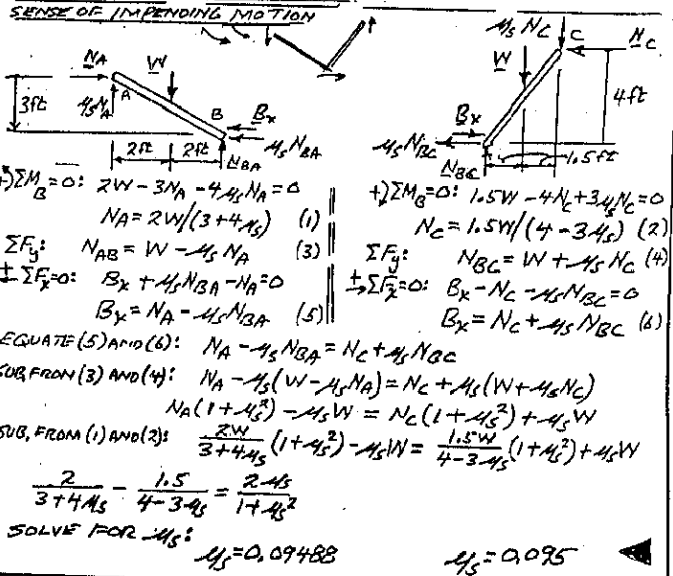


$\sum M_B = 0: 2W - 3N_A - 4\mu_s N_A = 0$
 $N_A = 2W / (3 + 4\mu_s) \quad (1)$
 $\sum F_y: N_{AB} = W - \mu_s N_A \quad (3)$
 $\sum F_x = 0: B_x + \mu_s N_{BA} - N_A = 0$
 $B_x = N_A - \mu_s N_{BA} \quad (5)$
 $\sum M_C = 0: 1.5W - 4N_C + 3\mu_s N_C = 0$
 $N_C = 1.5W / (4 - 3\mu_s) \quad (2)$
 $\sum F_y: N_{BC} = W + \mu_s N_C \quad (4)$
 $\sum F_x = 0: B_x - N_C - \mu_s N_{BC} = 0$
 $B_x = N_C + \mu_s N_{BC} \quad (6)$
 EQUATE (5) AND (6): $N_A - \mu_s N_{BA} = N_C + \mu_s N_{BC}$
 SUB. FROM (3) AND (4): $N_A - \mu_s (W - \mu_s N_A) = N_C + \mu_s (W + \mu_s N_C)$
 $N_A (1 + \mu_s^2) - \mu_s W = N_C (1 + \mu_s^2) + \mu_s W$
 SUB. FROM (1) AND (2): $\frac{2W}{3 + 4\mu_s} (1 + \mu_s^2) - \mu_s W = \frac{1.5W}{4 - 3\mu_s} (1 + \mu_s^2) + \mu_s W$
 $\frac{2}{3 + 4\mu_s} - \frac{1.5}{4 - 3\mu_s} = \frac{2 + \mu_s}{1 + \mu_s^2}$
 SOLVE FOR μ_s : $\mu_s = 0.09488$

8.58



GIVEN: LENGTH OF ROD = 225 mm,
 $\mu_s = 0.20$,
 FIND: LARGEST VALUE OF θ FOR ROD TO NOT FALL INTO THE PIPE.



MOTION OF ROD IMPENDS DOWN AT A AND TO LEFT AT B.
 $F_A = \mu_s N_A$ $F_B = \mu_s N_B$

$$\begin{aligned} \sum F_x = 0: & N_A - N_B \sin \theta + F_B \cos \theta = 0 \\ & N_A - N_B \sin \theta + \mu_s N_B \cos \theta = 0 \\ & N_A = N_B (\sin \theta - \mu_s \cos \theta) \quad (1) \\ \sum F_y = 0: & F_A + N_B \cos \theta + F_B \sin \theta - W = 0 \\ & \mu_s N_A + N_B \cos \theta + \mu_s N_B \sin \theta - W = 0 \quad (2) \end{aligned}$$

SUBSTITUTE FOR N_A FROM (1) INTO (2):

$$\begin{aligned} -\mu_s N_B (\sin \theta - \mu_s \cos \theta) + N_B \cos \theta + \mu_s N_B \sin \theta - W = 0 \\ N_B = \frac{W}{(1 - \mu_s^2) \cos \theta + 2\mu_s \sin \theta} = \frac{W}{(1 - 0.2^2) \cos \theta + 2(0.2) \sin \theta} \quad (3) \end{aligned}$$

$$\sum M_A = 0: N_B (75 / \cos \theta) - W (112.5 \cos \theta) = 0$$


SUBSTITUTE FOR N_B FROM (3), CANCEL W , AND SIMPLIFY TO FIND

$$9.6 \cos^3 \theta + 4 \sin \theta \cos^2 \theta - 6.6667 = 0$$


$$\cos^3 \theta (2.4 + \tan \theta) = 1.6667$$

SOLVE BY TRIAL + ERROR: $\theta = 35.8^\circ$

8.59



GIVEN: LENGTH OF ROD = 225 mm,
 $\mu_s = 0.20$,
 FIND: SMALLEST VALUE OF θ FOR ROD TO NOT FALL OUT OF THE PIPE.



MOTION OF ROD IMPENDS UP AT A AND RIGHT AT B

$$F_A = \mu_s N_A \quad F_B = \mu_s N_B$$

$$\begin{aligned} \sum F_x = 0: & N_A - N_B \sin \theta - F_B \cos \theta = 0 \\ & N_A - N_B \sin \theta - \mu_s N_B \cos \theta = 0 \\ & N_A = N_B (\sin \theta + \mu_s \cos \theta) \quad (1) \\ \sum F_y = 0: & -F_A + N_B \cos \theta - F_B \sin \theta - W = 0 \\ & -\mu_s N_A + N_B \cos \theta - \mu_s N_B \sin \theta - W = 0 \quad (2) \end{aligned}$$

SUBSTITUTE FOR N_A FROM (1) INTO (2):

$$\begin{aligned} -\mu_s N_B (\sin \theta + \mu_s \cos \theta) + N_B \cos \theta - \mu_s N_B \sin \theta - W = 0 \\ N_B = \frac{W}{(1 - \mu_s^2) \cos \theta - 2\mu_s \sin \theta} = \frac{W}{(1 - 0.2^2) \cos \theta - 2(0.2) \sin \theta} \quad (3) \end{aligned}$$

$$\sum M_A = 0: N_B (75 / \cos \theta) - W (112.5 \cos \theta) = 0$$


SUBSTITUTE FOR N_B FROM (3), CANCEL W , AND SIMPLIFY

$$9.6 \cos^3 \theta - 4 \sin \theta \cos^2 \theta - 6.6667 = 0$$



$$\cos^3 \theta (2.4 - \tan \theta) = 1.6667$$

SOLVE BY TRIAL + ERROR: $\theta = 20.5^\circ$


8.60



GIVEN: $\theta = 80^\circ$,
 $\mu_s = 0.30$
 FIND: LARGEST P FOR EQUILIBRIUM

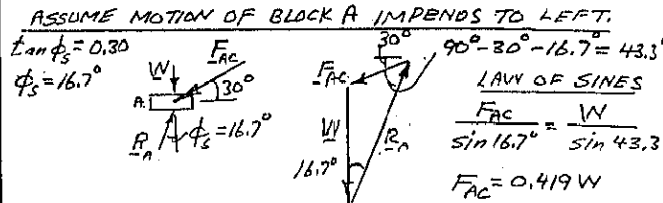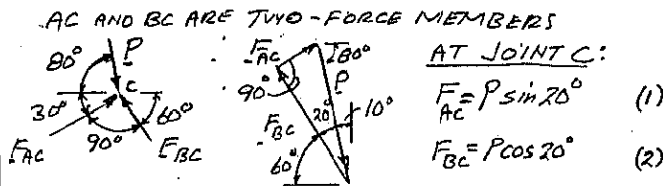


SUBSTITUTE INTO EQ.(1): $F_{AC} = 0.419W = P \sin 20^\circ$; $P = 1.225W$

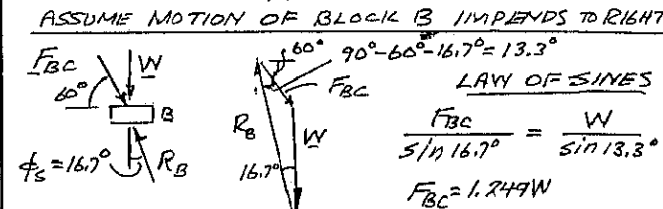


SUBSTITUTE INTO EQ.(2): $F_{BC} = 1.249W = P \cos 20^\circ$; $P = 1.329W$

LARGEST P FOR EQUILIBRIUM: $P = 1.225W$

8.61



GIVEN: $P = 1.260W$
 $\mu_s = 0.30$
 FIND: RANGE OF θ , BETWEEN 0 AND 180, FOR EQUILIBRIUM

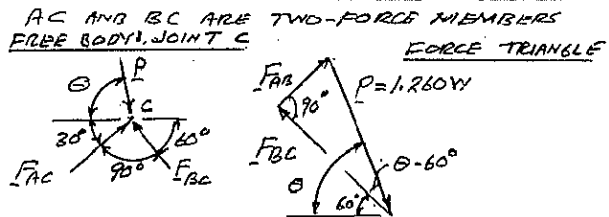

FROM FORCE TRIANGLE:

$$F_{AB} = P \sin(\theta - 60^\circ) = 1.26W \sin(\theta - 60^\circ) \quad (1)$$

$$F_{BC} = P \cos(\theta - 60^\circ) = 1.26W \cos(\theta - 60^\circ) \quad (2)$$

WE SHALL, IN TURN, SEEK θ CORRESPONDING TO IMPENDING MOTION OF EACH BLOCK FOR MOTION OF A IMPENDING TO LEFT

FROM SOLUTION OF PROB 8.60; $F_{AC} = 0.419W$

$$EQ(1): F_{AC} = 0.419W = 1.26W \sin(\theta - 60^\circ)$$

$$\sin(\theta - 60^\circ) = 0.33254$$

$$\theta - 60^\circ = 19.428^\circ$$

$$\theta = 79.42^\circ$$


(CONTINUED)

8.61 CONTINUED

FOR MOTION OF B
IMPENDING TO RIGHT.

FROM SOLUTION OF PROB. 8.60; $F_{BC} = 1.249W$
 EQ. (2): $F_{BC} = 1.249W = 1.26W \cos(\theta - 60^\circ)$
 $\cos(\theta - 60^\circ) = 0.99127$
 $\theta - 60^\circ = \pm 7.58^\circ$
 $\theta - 60^\circ = +7.58^\circ \quad \theta = 67.6^\circ$
 $\theta - 60^\circ = -7.58^\circ \quad \theta = 52.4^\circ$

FOR MOTION OF A IMPENDING TO RIGHT

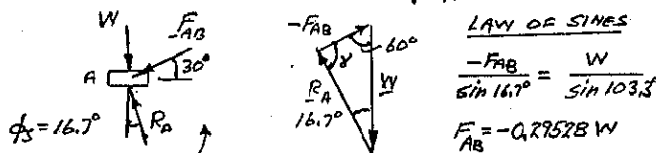

NOTE: DIRECTION OF F_{AB} IS KEPT SAME AS IN FREE BODY OF JOINT C.


EQ. (1): $F_{AB} = -0.29528W = 1.26W \sin(\theta - 60^\circ)$
 $\sin(\theta - 60^\circ) = -0.23435$
 $(\theta - 60^\circ) = -13.553^\circ \quad \theta = 46.4^\circ$

SUMMARY:


A MOVES TO RIGHT	NO MOTION	B MOVES TO RIGHT	NO MOTION	A MOVES TO LEFT
46.4°	52.4°	67.6°	79.4°	

NO MOTION FOR: $46.4^\circ \leq \theta \leq 52.4^\circ$ AND $67.6^\circ \leq \theta \leq 79.4^\circ$

8.63

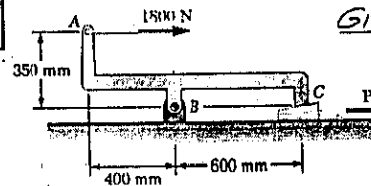


GIVEN: $\mu_s = 0.20$
 10° WEDGE
 FIND: FORCE P TO MOVE WEDGE TO THE RIGHT.



$\phi_s = \tan^{-1} 0.20 = 11.31^\circ$

FREE BODY: PART ABC
 $\sum M_B = 0$
 $(1800)(0.35) - R_C \cos(1.31^\circ)(0.6) = 0$
 $R_C = 1050.3N$

FREE BODY: WEDGE




FORCE TRIANGLE
 $\gamma = 90^\circ - 11.31^\circ = 78.69^\circ$
 LAW OF SINES
 $\frac{P}{\sin(11.31^\circ + 1.31^\circ)} = \frac{1050.3N}{\sin 78.69^\circ}$
 $P = 234N \quad \underline{P = 234N} \rightarrow$


(b) RETURN TO PART ABC:

$\sum F_x = 0: B_x + 1800N + R_C \sin 1.31^\circ = 0$
 $B_x + 1800N + (1050.3N) \sin 1.31^\circ = 0$
 $B_x = -1824N \quad \underline{B_x = 1824N} \leftarrow$
 $\sum F_y = 0: B_y + R_C \cos 1.31^\circ = 0$
 $B_y + (1050.3N) \cos 1.31^\circ = 0$
 $B_y = -1050N \quad \underline{B_y = 1050N} \downarrow$

8.62

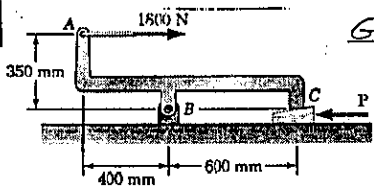


GIVEN: $\mu_s = 0.20$
 10° WEDGE
 FIND: FORCE P TO MOVE WEDGE TO LEFT.

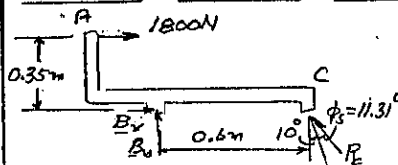

$\phi_s = \tan^{-1} 0.20 = 11.31^\circ$
 FREE BODY: PART ABC
 $\sum M_B = 0$
 $(1800)(0.35) - R_C \cos 21.31^\circ (0.6) = 0$
 $R_C = 1127.1N$

FREE BODY: WEDGE

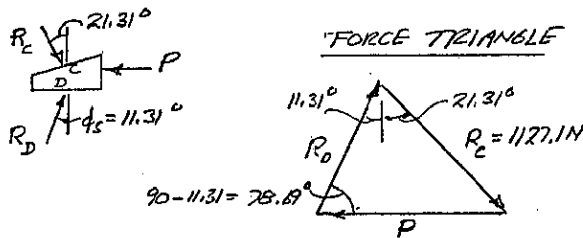

(a) LAW OF SINES


$\frac{P}{\sin(11.31^\circ + 21.31^\circ)} = \frac{1127.1N}{\sin 78.69^\circ}$

(b)

RETURN TO PART ABC:


$\sum F_x = 0: B_x + 1800N - R_C \sin 21.31^\circ = 0$
 $B_x + 1800N - (1127.1N) \sin 21.31^\circ = 0$
 $B_x = -1390.4N \quad \underline{B_x = 1390N} \leftarrow$
 $\sum F_y = 0: B_y + R_C \cos 21.31^\circ = 0$
 $B_y + (1127.1N) \cos 21.31^\circ = 0$
 $B_y = -1050N \quad \underline{B_y = 1050N} \downarrow$

8.64




GIVEN: TWO 10° WEDGES
 $\mu_s = 0.25$
 FIND: SMALLEST P TO MOVE WEDGE


FREE BODY: BLOCK AND TOP WEDGE $\phi_s = \tan^{-1} 0.25 = 14.04^\circ$

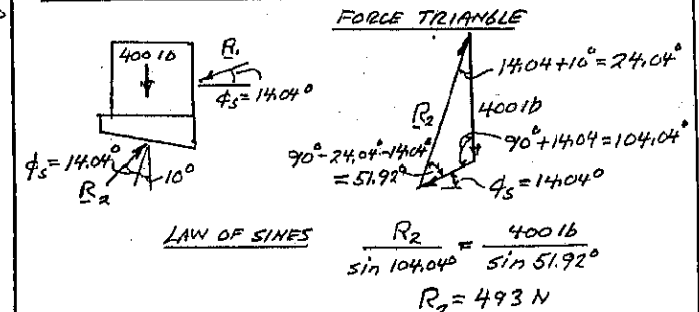

FREE BODY: LOWER WEDGE

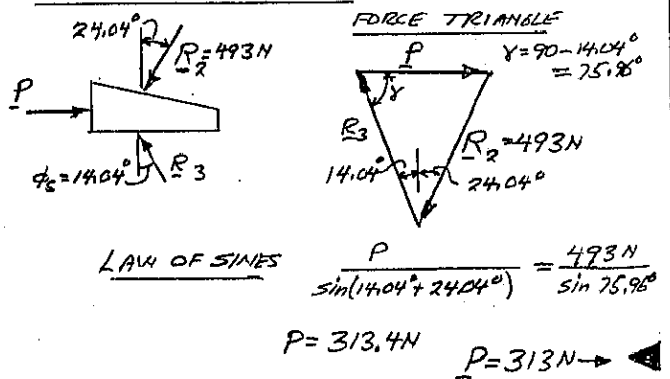


LAW OF SINES
 $\frac{P}{\sin(14.04^\circ + 24.04^\circ)} = \frac{493N}{\sin 75.96^\circ}$
 $P = 313.4N \quad \underline{P = 313N} \rightarrow$




GIVEN: TWO 10° WEDGES
 $\mu_s = 0.25$

FIND: SMALLEST P
 TO MOVE WEDGE

BODY: BLOCK




$\phi_s = \tan^{-1} 0.25 = 14.04^\circ$
 FORCE TRIANGLE

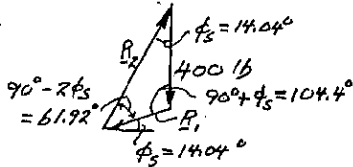


LAW OF SINES

$$\frac{R_2}{\sin 104.4^\circ} = \frac{400 \text{ lb}}{\sin 61.72^\circ} \quad R_2 = 439.8 \text{ N}$$

BODY: WEDGE




FORCE TRIANGLE



LAW OF SINES

$$\frac{P}{\sin(24.04^\circ + 14.04^\circ)} = \frac{439.8 \text{ N}}{\sin 61.72^\circ} \quad P = 297.0 \text{ N}$$




GIVEN: $\mu_s = 0.60$ BETWEEN STEEL
 AND CONCRETE

$\mu_s = 0.30$ BETWEEN TWO
 STEEL SURFACES

FIND: (a) P TO RAISE BEAM
 (b) CORRESPONDING Q

BODY: BEAM AND PLATE CD





$\phi_s = \tan^{-1} 0.3 = 16.7^\circ$

$$Q = (100 \text{ kN}) \tan 16.7^\circ \quad Q = 30 \text{ kN}$$


$$R_1 = (100 \text{ kN}) / \cos 16.7^\circ \quad R_1 = 104.4 \text{ kN}$$

BODY: WEDGE E



$$\frac{P}{\sin 43.4^\circ} = \frac{104.4 \text{ kN}}{\sin 63.3^\circ} \quad P = 80.3 \text{ kN}$$


BODY: WEDGE F



(TO CHECK THAT IT DOES
 NOT MOVE.)

SINCE WEDGE F IS A TWO-FORCE
 BODY, R_2 AND R_3 ARE COLINEAR
 THUS $\theta = 26.7^\circ$
 BUT $\phi_{\text{CONCRETE}} = \tan^{-1} 0.6 = 31.0^\circ > \theta$ OK


8.67




GIVEN: $\mu_s = 0.60$ BETWEEN
 STEEL AND CONCRETE
 $\mu_s = 0.30$ BETWEEN TWO
 STEEL SURFACES

FIND: (a) P TO RAISE BEAM
 (b) CORRESPONDING Q

FREE BODY: WEDGE F



$\phi_s = \tan^{-1} 0.30 = 16.7^\circ$





$$P = (100 \text{ kN}) \tan 26.7^\circ + (100 \text{ kN}) \tan \phi_s$$

$$P = 50.29 \text{ kN} + 30 \text{ kN}$$

$$P = 80.29 \text{ kN} \quad P = 80.3 \text{ kN}$$

$$R_1 = (100 \text{ kN}) / \cos 26.7^\circ = 111.94 \text{ kN}$$

FREE BODY: BEAM, PLATE, AND WEDGE E




$$Q = R_1 \sin 26.7^\circ$$

$$Q = (111.94 \text{ kN}) \sin 26.7^\circ$$

$$Q = 50.29$$

$$Q = 50.3 \text{ kN}$$


8.68



GIVEN: $\mu_s = 0.25$ AT ALL
 SURFACES OF CONTACT.


FIND: SMALLEST P TO
 RAISE BLOCK A.

FREE BODY: BLOCK A



$\phi_s = \tan^{-1} 0.25 = 14.04^\circ$



$$45^\circ + \phi_s = 45^\circ + 14.04^\circ = 59.04^\circ$$

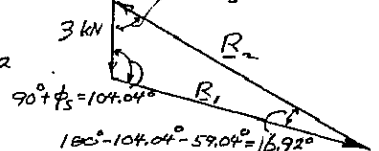

LAW OF SINES

$$\frac{R_2}{\sin 104.04^\circ} = \frac{3 \text{ kN}}{\sin 16.92^\circ} \quad R_2 = 10.00 \text{ kN}$$

FREE BODY: WEDGE B




LAW OF SINES

$$\frac{P}{\sin 73.08^\circ} = \frac{10.00 \text{ kN}}{\sin 75.96^\circ}$$

$$P = 9.86 \text{ kN}$$

$$P = 9.86 \text{ kN}$$


8.69



GIVEN: $\mu_s = 0.25$ BETWEEN ALL SURFACES OF CONTACT


FIND: SMALLEST P FOR EQUILIBRIUM

FREE BODY: BLOCK A



LAW OF SINES

FREE BODY: WEDGE B




LAW OF SINES

$$\frac{P}{\sin 16.97^\circ} = \frac{3.042 \text{ kN}}{\sin 104.04^\circ}$$


$$P = 0.913 \text{ kN} \quad P = 913 \text{ N} \leftarrow$$

$$\phi_s = \tan^{-1} 0.25 = 14.04^\circ$$




$$\frac{R_2}{\sin 75.96^\circ} = \frac{3 \text{ kN}}{\sin 73.08^\circ}$$

$$R_2 = 3.042 \text{ kN}$$

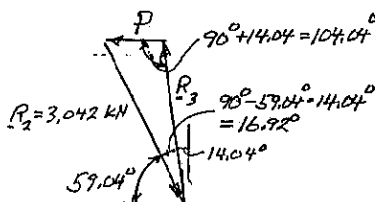


8.71



GIVEN: TWO 100-LB BLOCKS $\mu_s = 0.35$ AT ALL SURFACES OF CONTACT



FIND: SMALLEST P TO START WEDGE MOVING (a) IF BOTH B & C CAN MOVE (b) IF C CANNOT MOVE



WEDGE ANGLE θ
 $\theta = \tan^{-1} \frac{0.75 \text{ in}}{4 \text{ in}}$
 $\theta = 10.62^\circ$

(a)



FREE BODY: BLOCK B

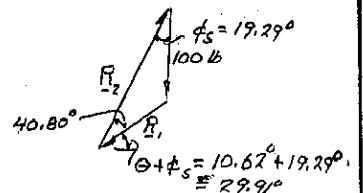

$$\frac{R_1}{\sin 19.29^\circ} = \frac{100 \text{ lb}}{\sin 40.80^\circ}; R_1 = 50.56 \text{ lb}$$

FREE BODY: WEDGE

BY SYMMETRY $R_3 = R_1$




$$P = 2R_1 \sin(\theta + \phi_s) = 2(50.56) \sin 29.91^\circ$$

$$P = 50.42 \text{ lb} \quad P = 50.41 \text{ lb} \leftarrow$$

(b) FREE BODIES UNCHANGED. SAME RESULT. $P = 50.41 \text{ lb} \leftarrow$


8.70



GIVEN: $P = 0, \mu_s = 0.25$



FIND: (a) ANGLE θ FOR IMPENDING MOTION (b) CORRESPONDING FORCE EXERTED BY WALL.

FREE BODY: WEDGE B



$\phi_s = \tan^{-1} 0.25 = 14.04^\circ$
 (a) SINCE WEDGE IS A TWO-FORCE BODY, R_2 AND R_3 MUST BE EQUAL AND OPPOSITE, THEREFORE, THEY FORM EQUAL ANGLES WITH VERTICAL $\beta = \phi_s$ AND $\theta - \phi_s = \phi_s$
 $\theta = 2\phi_s = 2(14.04^\circ)$
 $\theta = 28.1^\circ$


FREE BODY: BLOCK A



$$R_1 = (3 \text{ kN}) \sin 14.04^\circ = 0.7278 \text{ kN}$$


FORCE EXERTED BY WALL: $R_1 = 728 \text{ N} \angle 14^\circ \leftarrow$

8.72




GIVEN: TWO 100-LB BLOCKS $\mu_s = 0.35$ BETWEEN BLOCKS AND FLOOR, $\mu_s = 0$ AT WEDGE. FIND: SMALLEST P TO START WEDGE MOVING (a) IF BOTH B AND C CAN MOVE (b) IF C CANNOT MOVE

FREE BODY: WEDGE





WEDGE ANGLE θ
 $\theta = \tan^{-1} \frac{0.75 \text{ in}}{4 \text{ in}} = 10.62^\circ$
 $\phi_s = \tan^{-1} 0.35 = 19.29^\circ$

BY SYMMETRY $R_3 = R_1$



$$P = 2R_1 \sin 10.62^\circ \quad (1)$$


FREE BODY: BLOCK B




$$\frac{R_1}{\sin 19.29^\circ} = \frac{100 \text{ lb}}{\sin 60.09^\circ}; R_1 = 38.11 \text{ lb}$$

$$\text{EQ. (1): } P = 2R_1 \sin 10.62^\circ = 2(38.11 \text{ lb}) \sin 10.62^\circ; P = 14.05 \text{ lb} \leftarrow$$

(b) FREE BODIES UNCHANGED. SAME RESULT. $P = 14.05 \text{ lb} \leftarrow$



8.75
 GIVEN: 10° WEDGE
 WEIGHT OF AB = 5 kg
 $\mu_s = 0.40$ BETWEEN WEDGE AND ROD
 $\mu_s = 0.20$ BETWEEN WEDGE AND FLOOR
 FIND: SMALLEST P TO MOVE





$$\phi_s = \tan^{-1} 0.40 = 21.8^\circ$$

$$\sum M_A = 0: R_1 \cos(10^\circ + \phi_s) r - R_2 \sin(10^\circ + \phi_s) r - mg \left(\frac{2r}{\pi}\right) = 0$$

$$R_1 = \frac{2mg}{\pi} \frac{1}{\cos 31.8^\circ - \sin 31.8^\circ}$$


$$R_1 = \frac{2mg}{\pi(0.3229)} = 1.971 mg$$

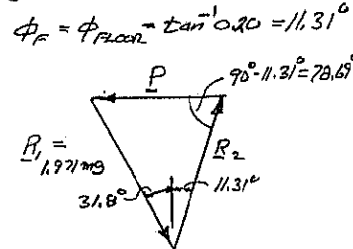

LAW OF SINES



$$\frac{P}{\sin(31.8^\circ + 11.31^\circ)} = \frac{1.971 mg}{\sin 78.69^\circ}$$

$$P = 1.374 mg = 1.374(5 kg)(9.81 m/s^2) = 67.4 N$$




GIVEN: $\mu_s = 0.30$
 FORCE P = 120 N USED TO INSERT WEDGE

FIND: MAGNITUDE OF FORCES EXERTED ON RING AFTER WEDGE IS INSERTED.



FROM FORCE TRIANGLE: Q = HORIZ. COMPONENT OF R


$$Q = \frac{1}{2}(120 N) / \tan 22.7^\circ = 143.4 N$$



WEDGE IS NOW A TWO-FORCE BODY WITH FORCES SHOWN

$$Q = 143.4 N$$


NOTE: SINCE ANGLES BETWEEN FORCES Q AND NORMAL TO WEDGE IS $6^\circ < \phi_s$, WEDGE STAYS IN PLACE.




8.76
 GIVEN: PLATE MOVE TOGETHER
 FIND: WHAT HAPPENS TO WEDGE
 (a) IF $\mu_s = 0.20$
 (b) IF $\mu_s = 0.30$

(a) FOR $\mu_s = 0.20$, $\phi_s = 11.31^\circ$, REGARDLESS OF HOW WEDGE IS ORIENTED, ON AT LEAST ONE SIDE THE ANGLE BETWEEN THE FACE AND THE HORIZONTAL WILL BE GREATER THAN ϕ_s . THE WEDGE WILL BE FORCED UP AND OUT FROM BETWEEN THE PLATES.

(b) FOR $\mu_s = 0.30$, $\phi_s = 16.7^\circ$. AS THE PLATES ARE MOVED TOGETHER, θ WILL BECOME SMALLER. AT $\theta = 4.2^\circ$, THE POSITION SHOWN IS REACHED.





AT THIS POSITION THE LARGEST ANGLE BETWEEN θ AND THE NORMAL TO THE WEDGE IS 16.7° . THE WEDGE WILL SELF LOCK.

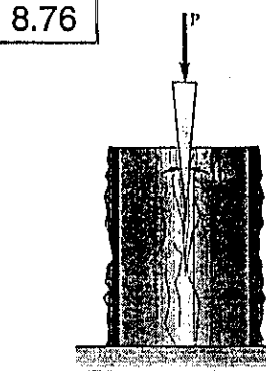

GIVEN: $\mu_s = 0.35$
 FORCE P = 600 lb REQUIRED TO INSERT WEDGE

FIND: MAGNITUDE OF FORCES EXERTED ON WOOD BY WEDGE AFTER INSERTION

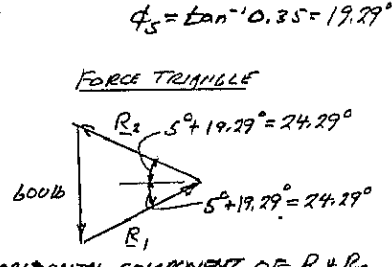


Q = HORIZONTAL COMPONENT OF R_1 & R_2

$$Q = \frac{1}{2}(600 lb) / \tan 24.29^\circ$$

$$Q = 664.7 lb$$

FREE BODY: AFTER WEDGE HAS BEEN INSERTED




WEDGE IS NOW A TWO-FORCE BODY. FORCE F EXERTED ON WOOD IS EQUAL AND OPPOSITE TO Q.


$$F = 664 lb$$

NOTE: SINCE THE 5° ANGLES SHOWN ARE LESS THAN ϕ_s , WEDGE STAYS IN PLACE

8.77



GIVEN: MASS OF PIPE = 50 lb
 $\mu_s = 0.20$
 AT ALL SURFACES
 (a) SHOW THAT SLIPPING OCCURS FIRST AT A
 (b) FIND: FORCE P TO CAUSE MOTION



FREE BODY: PIPE
 $\sum M_B = 0:$
 $W r \sin \theta + F_A r (1 + \sin \theta) - N_A r \cos \theta = 0$
 ASSUME SLIPPING AT A: $F_A = \mu_s N_A$
 $N_A \cos \theta - \mu_s N_A (1 + \sin \theta) = W \sin \theta$
 $N_A = \frac{W \sin \theta}{\cos \theta - \mu_s (1 + \sin \theta)}$

$N_A = \frac{W \sin 15^\circ}{\cos 15^\circ - (0.20)(1 + \sin 15^\circ)} = 0.3624 W$

$\sum F_x = 0: -F_B - W \sin \theta - F_A \sin \theta + N_A \cos \theta = 0$

$F_B = N_A \cos \theta - \mu_s N_A \sin \theta - W \sin \theta$
 $F_B = 0.3624 W \cos 15^\circ - 0.20(0.3624 W) \sin 15^\circ - W \sin 15^\circ$
 $F_B = 0.072462 W$


$\sum F_y = 0: N_B - W \cos \theta - F_A \cos \theta - N_A \sin \theta = 0$

$N_B = W \sin \theta + \mu_s N_A \cos \theta + N_A \sin \theta$
 $N_B = (0.3624 W) \sin 15^\circ + 0.20(0.3624 W) \cos 15^\circ + W \cos 15^\circ$
 $N_B = 1.12974 W$

MAX. AVAILABLE $F_B = \mu_s N_B = 0.22595 W$

WE NOTE THAT $F_B < F_{max}$ \therefore NO SLIP AT B


FREE BODY: WEDGE




$\sum F_y = 0: N_2 - N_B \sin \theta + F_B \sin \theta = 0$
 $N_2 = N_B \cos \theta - F_B \sin \theta$
 $N_2 = (1.12974 W) \cos 15^\circ - (0.07246 W) \sin 15^\circ$
 $N_2 = 1.07249 W$

$\sum F_x = 0: F_B \cos \theta + N_B \sin \theta + \mu_s N_2 - P = 0$
 $P = F_B \cos \theta + N_B \sin \theta + \mu_s N_2$
 $P = (0.07246 W) \cos 15^\circ + (1.12974 W) \sin 15^\circ + 0.2(1.07249 W)$
 $P = 0.5769 W$
 $P = 0.5769(50 \text{ lb})(9.81 \text{ m/s}^2) \quad P = 283 \text{ N}$

8.78



GIVEN: MASS OF PIPE = 50 lb
 $\mu_s = 0.20$
 FIND: LARGEST P AT A FOR WHICH SLIPPING WILL OCCUR AT A.



FREE BODY: PIPE
 $\sum M_A = 0$
 $N_B r \cos \theta - N_B N_B r - (\mu_s N_B \sin \theta) r - W r = 0$
 $N_B = \frac{W}{\cos \theta - \mu_s (1 + \sin \theta)}$
 $N_B = \frac{W}{\cos 15^\circ - 0.2(1 + \sin 15^\circ)}$
 $N_B = 1.4002 W$


$\sum F_y = 0: N_A - N_B \sin \theta - \mu_s N_B \cos \theta = 0$
 $N_A = N_B (\sin \theta + \mu_s \cos \theta)$
 $N_A = (1.4002 W) (\sin 15^\circ + 0.2 \cos 15^\circ)$
 $N_A = 0.63292 W$

(CONTINUED)


8.78 CONTINUED

$\sum F_y = 0: -F_A - W + N_B \cos \theta - \mu_s N_B \sin \theta = 0$
 $F_A = N_B (\cos \theta - \mu_s \sin \theta) - W$
 $F_A = (1.4002 W) (\cos 15^\circ - 0.2 \sin 15^\circ) - W$
 $F_A = 0.28001 W$
 FOR SLIPPING AT A: $F_A = \mu_s N_A$
 $\frac{N_A}{N_A} = \frac{F_A}{0.63292 W} = \frac{0.28001 W}{0.63292 W}$
 $\mu_s = 0.442$

8.79



GIVEN: $\theta = 8^\circ$ WEDGE
 $\mu_s = 0.15$
 FIND: (a) FORCE P TO MOVE THE WEDGE.
 (b) DOES MACHINE BASE MOVE?

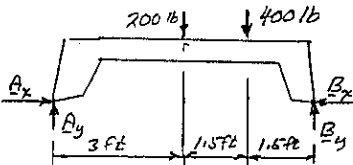


FREE BODY: MACHINE BASE

$\sum M_B = 0: (200 \text{ lb})(3 \text{ ft}) + (400 \text{ lb})(1.5 \text{ ft}) - A_y(6 \text{ ft}) = 0$
 $A_y = 200 \text{ lb}$

$\sum F_y = 0: A_y + B_y - 200 \text{ lb} - 400 \text{ lb} = 0$
 $200 \text{ lb} + B_y - 200 \text{ lb} - 400 \text{ lb} = 0$
 $B_y = 400 \text{ lb}$


FREE BODY: WEDGE

(ASSUME MACHINE BASE WILL NOT MOVE)
 $\mu_s = 0.15, \phi_s = \tan^{-1} 0.15 = 8.53^\circ$



WE KNOW THAT $B_y = 400 \text{ lb}$

FORCE TRIANGLE

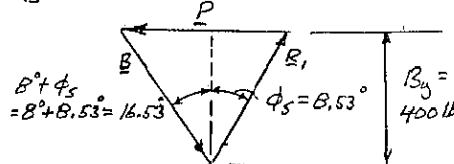

$P = (400 \text{ lb}) \tan 16.53^\circ + (400 \text{ lb}) \tan 8.53^\circ; P = 178.7 \text{ lb}$


TOTAL MAXIMUM FRICTION FORCE AT A AND B
 $F_m = \mu_s W = 0.15(200 \text{ lb} + 400 \text{ lb}) = 90 \text{ lb}$

\therefore IF MACHINE MOVES WITH WEDGE $P = F_m = 90 \text{ lb}$

USING SMALLER P , WE HAVE:

- (a) $P = 90 \text{ lb}$
- (b) MACHINE BASE MOVES


8.80

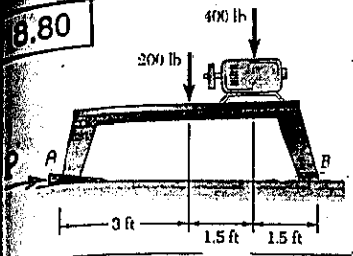

GIVEN: 8° WEDGE

$\mu_s = 0.15$


FIND: (a) FORCE P TO MOVE THE WEDGE
(b) DOES MACHINE BASE MOVE?



FREE BODY: MACHINE BASE

$\sum M_B = 0: (200\text{ lb})(3\text{ ft}) + (400\text{ lb})(1.5\text{ ft}) - A_y(6\text{ ft}) = 0$
 $A_y = 200\text{ lb} \uparrow$
 $\sum F_y = 0: A_y + B_y - 200\text{ lb} - 400\text{ lb} = 0$
 $B_y = 400\text{ lb} \uparrow$


FREE BODY: WEDGE



$\phi_s = \tan^{-1} 0.15 = 8.53^\circ$

WE KNOW THAT $A_y = 200\text{ lb}$

FORCE TRIANGLE




$P = (200\text{ lb}) \tan 8.53^\circ + (200\text{ lb}) \tan 16.53^\circ; P = 89.4\text{ lb}$

TOTAL MAX. FRICTION FORCE AT A AND B:

$F_m = \mu_s (W) = 0.15(200\text{ lb} + 400\text{ lb}) = 90\text{ lb}$


SINCE $P < F_m$, MACHINE BASE WILL NOT MOVE

* 8.81 and 8.82




GIVEN: $P = 100\text{ lb}$

FIND: VALUE OF μ_s FOR IMPENDING MOTION
 PROB. 8.81: FOR SYSTEM SHOWN
 PROB. 8.82: AFTER ROLLERS ARE REMOVED



FREE BODY: WEDGE

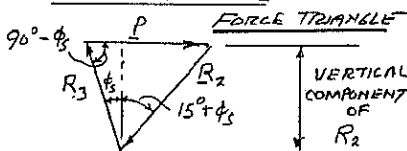


LAW OF SINES

$\frac{R_2}{\sin(90^\circ - \phi_s)} = \frac{P}{\sin(15^\circ + 2\phi_s)}$

$R_2 = P \frac{\sin(90^\circ - \phi_s)}{\sin(15^\circ + 2\phi_s)} \quad (1)$

PROB. 8.81

FREE BODY: BLOCK



$\sum F_y = 0$
 VERT. COMPONENT OF R_2 IS 200 lb

RETURN TO FORCE TRIANGLE OF WEDGE. NOTE $P = 100\text{ lb}$

$100\text{ lb} = (200\text{ lb}) \tan 15^\circ + (200\text{ lb}) \tan(15^\circ + \phi_s)$

$0.5 = \tan 15^\circ + \tan(15^\circ + \phi_s)$


SOLVE BY TRIAL AND ERROR $\phi_s = 6.301^\circ$

$\mu_s = \tan \phi_s = \tan 6.301^\circ; \mu_s = 0.110$


(CONTINUED)

* 8.81 and 8.82 CONTINUED

PROB. 8.82: FREE BODY: BLOCK (ROLLERS REMOVED)



FORCE TRIANGLE



LAW OF SINES

$\frac{R_2}{\sin(90^\circ + \phi_s)} = \frac{W}{\sin(90^\circ - 2\phi_s)}$

$R_2 = W \frac{\sin(90^\circ + \phi_s)}{\sin(90^\circ - 2\phi_s)} \quad (2)$

EQUATE R_2 FROM EQ.(1) AND EQ.(2):

$P \frac{\sin(90^\circ - \phi_s)}{\sin(15^\circ + 2\phi_s)} = W \frac{\sin(90^\circ + \phi_s)}{\sin(90^\circ - 2\phi_s)}$

$P = 100\text{ lb}; W = 200\text{ lb}; 0.5 = \frac{\sin(90^\circ + \phi_s) \sin(15^\circ + 2\phi_s)}{\sin(90^\circ - 2\phi_s) \sin(90^\circ - \phi_s)}$

SOLVE BY TRIAL AND ERROR: $\phi_s = 5.784^\circ$



$\mu_s = \tan \phi_s = \tan 5.784^\circ; \mu_s = 0.101$

8.83

FOR THE JACK OF SEC. 8.6 (PAGE 41B) DERIVE FORMULAS FOR FORCE P FOR CASES LISTED BELOW

FROM SEC. 8.6: $P = \frac{r}{a} Q$

(a) TO RAISE LOAD





$Q = W \tan(\theta + \phi_s)$

$P = \frac{r}{a} Q$

$P = \frac{Wr}{a} \tan(\theta + \phi_s)$

(b) TO LOWER LOAD





$Q = W \tan(\phi_s - \theta)$

$P = \frac{r}{a} Q$

$P = \frac{Wr}{a} \tan(\phi_s - \theta)$

(c) TO HOLD LOAD (JACK IS NOT SELF LOCKING)

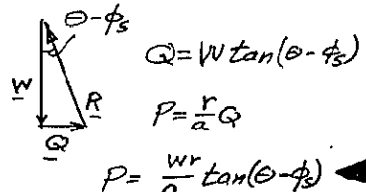


$Q = W \tan(\theta - \phi_s)$

$P = \frac{r}{a} Q$

$P = \frac{Wr}{a} \tan(\theta - \phi_s)$


8.84



GIVEN: THREAD DIAMETER $T = 22.6 \text{ mm}$
 LEAD $= 3 \text{ mm}$, $f_s = 0.40$,
 TENSION $= 210 \text{ kN}$
 FIND: REQUIRED TORQUE

BLOCK-AND-INCLINE ANALYSIS OF BOLT AND NUT:

$W = 210 \text{ kN}$



$\tan \theta = \frac{3 \text{ mm}}{\pi(22.6 \text{ mm})}$
 $\theta = 2.42^\circ$


$\phi_s = \tan^{-1} 0.40 = 21.8^\circ$

$Q = (210 \text{ kN}) \tan 24.22^\circ$
 $Q = 94.47 \text{ kN}$

TORQUE $= QR$
 $= (94.47 \text{ kN}) \left(\frac{22.6 \times 10^{-3} \text{ m}}{2} \right)$

TORQUE $= 1068 \text{ N}\cdot\text{m}$


8.85



GIVEN: MEAN RADIUS $= 1.5 \text{ in}$,
 LEAD $= 0.375 \text{ in}$,
 $f_s = 0.12$


FIND: TORQUE APPLIED
 TO SHAFT REQUIRED
 TO ROTATE GEAR
 COUNTERCLOCKWISE.

FREE BODY: LARGE GEAR



$\sum M_C = 0: W(12 \text{ in}) - 7200 \text{ lb}\cdot\text{in} = 0$
 $W = 600 \text{ lb}$

BLOCK-AND-INCLINE ANALYSIS OF WORM GEAR



$\tan \theta = \frac{0.375 \text{ in}}{2\pi(1.5 \text{ in})}$
 $\theta = 2.278^\circ$

$\phi_s = \tan^{-1} 0.12 = 6.843^\circ$

$\theta + \phi_s = 2.278^\circ + 6.843^\circ$
 $= 9.121^\circ$


$W = 600 \text{ lb}$

$Q = (600 \text{ lb}) \tan 9.121^\circ$
 $= 96.33 \text{ lb}$

TORQUE $= QR$
 $= (96.33 \text{ lb})(1.5 \text{ in})$

TORQUE $= 144.5 \text{ lb}\cdot\text{in}$


8.86



GIVEN: MEAN RADIUS $= 1.5 \text{ in}$,
 LEAD $= 0.375 \text{ in}$,
 $f_s = 0.12$


FIND: TORQUE APPLIED
 TO SHAFT REQUIRED
 TO ROTATE THE GEAR
 CLOCKWISE.

FREE BODY: LARGE GEAR




$\sum M_C = 0: W(12 \text{ in}) - 7200 \text{ lb}\cdot\text{in} = 0$
 $W = 600 \text{ lb}$

BLOCK-AND-INCLINE ANALYSIS OF WORM GEAR



$\tan \theta = \frac{0.375 \text{ in}}{2\pi(1.5 \text{ in})}$
 $\theta = 2.278^\circ$

$\phi_s = \tan^{-1} 0.12 = 6.843^\circ$




$Q = (600 \text{ lb}) \tan 4.565^\circ$
 $= 47.91 \text{ lb}$

TORQUE $= QR = (47.91 \text{ lb})(1.5 \text{ in})$
 TORQUE $= 71.9 \text{ lb}\cdot\text{in}$

8.87 and 8.88


GIVEN: MEAN RADIUS $= 6 \text{ mm}$,
 PITCH $= 2 \text{ mm}$,
 $f_s = 0.12$



FIND: COUPLE REQUIRED TO ROTATE SLEEVE

PROB 8.87: ROD A, RIGHT-HANDED THREAD, ROD B, LEFT-HANDED
 PROB 8.88: RIGHT-HANDED THREAD AT BOTH A AND B

TO DRAW RODS TOGETHER.
 SCREW AT A



$\tan \theta = \frac{2 \text{ mm}}{2\pi(6 \text{ mm})}$ $\theta = 3.037^\circ$
 $\phi_s = \tan^{-1} 0.12 = 6.843^\circ$


$Q = (2 \text{ kN}) \tan 9.88^\circ = 348.3 \text{ N}$
 TORQUE AT A $= QR$
 $= (348.3 \text{ N})(6 \text{ mm}) = 2.09 \text{ N}\cdot\text{m}$

SAME TORQUE REQUIRED AT B

PROB 8.87: TOTAL TORQUE $= 418 \text{ N}\cdot\text{m}$

FOR BOTH THREADS RIGHT HANDED (RODS DO NOT MOVE)

SCREW AT A (SEE ABOVE) TORQUE AT A $= 2.09 \text{ N}\cdot\text{m}$




SCREW AT B (LOOSENING)
 SEE ABOVE: $\theta = 3.037^\circ$
 $\phi_s = 6.843^\circ$

$\phi_s - \theta = 6.843^\circ - 3.037^\circ = 3.806^\circ$
 $Q = (2 \text{ kN}) \tan 3.806^\circ = 133.1 \text{ N}$
 TORQUE AT B $= QR$
 $= (133.1 \text{ N})(6 \text{ mm}) = 0.799 \text{ N}\cdot\text{m}$

TOTAL TORQUE $= 2.09 \text{ N}\cdot\text{m} + 0.799 \text{ N}\cdot\text{m}$

PROB 8.88: TOTAL TORQUE $= 2.89 \text{ N}\cdot\text{m}$


8.89

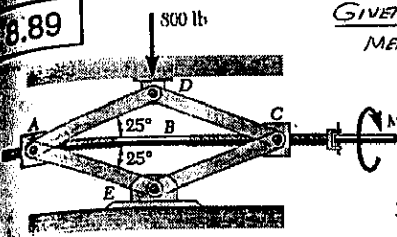

GIVEN: PITCH = 0.1 in.,
MEAN DIAMETER = 0.375 in.,
 $\mu_s = 0.15$

FIND: COUPLE M
REQUIRED TO
RAISE AUTOMOBILE.

FREE BODY: PARTS A, D, C, E
TWO-FORCE MEMBERS




JOINT D:
800 lb
SYMMETRY:
 $F_{AD} = F_{CD}$
 $\sum F_y = 0: 2F_{CD} \sin 25^\circ - 800 \text{ lb} = 0$
 $F_{CD} = 946.5 \text{ lb}$

JOINT C:

SYMMETRY: $F_{CE} = F_{CD}$
 $\sum F_x = 0: 2F_{CD} \cos 25^\circ - F_{AC} = 0$
 $F_{AC} = 2(946.5 \text{ lb}) \cos 25^\circ$ $F_{AC} = 1715.6 \text{ lb}$


BLOCK-AND-INCLINE ANALYSIS OF ONE SCREW:



$\tan \theta = \frac{0.1 \text{ in.}}{\pi(0.375 \text{ in.})}$; $\theta = 4.852^\circ$
 $\phi_s = \tan^{-1} 0.15 = 8.531^\circ$

$\theta + \phi_s = 4.852^\circ + 8.531^\circ = 13.383^\circ$
 $Q = (1715.6 \text{ lb}) \tan 13.383^\circ$
 $Q = 408.2 \text{ lb}$
BUT, WE HAVE TWO SCREWS
TORQUE = $2QR = 2(408.2 \text{ lb}) \left(\frac{0.375 \text{ in.}}{2} \right)$
TORQUE = $153.1 \text{ lb} \cdot \text{in.}$

8.90

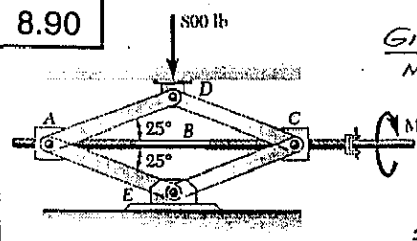


GIVEN: PITCH = 0.1 in.,
MEAN DIAMETER = 0.375 in.,
 $\mu_s = 0.15$.

FIND: COUPLE M
REQUIRED TO
LOWER AUTOMOBILE.

SEE SOLUTION OF PROB. 8.89 FOR ANALYSIS OF LINKAGE ADCE. $F_{AC} = 1715.6 \text{ lb}$


BLOCK-AND-INCLINE ANALYSIS OF ONE SCREW:



$\tan \theta = \frac{0.1 \text{ in.}}{\pi(0.375 \text{ in.})}$
 $\theta = 4.852^\circ$
 $\phi_s = \tan^{-1} 0.15 = 8.531^\circ$

SINCE $\phi_s > \theta$, THE SCREW IS SELF-LOCKING
 $\phi_s - \theta = 8.531^\circ - 4.852^\circ = 3.679^\circ$
 $Q = (1715.6 \text{ lb}) \tan 3.679^\circ$
 $Q = 110.3 \text{ lb}$
FOR TWO SCREWS:
TORQUE = $2(110.3 \text{ lb}) \left(\frac{0.375 \text{ in.}}{2} \right)$
TORQUE = $41.4 \text{ lb} \cdot \text{in.}$


8.91



GIVEN: LEAD = 4 mm,
MEAN RADIUS = 15 mm,
 $\mu_s = 0.10$,
FORCE TO BE APPLIED TO GEAR = 3 kN.


FIND: TORQUE THAT MUST BE APPLIED TO SCREW.

BLOCK-AND-INCLINE ANALYSIS OF SCREW

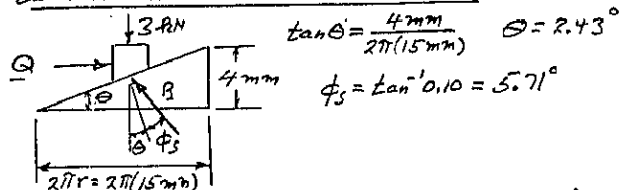

$\tan \theta = \frac{4 \text{ mm}}{2\pi(15 \text{ mm})}$ $\theta = 2.43^\circ$

$\phi_s = \tan^{-1} 0.10 = 5.71^\circ$




$\theta + \phi_s = 2.43^\circ + 5.71^\circ = 8.14^\circ$ $Q = (3 \text{ kN}) \tan 8.14^\circ = 429 \text{ N}$

TORQUE = $QR = (429 \text{ N})(0.015 \text{ m})$


TORQUE = $6.44 \text{ N} \cdot \text{m}$

8.92



GIVEN: PULLEY WEIGHS 5 lb.

FIND: COEFFICIENT OF STATIC FRICTION IF A 0.5-lb WEIGHT ADDED TO BLOCK A STARTS ROTATION.



$\sum M_B = 0: (10.5 \text{ lb})(6 \text{ in.} - r_f) - (10 \text{ lb})(6 \text{ in.} + r_f) = 0$
 $(0.5 \text{ lb})(6 \text{ in.}) = (20.5 \text{ lb})r_f$
 $r_f = 0.14834 \text{ in.}$

$r_f = r \sin \phi_s$

$\sin \phi_s = \frac{0.14834 \text{ in.}}{1.5 \text{ in.}} = 0.09886$


$\phi_s = 5.5987^\circ$

$\mu_s = \tan \phi_s = \tan 5.5987^\circ$
 $\mu_s = 0.09803$

$\mu_s = 0.098$

8.93 through 8.96

FOR EACH PULLEY: RADIUS OF SHAFT, $r = 10 \text{ mm}$
 $\mu_s = 0.40$, $\phi_s = \tan^{-1} 0.40 = 21.8^\circ$
 $r_f = r \sin \phi_s = r \mu_s = (10 \text{ mm})(0.40) = 4 \text{ mm}$
 $W = mg = (20 \text{ kg})(9.81 \text{ m/s}^2) = 196.2 \text{ N}$
 PROB. 8.93: FIND P REQUIRED TO START RAISING LOAD




$$+\sum M_D = 0: P(45 - r_f) - W(90 + r_f) = 0$$

$$P = W \frac{90 + r_f}{45 - r_f} = (196.2 \text{ N}) \frac{90 \text{ mm} + 4 \text{ mm}}{45 \text{ mm} - 4 \text{ mm}}$$

$$P = 449.8 \text{ N} \quad \underline{P = 450 \text{ N} \downarrow}$$

PROB. 8.94 FIND P REQUIRED TO START RAISING LOAD




$$+\sum M_D = 0: P(45 - r_f) - W(90 - r_f) = 0$$

$$P = W \frac{90 - r_f}{45 - r_f} = (196.2 \text{ N}) \frac{90 \text{ mm} - 4 \text{ mm}}{45 \text{ mm} - 4 \text{ mm}}$$

$$P = 411.54 \text{ N} \quad \underline{P = 412 \text{ N} \uparrow}$$

PROB. 8.95 FIND SMALLEST P TO MAINTAIN EQUILIBRIUM




$$+\sum M_D = 0: P(45 + r_f) - W(90 - r_f) = 0$$

$$P = W \frac{90 - r_f}{45 + r_f} = (196.2 \text{ N}) \frac{90 \text{ mm} - 4 \text{ mm}}{45 \text{ mm} + 4 \text{ mm}}$$

$$P = 344.3 \text{ N} \quad \underline{P = 344 \text{ N} \downarrow}$$

PROB. 8.96 FIND SMALLEST P TO MAINTAIN EQUILIBRIUM




$$+\sum M_D = 0: P(45 + r_f) - W(90 + r_f) = 0$$

$$P = W \frac{90 + r_f}{45 + r_f} = (196.2 \text{ N}) \frac{90 \text{ mm} + 4 \text{ mm}}{45 \text{ mm} + 4 \text{ mm}}$$


$$P = 376.4 \text{ N} \quad \underline{P = 376 \text{ N} \uparrow}$$

8.97



(a) LEVER MOVES \rightarrow FOR $P = 275 \text{ N}$, FIND μ_s .
 (b) FIND SMALLEST P TO PREVENT ROTATION.

(a) IMPENDING MOTION \rightarrow
 $r = 30 \text{ mm}$



$$W = (40 \text{ kg})(9.81 \text{ m/s}^2) = 392.4 \text{ N}$$

$$+\sum M_D = 0: P(160 - r_f) - W(100 + r_f) = 0$$

$$r_f = \frac{160P - 100W}{P + W}$$

$$r_f = \frac{(160 \text{ mm})(275 \text{ N}) - (100 \text{ mm})(392.4 \text{ N})}{275 \text{ N} + 392.4 \text{ N}}$$


$$r_f = 7.132 \text{ mm}$$

$$r_f = r \sin \phi_s \approx r \mu_s$$

$$\mu_s = \frac{r_f}{r} = \frac{7.132 \text{ mm}}{30 \text{ mm}} = 0.2377$$

$$\mu_s = 0.24 \quad \leftarrow$$

(b) IMPENDING MOTION \rightarrow



$$r_f = r \sin \phi_s \approx r \mu_s = (30 \text{ mm})(0.2377)$$

$$r_f = 7.132 \text{ mm}$$


$$+\sum M_D = 0: P(160 + r_f) - W(100 - r_f) = 0$$

$$P = W \frac{100 - r_f}{160 + r_f}$$

$$P = (392.4 \text{ N}) \frac{100 \text{ mm} - 7.132 \text{ mm}}{160 \text{ mm} + 7.132 \text{ mm}}$$

$$P = 218.04 \text{ N} \quad \underline{P = 218 \text{ N} \downarrow} \quad \leftarrow$$

8.98




GIVEN: 3-in.-DIAMETER PULLEYS ON 0.5-in. DIAMETER AXES.
 $\mu_s = 0.20$

FIND: TENSION IN EACH PORTION OF ROPE AS LOAD IS LOWERED.

FOR EACH PULLEY:

$$\text{AXLE DIAMETER} = 0.5 \text{ in.}$$


$$r_f = r \sin \phi_s \approx \mu_s r = 0.20 \left(\frac{0.5 \text{ in.}}{2} \right) = 0.05 \text{ in.}$$



PULLEY BC: $+\sum M_B = 0: T_{CD}(3 \text{ in}) - (150 \text{ lb})(1.5 \text{ in} + r_f) = 0$
 $T_{CD} = \frac{1}{3}(150 \text{ lb})(1.5 \text{ in} + 0.05 \text{ in}); T_{CD} = 77.5 \text{ lb} \quad \leftarrow$
 $+\sum F_y = 0: T_{AB} + 77.5 \text{ lb} - 150 \text{ lb} = 0; T_{AB} = 72.5 \text{ lb} \quad \leftarrow$

PULLEY DE: $+\sum M_D = 0: T_{CD}(1.5 + r_f) = T_{EF}(1.5 - r_f) = 0$
 $T_{EF} = T_{CD} \frac{1.5 + r_f}{1.5 - r_f} = (77.5 \text{ lb}) \frac{1.5 \text{ in} + 0.05 \text{ in.}}{1.5 \text{ in.} - 0.05 \text{ in.}}$
 $T_{EF} = 82.8 \text{ lb} \quad \leftarrow$



8.99



GIVEN: 3-in. DIAMETER PULLEYS ON 0.5-in. DIAMETER AXLES, $\mu_s = 0.20$.

FIND: TENSION IN EACH PORTION OF ROPE AS LOAD IS LOWERED.

FOR EACH PULLEY: $r_f = r \mu_s = \left(\frac{0.5 \text{ in.}}{2}\right) 0.2 = 0.05 \text{ in.}$



PULLEY BC: $\sum M_B = 0: T_{CD}(3 \text{ in.}) - (150 \text{ lb})(1.5 \text{ in.} - r_f) = 0$


$T_{CD} = \frac{(150 \text{ lb})(1.5 \text{ in.} - 0.05 \text{ in.})}{3 \text{ in.}} \quad T_{CD} = 77.5 \text{ lb}$

$\sum F_y = 0: T_{AB} + 77.5 \text{ lb} - 150 \text{ lb} = 0 \quad T_{AB} = 77.5 \text{ lb}$

PULLEY DE: $T_{CD}(1.5 \text{ in.} - r_f) - T_{EF}(1.5 \text{ in.} + r_f) = 0$

$T_{EF} = T_{CD} \frac{1.5 \text{ in.} - r_f}{1.5 \text{ in.} + r_f} = (77.5 \text{ lb}) \frac{1.5 \text{ in.} - 0.05 \text{ in.}}{1.5 \text{ in.} + 0.05 \text{ in.}} \quad T_{EF} = 67.8 \text{ lb}$

8.100




GIVEN: 60-mm-DIAMETER PINS AT A AND B, $\mu_s = 0.20$, LOAD = 200 kN. FIND: (a) HORIZ. FORCE AT C REQUIRED TO JUST MOVE THE LINK, (b) ANGLE THAT RESULTING FORCE EXERTED ON LINK WILL FORM WITH VERT..


BEARING: $r = 30 \text{ mm}$

$r_f = \mu_s r = 0.20(30 \text{ mm}) = 6 \text{ mm}$

RESULTANT FORCES R MUST BE TANGENT TO FRICTION CIRCLES AT POINTS C AND D.




$\sin \theta = \frac{6 \text{ mm}}{250 \text{ mm}} \quad \sin \theta = 0.024 \quad \theta = 1.375^\circ$



$R_x = R_y \tan \theta = (200 \text{ kN}) \tan 1.375^\circ = 4.80 \text{ kN}$


HORIZ. FORCE = 4.80 kN

8.101



GIVEN: $\mu_s = 0.15$.

FIND: FORCE P REQUIRED TO START COUNTERCLOCKWISE ROTATION.




$r_f = \mu_s r = 0.15(1.25 \text{ in.}) = 0.1875 \text{ in.}$

$\sum M_D = 0 \quad P(5 \text{ in.} + r_f) - (50 \text{ lb})r_f = 0$

$P = \frac{50(0.1875)}{5.1875} = 1.807 \text{ lb}$


$P = 1.807 \text{ lb}$

8.102

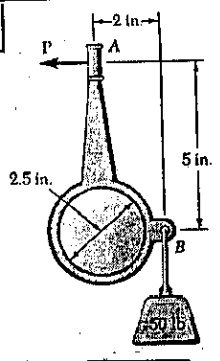

GIVEN: $\mu_s = 0.15$.

FIND: FORCE P REQUIRED TO START COUNTERCLOCKWISE ROTATION.

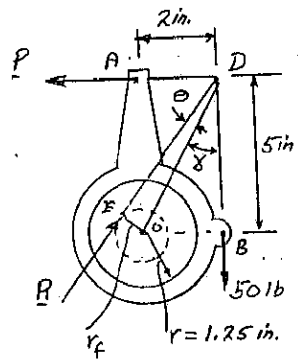

$r_f = \mu_s r = 0.15(1.25 \text{ in.}) \quad r_f = 0.1875 \text{ in.}$

$\tan \gamma = \frac{2 \text{ in.}}{5 \text{ in.}} \quad \gamma = 21.801^\circ$


IN $\triangle EOD$:

$OD = \sqrt{(2 \text{ in.})^2 + (5 \text{ in.})^2} = 5.3852 \text{ in.}$

$\sin \theta = \frac{OE}{OD} = \frac{r_f}{OD} = \frac{0.1875 \text{ in.}}{5.3852 \text{ in.}}$

$\theta = 1.995^\circ$


FORCE TRIANGLE




$P = (50 \text{ lb}) \tan(\gamma + \theta) = (50 \text{ lb}) \tan 23.796^\circ = 22.049 \text{ lb}$

$P = 22.0 \text{ lb}$

8.103



GIVEN: $\mu_s = 0.15$,
FIND: FORCE P
REQUIRED TO START
CLOCKWISE ROTATION.

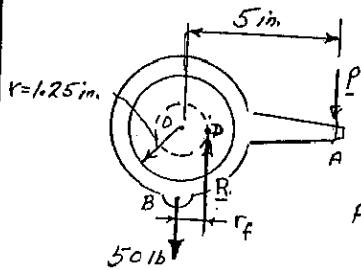

$$r_f = \mu_s r = 0.15(1.25 \text{ in})$$

$$r_f = 0.1875 \text{ in.}$$


$$+\circlearrowleft \Sigma M_D = 0$$

$$P(5 \text{ in.} - r_f) - (50 \text{ lb})r_f = 0$$


$$P = \frac{50(0.1875)}{5 - 0.1875} = 1.942 \text{ lb}$$

$$P = 1.942 \text{ lb} \downarrow$$

8.104

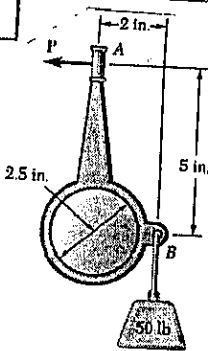

GIVEN: $\mu_s = 0.15$,
FIND: FORCE P
REQUIRED TO START
CLOCKWISE ROTATION

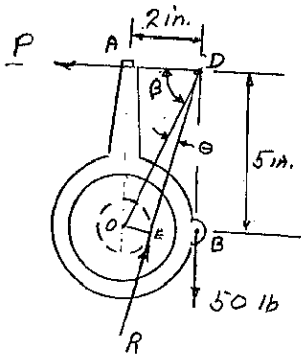


$$r_f = \mu_s r = 0.15(1.25 \text{ in})$$

$$= 0.1875 \text{ in.}$$

$$\tan \beta = \frac{5 \text{ in.}}{2 \text{ in.}}$$

$$\beta = 68.198^\circ$$

IN $\triangle EOD$:




$$OD = \sqrt{(2 \text{ in.})^2 + (5 \text{ in.})^2}$$

$$OD = 5.3852 \text{ in.}$$

$$\sin \theta = \frac{OE}{OD} = \frac{0.1875 \text{ in.}}{5.3852 \text{ in.}}$$


$$\theta = 1.994^\circ$$

FORCE TRIANGLE

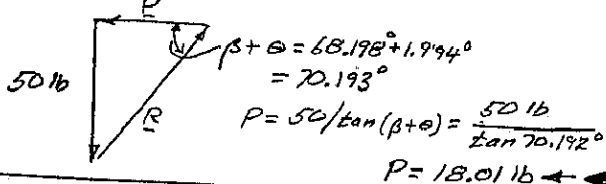

8.105

GIVEN: RAILROAD CAR OF MASS 30 Mg ON
EIGHT 800-mm-DIAMETER WHEELS WITH
125-mm-DIAMETER AXLES. $\mu_s = 0.020$, $\mu_k = 0.015$.
FIND: HORIZONTAL FORCE REQUIRED (a) TO START
CAR MOVING, (b) TO KEEP IT MOVING.

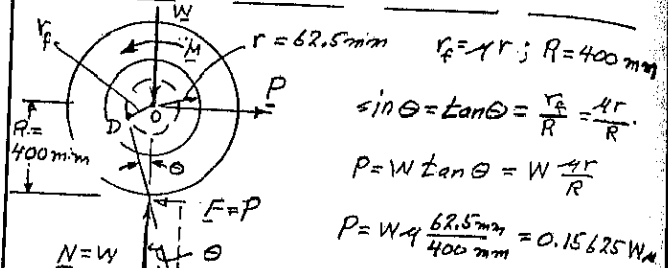

$$\sin \theta = \tan \theta = \frac{r_f}{R} = \frac{r}{R}$$

$$P = W \tan \theta = W \frac{r}{R}$$

$$P = W \left(\frac{62.5 \text{ mm}}{400 \text{ mm}} \right) = 0.15625 W$$

FOR ONE WHEEL:

$$W = \frac{1}{8} (30 \text{ Mg}) (9.81 \text{ m/s}^2) = \frac{1}{8} (294.3 \text{ kN})$$

FOR EIGHT WHEELS OF RAILROAD CAR

$$\Sigma P = 8(0.15625) \left(\frac{1}{8} (294.3 \text{ kN}) \right) = (45.984 \text{ kN})$$

(a) TO START MOTION: $\mu_s = 0.020$


$$\Sigma P = (45.984 \text{ kN})(0.020) = 0.9197 \text{ kN}; \quad \Sigma P = 920 \text{ N} \leftarrow$$

(b) TO MAINTAIN MOTION: $\mu_k = 0.015$

$$\Sigma P = (45.984 \text{ kN})(0.015) = 0.6897 \text{ kN}; \quad \Sigma P = 690 \text{ N} \leftarrow$$

8.106

GIVEN: SCOOTER IS TO ROLL DOWN
A 2 PERCENT SLOPE AT CONSTANT SPEED.
AXLES OF WHEELS ARE 25 mm IN DIAMETER, $\mu_k = 0.10$.
FIND: REQUIRED DIAMETER OF WHEELS.

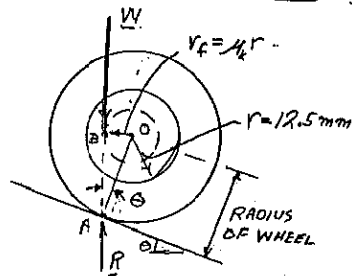

$$\tan \theta = \frac{2}{100} = 0.02$$


SINCE SCOOTER ROLLS AT CONSTANT SPEED, EACH
WHEEL IS IN EQUILIBRIUM. THUS W AND R
MUST HAVE COMMON LINE OF ACTION TANGENT
TO THE FRICTION CIRCLE.

$$r_f = \mu_k r = (0.10)(12.5 \text{ mm}) = 1.25 \text{ mm}$$

$$OA = \frac{OB}{\tan \theta} = \frac{r_f}{\tan \theta} = \frac{1.25 \text{ mm}}{0.02} = 62.5 \text{ mm}$$

$$\text{DIAMETER OF WHEEL} = 2(OA) = 125 \text{ mm} \leftarrow$$

107

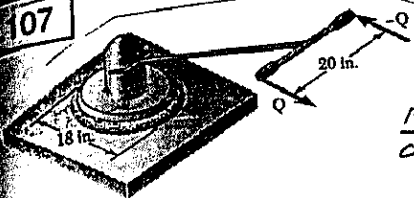

GIVEN: $\mu_k = 0.25$
50-lb FLOOR
POLISHER
FIND: MAGNITUDE
OF FORCES Q

SEE FIG. 8.12 (page 343) AND EQ. 8.9 (page 344)
USING: $R = 9 \text{ in.}$, $P = 50 \text{ lb}$, AND $\mu_k = 0.25$


$$M = \frac{2}{3} \mu_k P R = \frac{2}{3} (0.25)(50 \text{ lb})(9 \text{ in.}) = 75 \text{ lb}\cdot\text{in.}$$

$$\sum M_y = 0 \text{ YIELDS: } M = Q(20 \text{ in.})$$

$$75 \text{ lb}\cdot\text{in.} = Q(20 \text{ in.})$$

$$Q = 3.75 \text{ lb}$$

8.108



GIVEN: COUPLE
 $M = 30 \text{ N}\cdot\text{m}$
REQUIRED TO START
ROTATION

FIND: μ_s

SEE FIG. 8.12 (page 343) AND EQ. 8.8 (page 344).

USING: $R_1 = 25 \text{ mm} = 0.025 \text{ m}$
 $R_2 = 60 \text{ mm} = 0.060 \text{ m}$
 $P = 4,000 \text{ N}$, $M = 30 \text{ N}\cdot\text{m}$

$$M = \frac{2}{3} \mu_s P \frac{R_2^3 - R_1^3}{R_2^2 - R_1^2}$$

$$30 \text{ N}\cdot\text{m} = \frac{2}{3} \mu_s (4,000 \text{ N}) \frac{(0.060 \text{ m})^3 - (0.025 \text{ m})^3}{(0.060 \text{ m})^2 - (0.025 \text{ m})^2}$$

$$30 \text{ N}\cdot\text{m} = \frac{2}{3} \mu_s (4,000 \text{ N})(0.08735 \text{ m}); \mu_s = 0.167$$

* 8.109

FOR SHAFT AND BEARING ASSUME NORMAL
FORCE PER UNIT AREA IS INVERSELY
PROPORTIONAL TO r . SHOW THAT M IS 75%
OF VALUE GIVEN BY FORMULA (8.9) ON PAGE 344.

USING FIG. 8.12 (page 343), WE ASSUME

$$\Delta N = \frac{R}{r} \Delta A; \quad \Delta A = r \Delta \theta \Delta r$$

$$\Delta N = \frac{R}{r} r \Delta \theta \Delta r = R \Delta \theta \Delta r$$

WE WRITE, $P = \sum \Delta N$ OR $P = \int \Delta N$

$$P = \int_0^{2\pi} \int_{R_1}^{R_2} R \Delta \theta \Delta r = 2\pi R R; \quad R = \frac{P}{2\pi R}$$

$$\Delta N = \frac{P \Delta \theta \Delta r}{2\pi R}$$

$$\Delta M = r \Delta F = \mu_k \Delta N = \mu_k \frac{P \Delta \theta \Delta r}{2\pi R}$$

$$M = \int_0^{2\pi} \int_{R_1}^{R_2} \frac{\mu_k P}{2\pi R} r \, dr \, d\theta = \frac{2\pi \mu_k P}{2\pi R} \cdot \frac{R^2}{2} = \frac{1}{2} \mu_k P R$$

FROM EQ. (8.9) FOR A NEW BEARING $M_{\text{NEW}} = \frac{2}{3} \mu_k P R$

$$\text{THUS } \frac{M}{M_{\text{NEW}}} = \frac{1/2}{2/3} = \frac{3}{4}$$

$$M = 0.75 M_{\text{NEW}}$$

* 8.110

ASSUMING BEARING WEAR AS GIVEN
IN PROB. 8.109, SHOW THAT MAGNITUDE
OF COUPLE TO OVERCOME FRICTION IN A
WORN-OUT, COLLAR BEARING (SEE FIG. 8.12) IS

$$M = \frac{1}{2} \mu_k P (R_1 + R_2)$$

USING FIG. 8.12 (page 343), WE ASSUME $\Delta N = \frac{R}{r} \Delta A$

$$\Delta A = r \Delta \theta \Delta r; \quad \Delta N = \frac{R}{r} r \Delta \theta \Delta r = R \Delta \theta \Delta r$$

BUT: $P = \sum \Delta N$ OR $P = \int \Delta N$

$$P = \int_0^{2\pi} \int_{R_1}^{R_2} R \Delta \theta \Delta r = 2\pi (R_2 - R_1) R$$

$$\text{THUS, } R = \frac{P}{2\pi (R_2 - R_1)}, \text{ AND } \Delta N = \frac{P \Delta \theta \Delta r}{2\pi (R_2 - R_1)}$$


$$\Delta M = r \Delta F = \mu_k \Delta N = \mu_k \frac{P \Delta \theta \Delta r}{2\pi (R_2 - R_1)}$$

$$M = \int_0^{2\pi} \int_{R_1}^{R_2} \frac{\mu_k P}{2\pi (R_2 - R_1)} r \, dr \, d\theta = \frac{2\pi \mu_k P}{2\pi (R_2 - R_1)} \cdot \frac{R_2^2 - R_1^2}{2}$$

$$\text{SINCE } R_2^2 - R_1^2 = (R_2 - R_1)(R_2 + R_1)$$

$$M = \frac{1}{2} \mu_k P (R_1 + R_2)$$


* 8.111



ASSUME: UNIFORM
PRESSURE BETWEEN
SURFACES OF CONTACT

SHOW THAT

$$M = \frac{2}{3} \frac{\mu_k P}{\sin \theta} \cdot \frac{R_2^3 - R_1^3}{R_2^2 - R_1^2}$$



$$\Delta N = R \Delta A$$

$$\Delta A = (r \Delta \phi) \Delta s = (r \Delta \phi) \frac{\Delta r}{\sin \theta}$$

THUS:

$$\Delta N = R \Delta A = \frac{R r}{\sin \theta} \Delta \phi \Delta r$$

VERTICAL COMPONENT OF ΔN :

$$(\Delta N)_y = \Delta N \sin \theta = R r \Delta \phi \Delta r$$

$$P = \sum (\Delta N)_y = \sum R r \Delta \phi \Delta r$$

OR, USING INTEGRALS

$$P = \int_0^{2\pi} \int_{R_1}^{R_2} R r \, dr \, d\phi = 2\pi R \frac{R^2 - R_1^2}{2}$$


$$\text{THUS, } R = \frac{P}{\pi (R_2^2 - R_1^2)}; \quad \Delta N = \frac{R r}{\sin \theta} \Delta \phi \Delta r = \frac{\mu_k P r^2 \Delta \phi \Delta r}{\pi \sin \theta (R_2^2 - R_1^2)}$$

INTEGRATING:

$$M = \int_0^{2\pi} \int_{R_1}^{R_2} \frac{\mu_k P r^2 \Delta \phi \Delta r}{\pi \sin \theta (R_2^2 - R_1^2)} = \frac{2\pi \mu_k P}{\pi \sin \theta} \cdot \frac{R_2^3 - R_1^3}{3(R_2^2 - R_1^2)}$$

$$M = \frac{2}{3} \frac{\mu_k P}{\sin \theta} \cdot \frac{R_2^3 - R_1^3}{R_2^2 - R_1^2}$$


8.112

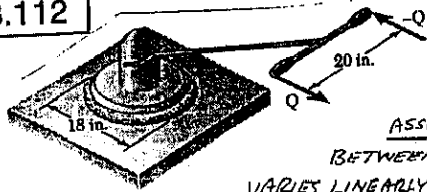

GIVEN: POLISHER
OF WEIGHT = 50 lb
 $\mu_k = 0.25$

ASSUME: NORMAL FORCE
BETWEEN FLOOR AND DISK
VARIES LINEARLY FROM A MAXIMUM
AT CENTER TO ZERO AT EDGE

FIND: MAGNITUDE, Q OF FORCES TO PREVENT MOTION.



$$\frac{\Delta N}{\Delta A} = k \left(1 - \frac{r}{R}\right)$$

$$\Delta A = r \Delta \theta \Delta r$$

$$\Delta N = k \left(1 - \frac{r}{R}\right) r \Delta \theta \Delta r$$

$$P = \sum \Delta N = \int_0^{2\pi R} \int_0^R k \left(1 - \frac{r}{R}\right) r \, d\theta \, dr = 2\pi k \left[\frac{r^2}{2} - \frac{r^3}{3R} \right]_0^R$$

$$P = k \frac{\pi R^2}{3}$$

$$\text{THUS: } k = \frac{3P}{\pi R^2} \text{ AND } \Delta N = \frac{3P}{\pi R^2} \left(1 - \frac{r}{R}\right) r \Delta \theta \Delta r$$

MOMENT OF FRICTION FORCE ON ΔA IS

$$\Delta M = r \Delta F = \mu_k \Delta N = \frac{3\mu_k P}{\pi R^2} \left(1 - \frac{r}{R}\right) r^2 \Delta \theta \Delta r$$

$$M = \sum \Delta M = \int_0^{2\pi R} \int_0^R \frac{3\mu_k P}{\pi R^2} \left(1 - \frac{r}{R}\right) r^2 \, d\theta \, dr = \frac{2\pi}{\pi} \frac{3\mu_k P}{R^2} \left[\frac{r^3}{3} - \frac{r^4}{4R} \right]_0^R$$


$$M = \frac{1}{2} \mu_k P R$$

$$\mu_k = 0.25, P = 50 \text{ lb}, R = 9 \text{ in}$$

$$M = \frac{1}{2} (0.25)(50 \text{ lb})(9 \text{ in}) = 56.25 \text{ lb}\cdot\text{in.}$$


$$\text{BUT: } Q(20 \text{ in.}) = M; Q = \frac{M}{20 \text{ in.}} = \frac{56.25 \text{ lb}\cdot\text{in.}}{20 \text{ in.}}; Q = 2.81 \text{ lb}$$

8.113



GIVEN: 900-kg BASE;
100-mm DIAMETER
PIPES, ROLLING
RESISTANCE IS

0.5 m BETWEEN PIPES AND BASE + 1.25 mm BETWEEN PIPES
AND CONCRETE FLOOR. FIND: P TO MAINTAIN MOTION

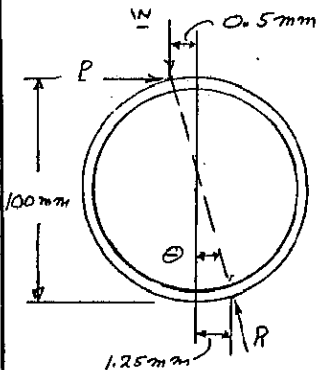

$$\tan \theta = \frac{0.5 \text{ mm} + 1.25 \text{ mm}}{100 \text{ mm}}$$

$$\tan \theta = 0.0175$$

$$P = W \tan \theta$$

$$P = 0.0175 W$$


$$W = mg = (900 \text{ kg})(9.81 \text{ m/s}^2)$$

$$P = (0.0175)(900 \text{ kg})(9.81 \text{ m/s}^2)$$


$$P = 154.51 \text{ N}$$

$$P = 154.4 \text{ N}$$

8.114



GIVEN: DISK ROLLS AT
CONSTANT VELOCITY
FIND: COEFFICIENT OF
ROLLING RESISTANCE



DISK IS IN EQUILIBRIUM

SIMILAR TRIANGLES


$$\frac{b}{r} = \frac{2}{100}$$

$$b = \frac{2}{100} r = \frac{2}{100} (6 \text{ in.}); b = 0.060 \text{ in.}$$

8.115

GIVEN: 2500-LB AUTOMOBILE WITH
23-IN.-DIAMETER TIRES, COEFFICIENT
OF ROLLING RESISTANCE = 0.05 in.

FIND: HORIZONTAL FORCE TO MOVE AUTOMOBILE ON
HORIZONTAL ROAD AT CONSTANT SPEED



$$\sum M_B = 0:$$

$$P(11.5 \text{ in.}) - W b = 0$$


$$P(11.5 \text{ in.}) = (2500 \text{ lb})(0.05 \text{ in.})$$

$$P = 10.869 \text{ lb}$$

$$P = 10.87 \text{ lb}$$

8.116

GIVEN: 30-Mg RAILROAD CAR ON EIGHT
800-mm-DIAMETER WHEELS WITH 125-mm AXLES,
 $\mu_s = 0.020$, $\mu_k = 0.015$, COEFFICIENT OF ROLLING RESISTANCE 0.5 mm
FIND: HORIZ. FORCE (a) TO START MOTION, (b) TO MAINTAIN MOTION.



$$r_f = \mu_r r \quad \text{FOR ONE WHEEL}$$

$$\tan \theta \approx \sin \theta = \frac{r_f + b}{a}$$

$$\tan \theta = \frac{4r + b}{a}$$

$$Q = \frac{W}{8} \tan \theta = \frac{W}{8} \frac{4r + b}{a}$$

FOR EIGHT WHEELS OF CAR

$$P = W \frac{4r + b}{a}$$

$$W = mg = (30 \text{ Mg})(9.81 \text{ m/s}^2) = 294.3 \text{ kN}$$

$$a = 400 \text{ mm}, r = 62.5 \text{ mm}, b = 0.5 \text{ mm}$$

(a) TO START MOTION: $\mu = \mu_s = 0.020$

$$P = (294.3 \text{ kN}) \frac{(0.020)(62.5 \text{ mm}) + 0.5 \text{ mm}}{400 \text{ mm}}$$

$$P = 1.2876 \text{ kN}$$

$$P = 1.288 \text{ kN}$$

(b) TO MAINTAIN CONSTANT SPEED $\mu = \mu_k = 0.015$


$$P = (294.3 \text{ kN}) \frac{(0.015)(62.5 \text{ mm}) + 0.5 \text{ mm}}{400 \text{ mm}}$$

$$P = 1.0576 \text{ kN}$$

$$P = 1.058 \text{ kN}$$

8.117

GIVEN: SCOOTER IS TO ROLL DOWN A 2 PERCENT SLOPE AT CONSTANT SPEED, RADIUS OF WHEELS ARE 25 mm IN DIAMETER, $\mu_k = 0.10$, COEFFICIENT OF ROLLING RESISTANCE = 1.75 mm. FIND: REQUIRED DIAMETER OF WHEELS.



SINCE SCOOTER ROLLS AT CONSTANT SPEED, EACH WHEEL IS IN EQUILIBRIUM. THUS W AND R MUST HAVE COMMON LINE OF ACTION TANGENT TO THE FRICTION CIRCLE.

$$\alpha = \text{RADIUS OF WHEEL}$$

$$\tan \theta = \frac{r}{a} = 0.02$$

SINCE b AND y ARE SMALL COMPARED TO a ,


$$\tan \theta \approx \frac{y + b}{a} = \frac{\mu_k y + b}{a} = 0.02$$

DATA: $\mu_k = 0.10$, $b = 1.75 \text{ mm}$, $r = 12.5 \text{ mm}$

$$\frac{(0.10)(12.5 \text{ mm}) + 1.75 \text{ mm}}{a} = 0.02$$

$$a = 150 \text{ mm}; \text{ DIAMETER} = 2a = 300 \text{ mm}.$$

8.118



(a) FOR TWO FULL TURNS OF HAWSER AND $P = 5000 \text{ lb}$, FIND μ_s
(b) FIND NUMBER OF TURNS, IF $P = 20,000 \text{ lb}$.

$$(a) \beta = 2 \text{ TURNS} = 2(2\pi) = 4\pi$$

$$T_1 = 80 \text{ lb} \quad T_2 = 5000 \text{ lb}$$

$$\ln \frac{T_2}{T_1} = \mu_s \beta \quad \mu_s = \frac{1}{\beta} \ln \frac{T_2}{T_1} = \frac{1}{4\pi} \ln \frac{5000 \text{ lb}}{80 \text{ lb}}$$

$$\mu_s = \frac{1}{4\pi} \ln 62.5 = \frac{4.1351}{4\pi} \quad \mu_s = 0.329$$

$$(b) T_1 = 80 \text{ lb}, T_2 = 20,000 \text{ lb}, \mu_s = 0.329$$


$$\ln \frac{T_2}{T_1} = \mu_s \beta \quad \beta = \frac{1}{\mu_s} \ln \frac{T_2}{T_1} = \frac{1}{0.329} \ln \frac{20,000 \text{ lb}}{80 \text{ lb}}$$

$$\beta = \frac{1}{0.329} \ln(250) = \frac{5.5215}{0.329} = 16.783$$

$$\text{NUMBER OF TURNS} = \frac{16.783}{2\pi}$$

$$\text{NUMBER OF TURNS} = 2.67$$

8.119

GIVEN: $\mu_s = 0.40$ FIND: RANGE OF MASS m FOR EQUILIBRIUM

FOR MOTION OF A IMPENDING DOWNWARD

FOR EACH ROD

$$\beta = \frac{\pi}{2}, \mu_s = 0.4$$

$$W_A = m_A g$$

$$W_D = m g$$

$$\frac{Q}{m_A g} = e^{\mu_s \beta}$$

$$\frac{m g}{Q} = e^{\mu_s \beta}$$

MULTIPLY EQUATIONS MEMBER BY MEMBER

$$\frac{Q}{m_A g} \cdot \frac{m g}{Q} = e^{\mu_s (\beta + \beta)}; \frac{m}{m_A} = e^{0.4(2)\frac{\pi}{2}} = 3.514$$



$$m = 3.514 m_A = 3.514(50 \text{ kg}) = 175.7 \text{ kg}$$

FOR MOTION OF B IMPENDING UPWARD, WE FIND IN A SIMILAR WAY

$$\frac{m_A}{m} = e^{0.4(2)\frac{\pi}{2}} = 3.514; m = \frac{50 \text{ kg}}{3.514} = 14.23 \text{ kg}$$

RANGE FOR EQUILIBRIUM: $14.23 \text{ kg} \leq m \leq 175.7 \text{ kg}$

8.120

GIVEN: MOTION OF D IMPENDS UPWARD WHEN $m = 20 \text{ kg}$.FIND: (a) μ_s
(b) TENSION IN BCFOR EACH ROD: $\beta = \frac{\pi}{2}$ 

$$W_A = m_A g$$

$$\text{EQ(1): } \frac{m_A g}{T_{BC}} = e^{\mu_s \beta}$$

$$\text{EQ(2): } \frac{T_{BC}}{m g} = e^{\mu_s \beta}$$

MULTIPLY EQUATIONS MEMBER BY MEMBER


$$\frac{m_A g}{T_{BC}} \cdot \frac{T_{BC}}{m g} = e^{\mu_s (\beta + \beta)}; \frac{m_A}{m} = e^{2\mu_s \beta}$$

$$\frac{50 \text{ kg}}{20 \text{ kg}} = e^{2\mu_s \frac{\pi}{2}}; \mu_s \pi = 0.9163; \mu_s = 0.2917$$

$$\text{EQ(2): } \frac{T_{BC}}{(20 \text{ kg})g} = e^{0.2917(\frac{\pi}{2})} = 1.582; T_{BC} = 1.582(20 \text{ kg})(9.81 \text{ m/s}^2)$$

$$T_{BC} = 310 \text{ N}$$


8.121



GIVEN: $\mu_s = 0.15$
ROPE WRAPPED $1\frac{1}{2}$
TIMES AROUND ROD

FIND: RANGE OF P
FOR EQUILIBRIUM

$1\frac{1}{2}$ TURNS; $\beta = 1.5(2\pi) = 3\pi$



FOR MOTION OF 300-LB BLOCK
IMPENDING UPWARD

$$\frac{P}{300 \text{ lb}} = e^{4\beta} = e^{0.15(3\pi)}$$


$$\frac{P}{300 \text{ lb}} = 4.111 \quad P = 1233 \text{ lb} \quad \blacktriangleleft$$

FOR MOTION OF BLOCK IMPENDING DOWNWARD

$$\frac{300 \text{ lb}}{P} = e^{4\beta} = e^{0.15(3\pi)} = 4.111; \quad P = 73.0 \text{ lb} \quad \blacktriangleleft$$

RANGE FOR EQUILIBRIUM; $73.0 \text{ lb} \leq P \leq 1233 \text{ lb} \quad \blacktriangleleft$

8.122




GIVEN:

$$\mu_s = 0.40$$

$$m_A = 12 \text{ kg}$$

FIND: SMALLEST m_B
FOR EQUILIBRIUM.




$$m_A g = m_B g$$

$$\frac{m_A g}{T} = e^{4\beta}$$

$$T = (m_A g) e^{-4\beta}$$

$$T = (12 \text{ kg}) g e^{-(0.40) \frac{\pi}{2}}$$

$$T = 6.4019 \text{ g}$$



$$F = \mu_s N = \mu_s m_B g$$

$$\sum F_x = 0; \quad T - F = 0$$


$$T = \mu_s m_B g$$

$$6.4019 \text{ g} = (0.40) m_B g$$

$$m_B = \frac{6.4019}{0.40}$$


$$m_B = 16.00 \text{ kg} \quad \blacktriangleleft$$

8.123



GIVEN: $m_A = m_B$

FIND: SMALLEST
 μ_s FOR EQUILIBRIUM



$$m_A g = m_B g$$


$$\frac{m_A g}{T} = e^{4\beta}$$

$$m_A = m_B = m$$

$$\frac{m}{\mu_s m} = e^{4\beta}; \quad \mu_s e^{4\beta} = 1$$

SOLVE BY TRIAL AND ERROR: $\mu_s = 0.475 \quad \blacktriangleleft$


8.124

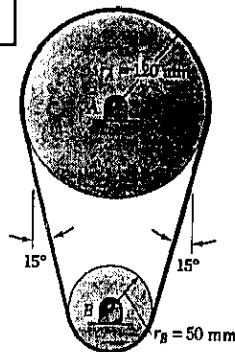

GIVEN: $\mu_s = 0.40$
 $T_{max} = 450 \text{ N}$

FIND: LARGEST COUPLE
THAT CAN BE
EXERTED ON DRUM A

BELT WILL SLIP FIRST AT B, SINCE β AT B IS
LESS THAN β AT A.




$$\beta = 150^\circ = 150 \frac{\pi}{180} = \frac{5}{2} \pi \text{ radians}$$

$$\frac{T_2}{T_1} = e^{4\beta}$$

$$\frac{450 \text{ N}}{T_1} = e^{0.4 \left(\frac{5}{2} \pi \right)} = 2.8497$$

$$T_1 = (450 \text{ N}) / 2.8497 = 157.91 \text{ lb}$$

TORQUE ON DRUM A:



$$+\sum M_A = 0$$


$$M - (T_{max} - T_1)(0.120 \text{ m})$$

$$M = (450 \text{ N} - 157.91 \text{ N})(0.120 \text{ m})$$

$$M = 35.053 \text{ N}\cdot\text{m}$$

$$M = 35.1 \text{ N}\cdot\text{m} \quad \blacktriangleleft$$


8.125

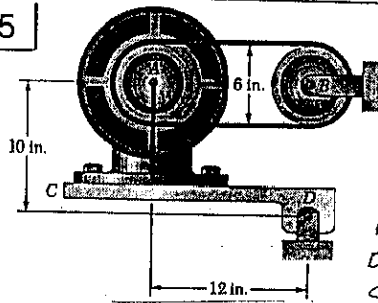

GIVEN: MOTOR
MOUNT WEIGHS
175 lb.

$\mu_s = 0.40$

FIND: LARGEST
TORQUE TRANS-
MITTED TO B WHEN
DRUM A ROTATES
CLOCKWISE.

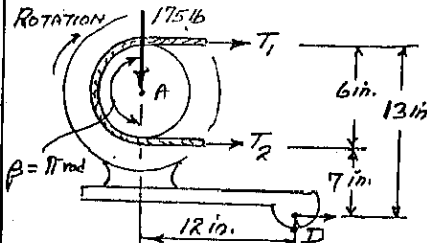

$$\frac{T_2}{T_1} = e^{4\beta} = e^{0.40 \pi}$$

$$T_2 = 3.5736 T_1$$

$$+\sum M_D = 0: \quad T_1(13 \text{ in.}) + T_2(7 \text{ in.}) - (175 \text{ lb})(12 \text{ in.}) = 0$$


$$T_1(13 \text{ in.}) + 3.5736 T_1(7 \text{ in.}) - 2100 \text{ lb}\cdot\text{in.}$$

$$37.595 T_1 = 2100$$

$$T_1 = 55.858 \text{ lb}$$

$$T_2 = 3.5736(55.858 \text{ lb}) = 196.26 \text{ lb}$$

DRUM B:




$$+\sum M_B = 0$$

$$M + (55.858 \text{ lb} - 196.26 \text{ lb})(3 \text{ in.}) = 0$$

$$M = 421.2 \text{ lb}\cdot\text{in.}$$


$$M = 421 \text{ lb}\cdot\text{in.} \quad \blacktriangleleft$$

8.126

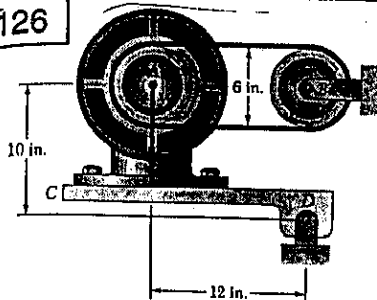

GIVEN: MOTOR MOUNT WEIGHS 175 lb.
 $\mu_s = 0.40$
 FIND: LARGEST TORQUE TRANSMITTED TO B WHEN DRUM A ROTATES COUNTERCLOCKWISE

ROTATION

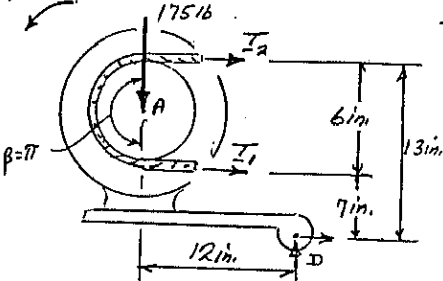

$$\frac{T_2}{T_1} = e^{\mu_s \beta} = e^{0.4 \pi}$$

$$T_2 = 3.5136 T_1$$

$$+\sum \Sigma M_D = 0: T_1(7 \text{ in.}) + T_2(13 \text{ in.}) - (175 \text{ lb})(12 \text{ in.}) = 0$$


$$T_1(7 \text{ in.}) + 3.5136 T_1(13 \text{ in.}) - 2100 \text{ lb}\cdot\text{in.} = 0$$

$$52.677 T_1 = 2100$$

$$T_1 = 39.866 \text{ lb}$$

$$T_2 = 3.5136(39.866 \text{ lb}) = 140.072 \text{ lb}$$

DRUM B:




$$+\sum \Sigma M_B = 0:$$

$$M + (39.866 \text{ lb} - 140.072 \text{ lb})(3 \text{ in.}) = 0$$

$$M = 300.6 \text{ lb}\cdot\text{in.}$$

$$M = 301 \text{ lb}\cdot\text{in.}$$


8.127

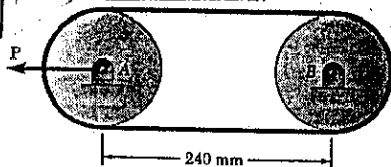

GIVEN: 60-mm-RADIUS PULLEYS,
 $P = 900 \text{ N}$,
 $\mu_s = 0.35$.

FIND: (a) LARGEST TORQUE WHICH CAN BE TRANSMITTED.
 (b) MAXIMUM TENSION IN BELT.

DRUM A:



$$\frac{T_2}{T_1} = e^{\mu_s \pi} = e^{(0.35)\pi}$$

$$T_2 = 3.0028 T_1$$

$$\beta = 180^\circ = \pi \text{ radians}$$

$$+\sum \Sigma F_x = 0: T_1 + T_2 - 900 \text{ N} = 0$$

$$T_1 + 3.0028 T_1 - 900 \text{ N} = 0$$

$$4.0028 T_1 = 900$$

$$T_1 = 224.841 \text{ N}$$

$$T_2 = 3.0028(224.841 \text{ N}) = 675.15 \text{ N}$$


$$T_{\text{max}} = 675 \text{ N}$$

TORQUE $\sum \Sigma M_A = 0:$

$$M - (675.15 \text{ N})(0.06 \text{ m}) + (224.841 \text{ N})(0.06 \text{ m}) = 0$$



$$M = 27.0 \text{ N}\cdot\text{m}$$

8.128

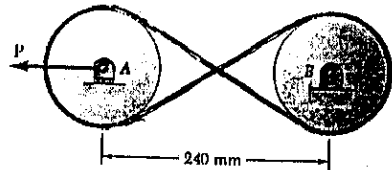

GIVEN: 60-mm-RADIUS PULLEYS, $\mu_s = 0.35$, $P = 900 \text{ N}$
 FIND: (a) LARGEST TORQUE WHICH CAN BE TRANSMITTED
 (b) MAXIMUM TENSION IN BELT.

DRUM A:



$$\sin \theta = \frac{60}{120} = \frac{1}{2}$$

$$\theta = 30^\circ$$

$$\frac{T_2}{T_1} = e^{\mu_s \beta} = e^{0.35(\frac{4}{3}\pi)}$$

$$T_2 = 4.3322 T_1$$

$$+\sum \Sigma F_x = 0: (T_1 + T_2) \cos 30^\circ - 900 \text{ N} = 0$$

$$(T_1 + 4.3322 T_1) \cos 30^\circ = 900$$

$$T_1 = 194.90 \text{ N}$$

$$T_2 = 4.3322(194.90 \text{ N}) = 844.3 \text{ N}$$


$$T_{\text{max}} = 844 \text{ N}$$

TORQUE:

$$+\sum \Sigma M_B = 0: M - (844.3 \text{ N})(0.06 \text{ m}) + (194.9 \text{ N})(0.06 \text{ m}) = 0$$

$$M = 39.0 \text{ N}\cdot\text{m}$$


8.129

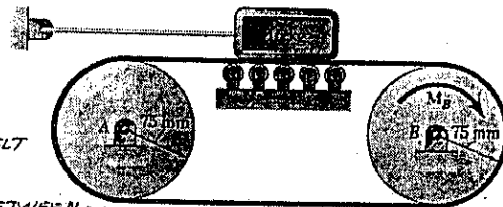


GIVEN:

$\mu_k = 0.45$ BETWEEN BELT AND BLOCK,
 $\mu_s = 0.30$ BETWEEN BELT AND DRUM. FIND: (a) M_B , (b) T_{min} FOR NO SLIPPING.

BLOCK

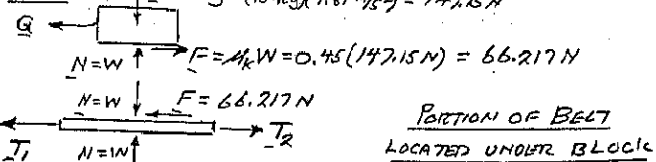

$$+\sum \Sigma F_x = 0: T_2 - T_1 - 66.217 \text{ N} = 0 \quad (1)$$



DRUM B:

$$\frac{T_2}{T_1} = e^{\mu_s \pi} = e^{0.3 \pi} = 2.5663$$

$$T_2 = 2.5663 T_1 \quad (2)$$

$$\text{EQ(1): } 2.5663 T_1 - T_1 - 66.217 \text{ N} = 0$$

$$1.5663 T_1 = 66.217 \text{ N}$$

EQ(2):


$$T_1 = 42.276 \text{ N}; \quad T_{\text{min}} = 42.3 \text{ N}$$

$$T_2 = 2.5663(42.276 \text{ N}) = 108.493 \text{ N}$$

$$+\sum \Sigma M_B = 0: M_B - (108.493 \text{ N})(0.075 \text{ m}) + (42.276 \text{ N})(0.075 \text{ m}) = 0$$

$$M_B = 4.97 \text{ N}\cdot\text{m}$$

8.130




GIVEN: $\mu_k = 0.25$

FIND: MAGNITUDE OF COUPLE APPLIED TO FLYWHEEL FOR CLOCKWISE ROTATION

SHOW THAT RESULT IS SAME FOR COUNTERCLOCKWISE ROTATION

FREE BODY: FLYWHEEL

FOR CLOCKWISE ROTATION OF FLYWHEEL T_2 AND T_1 ARE LOCATED AS SHOWN.




$$\beta = \frac{3}{4}(360^\circ) = \frac{3}{4}(2\pi) = \frac{3}{2}\pi \text{ radians}$$

$$\frac{T_2}{T_1} = e^{\mu_k \beta} = e^{0.25(\frac{3}{2}\pi)} = 3.2482$$

$$T_2 = 3.2482 T_1 \quad (1)$$

FREE BODY: HANDLE



$$+\sum M_C = 0 \quad (2)$$

$$(T_1 + T_2)(0.08 \text{ m}) - (100 \text{ N})(0.32 \text{ m}) = 0$$

$$(T_1 + 3.2482 T_1) = 400 \text{ N}$$

$$T_1 = (400 \text{ N}) / 4.2482 = 94.157 \text{ N}$$

$$T_2 = 3.2482(94.157 \text{ N}) = 305.842 \text{ N}$$

RETURN TO FREE BODY OF FLYWHEEL


$$+\sum M_E = 0: M + (T_1 - T_2)(0.15 \text{ m}) = 0$$

$$M + (94.157 \text{ N} - 305.842 \text{ N})(0.15 \text{ m}) = 0$$

$$M = 31.752 \text{ N}\cdot\text{m} \quad M = 31.8 \text{ N}\cdot\text{m}$$

IF ROTATION IS REVERSED (TO BE \curvearrowright) T_2 AND T_1 ARE INTERCHANGED; EQS. (1) AND (2) ARE NOT CHANGED, THUS VALUES OF T_1 , T_2 , AND M ARE THE SAME.

8.131



GIVEN: $\mu_k = 0.25$

FIND: MAGNITUDE OF COUPLE APPLIED TO DRUM FOR ROTATION

(a) COUNTERCLOCKWISE
(b) CLOCKWISE

(a) COUNTERCLOCKWISE ROTATION FREE BODY DRUM

$$r = 8 \text{ in.} \quad \beta = 180^\circ = \pi \text{ radians}$$

$$\frac{T_2}{T_1} = e^{\mu_k \beta} = e^{0.25\pi} = 2.1933$$

$$T_2 = 2.1933 T_1$$

FREE BODY: CONTROL BAR

$$+\sum M_C = 0$$

$$T_1(12 \text{ in.}) - T_2(4 \text{ in.}) - (25 \text{ lb})(28 \text{ in.}) = 0$$

$$T_1(12) - 2.1933 T_1(4) - 700 = 0$$

$$T_1 = 216.93 \text{ lb}$$

$$T_2 = 2.1933(216.93 \text{ lb}) = 475.80 \text{ lb}$$

(CONTINUED)

8.131 CONTINUED

RETURN TO FREE BODY OF DRUM

$$+\sum M_E = 0: M + T_1(8 \text{ in.}) - T_2(8 \text{ in.}) = 0$$

$$M + (216.96 \text{ lb})(8 \text{ in.}) - (475.80 \text{ lb})(8 \text{ in.}) = 0$$

$$M = 2070.9 \text{ lb}\cdot\text{in.}$$


$$M = 2070 \text{ lb}\cdot\text{in.}$$

(b) CLOCKWISE ROTATION


$$r = 8 \text{ in.} \quad \beta = \pi \text{ rad}$$

$$\frac{T_2}{T_1} = e^{\mu_k \beta} = e^{0.25\pi} = 2.1933$$

$$T_2 = 2.1933 T_1$$



FREE BODY: CONTROL ROD



$$+\sum M_D = 0$$

$$T_2(12 \text{ in.}) - T_1(4 \text{ in.}) - (25 \text{ lb})(28 \text{ in.}) = 0$$

$$2.1933 T_1(12) - T_1(4) - 700 = 0$$

$$T_1 = 31.363 \text{ lb}$$

$$T_2 = 2.1933(31.363 \text{ lb})$$

$$T_2 = 68.788 \text{ lb}$$

RETURN TO FREE BODY OF DRUM


$$+\sum M_E = 0: M + T_1(8 \text{ in.}) - T_2(8 \text{ in.}) = 0$$

$$M + (31.363 \text{ lb})(8 \text{ in.}) - (68.788 \text{ lb})(8 \text{ in.}) = 0$$


$$M = 299.4 \text{ lb}\cdot\text{in.}$$

$$M = 299 \text{ lb}\cdot\text{in.}$$

8.132



FIND: MAXIMUM μ_s FOR BRAKE TO BE SELF LOCKING FOR COUNTERCLOCKWISE ROTATION OF DRUM




$$r = 8 \text{ in.} \quad \beta = 180^\circ = \pi \text{ radians}$$

$$\frac{T_2}{T_1} = e^{\mu_s \beta} = e^{4.5\pi}$$

$$T_2 = e^{4.5\pi} T_1$$

FREE BODY: CONTROL ROD

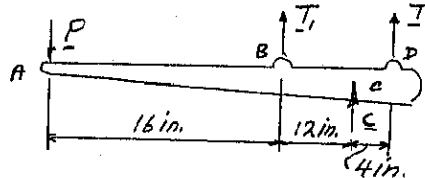

$$+\sum M_D = 0: P(28 \text{ in.}) - T_1(12 \text{ in.}) + T_2(4 \text{ in.}) = 0$$

$$28P - 12T_1 + e^{4.5\pi} T_1(4) = 0$$

FOR SELF-LOCKING BRAKE $P = 0$

$$12T_1 = 4T_1 e^{4.5\pi}$$


$$e^{4.5\pi} = 3$$

$$\mu_s \pi = \ln 3 = 1.0986$$


$$\mu_s = \frac{1.0986}{\pi} = 0.3497$$

$$\mu_s = 0.350$$

8.133




GIVEN: $\mu_s = 0.30$
 ROTATION \curvearrowright .
 FIND: MINIMUM
 VALUE OF a FOR
 WHICH BRAKE
 IS NOT SELF-
 LOCKING.



$r = 8 \text{ in.}, \beta = \pi \text{ radians}$
 $\frac{T_2}{T_1} = e^{\mu_s \beta} = e^{0.30\pi} = 2.5663$
 $T_2 = 2.5663 T_1$

FREE BODY: CONTROL ROD



$b = 16 \text{ in.} - a$


$\sum M_C = 0: P(16 \text{ in.} + b) - T_1 b + T_2 a = 0$
 FOR BRAKE TO BE SELF LOCKING, $P = 0$
 $T_2 a = T_1 b; 2.5663 T_1 a = T_1 (16 - a)$
 $2.5663 a = 16 - a$
 $3.5663 a = 16$
 $a = 4.49 \text{ in.}$

8.134 CONTINUED

(b) SMALLEST m TO START
 BLOCK MOVING UP

NO SLIPPING AT BOTH DRUM AND BLOCK $\mu_s = 0.35$
 EQ(1): $T_2 = mg e^{2(0.35)\pi/3} = 2.0814 mg$

BLOCK C:

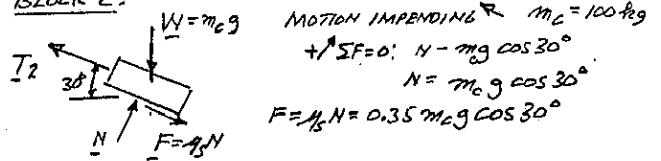


MOTION IMPENDING \curvearrowright $m_c = 100 \text{ kg}$
 $\sum F_x = 0: N - m_c g \cos 30^\circ = 0$
 $N = m_c g \cos 30^\circ$
 $F = \mu_s N = 0.35 m_c g \cos 30^\circ$
 $\sum F_y = 0: T_2 - F - m_c g \sin 30^\circ = 0$
 $2.0814 mg - 0.35 m_c g \cos 30^\circ - m_c g \sin 30^\circ = 0$
 $2.0814 m = 0.8031 m_c$
 $m = 0.38585 m_c = 0.38585 (100 \text{ kg})$
 $m = 38.6 \text{ kg}$

(c) SMALLEST m TO KEEP BLOCK MOVING UP

DRUM: NO SLIPPING $\mu_s = 0.35$


EQ(1) WITH $\mu_s = 0.35$
 $T_2 = mg e^{2(0.35)\pi/3} = 2.0814 mg$
 $T_2 = 2.0814 mg$

BLOCK C: MOVING UP PLANE, THUS $\mu_k = 0.25$

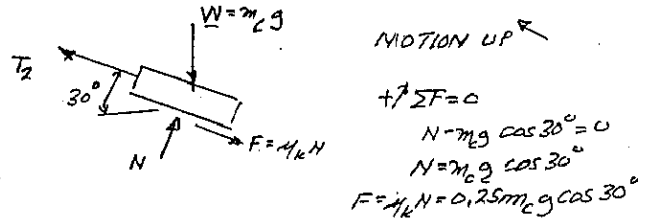


MOTION UP \curvearrowright
 $\sum F_x = 0: N - m_c g \cos 30^\circ = 0$
 $N = m_c g \cos 30^\circ$
 $F = \mu_k N = 0.25 m_c g \cos 30^\circ$
 $\sum F_y = 0: T_2 - F - m_c g \sin 30^\circ = 0$
 $2.0814 mg - 0.25 m_c g \cos 30^\circ - m_c g \sin 30^\circ = 0$
 $2.0814 m = 0.71651 m_c$
 $m = 0.34424 m_c = 0.34424 (100 \text{ kg})$
 $m = 34.4 \text{ kg}$

8.134



GIVEN: $\mu_s = 0.35$
 $\mu_k = 0.25$
 FIND: SMALLEST m
 FOR WHICH BLOCK C
 (A) REMAINS AT REST, (B) STARTS
 MOVING UP, (C) CONTINUES MOVING UP.

ROTATION



FREE BODY: DRUM


$\beta = 120^\circ = \frac{2}{3}\pi \text{ rad.}$
 $\frac{T_2}{T_1} = e^{\mu_s \beta} = e^{0.35 \cdot \frac{2}{3}\pi}$
 $\frac{T_2}{mg} = e^{2.47773}$
 $T_2 = mg e^{2.47773} \quad (1)$

(a) SMALLEST m FOR BLOCK C TO REMAIN AT REST

CABLE SLIPS ON DRUM

EQ(1) WITH $\mu_k = 0.25$; $T_2 = mg e^{2(0.25)\pi/3} = 1.6881 mg$


BLOCK C: AT REST, MOTION IMPENDING \curvearrowright

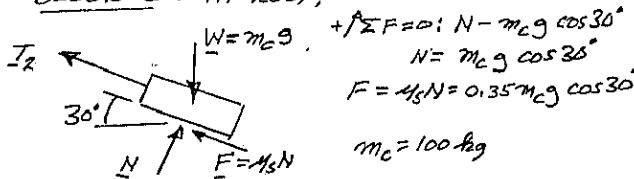

$\sum F_x = 0: T_2 + F - m_c g \sin 30^\circ = 0$
 $1.6881 mg + 0.35 m_c g \cos 30^\circ - m_c g \sin 30^\circ = 0$
 $1.6881 m = 0.19689 m_c$
 $m = 0.11683 m_c = 0.11683 (100 \text{ kg}); m = 11.66 \text{ kg}$

(CONTINUED)


8.135



GIVEN: DRUM B IS FIXED,
 $\mu_s = 0.35$
 $\mu_k = 0.25$

FIND: SMALLEST m FOR WHICH BLOCK C (a) REMAINS AT REST, (b) STARTS MOVING UP, (c) CONTINUES MOVING UP.


(a) BLOCK C REMAINS AT REST, MOTION IMPENDS

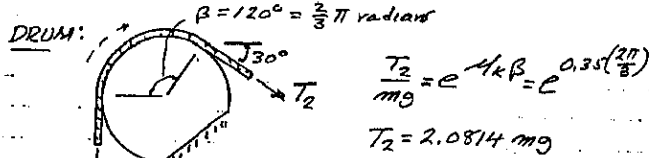

$$\frac{T_2}{m_0} = e^{\mu_k \beta} = e^{0.25(\frac{2\pi}{3})}$$

$$T_2 = 2.0814 m_0 g$$

BLOCK C



MOTION IMPENDS

$$\uparrow \Sigma F = 0: N - m_c g \cos 30^\circ = 0$$

$$N = m_c g \cos 30^\circ$$

$$F = \mu_s N = 0.35 m_c g \cos 30^\circ$$

$$\uparrow \Sigma F = 0: T_2 + F - m_c g \sin 30^\circ = 0$$


$$2.0814 m_0 g + 0.35 m_c g \cos 30^\circ - m_c g \sin 30^\circ = 0$$

$$2.0814 m_0 g = 0.19689 m_c$$

$$m = 0.09459 m_c = 0.09459 (100 \text{ kg})$$

$$m = 9.46 \text{ kg}$$

(b) BLOCK C STARTS MOVING UP

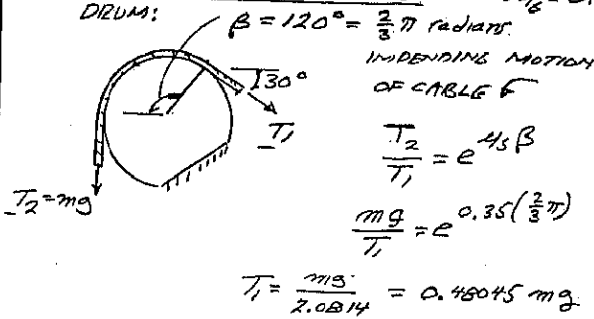

IMENDING MOTION OF CABLE F


$$\frac{T_2}{T_1} = e^{\mu_k \beta}$$

$$\frac{m_0 g}{T_1} = e^{0.35(\frac{2\pi}{3})}$$

$$T_1 = \frac{m_0 g}{2.0814} = 0.48045 m_0 g$$

BLOCK C

MOTION IMPENDS



$$\uparrow \Sigma F = 0: T_1 - F - m_c g \sin 30^\circ = 0$$

$$0.48045 m_0 g - 0.35 m_c g \cos 30^\circ - 0.5 m_c g = 0$$

$$0.48045 m_0 = 0.80311 m_c$$

$$m = 1.67158 m_c = 1.67158 (100 \text{ kg})$$


$$m = 167.2 \text{ kg}$$

(CONTINUED)

8.135 CONTINUED

(c) SMALLEST m TO KEEP BLOCK MOVING

DRUM: MOTION OF CABLE $\mu_k = 0.25$
 $\beta = 120^\circ = \frac{2}{3}\pi$ radians




$$\frac{T_2}{T_1} = e^{\mu_k \beta} = e^{0.25(\frac{2\pi}{3})}$$

$$\frac{m_0 g}{T_1} = 1.6881$$

$$T = \frac{m_0 g}{1.6881} = 0.59238 m_0 g$$

BLOCK C: BLOCK MOVES



$$\uparrow \Sigma F = 0: N - m_c g \cos 30^\circ = 0$$

$$N = m_c g \cos 30^\circ$$

$$F = \mu_k N = 0.25 m_c g \cos 30^\circ$$

$$\uparrow \Sigma F = 0: T_1 - F - m_c g \sin 30^\circ = 0$$


$$0.59238 m_0 g - 0.25 m_c g \cos 30^\circ - 0.5 m_c g = 0$$

$$0.59238 m_0 = 0.71651 m_c$$

$$m = 1.20954 m_c = 1.20954 (100 \text{ kg})$$

$$m = 121.0 \text{ kg}$$

8.136




GIVEN: $\mu_s = 0.25$
 $\mu_k = 0.20$

FIND: (a) SMALLEST W FOR EQUILIBRIUM
 (b) LARGEST W THAT CAN BE RAISED IF PIPE B IS ROTATED WITH A+C FIXED.

$$\frac{T_2}{T_1} = e^{\mu \beta}$$

(a) $\mu = \mu_s = 0.25$ AT ALL PIPES

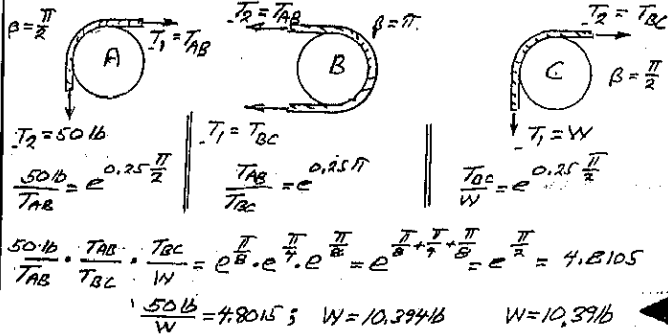


$$\frac{50 \text{ lb}}{T_{AB}} = e^{0.25 \frac{\pi}{2}} \quad \frac{T_{AB}}{T_{BC}} = e^{0.25 \pi} \quad \frac{T_{BC}}{W} = e^{0.25 \frac{\pi}{2}}$$

$$\frac{50 \text{ lb}}{T_{AB}} \cdot \frac{T_{AB}}{T_{BC}} \cdot \frac{T_{BC}}{W} = e^{\frac{\pi}{2}} \cdot e^{\frac{\pi}{2}} \cdot e^{\frac{\pi}{2}} = e^{\frac{3\pi}{2}} = 4.8105$$

$$\frac{50 \text{ lb}}{W} = 4.8105; W = 10.3946 \text{ lb}$$

(b) PIPE B ROTATED

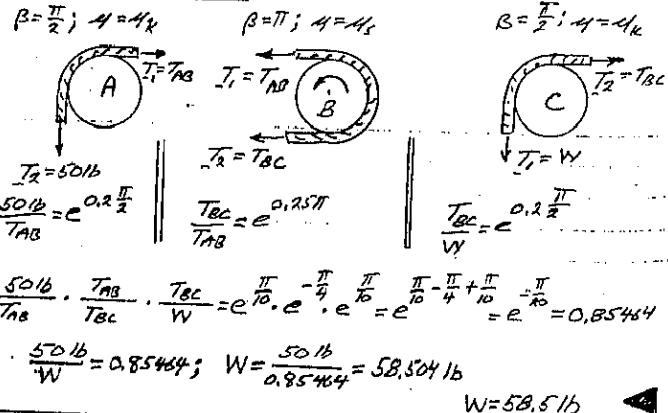


$$\frac{50 \text{ lb}}{T_{AB}} = e^{0.2 \frac{\pi}{2}} \quad \frac{T_{BC}}{T_{AB}} = e^{0.25 \pi} \quad \frac{T_{BC}}{W} = e^{0.2 \frac{\pi}{2}}$$

$$\frac{50 \text{ lb}}{T_{AB}} \cdot \frac{T_{AB}}{T_{BC}} \cdot \frac{T_{BC}}{W} = e^{\frac{\pi}{10}} \cdot e^{\frac{\pi}{2}} \cdot e^{\frac{\pi}{10}} = e^{\frac{3\pi}{5}} = 0.85444$$

$$\frac{50 \text{ lb}}{W} = 0.85444; W = \frac{50 \text{ lb}}{0.85444} = 58.5041 \text{ lb}$$

8.137




GIVEN: $\mu_s = 0.25$
 $\mu_k = 0.20$
 FIND: LARGEST WEIGHT W THAT CAN BE RAISED IF ONLY
 (a) PIPE A IS ROTATED
 (b) PIPE C IS ROTATED

$\frac{T_2}{T_1} = e^{\mu \theta}$

(a) PIPE A ROTATES

$\beta = \frac{\pi}{2}; \mu = \mu_s$ $\beta = \pi; \mu = \mu_k$ $\beta = \frac{\pi}{2}; \mu = \mu_k$

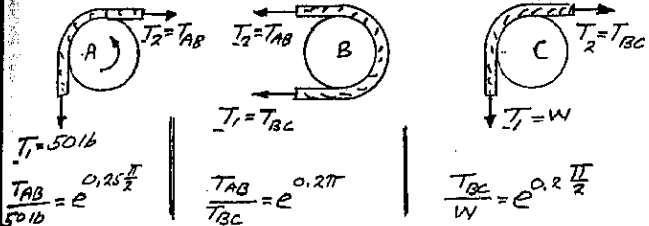


$\frac{T_{AB}}{50 lb} = e^{0.25 \frac{\pi}{2}}$ $\frac{T_{AB}}{T_{BC}} = e^{0.2 \pi}$ $\frac{T_{BC}}{W} = e^{0.2 \frac{\pi}{2}}$

$\frac{T_{AB}}{50 lb} \cdot \frac{T_{BC}}{T_{AB}} \cdot \frac{W}{T_{BC}} = e^{\frac{\pi}{4}} \cdot e^{-\frac{\pi}{5}} \cdot e^{-\frac{\pi}{10}} = e^{\pi(\frac{1}{4} - \frac{1}{5} - \frac{1}{10})} = e^{-\frac{\pi}{20}} = 0.57708$

$\frac{W}{50 lb} = 0.57708; W = 28.854 lb; W = 28.9 lb$

(b) PIPE C ROTATES

$\beta = \frac{\pi}{2}; \mu = \mu_k$ $\beta = \pi; \mu = \mu_k$ $\beta = \frac{\pi}{2}; \mu = \mu_s$

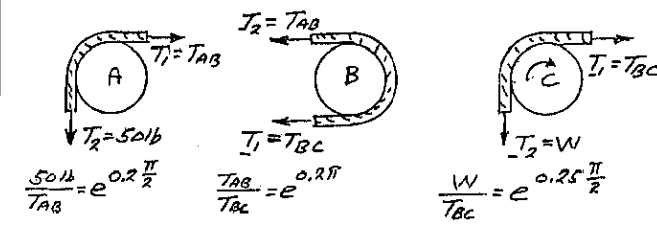


$\frac{50 lb}{T_{AB}} = e^{0.2 \frac{\pi}{2}}$ $\frac{T_{AB}}{T_{BC}} = e^{0.2 \pi}$ $\frac{W}{T_{BC}} = e^{0.25 \frac{\pi}{2}}$

$\frac{50 lb}{T_{AB}} \cdot \frac{T_{AB}}{T_{BC}} \cdot \frac{T_{BC}}{W} = e^{\frac{\pi}{10}} \cdot e^{\frac{\pi}{5}} \cdot e^{-\frac{\pi}{8}} = e^{\frac{2\pi}{40}} = 0.57708$

$\frac{50 lb}{W} = 0.57708; W = 28.854 lb; W = 28.9 lb$

8.138 CONTINUED

(b)

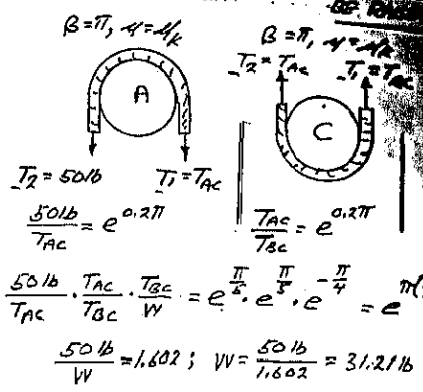


$\frac{50 lb}{T_{AC}} = e^{0.2 \pi}$ $\frac{T_{AC}}{T_{BC}} = e^{0.2 \pi}$ $\frac{T_{BC}}{W} = e^{0.2 \frac{\pi}{2}}$

$\frac{50 lb}{T_{AC}} \cdot \frac{T_{AC}}{T_{BC}} \cdot \frac{T_{BC}}{W} = e^{\frac{\pi}{5}} \cdot e^{\frac{\pi}{5}} \cdot e^{-\frac{\pi}{4}} = e^{\pi(\frac{1}{5} + \frac{1}{5} - \frac{1}{4})} = e^{\frac{3\pi}{20}}$

$\frac{50 lb}{W} = 1.602; W = \frac{50 lb}{1.602} = 31.21 lb$


8.139



GIVEN: $\mu_s = 0.25$
 $\mu_k = 0.20$
 FIND: LARGEST WEIGHT W THAT CAN BE RAISED IF ONLY
 (a) PIPE A IS ROTATED
 (b) PIPE C IS ROTATED

(a) PIPE A ROTATES

$\beta = \pi; \mu = \mu_s$ $\beta = \pi; \mu = \mu_k$ $\beta = \pi; \mu = \mu_k$

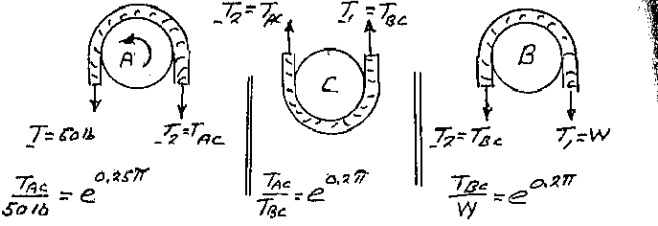


$\frac{T_{AC}}{50 lb} = e^{0.25 \pi}$ $\frac{T_{AC}}{T_{BC}} = e^{0.2 \pi}$ $\frac{T_{BC}}{W} = e^{0.2 \pi}$

$\frac{T_{AC}}{50 lb} \cdot \frac{T_{BC}}{T_{AC}} \cdot \frac{W}{T_{BC}} = e^{\frac{\pi}{4}} \cdot e^{-\frac{\pi}{5}} \cdot e^{-\frac{\pi}{5}} = e^{\pi(\frac{1}{4} - \frac{1}{5} - \frac{1}{5})} = e^{-\frac{3\pi}{20}} = 0.62423$

$\frac{W}{50 lb} = 0.62423; W = 31.21 lb; W = 31.2 lb$

(b) PIPE C ROTATES

$\beta = \pi; \mu = \mu_k$ $\beta = \pi; \mu = \mu_s$ $\beta = \pi; \mu = \mu_k$

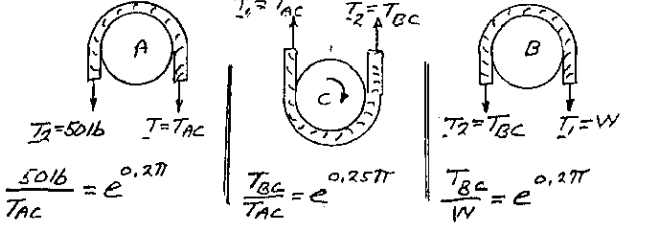

$\frac{50 lb}{T_{AC}} = e^{0.2 \pi}$ $\frac{T_{AC}}{T_{BC}} = e^{0.25 \pi}$ $\frac{T_{BC}}{W} = e^{0.2 \pi}$


$\frac{50 lb}{T_{AC}} \cdot \frac{T_{AC}}{T_{BC}} \cdot \frac{T_{BC}}{W} = e^{\frac{\pi}{5}} \cdot e^{\frac{\pi}{4}} \cdot e^{\frac{\pi}{5}} = e^{\pi(\frac{1}{5} + \frac{1}{4} + \frac{1}{5})} = e^{\frac{3\pi}{20}}$

$\frac{50 lb}{W} = e^{\frac{3\pi}{20}} = 1.602$

$W = \frac{50 lb}{1.602} = 31.21 lb$


$W = 31.2 lb$

8.138



GIVEN: $\mu_s = 0.25$,
 $\mu_k = 0.20$.
 FIND: (a) SMALLEST WEIGHT W FOR EQUILIBRIUM,
 (b) LARGEST W WHICH CAN BE RAISED IF PIPE B IS ROTATED WHILE A AND C ARE FIXED.

(a) SMALLEST W FOR EQUILIBRIUM; $\beta = \pi, \mu = \mu_s$

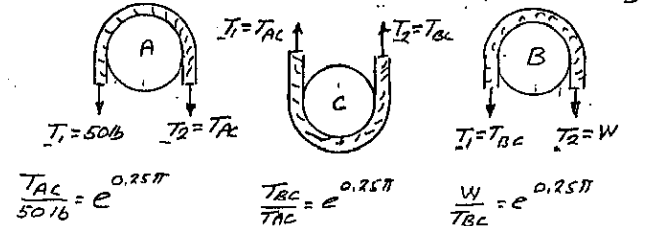


$\frac{T_{AC}}{50 lb} = e^{0.25 \pi}$ $\frac{T_{BC}}{T_{AC}} = e^{0.25 \pi}$ $\frac{W}{T_{BC}} = e^{0.25 \pi}$

$\frac{T_{AC}}{50 lb} \cdot \frac{T_{BC}}{T_{AC}} \cdot \frac{W}{T_{BC}} = e^{\frac{\pi}{4}} \cdot e^{\frac{\pi}{4}} \cdot e^{\frac{\pi}{4}} = e^{\frac{3\pi}{4}} = 10.551$

$W/50 lb = 10.551; W = 4.739 lb; W = 4.74 lb$

(CONTINUED)

8.140

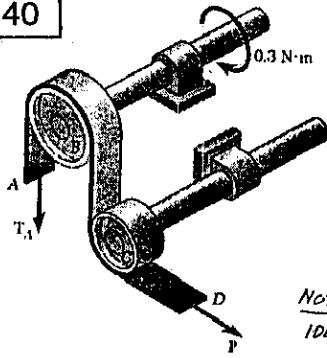


GIVEN: $\mu_s = 0.40$, $\mu_k = 0.30$
DRUM B, $r = 20 \text{ mm}$


FIND: SMALLEST P
IF SLIPPING IS NOT
TO OCCUR ON DRUM B.

NOTE: DRUM C IS AN
IDLER WITH NO FRICTION

DRUM C: IDLER



DRUM B

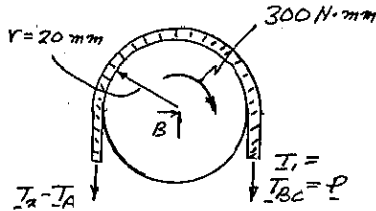

FOR SLIPPING IMPENDING:

$$\mu = \mu_s = 0.40$$


$$\beta = \pi \text{ radians}$$

$$\frac{T_2}{T_1} = e^{\mu\beta} : \frac{T_A}{P} = e^{0.4\pi} = 3.5136$$

$$T_A = 3.5136 P$$

$$\begin{aligned} \uparrow \Sigma M_B = 0: & T_A(20 \text{ mm}) - P(20 \text{ mm}) - 300 \text{ N}\cdot\text{mm} = 0 \\ & (3.5136 P - P)(20 \text{ mm}) = 300 \text{ N}\cdot\text{mm} \\ & 2.5136 P = 15 \text{ N} \\ & P = 5.967 \text{ N} \end{aligned}$$


8.142



GIVEN: $\mu_s = 0.30$
 M_0 ACTS \curvearrowright

FIND: (a) M_0 FOR
WHICH SLIPPING
IMPENOS,
(b) FORCE E EXERTED
ON BAR ACE

$$\beta = \pi \text{ rad.}$$




DRUM: SLIPPING IMPENDING

$$\mu_s = 0.30$$

$$\frac{T_2}{T_1} = e^{\mu\beta} : \frac{T_D}{T_B} = e^{0.30\pi} = 2.5663$$

$$T_D = 2.5663 T_B$$




BAR ACE:

$$\begin{aligned} \uparrow \Sigma F_y = 0: & T_B + T_D - E - 10 \text{ lb} = 0 \\ & T_B + 2.5663 T_B - E - 10 \text{ lb} = 0 \\ & 3.5663 T_B - E - 10 \text{ lb} = 0 \\ & E = 3.5663 T_B - 10 \text{ lb} \quad (1) \end{aligned}$$

$$\begin{aligned} \uparrow \Sigma M_D = 0: & E(3 \text{ in.}) - (10 \text{ lb})(5 \text{ in.}) + T_B(10 \text{ in.}) = 0 \\ & (3.5663 T_B - 10 \text{ lb})(3 \text{ in.}) - 50 \text{ lb}\cdot\text{in.} + T_B(10 \text{ in.}) = 0 \\ & 20.899 T_B = 80 \quad T_B = 3.8649 \text{ lb} \end{aligned}$$


$$\text{EQ. (1): } E = 3.5663(3.8649 \text{ lb}) - 10 \text{ lb}; \quad E = 3.78 \text{ lb} \downarrow$$



FREE BODY: DRUM AND BAR

$$\begin{aligned} \uparrow \Sigma M_C = 0: & M_0 - E(8 \text{ in.}) = 0 \\ & M_0 = (3.78 \text{ lb})(8 \text{ in.}) = 30.27 \text{ lb}\cdot\text{in.} \\ & M_0 = 30.3 \text{ lb}\cdot\text{in.} \end{aligned}$$

8.141

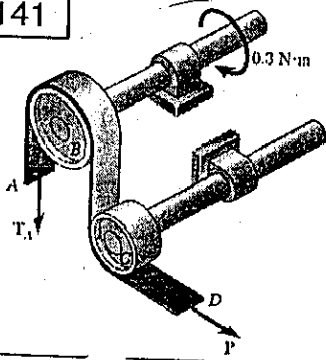


GIVEN: $\mu_s = 0.40$, $\mu_k = 0.30$
DRUM B, $r = 20 \text{ mm}$
DRUM C IS FROZEN
AND CANNOT ROTATE

FIND: SMALLEST P
IF SLIPPING IS NOT
TO OCCUR ON DRUM B.


$$\frac{T_2}{T_1} = e^{\mu\beta}$$

DRUM C: $\beta = \frac{\pi}{2}$
SLIPPING OCCURS
 $\mu = \mu_k = 0.30$



$$\begin{aligned} \frac{P}{T_{BC}} &= e^{0.3(\frac{\pi}{2})} \\ T_{BC} &= 1.602 P \\ P &= 1.602 T_{BC} \quad (1) \end{aligned}$$

DRUM B: $\beta = \pi$, $\mu = \mu_s = 0.40$



$$\begin{aligned} \frac{T_2}{T_1} = e^{\mu\beta} : \frac{T_A}{T_{BC}} &= e^{0.4\pi} = 3.5136 \\ T_A &= 3.5136 T_{BC} \quad (2) \end{aligned}$$

$$\uparrow \Sigma M_B = 0:$$


$$\begin{aligned} T_A(20 \text{ mm}) - T_{BC}(20 \text{ mm}) - 300 \text{ N}\cdot\text{mm} &= 0 \\ \text{SUBSTITUTE FOR } T_A \text{ FROM EQ. (2):} & \\ (3.5136 T_{BC} - T_{BC})(20 \text{ mm}) &= 300 \text{ N}\cdot\text{mm} \\ T_{BC} &= 5.967 \text{ N} \end{aligned}$$

$$\text{EQ. (1): } P = 1.602 T_{BC} = 1.602(5.967 \text{ N})$$

$$P = 9.559 \text{ N}$$

$$P = 9.56 \text{ N}$$


8.143



GIVEN: $\mu_s = 0.30$
 M_0 ACTS \curvearrowright

FIND: (a) M_0 FOR
WHICH SLIPPING
IMPENOS,
(b) FORCE E
EXERTED ON BAR ACE.

$$\beta = \pi \text{ rad.}$$




DRUM: SLIPPING IMPENDING

$$\mu_s = 0.30$$

$$\frac{T_2}{T_1} = e^{\mu\beta} : \frac{T_D}{T_B} = e^{0.30\pi} = 2.5663$$

$$T_D = 2.5663 T_B$$




BAR ACE

$$\begin{aligned} \uparrow \Sigma F_y = 0: & T_B + T_D + E - 10 \text{ lb} = 0 \\ & 2.5663 T_B + T_B + E - 10 \text{ lb} \\ & E = -3.5663 T_B + 10 \text{ lb} \quad (1) \end{aligned}$$


$$\begin{aligned} \uparrow \Sigma M_D = 0: & T_B(10 \text{ in.}) - (10 \text{ lb})(5 \text{ in.}) + E(3 \text{ in.}) = 0 \\ & T_B(10 \text{ in.}) - 50 \text{ lb}\cdot\text{in.} + (-3.5663 T_B + 10 \text{ lb})(3 \text{ in.}) = 0 \\ & -36.362 T_B + 80 \text{ lb}\cdot\text{in.} = 0; \quad T_B = 2.200 \text{ lb} \end{aligned}$$

$$\text{EQ. (1): } E = -3.5663(2.200 \text{ lb}) + 10 \text{ lb}; \quad E = 2.15 \text{ lb} \uparrow$$



FREE BODY: DRUM AND BAR


$$\begin{aligned} \uparrow \Sigma M_C = 0: & M_0 - E(8 \text{ in.}) = 0 \\ & M_0 = (2.15 \text{ lb})(8 \text{ in.}) \\ & M_0 = 17.23 \text{ lb}\cdot\text{in.} \end{aligned}$$

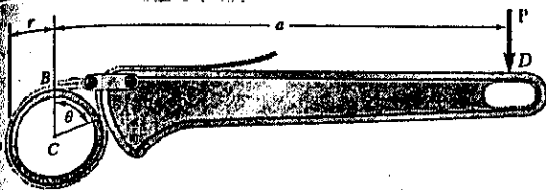

GIVEN: $a = 200 \text{ mm}$, $r = 30 \text{ mm}$.
 ASSUME VALUE OF μ_s IS THE SAME AT ALL SURFACES OF CONTACT
FIND: SMALLEST VALUE OF μ_s FOR WHICH THE WRENCH IS SELF-LOCKING IF IN
PROB. 8.144 $\theta = 65^\circ$
PROB. 8.145 $\theta = 75^\circ$

FOR WRENCH TO BE SELF-LOCKING ($P=0$), THE VALUE OF μ_s MUST PREVENT SLIPPING OF STRAP WHICH IS IN CONTACT WITH THE PIPE FROM POINT A TO POINT B AND MUST BE LARGE ENOUGH SO THAT AT POINT A THE STRAP TENSION CAN INCREASE FROM ZERO TO THE MINIMUM TENSION REQUIRED TO DEVELOP "BELT FRICTION" BETWEEN STRAP AND PIPE.

FREE BODY: WRENCH HANDLE

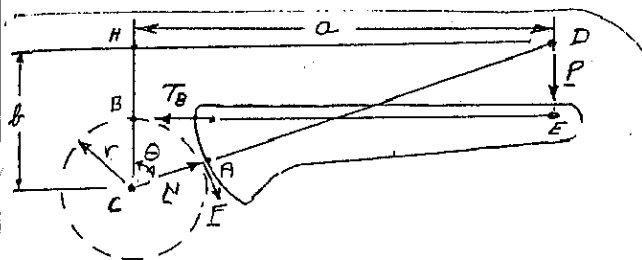


GEOMETRY IN ΔCDH : $CH = a / \tan \theta$, $CD = a / \sin \theta$
 $DE = BH = CH - BC$
 $DE = \frac{a}{\tan \theta} - r$
 $AD = CD - CA = \frac{a}{\sin \theta} - r$

ON WRENCH HANDLE

$$+\uparrow \sum M_D = 0: T_B(DE) - F(AD) = 0$$

$$\frac{T_B}{F} = \frac{AD}{DE} = \frac{\frac{a}{\sin \theta} - r}{\frac{a}{\tan \theta} - r} \quad (1)$$

FREE BODY: STRAP AT POINT A

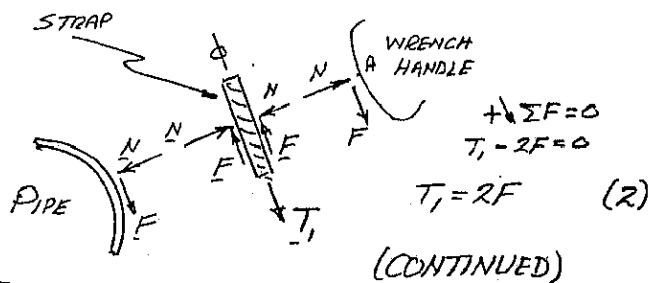


$$+\rightarrow \sum F = 0$$

$$T_1 - 2F = 0$$

$$T_1 = 2F \quad (2)$$

(CONTINUED)

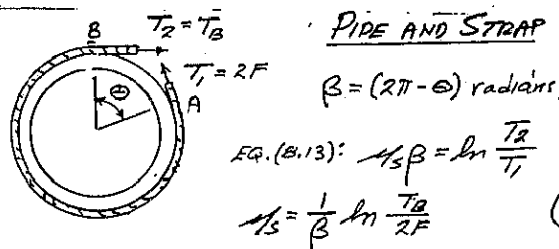

PIPE AND STRAP

$$\beta = (2\pi - \theta) \text{ radians}$$

$$\text{EQ. (8.13): } \mu_s \beta = \ln \frac{T_2}{T_1}$$

$$\mu_s = \frac{1}{\beta} \ln \frac{T_2}{2F} \quad (3)$$

RETURN TO FREE BODY OF WRENCH HANDLE

$$+\downarrow \sum F_y = 0: N \sin \theta + F \cos \theta - T_B = 0$$

$$\frac{N}{F} \sin \theta = \frac{T_B}{F} - \cos \theta$$

SINCE $F = \mu_s N$, WE HAVE

$$\frac{1}{\mu_s} \sin \theta = \frac{T_B}{F} - \cos \theta$$

$$\mu_s = \frac{\sin \theta}{\frac{T_B}{F} - \cos \theta} \quad (4)$$

NOTE: FOR A GIVEN SET OF DATA, WE SEEK THE LARGER OF THE VALUES OF μ_s FROM EQS. (3) AND (4)

PROB. 8.144: $a = 200 \text{ mm}$, $r = 30 \text{ mm}$, $\theta = 65^\circ$

$$\text{EQ. (1): } \frac{T_B}{F} = \frac{200 \text{ mm} - 30 \text{ mm}}{\tan 65^\circ} = \frac{170.676 \text{ mm}}{2.1445} = 3.0141$$

$$\beta = 2\pi - \theta = 2\pi - 65^\circ \frac{\pi}{180^\circ} = 5.1487 \text{ radians}$$

$$\text{EQ. (3): } \mu_s = \frac{1}{5.1487 \text{ rad}} \ln \frac{3.0141}{2} = \frac{0.41015}{5.1487} = 0.0797 \quad \triangleleft$$

$$\text{EQ. (4): } \mu_s = \frac{\sin 65^\circ}{3.0141 - \cos 65^\circ} = \frac{0.90631}{2.1575} = 0.3497 \quad \triangleleft$$

WE CHOOSE THE LARGER VALUE: $\mu_s = 0.350 \quad \blacktriangleleft$

PROB. 8.145: $a = 200 \text{ mm}$, $r = 30 \text{ mm}$, $\theta = 75^\circ$

$$\text{EQ. (1): } \frac{T_B}{F} = \frac{200 \text{ mm} - 30 \text{ mm}}{\tan 75^\circ} = \frac{170.055 \text{ mm}}{2.3028} = 7.5056$$


$$\beta = 2\pi - \theta = 2\pi - 75^\circ \frac{\pi}{180^\circ} = 4.9742$$

$$\text{EQ. (3): } \mu_s = \frac{1}{4.9742 \text{ rad}} \ln \frac{7.5056}{2} = \frac{1.3225}{4.9742} = 0.2659 \quad \triangleleft$$


$$\text{EQ. (4): } \mu_s = \frac{\sin 75^\circ}{7.5056 - \cos 75^\circ} = \frac{0.96753}{7.2462} = 0.1333 \quad \triangleleft$$

WE CHOOSE THE LARGER VALUE: $\mu_s = 0.266 \quad \blacktriangleleft$

8.146



PROVE THAT
EQS. (8.13) AND (8.14)
ARE VALID FOR
ANY SHAPE SURFACE

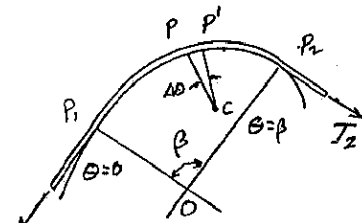

NOTE β IS THE
ANGLE BETWEEN
BOTH TANGENTS
AT P_1 AND
NORMALS AT P_1 AND P_2 .

NEXT, NOTE THAT THE
DERIVATION OF

$$\frac{dT}{T} = \mu_s d\theta \quad (1)$$


ON PAGES 436 AND 437
DID NOT DEPEND ON
THE RADIUS OF CURVATURE
BEING CONSTANT. THEREFORE
THIS EQUATION MAY BE OBTAINED
FROM THE FREE-BODY DIAGRAM
SHOWN HERE.

INTEGRATING EQ.(1) IN θ FROM 0 TO β AND IN
 T FROM T_1 TO T_2 , WE OBTAIN AGAIN

$$\ln \frac{T_2}{T_1} = \mu_s \beta \quad \text{AND} \quad \frac{T_2}{T_1} = e^{\mu_s \beta}$$

8.147

COMPLETE DERIVATION OF EQ. 8.15

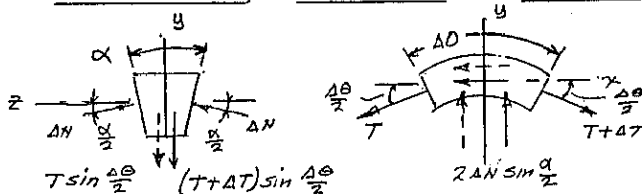

$$\pm \sum F_x = 0: (T + \Delta T) \cos \frac{\Delta\theta}{2} - T \cos \frac{\Delta\theta}{2} - 2\mu_s \Delta N = 0 \quad (1)$$

$$\uparrow \sum F_y = 0: 2\Delta N \sin \frac{\alpha}{2} - (T + \Delta T) \sin \frac{\Delta\theta}{2} - T \sin \frac{\Delta\theta}{2} = 0 \quad (2)$$

SOLVE (1) FOR ΔN AND SUBSTITUTE IN (2):

$$\Delta T \cos \frac{\Delta\theta}{2} \sin \frac{\alpha}{2} - \mu_s (2T + \Delta T) \sin \frac{\Delta\theta}{2} = 0$$

DIVIDE ALL TERMS BY $\Delta\theta$:

$$\frac{\Delta T}{\Delta\theta} \cos \frac{\Delta\theta}{2} \sin \frac{\alpha}{2} - \mu_s (T + \frac{\Delta T}{2}) \frac{\sin \frac{\Delta\theta}{2}}{\frac{\Delta\theta}{2}} = 0$$

LET $\Delta\theta$ APPROACH ZERO


$$\frac{dT}{d\theta} \sin \frac{\alpha}{2} - \mu_s T = 0$$

$$\frac{dT}{T} = \frac{\mu_s}{\sin \frac{\alpha}{2}} d\theta$$

INTEGRATE IN θ FROM 0 TO β AND IN T FROM
 T_1 TO T_2 :

$$\ln \frac{T_2}{T_1} = \frac{\mu_s \beta}{\sin \frac{\alpha}{2}} \quad \text{OR} \quad \frac{T_2}{T_1} = e^{\frac{\mu_s \beta}{\sin \frac{\alpha}{2}}}$$

8.148

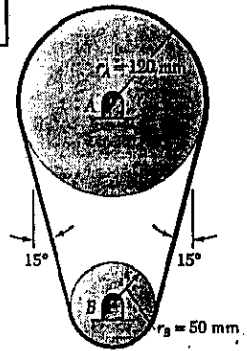

GIVEN: $\mu_s = 0.40$
 $T_{max} = 450 \text{ N}$
V-BELT WITH $\alpha = 36^\circ$

FIND: LARGEST COUPLE
THAT CAN BE
EXERTED ON PULLEY A

SINCE β IS SMALLER FOR PULLEY B, THE BELT
WILL SLIP FIRST AT B.

$$I_2 = T_{max} = 450 \text{ N}$$


$$\beta = 15^\circ \left(\frac{\pi \text{ rad}}{180^\circ} \right) = \frac{5}{8} \pi \text{ rad}$$

$$\frac{T_2}{T_1} = e^{\mu_s \beta / \sin \frac{\alpha}{2}}$$

$$\frac{450 \text{ N}}{T_1} = e^{(0.4) \left(\frac{5}{8} \pi \right) / \sin 18^\circ} = e^{3.397}$$

$$\frac{450 \text{ N}}{T_1} = 29.63; \quad T_1 = 15.187 \text{ N}$$

TORQUE ON PULLEY A



$$+\sum M_B = 0$$


$$M - (T_{max} - T_1)(0.12 \text{ m}) = 0$$

$$M - (450 \text{ N} - 15.187 \text{ N})(0.12 \text{ m}) = 0$$


$$M = 52.18 \text{ N}\cdot\text{m}$$

$$M = 52.2 \text{ N}\cdot\text{m}$$

8.149

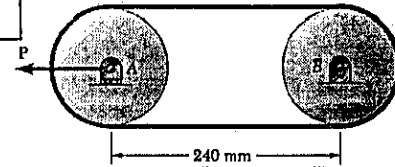

GIVEN: 60-mm-RADIUS V-BELT PULLEYS WITH $\alpha = 36^\circ$
 $P = 900 \text{ N}$, $\mu_s = 0.35$
FIND: LARGEST TORQUE WHICH CAN BE TRANSMITTED,
MAXIMUM TENSION IN V-BELT

PULLEY A: $\beta = \pi \text{ rad}$ 

$$\frac{T_2}{T_1} = e^{\mu_s \beta / \sin \frac{\alpha}{2}}$$

$$\frac{T_2}{T_1} = e^{0.35 \pi / \sin 18^\circ}$$

$$\frac{T_2}{T_1} = e^{3.558} = 35.1$$

$$T_2 = 35.1 T_1$$

$$\pm \sum F_x = 0: T_1 + T_2 + 900 \text{ N} = 0$$

$$T_1 + 35.1 T_1 - 900 \text{ N} = 0$$

$$T_1 = 24.93 \text{ N}; \quad T_2 = 35.1(24.93 \text{ N}) = 875.03 \text{ N}$$

$$+\sum M_A = 0: M - T_2(0.06 \text{ m}) + T_1(0.06 \text{ m}) = 0$$


$$M - (875.03 \text{ N})(0.06 \text{ m}) + (24.93 \text{ N})(0.06 \text{ m}) = 0$$

$$M = 51.0 \text{ N}\cdot\text{m}$$

$$T_{max} = T_2$$

$$T_{max} = 875 \text{ N}$$

50





GIVEN: $m_A = 12 \text{ kg}$, $m_B = 6 \text{ kg}$
 $\mu_s = 0.12$

FIND: SMALLEST VALUE OF P FOR EQUILIBRIUM

NOTE: PULLEY CAN FREELY ROTATE

IMPENDING MOTION: BLOCK A ↓ BLOCK B ↑
 FREE-BODY DIAGRAMS




$\sum F_y = 0: T_A + 2F_A - W_A = 0$
 $T_A + 2\mu_s N - m_A g = 0$
 $T_A = m_A g - 2\mu_s N$

$\sum F_y = 0: T_B - F_B - W_B = 0$
 $T_B - \mu_s N - m_B g = 0$
 $T_B = m_B g + \mu_s N$

NOT $T_A = T_B$: $m_A g - 2\mu_s N = m_B g + \mu_s N$
 $(m_A - m_B)g = 3\mu_s N$
 $(12 \text{ kg} - 6 \text{ kg})g = 3(0.12)N$

$N = \frac{6g}{0.36} = 16.667g = 16.667(9.81 \text{ m/s}^2) = 163.5 \text{ N}$
 SINCE $P = N$, WE HAVE $P = 163.5 \text{ N}$



8.151



GIVEN: $m_A = 12 \text{ kg}$, $m_B = 6 \text{ kg}$
 ROTATION OF PULLEY IS PREVENTED.
 $\mu_s = 0.12$ AT ALL SURFACES AND BETWEEN CABLE AND PULLEY

FIND: SMALLEST VALUE OF P FOR EQUILIBRIUM

FREE-BODY DIAGRAMS



$\sum F_y = 0: T_A + 2F_A - W_A = 0$
 $T_A + 2\mu_s N - m_A g = 0$
 $T_A = m_A g - 2\mu_s N$

$\sum F_y = 0: T_B - F_B - W_B = 0$
 $T_B - \mu_s N - m_B g = 0$
 $T_B = m_B g + \mu_s N$

FIXED PULLEY: $\beta = \pi$

IMPENDING MOTION ↓

$\frac{T_2}{T_1} = e^{\mu_s \beta}$; $\frac{T_A}{T_B} = e^{0.12\pi} = 1.4579$

$T_2 = T_A$



$T_A = 1.4579 T_B$

SUBSTITUTE FOR T_A AND T_B

$(m_A g - 2\mu_s N) = 1.4579(m_B g + \mu_s N)$

$(m_A - 1.4579 m_B)g = 3.4579 \mu_s N$

$[12 \text{ kg} - 1.4579(6 \text{ kg})]9.81 \text{ m/s}^2 = 3.4579(0.12)N$

$N = 76.998 \text{ N}$

SINCE $P = N$, WE HAVE


$P = 76.9 \text{ N}$

8.152



GIVEN: $\mu_s = 0.90$,
 12-in.-RADIUS WHEELS,
 60% OF WEIGHT IS ON FRONT WHEELS.

FIND: LARGEST h FOR AUTO TO CLIMB CURB
 (a) FRONT-WHEEL DRIVE, (b) REAR-WHEEL DRIVE



(a) FRONT-WHEEL DRIVE
 ONE FRONT WHEEL: $r = 12 \text{ in.}$

$\sum F_x = 0: F - P \sin \theta = 0$
 $\sum F_y = 0: N - P \cos \theta = 0$

SLIDING IMPENDS:

$\mu_s = \frac{F}{N} = \frac{P \sin \theta}{P \cos \theta} = \tan \theta$

$\tan \theta = \mu_s = 0.90$; $\theta = 41.987^\circ$

$h = r - r \cos \theta = r(1 - \cos \theta) = (12 \text{ in.})(1 - \cos 41.987^\circ)$


$h = 3.0805 \text{ in.}$ $h = 3.08 \text{ in.}$

(b) REAR WHEEL DRIVE

EACH REAR WHEEL CARRIES 0.2W AND EACH FRONT WHEEL CARRIES 0.3W. LET Q BE FORCE EXERTED BY CHASSIS ON EACH WHEEL

FREE BODY: REAR WHEEL

$P_R = 0.2W$



$\sum F_y = 0: N - 0.2W = 0$
 $N = 0.2W$

$F = F_m = \mu_s N = 0.90(0.2W)$
 $F = 0.18W$


$\sum F_x = 0: F - Q = 0$

$Q = F = 0.18W$

FREE BODY: FRONT WHEEL

$P_F = 0.3W$

$r = 12 \text{ in.}$



FRONT WHEEL IS A TWO-FORCE BODY

$\tan \theta = \frac{Q}{P_F} = \frac{0.18W}{0.3W} = 0.6$

$\theta = 30.96^\circ$

$h = r - r \cos \theta = r(1 - \cos \theta)$
 $= (12 \text{ in.})(1 - \cos 30.96^\circ)$
 $= 1.710 \text{ in.}$

$h = 1.710 \text{ in.}$

NOTE: COMPARING PROBS 8.152 AND 8.153, WE NOTE THAT -


FOR FRONT WHEEL DRIVE THE RESULT IS INDEPENDENT OF WEIGHT DISTRIBUTION
 FOR REAR-WHEEL DRIVE THE HEAVIER THE LOAD ON THE REAR WHEELS, THE LARGER THE CURB HEIGHT h WILL BE

8.153



GIVEN: $\mu_s = 0.90$,
12-in. RADIUS WHEELS
EQUAL WEIGHT ON
EACH WHEEL.

FIND: LARGEST h FOR AUTO CLIMB CURB
(a) FRONT-WHEEL DRIVE, (b) REAR-WHEEL DRIVE



(a) FRONT-WHEEL DRIVE

ONE FRONT WHEEL $r = 12$ in.

$$+\uparrow \Sigma F_x = 0: F - P \sin \theta = 0$$

$$+\rightarrow \Sigma F_y = 0: N - P \cos \theta = 0$$

SLIPPING IMPENDS:

$$\mu_s = \frac{F}{N} = \frac{P \sin \theta}{P \cos \theta} = \tan \theta$$

$$\tan \theta = \mu_s = 0.90; \theta = 41.987^\circ$$


$$h = r - r \cos \theta = r(1 - \cos \theta) = (12 \text{ in.})(1 - \cos 41.987^\circ)$$

$$h = 3.0805 \text{ in.}$$

$$h = 3.08 \text{ in.}$$

(b) REAR WHEEL DRIVE

FREE BODY: REAR WHEEL



LET Q BE FORCE EXERTED
BY CHASSIS ON EACH WHEEL.


$$+\uparrow \Sigma F_y = 0: N - 0.25W = 0$$

$$N = 0.25W$$

$$F = \mu_s N = 0.90(0.25W) = 0.225W$$

$$\Sigma F_x = 0: Q = 0.225W$$

FREE BODY: FRONT WHEEL



$r = 12$ in.

TWO-FORCE BODY

$$\tan \theta = \frac{Q}{F} = \frac{0.225W}{0.25W} = 0.9$$

$$\theta = 41.987^\circ$$


$$h = r - r \cos \theta = r(1 - \cos \theta)$$

$$h = (12 \text{ in.})(1 - \cos 41.987^\circ) = 3.0805 \text{ in.}$$

$$h = 3.08 \text{ in.}$$

[SEE NOTE AT END OF SOLUTION OF PROB 8.152

8.154



GIVEN: EACH ROD
IS OF LENGTH L
AND WEIGHT W ,
 $\mu_s = 0.40$

FIND: RANGE OF VALUES
OF M_0 FOR EQUILIBRIUM


FOR IMPENDING
CLOCKWISE MOTION

$$+\uparrow \Sigma M_A = 0$$

$$N(L \cos \theta) - W\left(\frac{L}{2}\right) = 0$$

$$N = \frac{W}{2 \cos \theta}$$

$$F = \mu_s N = \frac{\mu_s W}{2 \cos \theta}$$

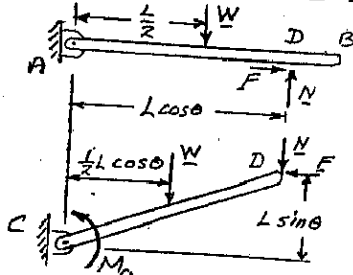

$$+\uparrow \Sigma M_C = 0: M_0 - W\left(\frac{1}{2}L \cos \theta\right) - \frac{W}{2 \cos \theta}(L \cos \theta) + \frac{\mu_s W}{2 \cos \theta}(L \sin \theta) = 0$$

$$M_0 = \frac{1}{2}WL(\cos \theta + 1 - \mu_s \tan \theta) \quad (1)$$

$$M_0 = \frac{1}{2}WL(\cos 30^\circ + 1 - 0.40 \tan 30^\circ)$$

$$M_0 = 0.81754WL$$

$$M_0 = 0.818WL$$

(CONTINUED)

8.154 CONTINUED

FOR IMPENDING
COUNTERCLOCKWISE

MOTION OF THE RODS, WE CHANGE THE
SIGN OF μ_s IN EQ.(1).

$$M_0 = \frac{1}{2}WL(\cos \theta + 1 + \mu_s \tan \theta)$$

$$= \frac{1}{2}WL(\cos 30^\circ + 1 + 0.40 \tan 30^\circ)$$


$$M_0 = 1.0484WL$$

$$M_0 = 1.048WL$$

RANGE OF M_0 FOR EQUILIBRIUM:

$$0.818WL \leq M_0 \leq 1.048WL$$

8.155




FIND: SMALLEST μ_s
BETWEEN RAIL
AND CAM AND
BETWEEN RAIL
AND PINS FOR
EQUILIBRIUM

FREE BODY: CAM

$$+\uparrow \Sigma M_C = 0:$$

$$N_D(0.8 \text{ in.}) - \mu_s N_D(3 \text{ in.}) - P(6 \text{ in.}) = 0$$

$$N_D = \frac{6P}{0.8 - 3\mu_s} \quad (1)$$



FREE BODY: SLEEVE AND CAM

$$+\uparrow \Sigma F_x = 0: N_D - N_A - N_B = 0$$

$$N_A + N_B = N_D \quad (2)$$

$$+\uparrow \Sigma F_y = 0: F_A + F_B + F_D - P = 0$$

$$\text{OR } \frac{1}{3}(N_A + N_B + N_D) = P \quad (3)$$

SUBSTITUTE FROM (2) INTO (3)

$$\frac{1}{3}(2N_D) = P \quad N_D = \frac{P}{2\mu_s} \quad (4)$$

EQUATE EXPRESSIONS FOR N_D FROM (1) AND (4)

$$\frac{P}{2\mu_s} = \frac{6P}{0.8 - 3\mu_s}; \quad 0.8 - 3\mu_s = 12\mu_s$$

$$\mu_s = \frac{0.8}{15}$$

$$\mu_s = 0.0533$$

NOTE: TO VERIFY THAT CONTACT AT PINS A AND B
TAKES PLACE AS ASSUMED WE SHALL
CHECK THAT $N_A > 0$ AND $N_B = 0$.

$$\text{FROM (4): } N_D = \frac{P}{2\mu_s} = \frac{P}{2(0.0533)} = 9.375P$$

FROM FREE BODY OF CAM AND SLEEVE

$$+\uparrow \Sigma M_B = 0: N_A(8 \text{ in.}) - N_D(4 \text{ in.}) - P(9 \text{ in.}) = 0$$

$$8N_A = (9.375P)(4) + 9P$$


$$N_A = 5.8125P > 0 \quad \text{OK}$$

FROM (2): $N_A + N_B = N_D$

$$5.8125P + N_B = 9.375P$$


$$N_B = 3.5625P > 0 \quad \text{OK}$$

8.156



FIND: LARGEST μ_s
BETWEEN RAIL AND
PINS A AND B IF
SLEEVE IS TO MOVE
UP WHEN
(a) $\theta = 60^\circ$;
(b) $\theta = 50^\circ$;
(c) $\theta = 40^\circ$.

NOTE THE CAM IS A TWO-FORCE MEMBER

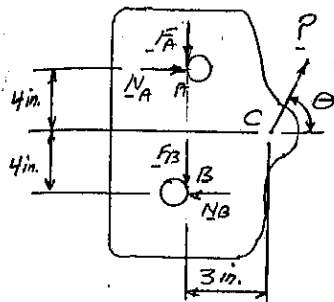

FREE BODY: SLEEVE

WE ASSUME CONTACT
BETWEEN RAIL AND
PINS AS SHOWN.

$$+\rightarrow \Sigma M_C = 0$$

$$F_A(3 \text{ in.}) + F_B(3 \text{ in.}) - N_A(4 \text{ in.}) - N_B(4 \text{ in.}) = 0$$

BUT: $F_A = \mu_s N_A$ $F_B = \mu_s N_B$
WE FIND

$$3\mu_s(N_A + N_B) - 4(N_A + N_B) = 0$$

$$\mu_s = \frac{4}{3} = 1.333$$

WE NOW VERIFY THAT OUR ASSUMPTION WAS CORRECT.

$$+\rightarrow \Sigma F_x = 0: N_A - N_B + P \cos \theta = 0 \quad (1)$$

$$+\uparrow \Sigma F_y = 0: -F_A - F_B + P \sin \theta = 0$$

$$\mu_s N_A + \mu_s N_B = \frac{P \sin \theta}{\mu_s} \quad (2)$$

$$\text{ADD (1) AND (2): } 2N_B = P \left(\cos \theta - \frac{\sin \theta}{\mu_s} \right) > 0 \quad \text{OK}$$

$$\text{SUBTRACT (1) FROM (2): } 2N_A = P \left(\frac{\sin \theta}{\mu_s} - \cos \theta \right)$$


$$N_A > 0 \text{ ONLY IF } \frac{\sin \theta}{\mu_s} - \cos \theta > 0$$

$$\tan \theta > \mu_s = 1.333; \quad \theta = 53.13^\circ$$

THUS FOR (a) AND (b) CONDITION IS SATISFIED,
CONTACT TAKES PLACE AS SHOWN. ANSWER IS CORRECT

$$(a) \text{ AND } (b) \quad \mu_s = 1.333$$

BUT FOR (c) $\theta = 50^\circ < 53.13^\circ$ AND OUR
ASSUMPTION IS WRONG, N_A IS DIRECTED TO LEFT



$$+\rightarrow \Sigma F_x = 0:$$

$$-N_A - N_B + P \cos 50^\circ = 0$$

$$N_A + N_B = P \cos 50^\circ \quad (3)$$

$$+\uparrow \Sigma F_y = 0:$$

$$-F_A - F_B + P \sin 50^\circ = 0$$

$$\mu_s(N_A + N_B) = P \sin 50^\circ \quad (4)$$


DIVIDE (4) BY (3)

$$\mu_s = \tan 50^\circ = 1.192$$

$$(c) \mu_s = 1.192$$

NOTE: FOR $\theta > 53.13^\circ$, μ_s IS INDEPENDENT OF θ .
FOR $\theta < 53.13^\circ$, μ_s DEPENDS ON θ
AND IS $\mu_s = \tan \theta$

8.157



GIVEN: 20-kg TUBE AB,
 $\mu_s = 0.30$.

FIND: LARGEST θ
FOR TUBE TO SLIDE
HORIZONTALLY WHEN
(a) $a = 0$, (b) $a = 0.75 \text{ m}$.

FOR MAX θ , SLIDING AND ROTATION ABOUT C BOTH IMPEND

(a) THREE-FORCE BODY
FORCE P MUST PASS THROUGH
POINT D WHERE W AND C
INTERSECT. SINCE SLIDING
IMPENDS ϕ_s FORM ANGLE ϕ_s
WITH TUBE

ISOSCELES TRIANGLE

$$\phi_s = \tan^{-1} \mu_s = \tan^{-1} 0.30$$

$$\phi_s = 16.70^\circ$$

$$\theta = 90^\circ - \phi_s = 90^\circ - 16.7^\circ$$


$$\theta = 73.3^\circ$$

$$+\rightarrow \Sigma M_C = 0: (P \cos \phi_s) L + W \frac{L}{2} = 0$$

$$P = \frac{W}{2 \cos \phi_s} = \frac{(20 \text{ kg})(9.81 \text{ m/s}^2)}{2 \cos 16.7^\circ}$$

$$P = 102.4 \text{ N}$$

(b)

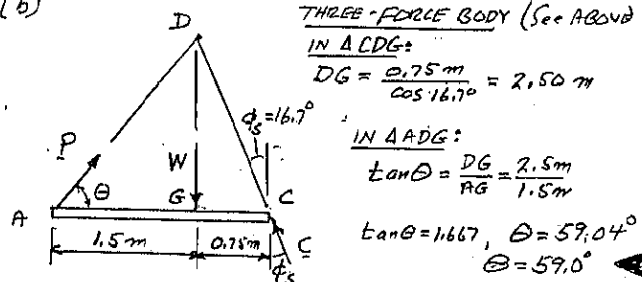

THREE-FORCE BODY (SEE ABOVE)

IN $\triangle CDG$:

$$DG = \frac{0.75 \text{ m}}{\cos 16.7^\circ} = 2.50 \text{ m}$$

IN $\triangle ADG$:

$$\tan \theta = \frac{DG}{AG} = \frac{2.5 \text{ m}}{1.5 \text{ m}}$$

$$\tan \theta = 1.667, \quad \theta = 59.04^\circ$$

$$\theta = 59.0^\circ$$


$$+\rightarrow \Sigma M_C = 0: (P \sin \theta)(2.25 \text{ m}) - W(0.75 \text{ m}) = 0$$

$$P = \frac{0.333}{\sin \theta} W = \frac{0.333}{\sin 59.04^\circ} (20 \text{ kg})(9.81 \text{ m/s}^2)$$

$$P = 76.27 \text{ N}$$


$$P = 76.3 \text{ N}$$

8.158



GIVEN: $\mu_s = 0.30$
20-kg TUBE AB

FIND: (a) SMALLEST P
TO MOVE TUBE, (b)
WHETHER TUBE
SLIDES OR ROTATES.



ASSUME SLIDING

$$\Sigma F_x = 0: N = W - P \sin 60^\circ$$

$$F = \mu_s N = \mu_s (W - P \sin 60^\circ)$$

$$\Sigma F_x = 0: P \cos 60^\circ = F = \mu_s (W - P \sin 60^\circ)$$

$$P = \frac{\mu_s W}{\cos 60^\circ + \mu_s \sin 60^\circ} = \frac{0.3 W}{\cos 60^\circ + 0.3 \sin 60^\circ} = 0.3948 W$$

ASSUME ROTATION ABOUT C

$$+\rightarrow \Sigma M_C = 0$$

$$(P \sin 60^\circ)(2.75 \text{ m}) - W(1.25 \text{ m}) = 0$$


$$P = 0.5249 W$$

TUBE SLIDES

$$\text{FOR SLIDING: } P = 0.3948 W = 0.3948 (20 \text{ kg})(9.81 \text{ m/s}^2)$$

$$P = 77.5 \text{ N}$$

8.159



GIVEN: HOMOGENEOUS HEMISPHERE

$\mu_s = 0.30$

FIND: (a) VALUE OF θ FOR WHICH SLIDING IMPENDS. (b) CORRESPONDING VALUE OF θ .

$r = \text{RADIUS}$

WE HAVE A TWO-FORCE BODY FOR SLIDING TO IMPEND. R FORMS ANGLE ϕ_s WITH INCLINE.


$\phi_s = \tan^{-1} 0.30 = 16.70^\circ$

$\beta = 16.70^\circ$

GEOMETRY:

$GC = \frac{3}{8}r$ (See Fig. 5.21)

$AC = r$



TRIANGLE ACG: $\angle ACG = \theta - \phi$

$\angle AGC = 180^\circ - \theta$

LAW OF SINES

$\frac{\sin(180^\circ - \theta)}{AC} = \frac{\sin \phi_s}{GC}$

$\sin(180^\circ - \theta) = \frac{AC}{GC} \sin \phi_s = \frac{r}{\frac{3}{8}r} \sin 16.70^\circ$

$\sin(180^\circ - \theta) = 0.76629$


$180^\circ - \theta = 50.0^\circ \text{ AND } 130.0^\circ$

$\theta = 130.0^\circ \text{ AND } 50.0^\circ$

$\theta = 130.0^\circ$ IMPOSSIBLE

$\theta = 50.0^\circ$

8.160




GIVEN: HOMOGENEOUS HEMISPHERE

$\mu_s = 0.30$

FIND: VALUE OF Q FOR WHICH SLIDING IMPENDS.

$r = \text{radius}$

$GC = \frac{3}{8}r$ (See Fig. 5.21)

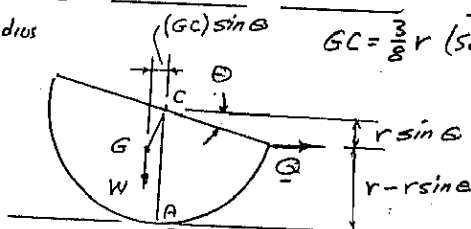

FREE BODY: HEMISPHERE

$\uparrow \sum F_y = 0: N - W = 0; N = W$

SLIDING IMPENDS: $F = \mu_s N = \mu_s W$

$\rightarrow \sum F_x = 0: Q - F = 0; Q = \mu_s W$

$\uparrow \sum M_A = 0: W(GC) \sin \theta - Q(r - r \sin \theta) = 0$

$W(\frac{3}{8}r) \sin \theta - Qr + Qr \sin \theta = 0$


$\sin \theta = \frac{Q}{\frac{3}{8}W + Q} = \frac{\mu_s W}{\frac{3}{8}W + \mu_s W}$

$\sin \theta = \frac{\mu_s}{\frac{3}{8} + \mu_s} = \frac{0.30}{0.375 + 0.30} = \frac{4}{9}$

$\theta = 26.39^\circ$

$\theta = 26.4^\circ$

8.161




GIVEN: AXLE OF PULLEY IS FROZEN AND CANNOT ROTATE WITH RESPECT TO BLOCK

$\mu_s = 0.30$

FIND: (a) MAXIMUM VALUE OF θ FOR EQUILIBRIUM. (b) REACTIONS AT SUPPORTS A AND D

FREE BODY: BLOCK AND PULLEY

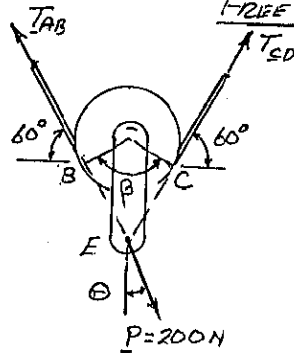

SINCE 200-N FORCE TENDS TO ROTATE PULLEY, CABLE TENDS TO SLIP RELATIVE TO PULLEY. $T_1 = T_{CD}$ $T_2 = T_{AB}$

$\beta = 120^\circ = \frac{2\pi}{3} \text{ rad}$

$\mu_s = 0.30$

$\frac{T_1}{T_2} = e^{\mu_s \beta}$

$\frac{T_{AB}}{T_{CD}} = e^{0.30(\frac{2\pi}{3})} = e^{0.2\pi} = 1.8745$

$T_{AB} = 1.8745 T_{CD}$ (1)

FORCE TRIANGLE

LAW OF COSINES

$P^2 = T_{AB}^2 + T_{CD}^2 - 2T_{AB}T_{CD} \cos 120^\circ$

$= (1.8745 T_{CD})^2 + T_{CD}^2$

$- 2(1.8745 T_{CD})T_{CD}(-0.5)$

$= [(1.8745)^2 + 1 + 1.8745] T_{CD}^2$

$P^2 = 6.3880 T_{CD}^2$

$T_{CD} = 0.39565 P$ (2)

(a) MAXIMUM ALLOWABLE VALUE OF θ :

LAW OF SINES: $\frac{\sin \gamma}{T_{CD}} = \frac{\sin 120^\circ}{P}; \sin \gamma = \frac{T_{CD}}{P} \sin 120^\circ$

RECALLING EQ(2):

$\sin \gamma = \frac{0.39565 P}{P} \sin 120^\circ = 0.34264; \gamma = 20.04^\circ$

$\theta = 90^\circ - (60^\circ + 20.04^\circ)$

$\theta = 9.96^\circ$

(b) REACTIONS AT A AND D. $P = 200 \text{ N}$

EQ(2): $T_{CD} = 0.39565(200 \text{ N}) = 79.13 \text{ N}$

EQ(1) $T_{AB} = 1.8745 T_{CD} = 1.8745(79.13 \text{ N}) = 148.33 \text{ N}$

THUS

$A = 148.3 \text{ N} \angle 60^\circ$

$D = 79.1 \text{ N} \angle 60^\circ$